

G. S. DAVIS.
NOZZLE HOLDER
APPLICATION FILED JUNE 2, 1909.

1,040,645.

Patented Oct. 8, 1912.

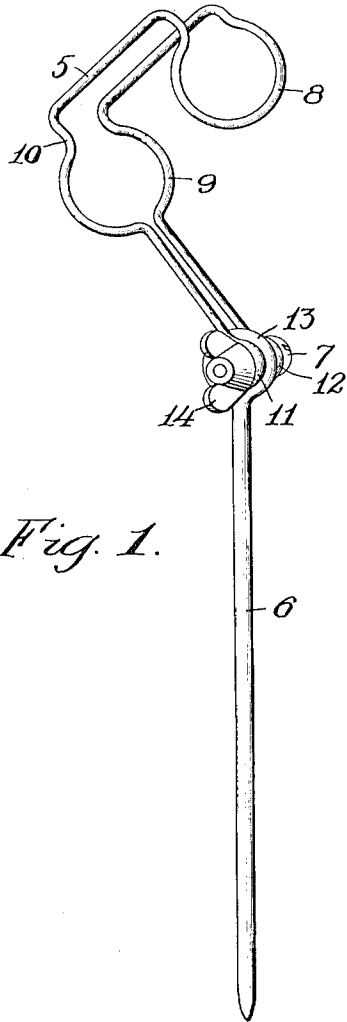


Fig. 1.

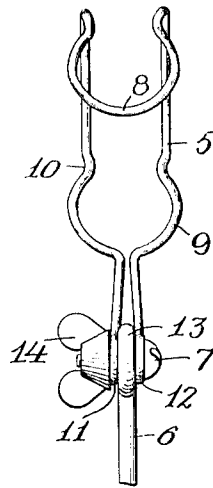


Fig. 2.

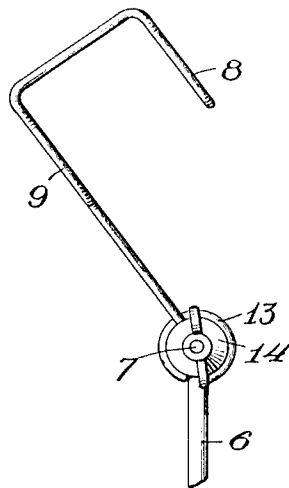


Fig. 3.

Witnesses

R. J. Tolman

A. H. Neilson

Inventor

George S. Davis.

By *Harley W. Boudett*
Attorney

UNITED STATES PATENT OFFICE.

GEORGE S. DAVIS, OF WORCESTER, MASSACHUSETTS, ASSIGNOR TO PARKER WIRE GOODS COMPANY, OF WORCESTER, MASSACHUSETTS, A CORPORATION OF MASSACHUSETTS.

NOZZLE-HOLDER.

1,040,645.

Specification of Letters Patent.

Patented Oct. 8, 1912.

Application filed June 2, 1909. Serial No. 499,694.

To all whom it may concern:

Be it known that I, GEORGE S. DAVIS, a citizen of the United States, residing at Worcester, in the county of Worcester, State of Massachusetts, have invented a certain new and useful Improvement in Nozzle-Holders, of which the following is a specification, reference being had therein to the accompanying drawings.

This invention relates to water distribution, but more particularly to nozzle holders.

The object of this invention is to provide a simple, efficient, and inexpensive device which may be used to support the nozzle of a garden hose.

One feature of this device is a holder provided with resilient gripping means to permit the hose being pressed therein, or removed therefrom without the necessity of loosening any screws or bolts, or unscrewing any joints.

Another feature is the means whereby the holder may be tilted to permit the nozzle being set at any desired angle.

One embodiment of the invention is shown in the drawings in which:—

Figure 1 is a perspective view of the invention complete. Fig. 2, front view of same. Fig. 3, side view of same.

In the drawings, the nozzle holder 5 is secured to the standard 6 by the bolt 7. This standard is here shown composed of a pointed rod adapted to be pressed into the ground, but any other type might be adopted. The holder is here shown as composed of a single spring wire bent to form two U shaped loops 8 and 9. The upper portions 10 of each of these loops are bent outward

to facilitate the placing of the nozzle within the holder. The extremities of the holder wire form two eyes 11 and 12, which loop the bolt 7, and the standard is also provided with an eye 13 which is preferably set between the eyes 11 and 12, so that a tightening of the bolt binds these together and maintains the holder at the angle relative to the standard at which it is set. This bolt 7 is fitted with a thumb nut 14 to allow the holder to be readily adjusted. To alter the angle of the holder, it is only necessary to slightly loosen the thumb nut 14.

A great number of modifications of this device will readily occur to a person skilled in the art, and it should be clearly understood that the invention is not limited to the embodiment here shown and described.

What I claim as my invention and desire to secure by Letters Patent is:—

In a device of the class described, the combination of a nozzle holder comprising a single piece of wire bent to form a plurality of loops in alinement to receive the nozzle and having its extremities bent to form eyelets, a supporting standard adapted to have its lower extremity forced into the ground, and having its upper extremity forming an eyelet, and a bolt passing through the eyelets on the holder and the standard to lock these parts together.

In testimony whereof I affix my signature in presence of two witnesses.

GEORGE S. DAVIS.

Witnesses:

HARTLEY W. BARTLETT,
ALMA H. NEILSON.