

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number  
WO 01/51898 A1

- (51) International Patent Classification<sup>7</sup>: **G01F 1/84** 3902 Cypress Dale, Spring, TX 77388 (US). **RITTER, Thomas, Edward**; 24719 Mount Auburn, Katy, TX 77494 (US).
- (21) International Application Number: PCT/US01/00790
- (22) International Filing Date: 10 January 2001 (10.01.2001) (74) Agents: **KRUEGER, Daniel, J.** et al.; Conley, Rose & Tayon, P.C., P.O. Box 3267, Houston, TX 77253-3267 (US).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (*national*): CA, NO.
- (30) Priority Data: 09/482,793 13 January 2000 (13.01.2000) US (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 4100 Clinton Drive, Building 01, 6th Floor, Houston, TX 77020 (US). **Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (72) Inventors: **PELLETIER, Michael, T.**; 7826 Heather Heights Way, Houston, TX 77095-4113 (US). **PROETT, Mark, A.**; 3611 Covey Trail, Missouri City, TX 77459 (US). **STORM, Bruce, H., Jr.**; 15014 Long Oak Drive, Houston, TX 77070 (US). **BIRCHAK, James, Robert**; For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DOWNHOLE DENSITOMETER

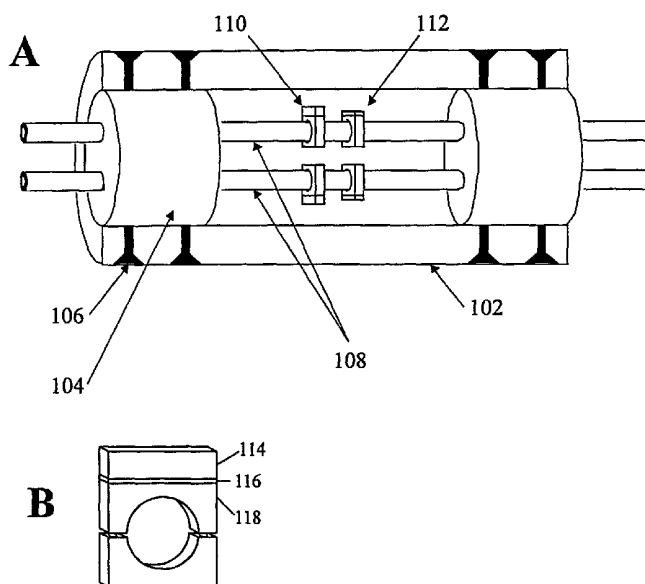

(57) Abstract: A measurement device (104) is provided that determines fluid properties from vibration frequencies of a sample cavity (first 108) and a reference cavity (second 108). In one embodiment, the measurement device includes a sample flow tube (first 108), a reference flow tube (second 108), vibration sources (110) and detectors (12) mounted on the tubes, and a measurement module. The sample flow tube receives a flow of sample fluid for characterization. The reference flow tube is filled with a reference fluid having well-characterized properties. The measurement module employs the vibration sources to generate vibrations in both tubes. The measurement module combines the signals from the vibration detectors on the tubes to determine properties of the sample fluid, such as density, viscosity, compressibility, water fraction, and bubble size.



WO 01/51898 A1

## Downhole Densitometer

### BACKGROUND OF THE INVENTION

#### Field of the Invention

5 The present invention generally relates to devices and methods for measuring fluid density and other fluid flow properties in a flow stream, where fluid is taken to mean any liquid, gas, or mixture thereof, including those which contain solids. More particularly, the present invention relates to a high accuracy density and viscosity measurement device suitable for use in a high-temperature, high-pressure, high-shock environment such as may be encountered in a wellbore.

10

#### Description of the Related Art

There are many instances in industrial processes and controls for handling flowing fluids where the density of the moving fluid has to be determined accurately. One particular application is in the identification of reservoir fluids flowing in a well. Water often co-  
15 exists with crude oil in some common geologic formations. As such, both substances are often pumped up together by a working oil well and the water is ultimately separated from the crude oil at a downstream location. It is desirable to determine the amount of oil that occurs in an oil-water stream flowing from a formation. To accurately determine the amount of crude oil extracted from a formation, a "net oil computer" may be used to  
20 ascertain the amount of crude oil. The "net oil computer" determines the total volume flow rate of the flow stream and calculates the flow stream's oil percentage (based on density measurements) to determine the net amount of oil that emanates from the formation. Given the large quantities of crude oil that are usually involved, any small inaccuracies in measuring density can disadvantageously accumulate over a relatively  
25 short interval of time to become a large error in a totalized volumetric measure.

Another particular application of density measurement is to determine the mass flow rate of a fluid medium. Mass flow rate can be calculated as a product of a fluid density (determined by a density meter) and a volume flow rate of the fluid (measured by a volumetric flowmeter). There are mass flowmeters available at the present time such as the  
30 Coriolis force or convective inertia force mass flowmeters and thermal probe mass flowmeters. These types of mass flowmeters, while they function excellently in the mass

flow measurement of low viscosity fluids, work poorly in measuring flows of highly viscous fluids. The fluid's viscosity introduces error in the data acquisition for the mass flow rate. One of the more promising approaches to measurement of the mass flow rate is to combine an accurate density meter and a reliable positive displacement volumetric flowmeter. This combination is particularly effective in measuring mass flow rates of highly viscous fluids or mixtures of fluids and gasses.

Coriolis mass flow meters can be used to measure the density of an unknown process fluid. In general, as taught, for example, in U.S. Patent No. 4,491,025, a Coriolis meter can contain two parallel conduits, each typically being a U-shaped flow tube. Each flow tube is driven such that it oscillates about an axis. As the process fluid flows through each oscillating flow tube, movement of the fluid produces reactionary Coriolis forces that are perpendicularly oriented to the plane of the fluid's angular velocity in the tube. These reactionary Coriolis forces cause each tube to twist about a torsional axis that, for U-shaped flow tubes, is normal to its bending axis. The net effect is a slight deformation and deflection of the conduit proportional to the mass flow rate of the fluid. This deformation is normally measured as a small difference between the deflection at the inlet ends of the conduits compared to the deflection at the outlet ends. Both tubes are oppositely driven such that each tube behaves as a separate tine of a tuning fork and thereby advantageously cancels any undesirable vibrations that might otherwise mask the Coriolis forces. The resonant frequency at which each flow tube oscillates depends upon its total mass, i.e. the mass of the empty tube itself plus the mass of the fluid flowing therethrough. Inasmuch as the total mass will vary as the density of the fluid flowing through the tube varies, the resonant frequency will likewise vary with any changes in density.

As specifically taught in U.S. Patent No. 4,491,009, the density of an unknown fluid flowing through an oscillating flow tube is proportional to the square of the period at which the tube resonates. While the circuit taught in this patent may provide accurate density measurements, it unfortunately possesses several drawbacks. First, for certain applications, density measurements to an accuracy of one part in 10,000 are necessary. An accuracy of this magnitude is generally not available through an analog circuit unless highly precise analog components are used. Such components are quite expensive. Second, the analog circuit disclosed in this patent cannot be independently calibrated to compensate for changing characteristics of the electronic components--such as offset, drift, aging and the

like. Specifically, this circuit is calibrated on a "lumped" basis, i.e. by first passing a known fluid, such as water, through the meter and then adjusting the circuit to provide the proper density reading at its output. This process compensates for any errors that occur at the time of calibration that are attributable either to physical errors in measuring density using a  
5 Coriolis mass flow meter or to errors generated by the changing characteristics of the electrical components themselves. Unfortunately, after the circuit has been calibrated in this fashion, component characteristics will subsequently change over time and thereby inject errors into the density readings produced by the circuit. This, in turn, will eventually necessitate an entire re-calibration.

10 All densitometers are generally calibrated using a calibration fluid having a known density. This density is specified at a certain temperature. Unfortunately, the density of most fluids varies with temperature; some fluids exhibit a significant variation, while other fluids exhibit relatively little variation. Consequently, many currently available densitometers require that the temperature of the calibration fluid must be carefully  
15 controlled before the fluid is injected into the densitometer for calibration. This necessitates that the container holding the fluid must be placed in a temperature bath for a sufficiently long period of time so that the fluid will stabilize to a desired temperature. In addition, provisions must be made to ensure that the temperature of the fluid will not change as the fluid is pumped through the meter. Accurately controlling the temperature of a fluid and  
20 then accurately maintaining its temperature, while the fluid is being pumped through the meter, is both a costly and tedious process.

It may be appreciated from the foregoing that a need exists in the art for a high-accuracy densitometer which is capable of operation under the high temperature, pressure, shock and vibration conditions encountered in a wellbore; which uses relatively  
25 inexpensive components; which substantially eliminates any error caused by changing characteristics of any of the electronic components; and which effectively eliminates the errors associated with the effects of temperature and pressure on the system.

### SUMMARY OF THE INVENTION

30 Accordingly, there is disclosed herein a measurement device for determining fluid properties from vibration frequencies of a sample cavity and a reference cavity. In one embodiment, the measurement device includes a sample flow tube, a reference flow tube,

vibration sources and detectors mounted on the tubes, and a measurement module. The sample flow tube receives a flow of sample fluid for characterization. The reference flow tube is filled with a reference fluid having well-characterized properties. The reference flow tube may be pressure balanced to the same pressure as the sample. The measurement module employs the vibration sources to generate vibrations in both tubes. The measurement module combines the signals from the vibration detectors on the tubes to determine properties of the sample fluid, such as density, viscosity, compressibility, water fraction, and bubble size. The measurement module may further detect certain flow patterns such as slug flow, for example.

To determine the sample fluid density, the measurement module measures the difference between resonance frequencies of the sample flow tube and the reference flow tube. The density can then be calculated according to a formula. Other fluid properties may be determined from the sample tube's resonance peak amplitude, peak width and/or peak shape. Variation of the density measurements may be used to detect and characterize multiple phase fluid flow. The use of a reference tube in the disclosed measurement device is expected to greatly enhance the accuracy and reliability of the measurement device over a range of temperatures, pressures, and shock accelerations such as those that may be found in a borehole.

## BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the present invention can be obtained when the following detailed description of the preferred embodiment is considered in conjunction with the following drawings, in which:

Figure 1A shows a densitometer according to a preferred embodiment of the present invention;

Figure 1B shows a piezoelectric vibratory source;

Figure 2 shows an alternative embodiment of a densitometer according to the present invention;

Figure 3 shows a graph of an exemplary resonance peak;

Figure 4 shows an exemplary measurement module;

Figure 5 shows a method for adaptive tracking of a resonance frequency;

Figure 6 shows a method for measuring resonance peak frequency, amplitude, and width; and

Figure 7 shows a graph of a measured density as a function of time.

While the invention is susceptible to various modifications and alternative forms, 5 specific embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives 10 falling within the spirit and scope of the present invention as defined by the appended claims.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to Figure 1A, one embodiment of a device for measuring density and viscosity of a flowing fluid generally includes a rigid housing 102, two bulkheads 104, 15 fasteners 106, flow tubes 108, vibration sources 110, vibration detectors 112, and a measurement module (not shown). The rigid housing 102 surrounds and protects a volume through which the flow tubes 108 pass and reduces the response to vibrations not associated with particular modes of the flow tubes. The bulkheads 104 seal the volume and secure the flow tubes 108 within that volume. Fasteners 106 are provided to secure the bulkheads 104 20 to the rigid housing 102. The volume preferably contains air, a vacuum or a relatively inert gas such as nitrogen or argon. If gasses are used, then they are preferably at atmospheric pressure when the device is at room temperature.

Rigid housing 102, bulkheads 104, and flow tubes 108 are preferably made from materials that can withstand pressures of more than 20,000 psi (pounds per square inch) at 25 temperatures of 250°C or more. Two examples of suitable materials are Titanium and Hastaloy-HA276C. The flow tubes 108 may be welded to the bulkheads 104, or (as discussed further below) mechanically isolated from the bulkheads 104.

The flow tubes 108 are preferably straight, as this reduces any tendencies for plugging and erosion by materials passing through the flow tubes 108. However, it is 30 recognized that bent tubes of various shapes, including "U"-shaped tubes, may provide greater measurement sensitivities.

Contemplated dimensions for the embodiment of Figure 1A are shown in Table 1:

TABLE 1

	Flow Tube	Bulkhead	Housing
<b>Length</b>	6"	2"	10"
<b>Outer Diam</b>	0.304"	1.5"	2"
<b>Inner Diam</b>	0.219"	-	~1.5"

However, it is noted that other dimensions may be used without departing from the scope of  
5 the invention.

The vibration sources 110 are piezoelectric transducers such as those shown in Figure 1B. They include a clamp 118 for securing the vibration source to the flow tube 108, an inertial or "backing" mass 114, and a piezoelectric layer 116 sandwiched between the clamp 118 and the inertial mass 114. When a voltage is applied to the piezoelectric layer  
10 116, the layer expands, driving the tube 108 and mass 114 away from each other. When the voltage is subsequently removed or reversed, the layer contracts, pulling the tube and the mass together. Application of an oscillating voltage to the piezoelectric layer imparts a vibratory motion to the flow tube.

As discussed further below, the flow tube 108 has a resonance frequency that  
15 depends on the density of the fluid it contains. When the vibration source 110 drives the flow tube 108 at a resonance frequency, the vibration of the tube reaches maximum amplitude (displacement), and the energy required to drive the vibration reaches a local minimum.

The vibration detectors 112 shown in Figure 1A are piezoelectric devices with a  
20 structure similar to the vibration sources 110. A piezoelectric transducer is sandwiched between a clamp and an inertial mass. When the piezoelectric transducer is compressed (e.g. by movement of the clamp toward the inertial mass), it generates a voltage. When the layer is subsequently restored or expanded (e.g. by movement of the clamp away from the inertial mass), the voltage decreases. Vibration of the vibration detector 112 causes the  
25 detector to generate an electrical signal that oscillates at the vibration frequency. The amplitude of the electrical signal increases with the amplitude of the vibration.

Referring now to Figure 4, one embodiment of the measurement module generally includes a digital signal processor 402, two voltage-to-frequency converters 404, two

current drivers 406, two filter/amplifiers 408, two amplitude detectors 410, and a read-only memory (ROM) 412. The digital signal processor 402 may be configured and controlled by a system controller 414 that operates in response to actions of the user on the user interface 416. The system controller 414 preferably also retrieves measurements from the digital  
5 signal processor 402 and provides them to the user interface 416 for display to the user.

The digital signal processor 402 preferably executes a set of software instructions stored in ROM 412. Typically, configuration parameters are provided by the software programmer so that some aspects of the digital signal processor's operation can be customized by the user via interface 416 and system controller 414. Preferably, the set of  
10 software instructions causes the digital signal processor 402 to perform density measurements according to one or more of the methods detailed further below. The digital signal processor preferably includes digital to analog (D/A) and analog to digital (A/D) conversion circuitry for providing and receiving analog signals to off-chip components. Generally, most on-chip operations by the digital signal processor are performed on digital  
15 signals.

In performing one of the methods described further below, the digital signal processor 402 provides a voltage signal to the voltage-to-frequency converter 404. The voltage-to-frequency converter 404 produces a frequency signal having a frequency proportional to the input voltage. The current driver 406 receives this frequency signal and  
20 amplifies it to drive the vibration source 110. The vibration source 110 causes the flow tube to vibrate, and the vibrations are detected by vibration detector 112. A filter/amplifier 408 receives the detection signal from vibration detector 112 and provides some filtering and amplification of the detection signal before passing the detection signal to the amplitude detector 410. The filter/amplifier 408 serves to isolate the vibration detector 112 from the  
25 amplitude detector 410 to prevent the amplitude detector 410 from electrically loading the vibration detector 112 and thereby adversely affecting the detection sensitivity. The amplitude detector 410 produces a voltage signal indicative of the amplitude of the detection signal. The digital signal processor 402 measures this voltage signal, and is thereby able to determine a vibration amplitude for the chosen vibration frequency.

30 The measurement module employs the vibration sources 110 and vibration detectors 112 to locate and characterize the resonance frequencies of the flow tubes 108. Several different methods are contemplated. In a first method, the measurement module causes the



vibration sources 110 to perform a frequency "sweep" across the range of interest, and records the amplitude readings from the vibration detectors 112 as a function of the frequency. As shown in Figure 3, a plot of the vibration amplitude versus frequency will show a peak at the resonance frequency  $f_0$ . The resonance frequency can be converted to a density measurement, and the shape of the peak may yield additional information such as viscosity and multiple phase information.

In a second method, the measurement module adaptively tracks the resonance frequency using a feedback control technique. One implementation of this method is shown in Figure 5. An initial step size for changing the frequency is chosen in block 502. This step size can be positive or negative, to respectively increase or decrease the frequency. In block 504, the vibration source is activated and an initial amplitude measurement is made. In block 506, the vibration frequency is adjusted by an amount determined by the step size. In block 508, a measurement of the amplitude at the new frequency is made, and from this, an estimate of the derivative can be made. The derivative may be estimated to be the change in amplitude divided by the change in frequency, but the estimate preferably includes some filtering to reduce the effect of measurement noise. From this estimated derivative, a distance and direction to the resonance peak can be estimated. For example, if the derivative is large and positive, then referring to Figure 3 it becomes clear that the current frequency is less than the resonance frequency, but the resonance frequency is nearby. For small derivatives, if the sign of the derivative is changing regularly, then the current frequency is very near the resonance frequency. For small negative derivatives without any changes of sign between iterations, the current frequency is much higher than the resonance frequency. Returning to Figure 5, this information is used to adjust the step size in block 510, and the digital signal processor 402 returns to block 506. This method may work best for providing a fast measurement response to changing fluid densities.

In a third method, the measurement module employs an iterative technique to search for the maximum amplitude as the frequency is discretely varied. Any of the well-known search algorithms for minima or maxima may be used. One illustrative example is now described, but it is recognized that the invention is not limited to the described details. In essence, the exemplary search method uses a back-and-forth search method in which the measurement module sweeps the vibration source frequency from one half-amplitude point across the peak to the other half-amplitude point and back again. One implementation of

this method is shown in Figure 6. In block 602, vibration is induced at an initial (minimum) frequency. In block 604, the vibration amplitude at the current vibration frequency is measured and set as a threshold. In block 606, the frequency is increased by a predetermined amount, and in block 608, the amplitude at the new frequency is measured. Block 610 compares the measured amplitude to the threshold, and if the amplitude is larger, then the threshold is set equal to the measured amplitude in block 612. Blocks 606-612 are repeated until the measured amplitude falls below the threshold. At this point, the threshold indicates the maximum measured amplitude, which occurred at the resonance peak. The amplitude and frequency are recorded in block 614. The frequency increases and amplitude measurements continue in blocks 616 and 618, and block 620 compares the amplitude measurements to half the recorded resonance frequency. Blocks 616-620 are repeated until the amplitude measurement falls below half the resonance peak amplitude, at which point, the half-amplitude frequency is recorded in block 622. Blocks 624-642 duplicate the operations of corresponding blocks 602-622, except that the frequency sweep across the resonance peak occurs in the opposite direction. For each peak crossing, the measurement module records the resonance amplitude and frequency, and then records the subsequent half-amplitude frequency. From this information the peak width and asymmetry can be determined, and the fluid density, viscosity, and multiple phase information can be calculated.

The measurement module is an electronic circuit that may have temperature, pressure, and age-dependent variations. The densitometer structure as a whole may also exhibit these variations. Since it is expected that the densitometer will be exposed to temperature and pressure extremes over the device lifetime, it is unrealistic to believe that the device can sustain a given set of calibration settings. To circumvent the need for frequent re-calibrations, one of the flow tubes 108 is set up as a "vibration standard" that has a well-determined resonance frequency, and the resonance frequency of the other flow tube (hereafter termed the sample flow tube) is measured relative to the standard, or reference, flow tube. The sample flow tube accepts a flow of the sample fluid whose density is to be measured in one end and discharges the flow from the other end.

As the properties of water are extremely well known, it is preferred to have the reference flow tube filled with water. Alternatively, the reference flow tube may be filled with a vacuum, a gas, or some other substance with well known density properties. For the

present purposes, the reference tube is considered to contain a vacuum if at room temperature the internal pressure is less than 0.05 atmospheres. Any fluid in the reference flow tube is preferably subjected to the pressure and temperature of the sample fluid's environment. Thermometers and pressure meters are preferably provided to determine what these temperature and pressure values are.

The measurement module preferably employs one vibration source 110 and one vibration detector 112 to adaptively track the resonance frequency of the reference flow tube 108. The measurement module then measures the frequency of the vibration signal from the sample tube relative to the resonance frequency signal from the reference tube. In one embodiment, the measurement module adds the two signals to obtain a signal that exhibits a beat frequency. The frequency of the beats is equal to the (unsigned) difference between the resonance frequency and the frequency of the vibration signal. The sign of the difference can be determined in a number of ways. One method is to utilize a fluid in the reference tube that is outside the anticipated density range (either lighter or heavier) of the sample. Another is to de-tune the frequency of the sample tube from its resonant frequency and observe the change in the measured frequency difference. For example, if an increase in the driving frequency results in an increase of the frequency difference, the resonant frequency of the sample is greater than that of the reference. Alternatively, the drive frequency of the reference tube could be de-tuned with similar results. From the signed difference, the density of the unknown fluid can be determined. A method for determining the density of the unknown fluid is presented further below.

Turning now to Figure 2, a second embodiment is shown. In Figure 2, the flow tubes are mechanically isolated from the mounting structure by elastomeric seals 202. This makes the ends free to vibrate because the seals are soft and the deflections are small, but perhaps more significantly, this configuration may eliminate most of the extraneous vibration noise from the flow tubes. The vibration sources shown for this embodiment are inductive coils 204. Electrical currents passing through the inductive coils generate a magnetic field that attracts or repels a permanent magnet. By alternating the current direction at a desired vibration frequency, the magnet can be forced to vibrate the flow tubes at that frequency.

The position of the magnet can be measured from the back EMF (electromotive force) that the coil generates, so the inductive coils can also be used as the vibration

sensors. Alternatively, a separate inductive coil may serve as a vibration sensor, as may any one of a multitude of other position sensors including piezoelectric devices, Hall-effect sensors, interferometers, strain gauges, capacitance meters, accelerometers, etc.

5 It is noted that in both embodiments, the vibration sources and vibration detectors are preferably mounted near an antinode (point of maximum displacement from the equilibrium position) of the mode of vibration they are intended to excite and monitor. It is contemplated that more than one mode of vibration may be employed (e.g. the vibration source may switch between multiple frequencies to obtain information from higher resonance harmonic frequencies). The vibration sources and detectors are preferably  
 10 positioned so as to be near antinodes for each of the vibration modes of interest.

The locations of nodes (points of zero vibrational amplitude) and antinodes are determined by the wavelength of the vibration mode. The frequency  $f$  and wavelength  $\lambda$  are related to the speed of sound  $v$  in the material by the equation  $v = f\lambda$ .

The following notation is used for the resonance frequency derivation:

15

- $A$  . vibration system constant (22.4 fixed ends, 22.4 free ends, 3.52 cantilevered on one end)
- $A$  .....calibration constant (lbf/(in<sup>3</sup>-sec<sup>2</sup>)
- $B$  ..... calibration constant (lbf/in<sup>3</sup>)
- $f_n$  ..... natural frequency (Hz)
- 20  $p$  ..... period of natural frequency (sec)
- $\rho$  ..... fluid density (lbf/in<sup>3</sup>)
- $\rho_t$  .....tube material density (lbf/in<sup>3</sup>)
- $\mu$  ..... system mass per unit length (lbf-sec<sup>2</sup>/in<sup>2</sup>)
- $\mu_f$  ..... fluid mass per unit length (lbf-sec<sup>2</sup>/in<sup>2</sup>)
- 25  $\mu_t$  .....tube mass per unit length (lbf-sec<sup>2</sup>/in<sup>2</sup>)
- $d_o$  ..... tube outside diameter (in)
- $d_i$  .....tube inside diameter (in)
- $l$  ..... tube length (in)
- $E$  .....tube modulus of elasticity (psi)
- 30  $I$  ..... area moment of inertia of the tube cross section (in<sup>4</sup>)
- $g$  .....gravitational constant (386.4 in/sec<sup>2</sup>)

The natural frequency of the tube can be calculated as follows (see page I-14 of the Shock and Vibration Handbook, McGraw Hill, NY, 1976.):

$$f_n = \frac{A}{2\pi} \sqrt{\frac{E \cdot I}{\mu \cdot l^4}} \text{ (Hz)} \tag{1}$$

$A$  is determined by the geometry of the system, and is 22.4 for the first mode of vibration in a tube with fixed ends or free ends. The area moment of inertia of a tube ( $I$ ) is given by:

$$I = \frac{\pi d_o^4}{64} \left( 1 - \frac{d_i^4}{d_o^4} \right) \text{ (in}^4\text{)} \tag{2}$$

The mass per unit length  $\mu$  consists of the tube's weight and the fluid's weight divided by the length of the tube and the gravitational constant ( $g = 386.4 \text{ in/ sec}^2$ ):

$$\mu_t = \frac{\rho_t \pi (d_o^2 - d_i^2)}{g \cdot 4} \text{ (lbf-sec}^2\text{/in}^2\text{)} \tag{3}$$

$$\mu_f = \frac{\rho \pi d_i^2}{g \cdot 4} \text{ (lbf-sec}^2\text{/in}^2\text{)} \tag{4}$$

$$\mu = \mu_t + \mu_f = \frac{\rho_t d_o^2 \pi}{g \cdot 4} \left( 1 - \frac{d_i^2}{d_o^2} \left( 1 - \frac{\rho}{\rho_t} \right) \right) \text{ (lbf-sec}^2\text{/in}^2\text{)} \tag{5}$$

Substituting Equations 2 and 5 into Equation 1 yields an estimate of the natural frequency:

$$f_n = \frac{A}{2\pi} \sqrt{\frac{E \cdot \frac{\pi d_o^4}{64} \left( 1 - \frac{d_i^4}{d_o^4} \right)}{\frac{\rho_t d_o^2 \pi}{g \cdot 4} \left( 1 - \frac{d_i^2}{d_o^2} \left( 1 - \frac{\rho}{\rho_t} \right) \right) \cdot l^4}} = \frac{A d_o}{8\pi l^2} \sqrt{\frac{\frac{E g}{\rho_t} \left( 1 - \frac{d_i^4}{d_o^4} \right)}{1 - \frac{d_i^2}{d_o^2} \left( 1 - \frac{\rho}{\rho_t} \right)}} \text{ (Hz)} \tag{6}$$

Solving Equation 6 for density yields:

$$\rho = E g \left( \frac{A d_o^2}{f_n 8\pi d_i l^2} \right)^2 \left( 1 - \frac{d_i^4}{d_o^4} \right) - \rho_t \left( \frac{d_o^2}{d_i^2} - 1 \right) \tag{7}$$

Equation 7 can be expressed in terms of constant coefficients **A** & **B**:

$$\rho = A / f_n^2 - B \tag{8}$$

Table 2

Variables:	Hastaloy-HA276C			Titanium		
	Cantilever	Fixed	Fixed	Cantilever	Fixed	Fixed
A	3.52	22.4	22.4	3.52	22.4	22.4
E	29.8 10 <sup>6</sup>	29.8 10 <sup>6</sup>	29.8 10 <sup>6</sup>	15.0 10 <sup>6</sup>	15.0 10 <sup>6</sup>	15.0 10 <sup>6</sup>
g	386.4	386.4	386.4	386.4	386.4	386.4
d <sub>i</sub>	0.09	0.219	0.219	0.09	0.219	0.219
d <sub>o</sub>	0.125	0.304	0.304	0.125	0.304	0.304
σ stress	63056.48	63154.651	63154.651	63056.478	63154.651	63154.651
l	4	16	6	4	16	6
ρ <sub>t</sub>	0.321	0.321	0.321	0.175	0.175	0.175
ρ <sub>-sg=1</sub>	0.0361			0.0361		
Results:						
ρ <sub>-sg</sub>	<i>fn</i>	<i>fn</i>	<i>fn</i>	<i>fn</i>	<i>fn</i>	<i>fn</i>
2	229.13	221.62	1575.98	204.19	197.47	1404.26
1.8	231.40	223.82	1591.60	207.40	200.59	1426.40
1.6	233.73	226.08	1607.69	210.77	203.85	1449.62
1.4	236.14	228.41	1624.28	214.31	207.28	1474.02
1.2	238.62	230.82	1641.39	218.04	210.89	1499.68
1	241.18	233.30	1659.06	221.97	214.70	1526.74
0.8	243.83	235.87	1677.30	226.11	218.72	1555.31
0.6	246.57	238.52	1696.17	230.50	222.97	1585.56
0.4	249.40	241.27	1715.68	235.15	227.48	1617.63
0.2	252.33	244.11	1735.89	240.10	232.28	1651.74
0.00122	255.35	247.03	1756.69	245.34	237.36	1687.87
Δf	26.22	25.41	180.71	41.15	39.88	283.61
Δf/f <sub>c</sub>	10.87%	10.89%	10.89%	18.54%	18.58%	18.58%

Where the coefficients **A** & **B** are determined by the tube's material properties and geometry:

$$A = E \left( \frac{gAd_o^2}{8\pi d_i l^2} \right)^2 \left( 1 - \frac{d_i^4}{d_o^4} \right) \tag{9}$$

$$B = \rho_i \left( \frac{d_o^2}{d_i^2} - 1 \right) \tag{10}$$

5 In practice, the constants **A** & **B** may be estimated by fitting a calibration curve.

Table 2 is an example calculation of the natural frequencies for various configurations and materials. The frequencies are calculated as a function of fluid specific gravity (ρ<sub>-sg</sub>) in a range from near 0 (air) to 2 (heavy mud). The sensitivity of the device can be defined as the change in frequency from air to a heavy mud divided by a center frequency determined with water (specific gravity=1) in the tube. The cantilever device

10

has a sensitivity of 10.87% and the 16" fixed-end straight tube has a sensitivity slightly larger with 10.89%. A 6" fixed-end straight tube exhibits an increased frequency with water (sg=1) to 1659 Hz. It is noted that while the frequency increased, the sensitivity remained unchanged (10.89%). The sensitivity ratios can be increased to 19% by using  
 5 Titanium, due to its improved stiffness to weight ratio. The housing, when made of steel, exhibits a much higher natural frequency than the tubes (5960 Hz). Hence, it does not couple with the tube modes.

The overriding natural frequency of the tubes is dominated by the tube material and its properties. It is noted that the tube's length has the most significant influence on the  
 10 natural frequency. The resolution (sensitivity) of the gauge may be increased in terms of frequency change versus density by reducing the weight or density of the tube.

Using Equation 8,  $\rho_s$  (the density of the sample fluid in the sample tube) can be expressed in terms of  $\rho_r$  (the density of the reference fluid in the reference tube) and  $\Delta f$  (the measured difference in frequencies):

$$15 \quad \rho_s = \frac{\mathbf{A}}{\left( \sqrt{\frac{\mathbf{A}}{\rho_R + \mathbf{B}}} + \Delta f \right)^2} - \mathbf{B} \quad (11)$$

It is expected that the accuracy of this calculation may be limited by the calibration accuracy for **A** and **B** and the frequency resolution.

Figure 7 shows an example of density measurements made according to the disclosed method as a function of time. Initially, the sample flow tube fills with oil, and the  
 20 density measurement quickly converges to a specific gravity of 0.80. As a miscible gas is injected into the flow stream, the sample tube receives a multiple-phase flow stream, and the density measurement exhibits a significant measurement variation. As the flow stream becomes mostly gas, the oil forms a gradually thinning coating on the wall of the tube, and the density measurement converges smoothly to 0.33. It is noted that in the multiple-phase  
 25 flow region, the density measurement exhibits a variance that may be used to detect the presence of multiple phases.

Air or gas present in the flowing fluid affect the densitometer measurements. Gas that is well-mixed or entrained in the liquid may simply require slightly more drive power to keep the tube vibrating. Gas that breaks out, forming voids in the liquid, will reduce the  
 30 amplitude of the vibrations due to damping of the vibrating tube. Small void fractions will

cause variations in signals due to local variation in the system density, and power dissipation in the fluid. The result is a variable signal whose envelope corresponds to the densities of the individual phases. In energy-limited systems, larger void fractions can cause the tube to stop vibrating altogether when the energy absorbed by the fluid exceeds that available. Nonetheless, slug flow conditions can be detected by the flowmeter electronics in many cases, because they manifest themselves as periodic changes in measurement characteristics such as drive power, measured density, or amplitude. Because of the ability to detect bubbles, the disclosed densitometer can be used to determine the bubble-point pressure. As the pressure on the sample fluid is varied, bubbles will form at the bubble point pressure and will be detected by the disclosed device.

If a sample is flowing through the tube continuously during a downhole sampling event, the fluids will change from borehole mud, to mud filtrate and cake fragments, to majority filtrate, and then to reservoir fluids (gas, oil or water). When distinct multiple phases flow through the tube, the sensor output will oscillate within a range bounded by the individual phase densities. If the system is finely homogenized, the reported density will approach the bulk density of the fluid. To enhance the detection of bulk fluid densities, the disclosed measurement devices may be configured to use higher flow rates through the tube to achieve a more statistically significant sample density. Thus, the flow rate of the sample through the device can be regulated to enhance detection of multiple phases (by decreasing the flow rate) or to enhance bulk density determinations (by increasing the flow rate). If the flow conditions are manipulated to allow phase settling and agglomeration (intermittent flow or slipstream flow with low flow rates), then the vibrating tube system can be configured to accurately detect multiple phases at various pressures and temperatures. The fluid sample may be held stagnant in the sample chamber or may be flowed through the sample chamber.

Peak shapes in the frequency spectrum may provide signatures that allow the detection of gas bubbles, oil/water mixtures, and mud filtrate particles. These signatures may be identified using neural network "template matching" techniques, or parametric curve fitting may be preferred. Using these techniques, it may be possible to determine a water fraction from these peak shapes. The peak shapes may also yield other fluid properties such as compressibility and viscosity. The power required to sustain vibration may also serve as an indicator of certain fluid properties.



The disclosed instrument can be configured to detect fluid types (e.g. fluids may be characterized by density), multiple phases, phase changes and additional fluid properties such as viscosity and compressibility. The tube can be configured to be highly sensitive to changes in sample density and phases. For example, the flow tubes may be formed into any of a variety of bent configurations that provide greater displacements and frequency sensitivities. Other excitation sources may be used. Rather than using a variable frequency vibration source, the tubes may be knocked or jarred to cause a vibration. The frequencies and envelope of the decaying vibration will yield similar fluid information and may provide additional information relative to the currently preferred variable frequency vibration source.

The disclosed devices can quickly and accurately provide measurements of downhole density and pressure gradients. The gradient information is expected to be valuable in determining reservoir conditions at locations away from the immediate vicinity of the borehole. In particular, the gradient information may provide identification of fluids contained in the reservoir and the location(s) of fluid contacts. Table 3 shows exemplary gradients that result from reservoir fluids in a formation.

Determination fluid contacts(Gas/Oil and Oil/Water) is of primary importance in reservoir engineering. A continuous vertical column may contain zones of gas, oil and water. Current methods require repeated sampling of reservoir pressures as a function of true vertical depth in order to calculate the pressure gradient (usually psi/ft) in each zone. A fluid contact is indicated by the intersection of gradients from two adjacent zones (as a function of depth). Traditionally, two or more samples within a zone are required to define the pressure gradient.

The pressure gradient ( $\Delta p/\Delta h$ ) is related to the density of the fluid in a particular zone. This follows from the expression for the pressure exerted by a hydrostatic column of height h.

$$P=\rho * g * h \quad (12)$$

TABLE 3

Fluid	Density	Gradient
	Gm/cc	psi/ft
Low Pressure Gas Cap	0.10	0.04
Gas Condensate	0.20	0.09
Light Oil	0.50	0.22
Med. Oil	0.70	0.30
Heavy Oil	0.90	0.39
Pure Water	1.00	0.43
Formation Water	≥1.00	≥0.43
Mud Filtrate (from 8.7 ppg)	1.04	0.45
Completion Brine	1.08	0.47
Mud (12.5 ppg)	1.50	0.65

5 where P denotes pressure, ρ denotes density, g denotes gravitational acceleration, and h denotes elevation.

In a particular zone, with overburden pressure which differs from that of a continuous fluid column, the density of the fluid may be determined by measuring the pressure at two or more depths in the zone, and calculating the pressure gradient:

10 
$$\rho = \frac{\Delta P / \Delta h}{g} \tag{13}$$

However, the downhole densitometer directly determines the density of the fluid. This allows contact estimation with only one sample point per zone. If multiple samples are acquired within a zone, the data quality is improved. The gradient determination can then be cross-checked for errors which may occur. A high degree of confidence is achieved  
 15 when both the densitometer and the classically determined gradient agree.

Once the gradient for each fluid zone has been determined, the gradient intersections of adjacent zones are determined. The contact depth is calculated as the gradient intersection at true vertical depth.

5 Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. For example, the flow tubes may be replaced with sample chambers of any rigid variety. It is intended that the following claims be interpreted to embrace all such variations and modifications.

## CLAIMS

## WHAT IS CLAIMED IS:

1. A downhole instrument which comprises:

a vibrating tube device configured to determine properties of a fluid; and

5 a rigid pressure housing enclosing the vibrating tube device and sealed to protect the exterior of the vibrating tube device from pressure external to the housing.

2. The downhole instrument of claim 1, wherein the vibrating tube device includes:

a tube configured to receive a sample fluid.

10

3. The downhole instrument of claim 2, wherein the sample fluid includes a gas.

4. The downhole instrument of claim 2, wherein the sample fluid includes a liquid.

15 5. The downhole instrument of claim 2, wherein the sample fluid includes suspended solids.

6. The downhole instrument of claim 2, wherein the vibrating tube device further includes:

a vibration sensor configured to convert vibration of the tube into an electrical signal.

20

7. The downhole instrument of claim 6, wherein the vibration sensor is a sensor from a set of sensors consisting of a piezoelectric transducer, an inductive coil, and a magnetoresistive transducer.

25 8. The downhole instrument of claim 6, wherein the vibration sensor is mechanically coupled to the tube.

9. The downhole instrument of claim 6, wherein the vibration sensor is inductively coupled to the tube.

30

10. The downhole instrument of claim 6, wherein the vibrating tube device further includes: an excitation source configured to generate vibration of the tube.

11. The downhole instrument of claim 10, wherein the excitation source is one of a set of sources consisting of a piezoelectric transducer, an inductive coil, a magnetoresistive transducer, and a mechanical shock device.

5

12. The downhole instrument of claim 10, wherein the vibrating tube device further includes:

an excitation source driver which is one of a set of drivers consisting of an impulse driver, a frequency-swept driver, and a phase-lock loop driver.

10

13. The downhole instrument of claim 6, wherein the vibration sensor is further configured to generate vibration of the tube.

14. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

15

a second vibration sensor coupled to the tube and configured to convert vibration of the tube into a second electrical signal.

15. The downhole instrument of claim 10, wherein the vibrating tube device further includes:

20

a second excitation source coupled to the tube and configured to generate vibration of the tube.

16. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

25

a measurement module coupled to receive the electrical signal and configured to determine the vibration frequency response of the tube.

17. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

30

a measurement module coupled to receive the electrical signal and configured to determine the vibration amplitude of the tube.

18. The downhole instrument of claim 12, wherein the vibrating tube device further comprises:

5 a measurement module coupled to receive a drive signal from the excitation source driver and configured to determine the power input to the excitation source.

19. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

10 a measurement module coupled to receive the electrical signal and configured to determine a density of the sample fluid.

20. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

15 a measurement module coupled to receive the electrical signal and configured to responsively determine a viscosity of the sample fluid.

21. The downhole instrument of claim 6, wherein the vibrating tube device further comprises:

20 a measurement module coupled to receive the electrical signal and configured to determine a bubble point of the sample fluid.

22. The downhole instrument of claim 6, wherein the vibrating tube device further includes:

25 a measurement module coupled to receive the electrical signal and configured to determine a thermodynamic phase of the sample fluid.

23. The downhole instrument of claim 6, wherein the vibrating tube device further includes:

a reference tube configured to produce a reference vibration;  
a reference vibration sensor coupled to the reference tube and configured to convert vibration of the reference tube into a reference electric signal; and  
30 a measurement module coupled to receive the electrical signal and the reference electrical signal.

24. The downhole instrument of claim 23, wherein the reference tube includes a vacuum.

25. The downhole instrument of claim 23, wherein the reference tube includes a reference fluid.

5

26. The downhole instrument of claim 25, wherein the reference tube includes a reference fluid from a set of fluids consisting of water, nitrogen, air.

27. A device for determining a property of a sample fluid, wherein the device comprises:

10

a sample tube having a bore configured to receive a fluid sample, wherein the tube is configured to vibrate at a frequency characteristic of one or more properties of the fluid sample;

a vibration sensor configured to convert vibrations of the sample tube into a measurement signal;

15

a reference standard configured to provide a reference frequency signal; and

a measurement module configured to receive the measurement signal and the reference frequency signal, and further configured to use the measurement and reference signals to determine a property of the sample fluid.

20

28. The device of claim 27, wherein the fluid sample includes a liquid.

29. The device of claim 27, wherein the fluid sample includes a gas.

30. The device of claim 27, wherein the fluid sample includes suspended solids.

25

31. The device of claim 27, wherein the reference standard includes a solid cylinder having a length and diameter equal to those of the sample tube.

30

32. The device of claim 27, wherein the reference standard includes a reference tube having a bore.

33. The device of claim 32, wherein the bore of the reference tube contains a vacuum.

34. The device of claim 32, wherein the bore of the reference tube contains a reference solid.

5 35. The device of claim 32, wherein the bore of the reference tube contains a reference fluid.

36. The device of claim 35, wherein the reference fluid is a gas.

10 37. The device of claim 35, wherein the reference fluid is subjected to substantially the same pressure and temperature as the sample fluid.

38. The device of claim 32, further comprising:

15 a second reference tube having a bore having contents different from the first reference tube, wherein the second reference tube is configured to provide a second reference signal to the measurement module.

39. The device of claim 27, wherein the vibration sensor is mechanically coupled to the sample tube.

20

40. The device of claim 27, wherein the vibration sensor is an electromechanical sensor.

41. The device of claim 40, wherein the vibration sensor includes a piezoelectric transducer.

25 42. The device of claim 40, wherein the vibration sensor includes an induction coil.

43. The device of claim 27, further comprising:

an excitation source configured to generate vibration of the sample tube.

30 44. The device of claim 43, wherein the excitation source includes a piezoelectric transducer.



45. The device of claim 43, wherein the excitation source includes a magnetostrictive transducer.

46. The device of claim 43, wherein the excitation source includes an induction coil.

5

47. The device of claim 43, wherein the excitation source includes a mechanical striker.

48. The device of claim 43, wherein the excitation source is driven by an impulse.

10 49. The device of claim 43, wherein the excitation source is frequency-swept.

50. The device of claim 43, wherein the excitation source is driven by a phase-lock loop.

15 51. The device of claim 27, wherein the vibration sensor is further configured to generate vibration of the sample tube.

52. The device of claim 27, wherein multiple vibration sensors are coupled to the sample tube.

20 53. The device of claim 43, wherein multiple excitation sources are coupled to the sample tube.

54. The device of claim 32, further comprising:

25 an excitation source mounted on the reference tube to generate vibration of the reference tube, wherein vibration of the reference tube also induces vibration of the sample tube.

55. The device of claim 27, wherein the measurement module is configured to determine the vibration frequency response of the sample tube.

30

56. The device of claim 27, wherein the measurement module is configured to determine the vibration amplitude of the tube.

57. The device of claim 43, wherein the measurement module is configured to determine the drive power of the excitation source.

5 58. The device of claim 27, wherein the measurement module is configured to determine a beat frequency of the measurement and reference signals.

59. The device of claim 27, wherein the property of the sample fluid is density.

10 60. The device of claim 27, wherein the property of the sample fluid is viscosity.

61. The device of claim 27, wherein the property of the sample fluid is bubble point.

15 62. The device of claim 27, wherein the property of the sample fluid is thermodynamic phase.

63. A reservoir measurement system which comprises:

a borehole;

20 a flow-tube densitometer located in said borehole and configured to perform density measurements on fluid in the borehole; and

a pressure sensor located in said borehole and configured to perform pressure measurements on fluid in the borehole.

64. The system of claim 63, further comprising:

25 a surface computer configured to receive said density and pressure measurements, wherein the surface computer is configured to responsively determine a pressure gradient.

30 65. The system of claim 64, wherein the surface computer is further configured to extrapolate the pressure gradient to determine a fluid contact interface.

66. The system of claim 63, further comprising:

a surface computer configured to receive said density and pressure measurements, wherein the surface computer is configured to responsively determine if fluid in the borehole is at a bubble point pressure.

5 67. The system of claim 63, wherein the flow-tube densitometer is further configured to perform viscosity measurements on fluid in the borehole.

68. A method for measuring a property of a fluid, where the method comprises:

receiving a sample fluid into a sample cavity;  
10 vibrating the sample cavity to obtain a vibration signal having a sample cavity vibration frequency;  
producing a resonant signal from a vibratory standard, wherein the resonant signal has a resonant frequency;  
determining a frequency difference between the resonant frequency and the sample  
15 cavity vibration frequency; and  
converting the frequency difference in to a density measurement of the sample fluid.

69. The method of claim 68, wherein the determining a frequency difference includes:

combining the vibration signal with the resonant signal to produce a beat-frequency  
20 signal; and  
measuring a beat-frequency in the beat-frequency signal.

70. The method of claim 68, further comprising:

measuring an amplitude of the vibration signal; and  
25 calculating a sample fluid viscosity from the amplitude and the frequency difference.


71. The method of claim 68, further comprising:

adjusting the sample cavity vibration frequency to determine the frequency  
30 differences for a sample cavity resonance frequency and at least one sample cavity half-amplitude frequency; and


calculating the density and a second fluid property from the resonance frequency difference and the half-amplitude frequency difference.

72. The method of claim 68, further comprising:


- 5       varying the sample cavity vibration frequency to determine a sample cavity resonance peak shape; and  
determining fluid properties from the peak shape.

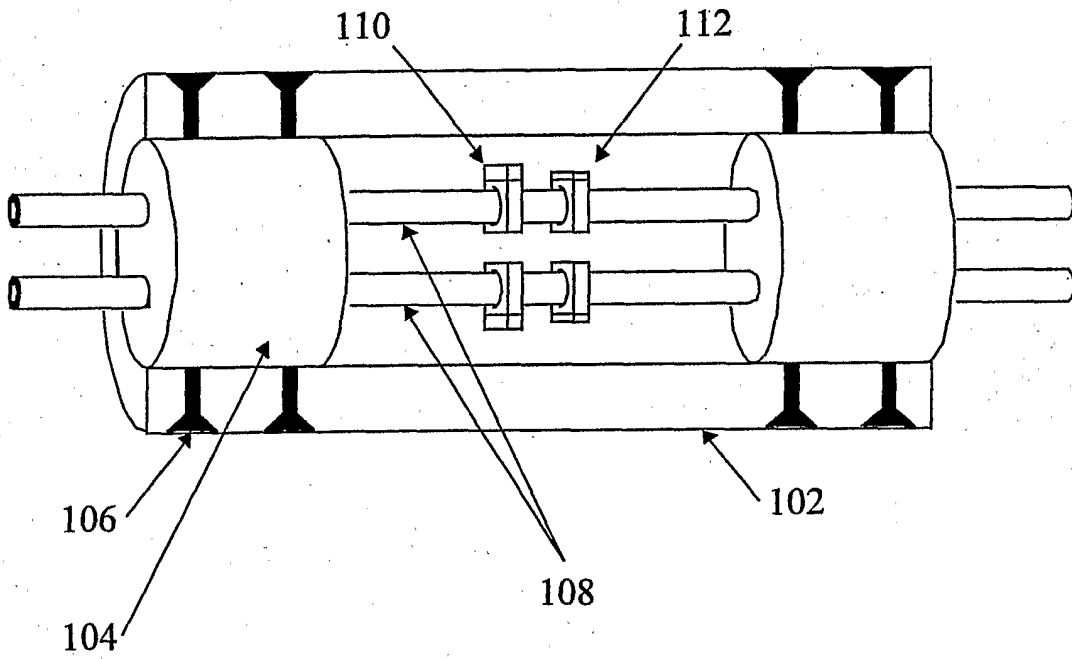


**FIG. 1A**



**FIG. 1B**

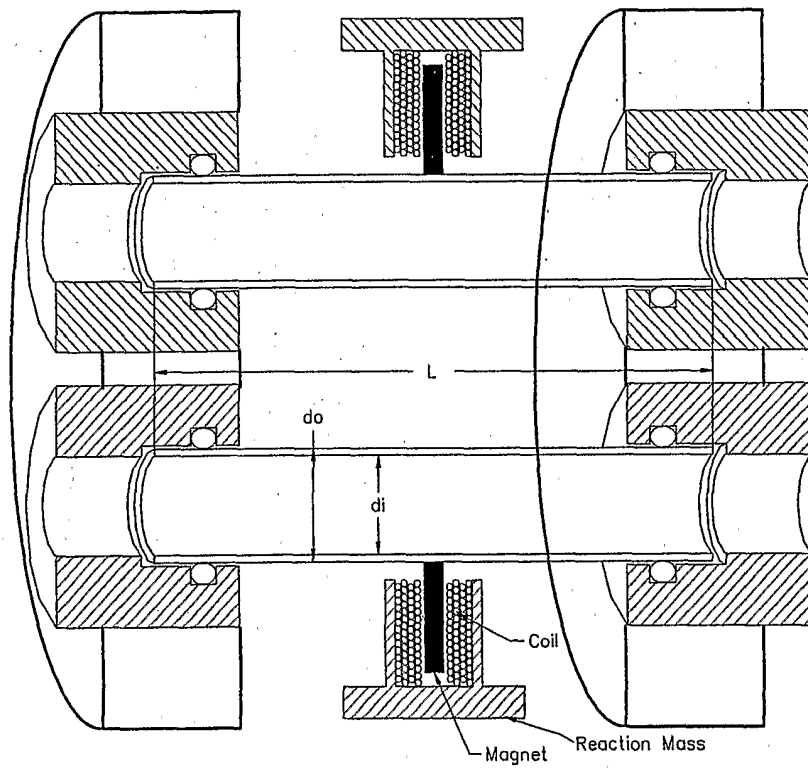

**FIG. 2**

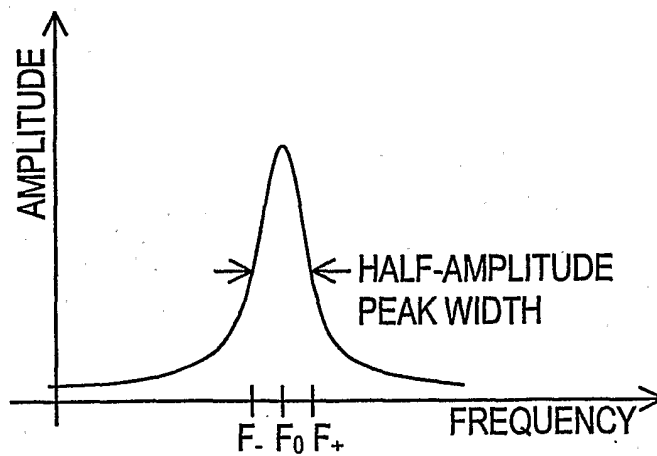

**FIG. 3**

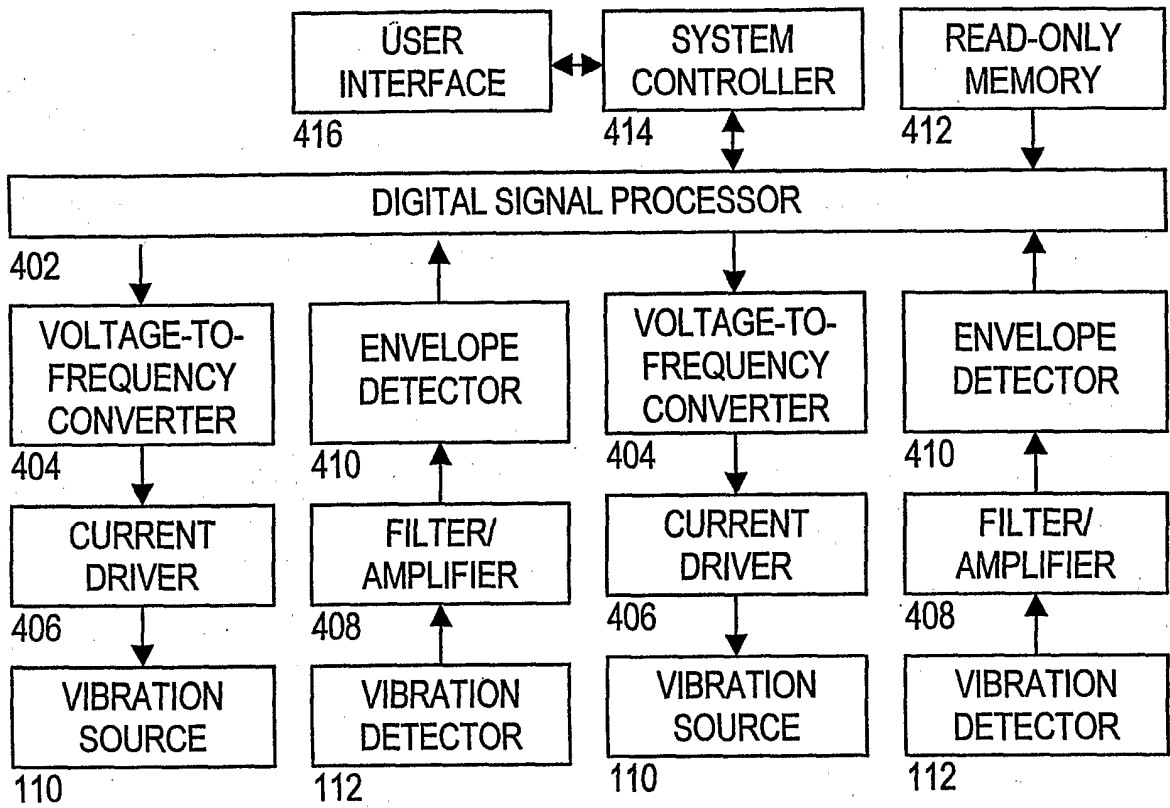


FIG. 4

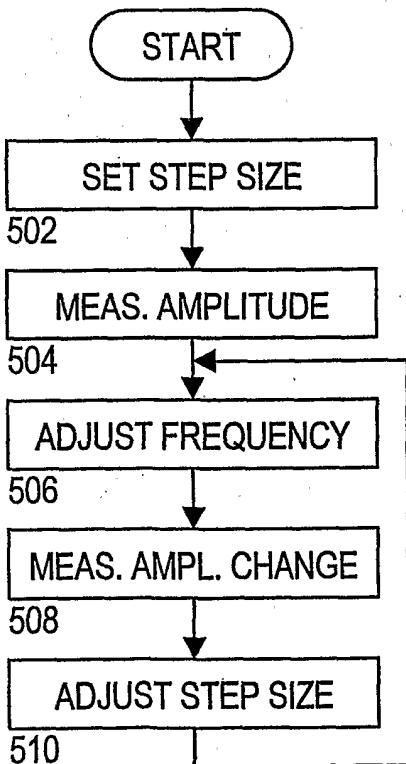


FIG. 5


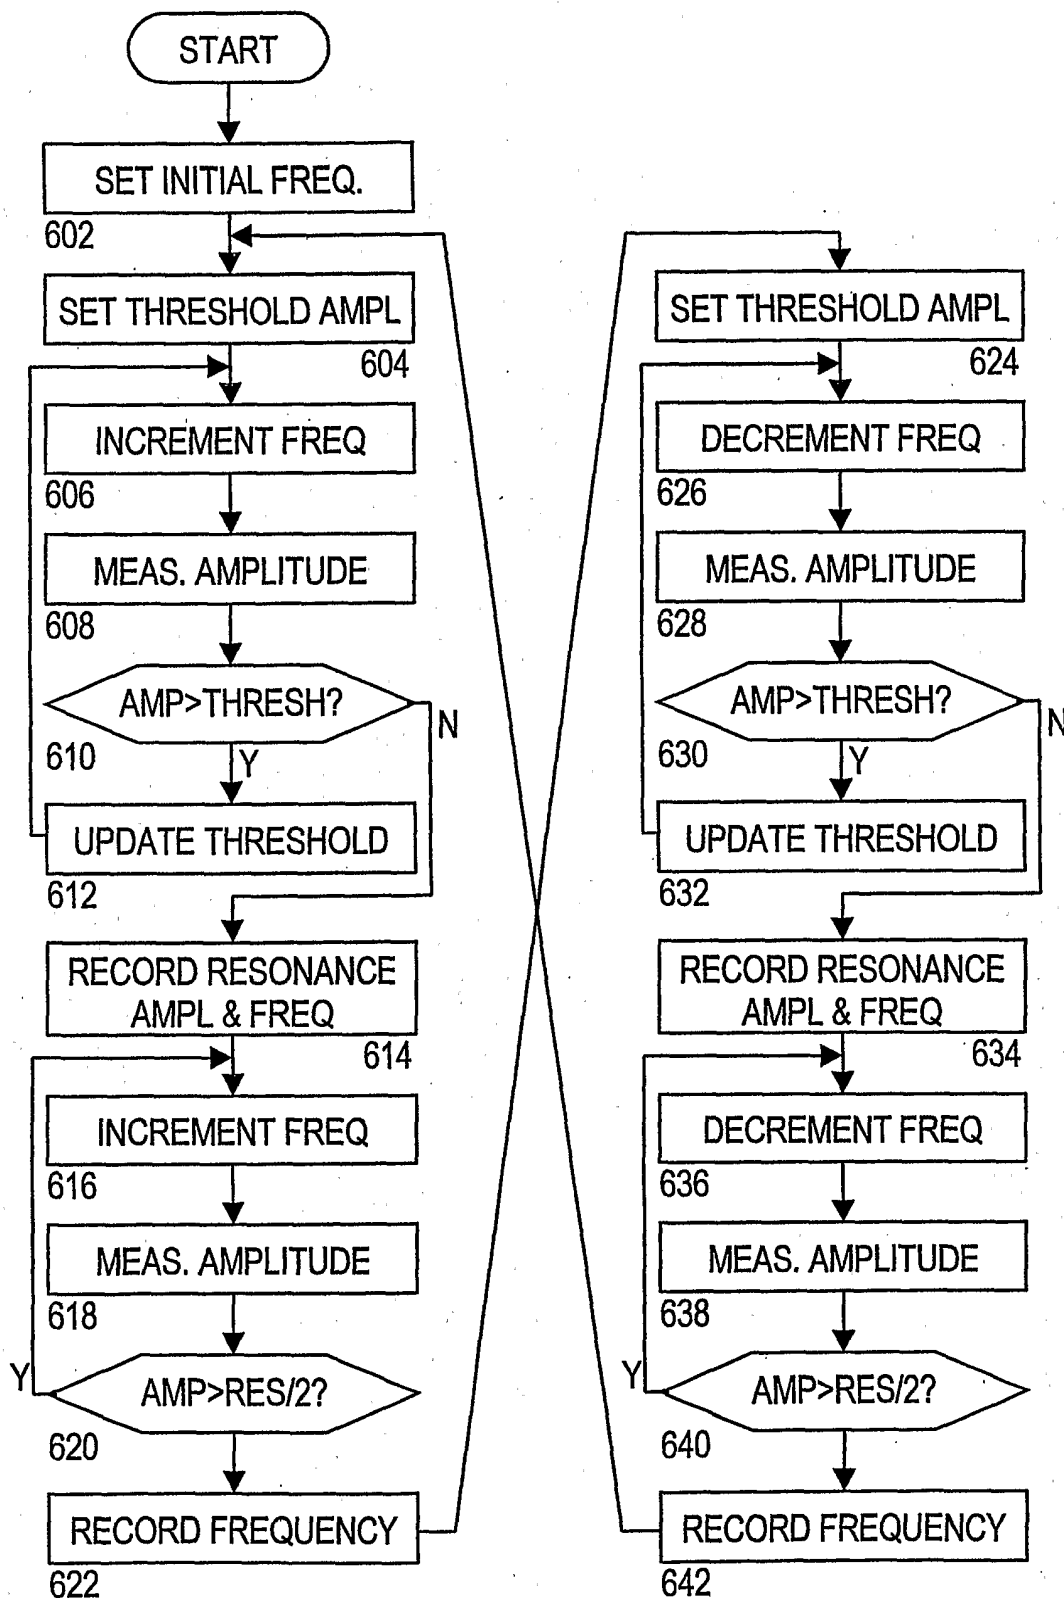


FIG. 6



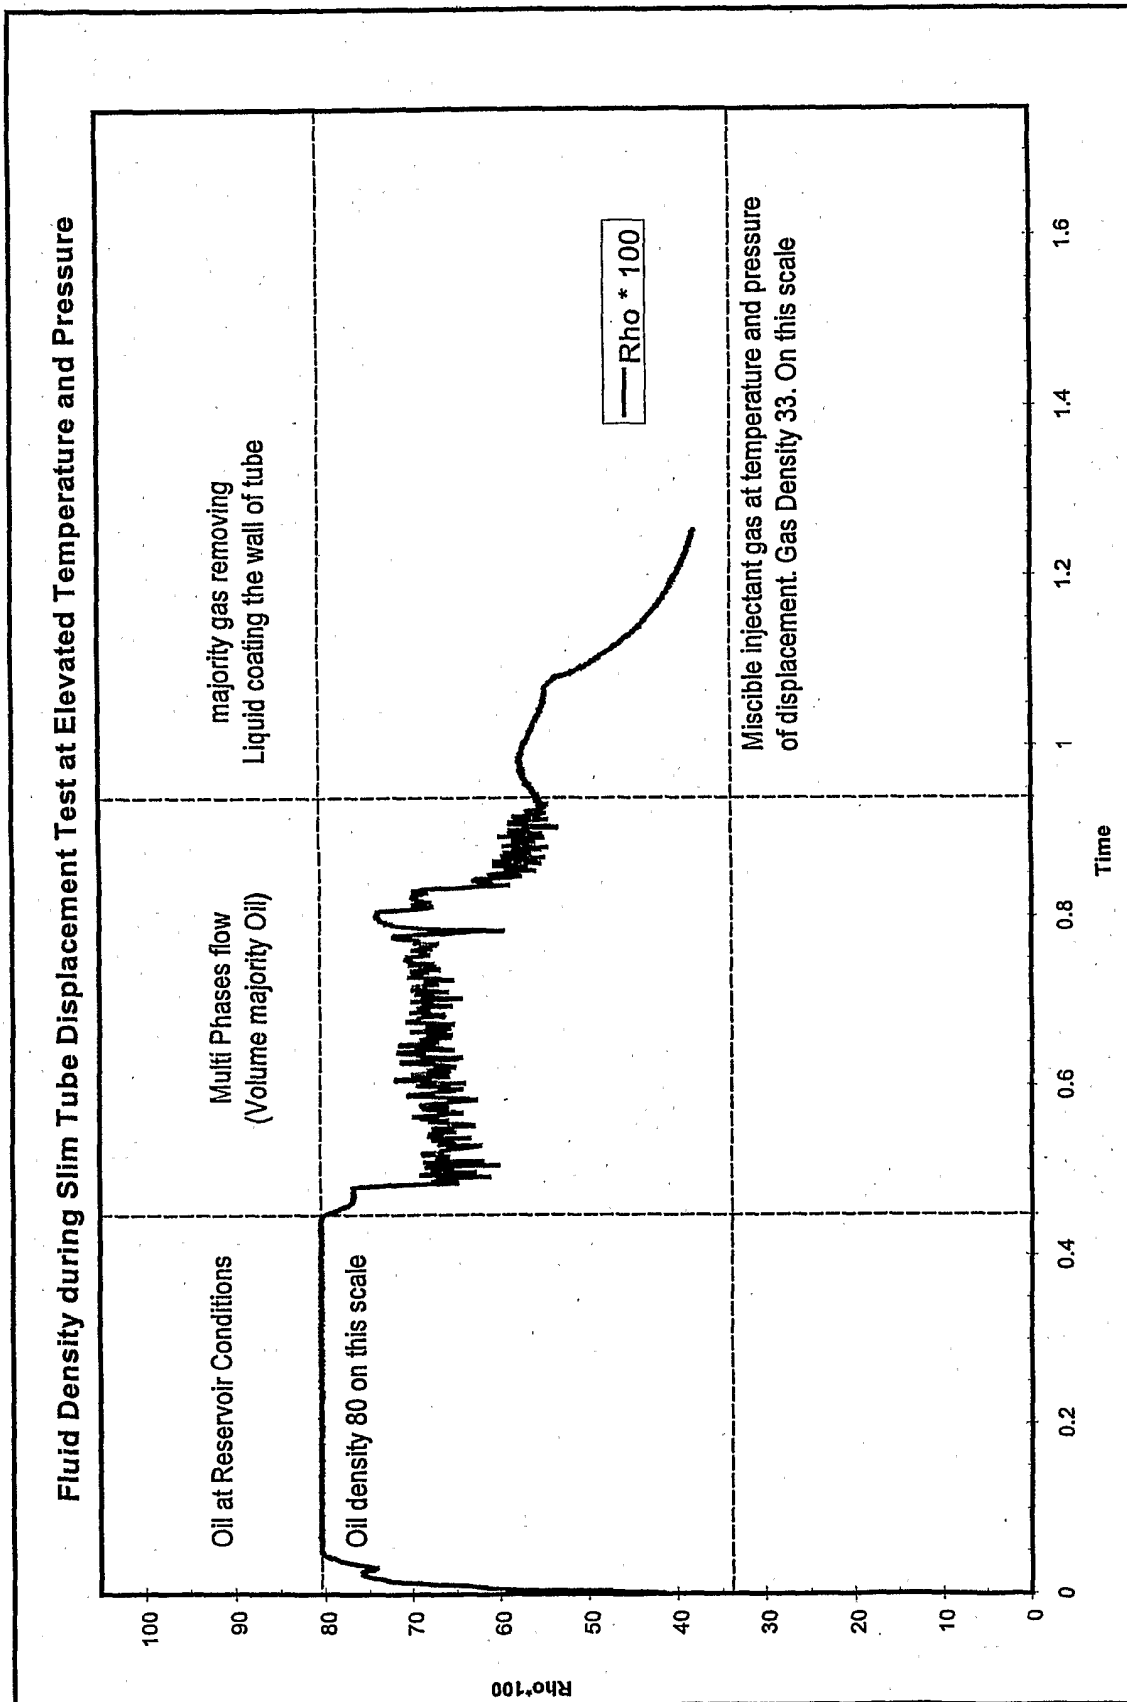

**FIG. 7**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/00790

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : G01F 1/84  
 US CL : 73/861.355, 861.356, 861.357

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 U.S. : 73/861.355, 861.356, 861.357

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
 NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 APS, Derwent

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,796,012 A (GOMI et al.) 18 August 1998 (18.08.1998) figures, abstract; Col 1, Line 35 bridging Col 2, Line 19.	27, 31, 32, 34, 37-38, 40-46, 51, 53, 52, 54-58, 60-62, 68-69, 70-72
X	SPITZER Mass Flowmeters, Instrument Society of America, 1991, pp 221-247, esp Fig 10-6, and Pg. 239, Pg. 221 sidebar.	35-36, 47-50 27-30, 39
X	US 4,823,614 A (DAHLIN et al.) 25 April 1989 (25.04.1989) abstract, Figs 7b, 10, Col 2, Line 57-58.	27, 33, 39, 59
Y	US 5,009,109 A (KALOTAY et al.) 23 April 1991 (23.04.1991) Fig 3, Col 8, Line 60-62	47-48, 50
Y	US 5,363,706 A (LEW) 15 November 1994 (15.11.1994) Col 5, Line 1-16.	49
Y	US 5,827,979 A (SCHOTT et al.) 27 October 1998 (27.10.1998) Col 10, Line 10-13.	35-36

Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search

09 March 2001 (09.03.2001)

Date of mailing of the international search report

04 JUN 2001

Name and mailing address of the ISA/US  
 Commissioner of Patents and Trademarks  
 Box PCT  
 Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Hezron Williams

Telephone No. 703-305-4900

*Sharon S. Hoppe*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/00790

**Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)**

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

- 1.  Claim Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
- 2.  Claim Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
- 3.  Claim Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

- 1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
- 2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
- 3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
- 4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 27-62 and 68-72

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.