



EUROPEAN PATENT APPLICATION

(43) Date of publication:
18.03.2015 Bulletin 2015/12

(51) Int Cl.:
H01H 71/16 (2006.01) **H01H 71/40** (2006.01)
H01H 71/02 (2006.01)

(21) Application number: **13184775.8**

(22) Date of filing: **17.09.2013**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(72) Inventor: **Baek, Ki Ho**
Chungcheongbuk-do (KR)

(74) Representative: **Tholén, Johan**
Awapatent AB
Box 1066
251 10 Helsingborg (SE)


(71) Applicant: **LSIS Co., Ltd.**
Dongan-gu, Anyang-si
Gyeonggi-do 431-848 (KR)

(54) **Circuit breaker with a magnet fixing means**

(57) The present disclosure relates to a circuit breaker having a magnet fixing means, and according to an aspect of the present disclosure, as a circuit breaker including a heater configured to generate heat due to a conduction current induced to a moving contact of the circuit breaker; a bimetal configured to be deformed due to heat generated by the heater to separate a contact point of the moving contact; a magnet configured to generate a magnetic force to move an amateur bar when a current above a previously set reference current is induced; and a trip case configured to accommodate the

bimetal and magnet, at least part of which is made of a synthetic resin material, there is provided the circuit breaker including a magnetic fixing portion integrally formed in the trip case, and made of a synthetic resin material; a magnet fixing means configured to fasten the magnet to the magnet fixing portion; and a bimetal fixing means configured to fix the bimetal to the heater, wherein a magnet-side separating portion exists between the magnet and the heater to be disposed such that the heater is not brought into contact with the magnet.

FIG. 2

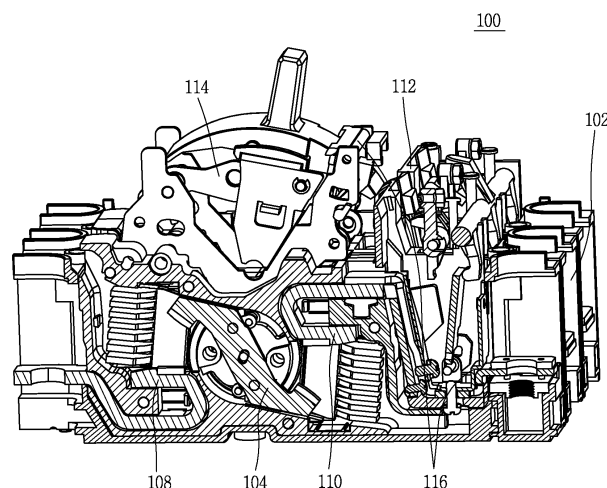

100

Description

BACKGROUND OF THE INVENTION

1. Field of the invention

[0001] The present disclosure relates to a circuit breaker with a magnet fixing means, and more particularly, to a circuit breaker with a magnet fixing means for fixing a magnet used to suppress an overcurrent instantly being occurred.

2. Description of the related art

[0002] In general, a circuit breaker is an electrical device provided within a distribution switchboard having a low voltage circuit (15-30A) with AC 110/220V to be used for the purpose of preventing electric shock on human body, a fire caused by a short circuit, an accident due to an overcurrent and a short circuit, and the like.

[0003] Such a circuit breaker, as a device for sensing a fault current when the fault current and short-circuit current occur and suppressing a line to protect the load and line connected thereto, is widely used instead of one combined with a knife switch and a fuse in the related art since it is small-sized and safely manipulated as well as has no trouble in inserting a fuse.

[0004] The fault current sensing function of the circuit breaker may include an overcurrent protection function and an instantaneous current protection function, and the overcurrent protection function performs a trip operation using a heater and a bimetal provided within the breaker by allowing the bimetal to be bent, and the instantaneous current protection function performs a trip operation using a magnet magnetized by an instantaneously generated high current.

[0005] According to the use of a circuit breaker, the size and conduction time of current is variably set at which a trip operation should be carried out, and in case of a thermal electronic circuit breaker having the foregoing structure, it is set not to perform a trip operation when the current flows below 105% of rated current, but set to perform a trip operation above 130% of rated current. Furthermore, when the current flows above 105% and below 130%, a time for starting the trip operation is individually set according to the size of current.

[0006] FIG. 1 is a cross-sectional view illustrating the internal structure of a typical circuit breaker. Referring to FIG. 1, the foregoing bimetal 10, heater 11, and magnet 12 are fastened by one fixing bolt. The heater 11 generates heat due to its induced current, and the generated heat is conducted into the bimetal 10. When an overcurrent flows, heat enough to deform the bimetal 10 is generated, thereby suppressing the conduction of the overcurrent. Meanwhile, in describing the instantaneous current protection function, when a current above the reference current instantaneously flows therethrough, the magnet 12 is magnetized to pull an amateur bar 13 dis-

posed at the right side (with respect to FIG. 1) of the magnet 12 to the side of the magnet 12 to perform a trip operation.

[0007] In the foregoing structure, heat generated by the heater while an overcurrent flows therethrough is conducted to the side of the magnet along the fixing bolt as well as the bimetal. Due to this, an amount of heat conducted to the bimetal is reduced, thereby causing a problem that the operation of the bimetal is inaccurate. Due to this, an amount of heat transferred to the side of the bimetal should be taken into consideration during the design of a circuit breaker, thereby causing a problem that the design becomes difficult. Furthermore, the amount of conducted heat varies according to the abrasion degree of the fixing bolt and the difference of the fastening force, and as a result, there exists a problem that the operational characteristics of the circuit breaker becomes non-uniform.

SUMMARY OF THE INVENTION

[0008] The present disclosure is contrived to overcome the foregoing problems in the related art, and a technical task of the present disclosure is to provide a circuit breaker capable of constantly maintaining the operational characteristics of a circuit breaker.

[0009] Another technical task of the present disclosure is to provide a circuit breaker capable of allowing a bimetal to be accurately operated according to regulations such as a conduction time, a conduction current value, and the like.

[0010] In order to accomplish the foregoing technical tasks, according to an aspect of the present disclosure, as a circuit breaker including a heater configured to generate heat due to a conduction current induced to a moving contact of the circuit breaker; a bimetal configured to be deformed due to heat generated by the heater to separate a contact point of the moving contact; a magnet configured to generate a magnetic force to move an amateur bar when a current above a previously set reference current is induced; and a trip case configured to accommodate the bimetal and magnet, at least part of which is made of a synthetic resin material, there is provided the circuit breaker including a magnetic fixing portion integrally formed in the trip case, and made of a synthetic resin material; a magnet fixing means configured to fasten the magnet to the magnetic fixing portion; and a bimetal fixing means configured to fix the bimetal to the heater, wherein a magnet-side separating portion exists between the magnet and the heater to be disposed such that the heater is not brought into contact with the magnet.

[0011] Here, the circuit breaker may further include a heater fixing means configured to fix the heater to the trip case, wherein the heater fixing means is fastened to the magnetic fixing portion.

[0012] Furthermore, a bimetal-side separating portion may be disposed between the heater and the bimetal. Here, the two separating portions may be respectively

disposed on the remaining portion excluding the contact portion.

[0013] Furthermore, only one side end portion of the magnet may be fixed to the magnetic fixing portion. Further, the magnet may be spaced apart from the trip case except the end portion fixed to the magnet fixing portion.

[0014] In addition, an interference avoidance portion for accommodating part of the magnet fixing means may be formed at the heater.

[0015] According to aspects of the present disclosure, a heater and a magnet may be separated from each other and individually fastened, thereby minimizing an amount of heat transferred from the heater to the magnet, and accordingly, constantly maintaining the operational characteristics of a bimetal. In particular, the magnet may be fastened to a magnet fixing portion made of a synthetic resin material having a low thermal conductivity, and a magnet-side separating portion may be disposed between the heater and the magnet, thereby further minimizing the amount of heat conducted from the heater.

[0016] Moreover, a bimetal-side separating portion may be also provided between the heater and the bimetal, thereby minimizing the deformation and positional discrepancy and the like of the bimetal due to the expansion of the heater.

[0017] In addition, only one side end portion of the magnet may be fastened to the magnet fixing portion, thereby minimizing a thermal conduction path connected from the heater to the magnet.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0019] In the drawings:

FIG. 1 is a schematic diagram illustrating the internal structure of a circuit breaker according to the related art;

FIG. 2 is a partial cross-sectional view illustrating the internal structure of a circuit breaker according to an embodiment of the present disclosure;

FIG. 3 is an enlarged partial cross-sectional view illustrating part of the embodiment illustrated in FIG. 2; and

FIG. 4 is an enlarged cross-sectional view illustrating another part of the embodiment illustrated in FIG. 2.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Hereinafter, a circuit breaker according to an embodiment of the present disclosure will be described in detail with reference to the accompanying drawings.

[0021] Prior to the description, it should be noted that

terms and words used in the description and claims must not be limited and interpreted to be typical or literal, and should be construed as the meaning and concept conforming to the technical concept of the invention on the basis that the inventor can define the concept of the terms and words to describe the invention in a best way.

[0022] Accordingly, since the embodiments described in the present invention and configurations shown the drawings are the most preferred embodiments only and do not represent all of technical concept of the invention, it should be understood that there may be various equivalents and modification examples that may replace them at the time of application of present invention.

[0023] FIG. 2 is a partial cross-sectional view illustrating the internal structure of a circuit breaker according to an embodiment of the present disclosure, and FIG. 3 is an enlarged partial cross-sectional view illustrating part of the embodiment illustrated in FIG. 2. Referring to FIGS. 2 and 3, the embodiment 100 may include a case 102 on which a switch is rotatably provided to selectively switch a current supplied from the power side to the load side, a moving contact 104 rotatably provided within the case 102, on an end portion of which there is provided a contact point of the current, and a bimetal 106 connected to the moving contact 104 through a lead line.

[0024] The case 102 is an injection molded part made of a synthetic resin material, which functions as an enclosure of the circuit breaker.

[0025] A first fix contact 108 formed of a conductive material to be fixed to the case, which is a power-side stationary contact point, and a second fix contact 110, which is a load-side stationary contact point, are provided within the case 102. A gap between the first fix contact and the second fix contact is electrically connected or disconnected while rotating the moving contact 104, and FIG. 1 illustrates a state in which the moving contact is not brought into contact with the first and the second fix contact, namely, a disconnecting state.

[0026] A trip assembly 112 configured to actuate the moving contact and a driving mechanism 114 mechanically connected to the trip assembly to drive the trip assembly are additionally provided within the case 102.

[0027] Furthermore, the driving mechanism 114 may include a plurality of nails 116 mechanically connected to the trip assembly 112.

[0028] Referring to FIG. 3, the trip assembly 112 may include a rotatably fixed shooter 118, and the shooter 118 transfers power between the nail 116 and a crossbar 120.

[0029] On the other hand, a magnet fixing portion 130 provided as an integral or individual element with the case 102 is provided within the case 102. The magnet fixing portion 130 is made of a synthetic resin material, and part of an element contained in the trip assembly 112 is fixed thereto.

[0030] Specifically, a heater 140 for generating heat to deform the bimetal 106 when an overcurrent flows is fixed to an upper surface of the magnet fixing portion 130. Re-

ferring to FIG. 4, the heater 140 is immovably fixed to the magnet fixing portion 130 by the heater fixing bolt 142, and a lower end portion of the bimetal 106 is fixed to heater 140 by a bimetal fixing bolt 144. Here, the heater 140 is in a state of being brought into contact with the bimetal at a portion adjacent to the bimetal fixing bolt 144, but separated from the bimetal 106 at the remaining portion to form a bimetal-side separating portion (G1).

[0031] On the other hand, an amateur bar 150 for rotating the crossbar 120 is provided at the right side of the bimetal 106, and a magnet 160 formed of a ferromagnetic substance to generate a magnetic force using a current flowing through the heater 140 so as to pull the amateur bar 150 is provided at the left side of the heater 140. Here, the magnet 160 is fixed to the magnet fixing portion 130 by a magnet fixing bolt 162. Moreover, the magnet 160 is merely brought into contact with the magnet fixing bolt 162 and the magnet fixing portion 130 but not brought into contact with other elements in the remaining portion. In particular, a separating portion (G) exists between the heater 140 and the magnet 160, and thus it is seen that the paths of transferring heat generated from the heater directly to the side of the magnet 160 are all suppressed.

[0032] Here, in order to prevent the magnet fixing bolt 162 from being brought into contact with the heater 140, a bolt accommodating portion 146 is formed at the heater 140 to pass therethrough. The bolt accommodating portion 146 is formed to be larger than the head portion of the magnet fixing bolt 162 not to allow the heater to be brought into contact with the fixing bolt, and a tool such as a driver or the like can be approached to the side of the magnet fixing bolt.

[0033] The operation of the embodiment will be described below. First, heat generation is carried out in the heater 140 when an overcurrent flows, and accordingly, heat is conducted to the bimetal 106 in contact therewith. When the conducted heat reaches a degree sufficient to bend the bimetal, the crossbar 120 is rotated while bending the bimetal 106. As a result, the restraint of the shooter 118 is released to be rotated, and the nail 116 is rotated by the force of the shooter 118 to operate the driving mechanism 114. The driving mechanism 114 is mechanically connected to the moving contact 104 to rotate the moving contact 104, and thus the circuit is open.

[0034] During the foregoing process, a path of conducting heat is suppressed between the heater and the magnet due to the existence of the separating portion (G), and thus most of heat generated from the heater is conducted to the bimetal. Accordingly, the bimetal can be correctly operated according to the intention at the time of the design. In other words, the bimetal can be operated according to the conduction time and conduction current. Of course, though there exists a magnet fixing portion between the heater and the magnet, an amount of heat conducted therethrough is very small since the magnet is made of a synthetic resin material.

[0035] Moreover, the bimetal-side separating portion (G1) performs the role of preventing the bimetal from

being deformed while the heater is expanded due to heat. When there does not exist the bimetal-side separating portion (G1), the expanded heater may push the bimetal to dislocate the position of the bimetal, but the expanded amount of the heater can be absorbed since there exists the bimetal-side separating portion (G1).

Claims

1. A circuit breaker comprising a heater (106) configured to generate heat due to a conduction current induced to a moving contact of the circuit breaker; a bimetal (140) configured to be deformed due to heat generated by the heater to separate a contact point of the moving contact; a magnet (160) configured to generate a magnetic force to move an amateur bar when a current above a previously set reference current is induced; and a trip case (102) configured to accommodate the bimetal and magnet, at least part of which is made of a synthetic resin material, the circuit breaker comprising:

a magnetic fixing portion (130) integrally formed in the trip case, and made of a synthetic resin material;

a magnet fixing means (162) configured to fasten the magnet to the magnet fixing portion; and a bimetal fixing means (144) configured to fix the bimetal to the heater, wherein a magnet-side separating portion exists between the magnet and the heater to be disposed such that the heater is not brought into contact with the magnet.

2. The circuit breaker of claim 1, further comprising:

a heater fixing means (142) configured to fix the heater to the trip case, wherein the heater fixing means (142) is fastened to the magnetic fixing portion.

3. The circuit breaker of claim 1, wherein a bimetal-side separating portion is disposed between the heater and the bimetal.

4. The circuit breaker of claim 3, wherein the two separating portions are respectively disposed on the remaining portion excluding the contact portion.

5. The circuit breaker of claim 1, wherein only one side end portion of the magnet is fixed to the magnetic fixing portion.

6. The circuit breaker of claim 5, wherein the magnet is spaced apart from the trip case except the end portion fixed to the magnet fixing portion.

7. The circuit breaker of claim 1, wherein an interference avoidance portion for accommodating part of the magnet fixing means is formed at the heater.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

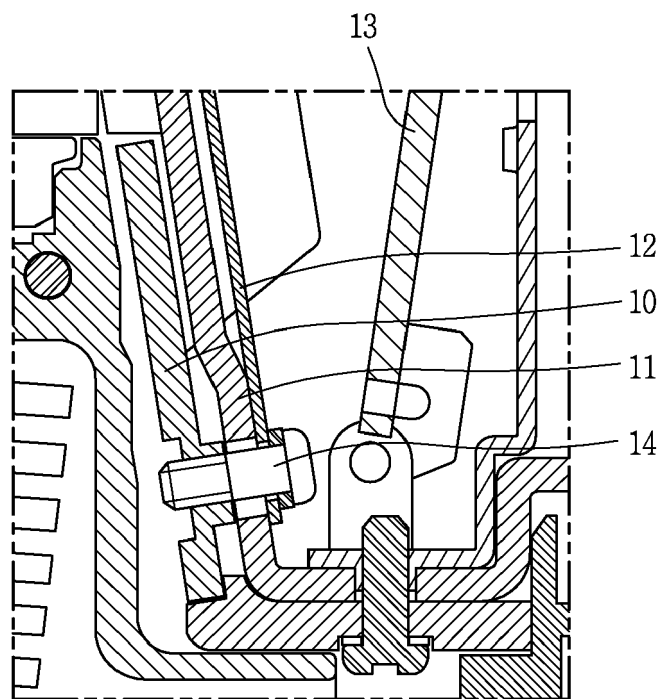


FIG. 2

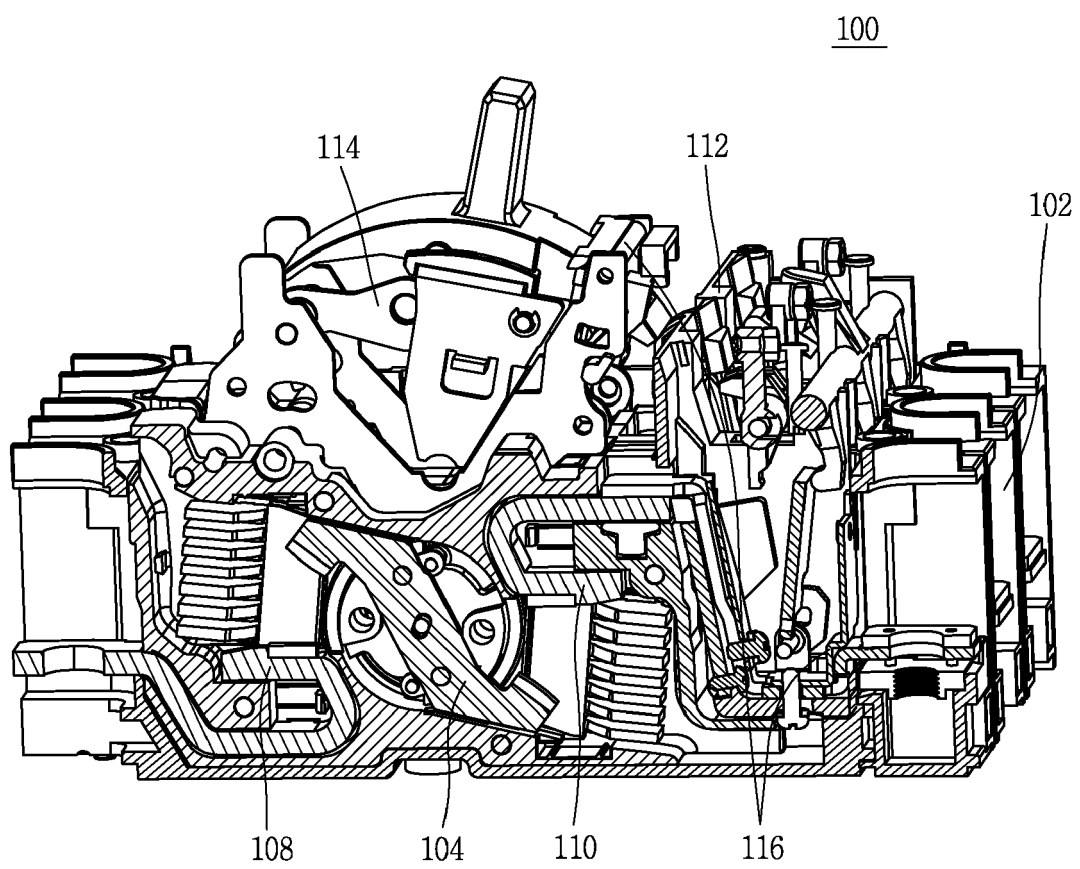


FIG. 3


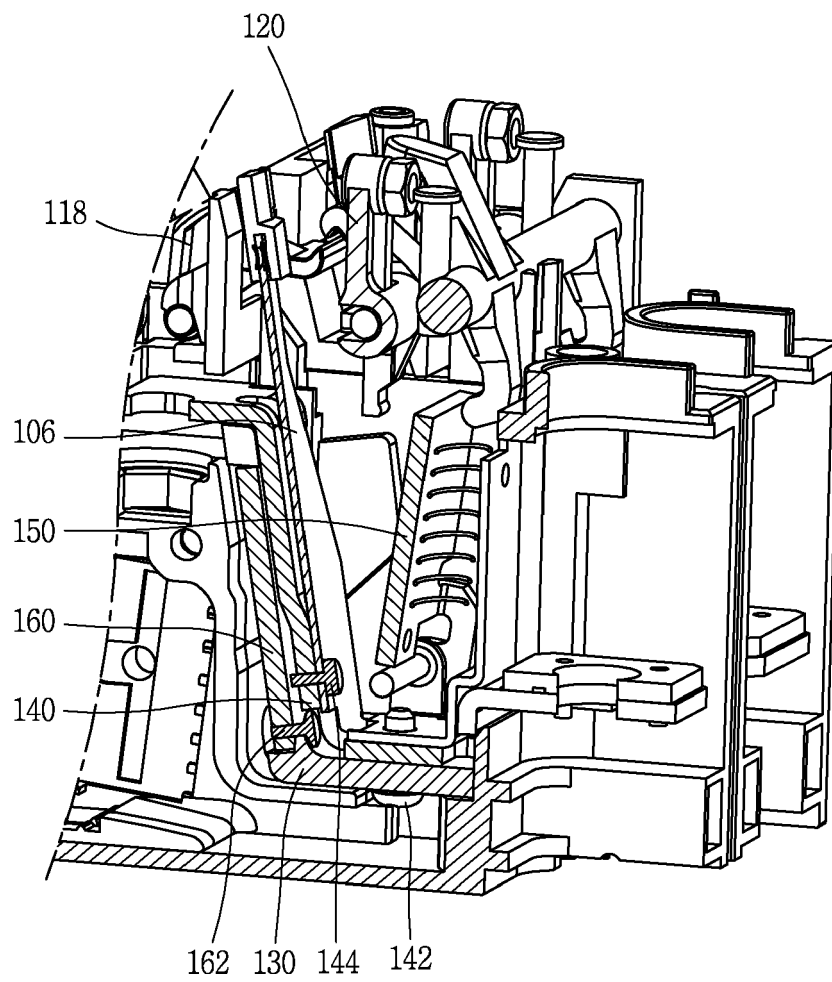


FIG. 4



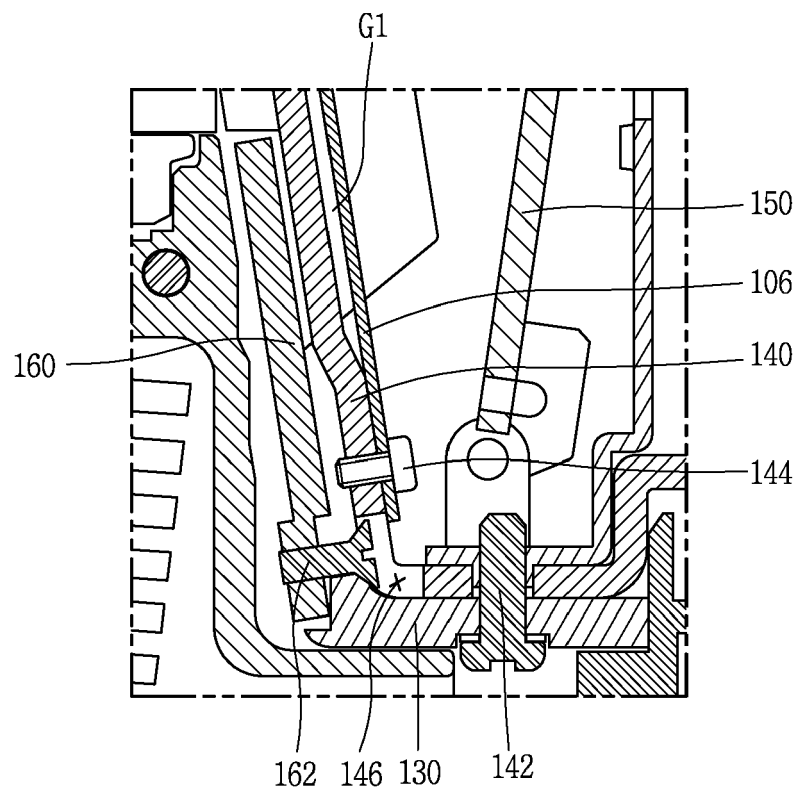

EUROPEAN SEARCH REPORT

Application Number
EP 13 18 4775

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2009/295532 A1 (PUHALLA CRAIG J [US] ET AL) 3 December 2009 (2009-12-03) * page 2, paragraph 0031 - page 5, paragraph 0049; figures 2-5 *	1-7	INV. H01H71/16 H01H71/40 H01H71/02
X	KR 2004 0070544 A (LG IND SYSTEMS CO LTD) 11 August 2004 (2004-08-11) * page 2, paragraph 4 - page 4, paragraph 8; figures 1-6 *	1-7	
X	US 3 345 591 A (LEONARD JAMES H ET AL) 3 October 1967 (1967-10-03) * column 3, line 30 - column 4, line 59; claim 3; figures 4,5 *	1-4,7	
Y		5,6	
Y	WO 2013/126061 A1 (SIEMENS AG [DE]; SANDOVAL CAMACHO ESTEBAN [MX]; THOMAS STEPHEN SCOTT []) 29 August 2013 (2013-08-29) * page 8, paragraph 3 - page 10, paragraph 5; figure 4 *	5,6	
A		1-4,7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) H01H
Place of search Munich		Date of completion of the search 22 January 2014	Examiner Pavlov, Valeri
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 4775

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-01-2014

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009295532 A1	03-12-2009	CN 101593640 A	02-12-2009
		CN 201536088 U	28-07-2010
		US 2009295532 A1	03-12-2009

KR 20040070544 A	11-08-2004	NONE	

US 3345591 A	03-10-1967	DE 1588732 B1	21-10-1971
		GB 1148957 A	16-04-1969
		US 3345591 A	03-10-1967

WO 2013126061 A1	29-08-2013	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82