



(51) International Patent Classification:

F04B 39/06 (2006.01) F04C 29/02 (2006.01)
F04C 29/04 (2006.01)

(21) International Application Number:

PCT/US2016/067089

(22) International Filing Date:

16 December 2016 (16.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/974,741 18 December 2015 (18.12.2015) US

(71) Applicant: **SUMITOMO (SHI) CRYOGENICS OF AMERICA, INC.** [US/US]; 1833 Vultee Street, Allentown, PA 18103-4783 (US).

(72) Inventors: **SLOAN, R. Bruce**; 5309 Columbine Circle, Schnecksville, PA 18078 (US). **LONGSWORTH, Ralph, C.**; C/o Sumitomo (SHI) Cryogenics Of America Inc., 1833 Vultee Street, Allentown, PA 18103-4783 (US).

(74) Agents: **HELFGOTT, Samson et al.**; Katten, Muchin, Rosenman LLP, 575 Madison Avenue, New York, NY 10022-2585 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HELIUM COMPRESSOR WITH DUAL AFTER-COOLERS

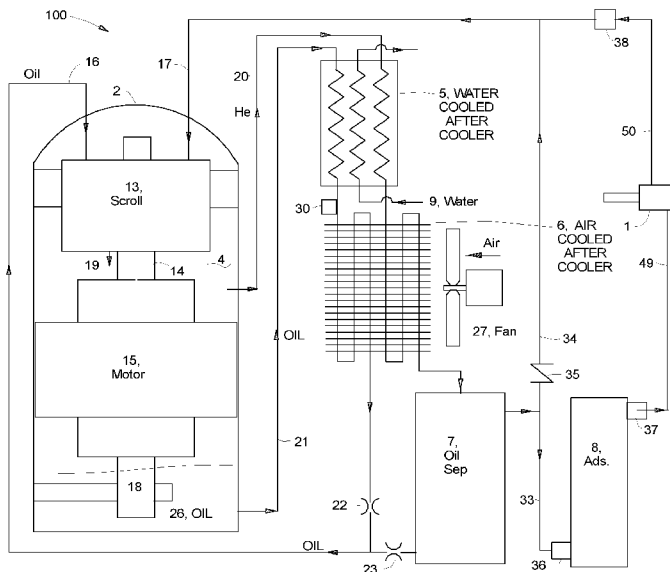


FIG. 1

(57) Abstract: An oil lubricated helium compressor system is located in an indoor environment where the ambient air temperature is between 15°C and 30°C. The system includes a compressor, a separator internal or external to the compressor that receives a mixture of compressed helium and oil and discharges helium and oil through separate ports, a water cooled after-cooler for effecting cooling of the helium and oil, an air cooled after-cooler for effecting cooling of the helium and oil, the air cooled after-cooler including a heat exchanger and a fan, the both coolers are connected in series, a first line extending from the helium discharge port and passing through the water cooled after-cooler and the air cooled after-cooler the helium being cooled by one or both the water cooled after-cooler and the air cooled after-cooler; and a second line extending from the oil discharge port through both coolers.

WO 2017/106594 A1

HELIUM COMPRESSOR WITH DUAL AFTER-COOLERS

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to helium compressor units for use in cryogenic refrigeration systems operating on the Gifford McMahon (GM) and Brayton cycles. More particularly, the invention relates to dual after-coolers that provide redundancy between water cooling and air cooling if there is a blockage in the water or air supply.

2. Description of the Related Art

The basic principal of operation of a GM cycle refrigerator is described in U.S. Patent No. 2,906,101 to McMahon, et al. A GM cycle refrigerator consists of a compressor that supplies gas at a discharge pressure to an inlet valve which admits gas to an expansion space through a regenerator, expands the gas adiabatically within a cold end heat exchanger where it receives heat from an object being cooled, then returns the gas at low pressure to the compressor through the regenerator and an outlet valve. The GM cycle has become the dominant means of producing cryogenic temperatures in small commercial refrigerators primarily because it can utilize mass produced oil-lubricated air-conditioning compressors to build reliable, long life, refrigerators at minimal cost. GM cycle refrigerators operate well at pressures and power inputs within the design limits of air-conditioning compressors, even though helium is substituted for the design refrigerants. Typically, GM refrigerators operate at a high pressure of about 2 MPa, and a low pressure of about 0.8 MPa. The cold expander in a GM refrigerator is typically separated from the compressor by 5 m to 20 m long gas lines. The expanders and compressors are usually mounted indoors and the compressor is usually cooled by water, most frequently water that is circulated by a water chiller unit. Air cooled compressors that are mounted indoors are typically cooled by air conditioned air which is in the temperature range of 15°C to 30°C.

A system that operates on the Brayton cycle to produce refrigeration consists of a compressor that supplies gas at a discharge pressure to a heat exchanger, from which gas is admitted to an expansion space through an inlet valve, expands the gas adiabatically, exhausts the expanded gas (which is colder) through in outlet valve, circulates the cold gas through a load being cooled, then returns it to the compressor at a low pressure through the

heat exchanger. Brayton cycle refrigerators operating at cryogenic temperatures can also be designed to operate with the same compressors that are used for GM cycle refrigerators.

Disadvantageously, compressors designed for air-conditioning service require additional cooling when compressing helium because monatomic gases including helium get a lot hotter when compressed than standard refrigerants. US 7,674,099 describes a means of adapting a scroll compressor manufactured by Copeland Corp. to injecting oil along with helium into the scroll such that about 2% of the displacement is used to pump oil. Approximately 70% of the heat of compression leaves the compressor in the hot oil and the balance in the hot helium.

The Copeland compressor is oriented horizontally and requires an external bulk oil separator to remove most of the oil from the helium. Another scroll compressor that is widely used for compressing helium is manufactured by Hitachi Inc. The Hitachi compressor is oriented vertically and brings the helium and oil directly into the scroll through separate ports at the top of the compressor and discharges it inside the shell of the compressor. Most of the oil separates from the helium inside the shell and flows out of the shell near the bottom while the helium flows out near the top. Helium compressor systems that use the Copeland and Hitachi scroll compressors have separate channels in one or more after-coolers for the helium and oil. Heat is transferred from the oil and helium to either air or water. The cooled oil is returned to the compressor and the cooled helium passes through a second oil separator and an adsorber before flowing to the expander. US 7,674,099 shows after-cooler 8 as being a single heat exchanger cooled by water. This is a typical arrangement for helium compressor systems that operate indoors where chilled water is available. Some helium compressor systems have air cooled after-coolers located indoors but they put an extra heat load on the air conditioning system so it is more typical to have air cooled after-coolers mounted outdoors, either integral with the compressor or separate from the compressor. US 8,978,400 shows an arrangement with a Hitachi scroll compressor that has the oil cooler outdoors cooled by air and all the other components indoors with the helium cooled either by air or water. As explained in the '400 patent, keeping all of the components that have helium in them indoors in an air condition environment, where the temperature is in the range of 15°C to 30°C, minimizes the contaminants that evolve from hot oil and increases the life of the final adsorber.

Patent DE3023925 describes a helium compressor system with a water cooled after-cooler which has an option to cool the water with an air cooled heat exchanger and a pump that circulates the water. This arrangement adds the temperature difference of the helium/oil-

to-water heat exchanger to the water-to-air heat exchanger and results in higher helium and oil temperatures that release more contaminants into the helium.

SUMMARY OF THE INVENTION

The objective of this invention is to provide redundancy in the after-cooler of a helium compressor operating with an expander, preferably a GM cycle expander, to produce refrigeration at cryogenic temperatures. An important application is cooling of superconducting MRI magnets which operate at temperatures near 4K and require very reliable operation. Most MRI systems are located in hospitals and have chilled water available, so the primary after-cooler in the helium compressor is water cooled. In the event of a failure in the water cooling system this invention provides backup cooling using an air cooled after-cooler. A preferred option is to have the air cooled after-cooler in series with the water cooled after-cooler and a second option is to have the two after-coolers in parallel.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a schematic diagram of an oil-lubricated helium compressor system that has an air cooled after-cooler in series with a water cooled after-cooler.

FIG. 2 is a schematic diagram of an oil-lubricated helium compressor system that has an air cooled after-cooler in parallel with a water cooled after-cooler.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Parts that are the same or similar in the drawings have the same numbers and descriptions are not repeated.

FIG. 1 is a schematic diagram of an oil-lubricated helium compressor system that has an air cooled after-cooler in series with a water cooled after-cooler and FIG. 2 is a schematic diagram of an oil-lubricated helium compressor system that has an air cooled after-cooler in parallel with a water cooled after-cooler. These figures show the vertical Hitachi scroll compressors but the schematics for the horizontal Copeland compressors are similar.

Compressor system components that are common to all of the figures are: compressor shell **2**, high pressure volume **4** in the shell, compressor scroll **13**, drive shaft **14**, motor **15**, oil pump **18**, oil in the bottom of the compressor **26**, oil return line **16**, helium return line **17**, helium/oil mixture discharge from the scroll **19**, oil separator **7**, adsorber **8**, main oil flow control orifice **22**, orifice **23** which controls the flow rate of oil from the oil separator, gas line **33** from oil separator **7** to adsorber **8** and internal relief valve **35**, gas line **34** from

internal relief valve **35** to helium return line **17**, adsorber inlet gas coupling **36**, adsorber outlet gas coupling **37** which supplies high pressure helium to expander **1** through line **49**, and returns gas at low pressure to the compressor through line **50**, coupling **38**, And line **17**.

Compressor system **100** in **Fig. 1** shows water cooled after-cooler **5** in series with air cooled after-cooler **6**. High pressure helium flows from compressor **2** through line **20** which extends through after-coolers **5** and **6** to oil separator **7**. High pressure oil flows from compressor **2** through line **21** which extends through after-coolers **5** and **6** to main oil control orifice **22**. Cooling water **9** flows through after-cooler **5** in a counter-flow heat transfer relation with the helium and oil. Fan **27** drives air through after-cooler **6** in a counter-flow heat transfer relation with the helium and oil.

Applications for this system are typically indoors where chilled water at temperatures between 10°C and 30°C is available and water cooled after-cooler **6** is the primary cooler. Helium and oil typically leave after-cooler **5** near room temperature so fan **27** can be allowed to run continuously without transferring a significant amount of heat either to or from the air. Having the fan run continuously provides redundancy in the event that the water circuit is blocked without having to take any action. Another option is to sense the temperature of the helium and/or oil leaving water cooled after-cooler **5** and have a control circuit that turns fan **27** on when the temperature exceeds a defined temperature and turns fan **27** off when the temperature drops below the defined temperature. Such a temperature sensor might be mounted as shown for sensor **30**.

FIG. 2 is a schematic diagram of compressor system **200**. It shows a schematic diagram of an oil-lubricated helium compressor system that has air cooled after-cooler **6** in parallel with water cooled after-cooler **5**. Helium flows at high pressure from compressor **2** through line **40** to three-way valve **24** which is shown in a position that allows the helium to flow in line **41** through water cooled after-cooler **5** then connecting through line **43** to oil separator **7**. Oil flows at high pressure from compressor **2** through line **45** to three-way valve **25** which is shown in a position that allows the oil to flow in line **46** through water cooled after-cooler **5** then connecting through line **48** to main oil control restrictor **22**. To divert helium and oil from flowing through after-cooler **5** to air cooled after-cooler **6**, three-way valves **24** and **25** are rotated 90° counter clockwise. When the valves are switched, helium flows in line **42** through air cooled after-cooler **6** then through line **43** to oil separator **7**, and oil flows in line **47** through air cooled after-cooler **6** then through line **48** to main oil control restrictor **22**. The switching of the valves can be manual or automatic and controlled on the basis of temperature sensor **30** as described above. Fan **27** would be turned on when helium

and oil are flowing through air cooled after-cooler 6. The control system that determines which after-cooler is being used, when there is a fault, when to switch from one after-cooler to the other, when to turn the fan on and off, and when to open and close a water supply valve, may be either be included as part of the compressor system or located in an external control system.

The preference for having the water cooled after-cooler as the primary cooler is typical but there may be circumstances when the air cooled after-cooler is the primary cooler and the water cooled after-cooler is used as a backup. It is also possible that the air cooled after-cooler is used in the winter to help heat the building and the water cooled after-cooler is used in the summer to minimize the load on the air conditioner. Some MRI magnets are kept cold during transport by running the refrigerator using the air cooled compressor because electrical power is available but not cooling water.

While this invention has been described in most detail for GM cycle refrigerators cooling MRI magnets at 4K it is also applicable to Brayton cycle refrigerators and applications such as cooling cryopumping panels at 150K. It will further be understood that it is capable of further modification, uses and/or adaptations, following in general the principal of the invention, and including such departures from the present disclosure as come within known or customary practice in the art to which the invention pertains, and as may be applied to the essential features herein before set forth, as fall within the scope of the invention or the limits of the appended claims. Also, it is to be understood that the phraseology and terminology employed herein, as well as the abstract, are for the purpose of description and should not be regarded as limiting.

It is also understood that the following claims are intended to cover all of the generic and specific features of the invention described herein.

CLAIMS

What is claimed is:

1. An oil lubricated helium compressor system which is located in an indoor environment where the ambient air temperature is between 15°C and 30°C, the compressor system comprising:

a compressor,

a separator internal or external to the compressor that receives a mixture of compressed helium and oil and discharges helium and oil through separate ports,

a water cooled after-cooler for effecting cooling of the helium and oil,

an air cooled after-cooler for effecting cooling of the helium and oil, the air cooled after-cooler comprising a heat exchanger and a fan, the water cooled after-cooler and the air cooled after-cooler connected in series:

a first line extending from the helium discharge port and passing through the water cooled after-cooler and the air cooled after-cooler the helium being cooled by one or both the water cooled after-cooler and the air cooled after-cooler; and

a second line extending from the oil discharge port and passing through the water cooled after-cooler and the air cooled after-cooler the oil being cooled by one or both the water cooled after-cooler and the air cooled after-cooler;

wherein the first line and the second line are separate.

2. A compressor system in accordance with claim 1, the first line and the second line pass through the water cooled after-cooler before the air cooled after-cooler.

3. The compressor system of claim 1 including one or more sensors connected to a controller.

4. An oil-lubricated helium compressor system located in an indoor environment where the ambient air temperature is between 15°C and 30°C, the compressor system comprising:

a compressor;

a separator internal or external to the compressor that receives a mixture of compressed helium and oil and discharges helium and oil through separate ports,

a water cooled after-cooler;

an air cooled after-cooler;

a first line extending from the helium discharge port and passing through a three-way valve then one of the water cooled after-cooler and the air cooled after-cooler, the helium being cooled by the respective water cooled after-cooler or the air cooled after-cooler; and

a second line extending from the-oil discharge port and passing through a three-way valve then one of the water cooled after-cooler and the air cooled after-cooler, the oil being cooled by the respective water cooled after-cooler or the air cooled after-cooler;

wherein the first line and the second line are separate.

5. An oil-lubricated helium compressor system in accordance with claim 4 in which the oil and helium flow through one of the air cooled and water cooled after-coolers.

6. A method of operating an oil-lubricated helium compressor system located in an indoor environment where the ambient air temperature is between 15°C and 30°C, the compressor system comprising;

a compressor;

a separator internal or external to the compressor that receives a mixture of compressed helium and oil and discharges helium and oil through separate ports,

a water cooled after-cooler for effecting cooling of the-helium and oil;

an air cooled after-cooler for effecting cooling of the helium, and the air cooled after-cooler comprising a heat exchanger and a fan, the water cooled after-cooler and the air cooled after-cooler connected in series;

one or more sensors connected to a controller programed to detect a fault in the water cooled after-cooler,

a first line extending from the helium discharge port and passing through the water cooled after-cooler and the air cooled after-cooler, the helium being cooled by one or both the water cooled after-cooler and the air cooled after-cooler; and

a second line extending from the oil discharge port and passing through the water cooled after-cooler and the air cooled after-cooler, the oil being cooled by one or both the water cooled after-cooler and the air cooled after-cooler;

wherein the first line and the second line are separate;

the method comprising the steps of:

(a) running the compressor with water flowing through the water cooled after-cooler,

- (b) detecting a fault in the water cooled after-cooler,
- (c) turning on the fan.

7. A method in accordance with claim 5 in which the fan is on all the time.
8. A method of operating an oil-lubricated helium compressor system located in an indoor environment where the ambient air temperature is between 15°C and 30°C, the compressor system comprising;
- a compressor;
 - a separator internal or external to the compressor that receives a mixture of compressed helium and oil and discharges helium and oil through separate ports,
 - a water cooled after-cooler;
 - an air cooled after-cooler;
 - one or more sensors connected to a controller programmed to detect a fault in the water cooled after-cooler,
 - a first line extending from the helium discharge port and passing through a three-way valve then one of the water cooled after-cooler and the air cooled after-cooler, the helium being cooled by the respective water cooled after-cooler or the air cooled after-cooler; and
 - a second line extending from the-oil discharge port and passing through a three-way valve then one of the water cooled after-cooler and the air cooled after-cooler, the oil being cooled by the respective water cooled after-cooler or the air cooled after-cooler;
- wherein the first line and the second line are separate;
- the method comprising the steps of:
- (a) running the compressor with the helium and oil being cooled by the water cooled after-cooler,
 - (b) detecting a fault in the water cooled after-cooler,
 - (c) switching the flow of helium and oil from the water cooled after-cooler to the air cooled after-cooler.
9. A method to conserve energy in maintaining the interior of a building at a temperature in the range of 15 to 30°C in which a refrigerator is operating in the building at cryogenic temperatures, said system comprising;
- one of a GM and Brayton cycle expander,

an oil lubricated helium compressor;
a water cooled after-cooler for effecting cooling of the helium and oil;
an air cooled after-cooler for effecting cooling of the helium and oil, and the air cooled after-cooler comprising a heat exchanger and a fan, the water cooled after-cooler and the air cooled after-cooler connected in series;

the method comprising the step of:

(a) running the refrigerator with water flowing through the water cooled after-cooler, and the fan of the air cooled after-cooler off, when the temperature outside the building is greater than the temperature inside the building, and operating with no water flowing through the water cooled after-cooler, and the fan of the air cooled after-cooler on, when the temperature outside the building is less than the temperature inside the building.

10. A method to conserve energy in maintaining the interior of a building at a temperature in the range of 15 to 30°C in which a refrigerator is operating in the building at cryogenic temperatures, said system comprising;

one of a GM and Brayton cycle expander,

an oil lubricated helium compressor;

a water cooled after-cooler for effecting cooling of the helium and oil;

an air cooled after-cooler for effecting cooling of the helium and oil, and the air cooled after-cooler comprising a heat exchanger and a fan, the water cooled after-cooler and the air cooled after-cooler connected in parallel;

the method comprising the step of:

(a) running the refrigerator with the helium and oil flowing through the water cooled after-cooler when the temperature outside the building is greater than the temperature inside the building, and running the refrigerator with the helium and oil flowing through the air cooled after-cooler when the temperature outside the building is less than the temperature inside the building.

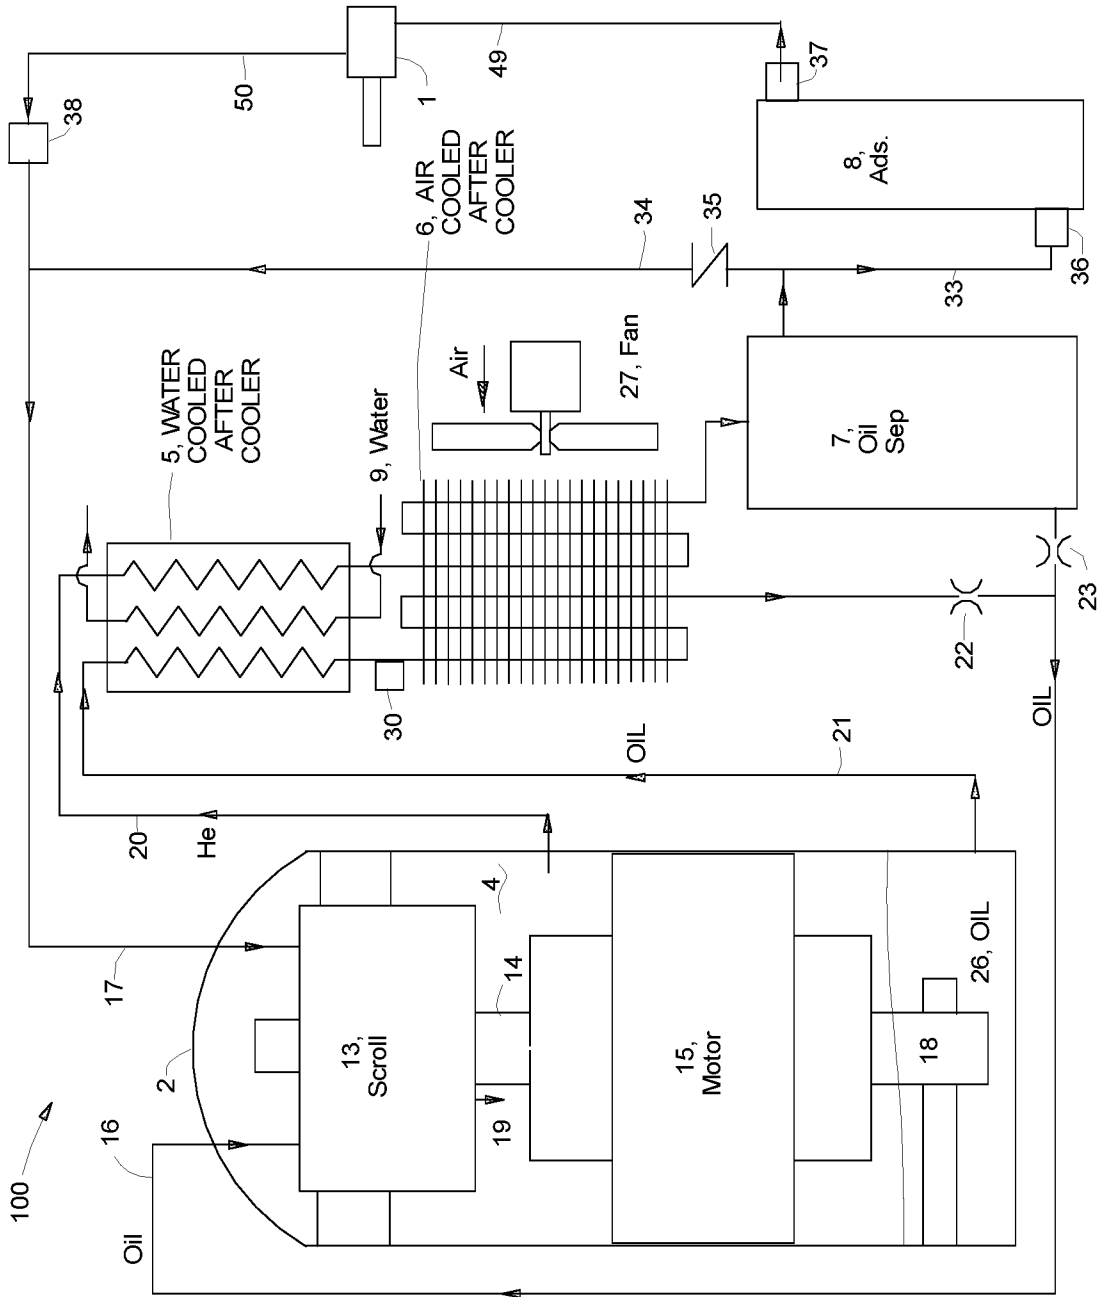


FIG. 1

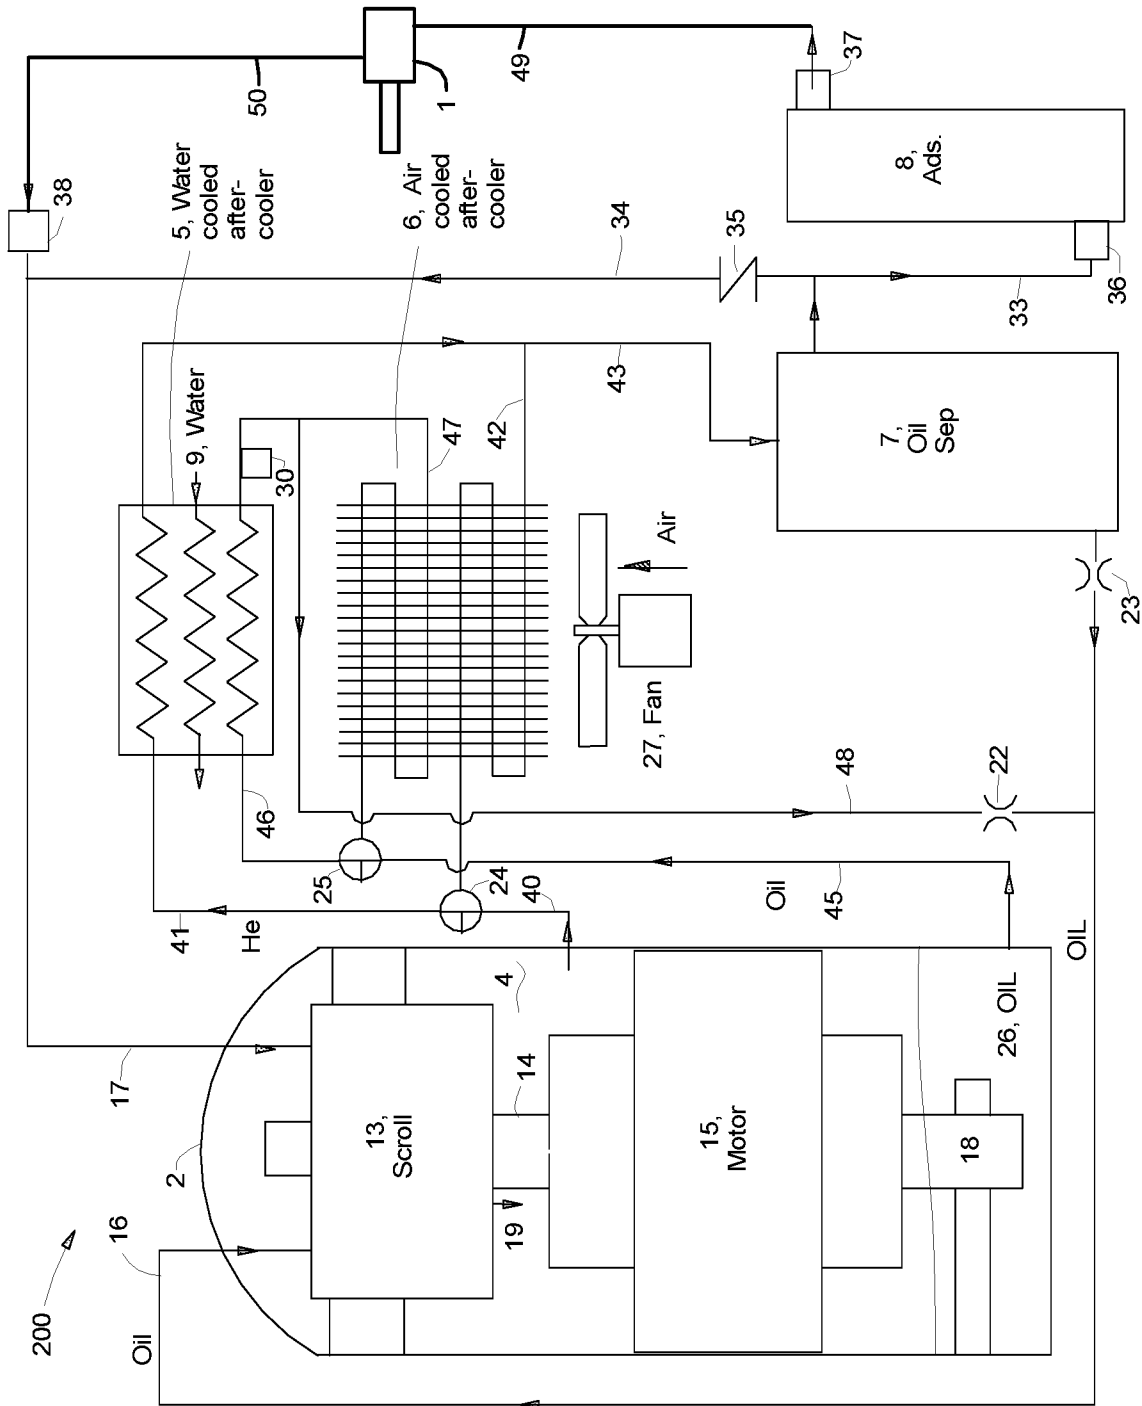


FIG. 2

A. CLASSIFICATION OF SUBJECT MATTER**F04B 39/06(2006.01)i, F04C 29/04(2006.01)i, F04C 29/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F04B 39/06; F25B 49/02; F25D 16/00; F01M 11/08; F25B 25/00; F01M 1/00; F25B 1/00; F04C 29/04; F04C 29/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: oil, helium, compressor, separator, cooler, expander, cryogenic, valve, Brayton, Gifford McMahon

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011-0107790 A1 (DUNN et al.) 12 May 2011 See abstract, paragraphs [0017]-[0020], and figures 1, 2A.	1-10
Y	US 2008-0011550 A1 (DUNN et al.) 17 January 2008 See paragraph [0040] and figure 1.	1-10
Y	WO 2011-019909 A1 (JOHNSON CONTROLS TECHNOLOGY COMPANY et al.) 17 February 2011 See paragraphs [0029]-[0039] and figure 2.	2-10
A	US 2013-0145781 A1 (LIU, LUCY Y.) 13 June 2013 See paragraphs [0011]-[0015] and figures 1, 2.	1-10
A	US 2003-0010574 A1 (LONGSWORTH, RALPH C.) 16 January 2003 See paragraphs [0029]-[0034] and figure 1.	1-10

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 March 2017 (29.03.2017)

Date of mailing of the international search report

03 April 2017 (03.04.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/067089

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0107790 A1	12/05/2011	CN 102052282 A	11/05/2011
		CN 102052282 B	09/09/2015
		JP 2011-099669 A	19/05/2011
		JP 5584901 B2	10/09/2014
		US 8978400 B2	17/03/2015
US 2008-0011550 A1	17/01/2008	CN 101105356 A	16/01/2008
		CN 101105356 B	22/02/2012
		DE 102007032868 A1	14/02/2008
		JP 2008-019857 A	31/01/2008
		JP 4810503 B2	09/11/2011
		US 8187370 B2	29/05/2012
WO 2011-019909 A1	17/02/2011	CN 102549361 A	04/07/2012
		CN 102549361 B	24/12/2014
		EP 2464924 A1	20/06/2012
		US 2012-0125023 A1	24/05/2012
US 2013-0145781 A1	13/06/2013	CN 103635763 A	12/03/2014
		EP 2710314 A1	26/03/2014
		WO 2012-158326 A1	22/11/2012
US 2003-0010574 A1	16/01/2003	EP 1197711 A2	17/04/2002
		EP 1197711 A3	23/10/2002
		EP 1197711 B1	14/05/2008
		EP 1965157 A2	03/09/2008
		EP 1965157 A3	17/09/2008
		JP 2002-168535 A	14/06/2002
		JP 4641129 B2	02/03/2011
		US 6488120 B1	03/12/2002
		US 6554103 B2	29/04/2003