



US006963728B2

(12) **United States Patent**  
**Edwards et al.**

(10) **Patent No.:** **US 6,963,728 B2**  
(45) **Date of Patent:** **Nov. 8, 2005**

(54) **LOW POWER, HIGH SPEED DATA COMMUNICATIONS IN VEHICLES**

6,091,372 A \* 7/2000 Dienes ..... 343/770  
6,594,471 B1 \* 7/2003 Crowley et al. .... 455/575.7  
2004/0204187 A1 \* 10/2004 Nevermann ..... 455/575.1

(75) Inventors: **Daniel R. Edwards**, Ypsilanti, MI (US); **Robert A. DiPaolo**, Northville, MI (US); **Daniel E. Farnstrom**, Redford, MI (US)

FOREIGN PATENT DOCUMENTS

JP 7177071 7/1995  
JP 8223095 8/1996

(73) Assignee: **Visteon Global Technologies, Inc.**, Van Buren Township, MI (US)

\* cited by examiner

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 320 days.

*Primary Examiner*—Nick Corsaro  
(74) *Attorney, Agent, or Firm*—MacMillan, Sobanski & Todd LLC

(21) Appl. No.: **10/146,214**

(57) **ABSTRACT**

(22) Filed: **May 15, 2002**

Cavities within structural members of a motor vehicle or other structure are used for propagation of wireless RF communication signals. The system is particularly adapted for use in structures wherein permanent, fixed transmission guides can be easily provided, and it is especially useful in motor vehicles where it 1) reduces the cost and power requirements of electronic modules using wireless communication, 2) shields the communication channel from outside electromagnetic interference, and 3) allows the propagation of emissions to be substantially restricted to desired regions away from people and electronic devices not in the intended network.

(65) **Prior Publication Data**

US 2003/0216149 A1 Nov. 20, 2003

(51) **Int. Cl.**<sup>7</sup> ..... **H04B 5/00**; H04B 1/034

(52) **U.S. Cl.** ..... **455/41.2**; 455/41.1; 455/41.3; 455/95; 455/96; 455/99; 340/854.7


(58) **Field of Search** ..... 455/41.1, 41.2, 455/41.3, 98, 99, 95, 96, 97, 100; 340/854.7; 385/101

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,264,064 A 11/1993 Hughes

**27 Claims, 5 Drawing Sheets**

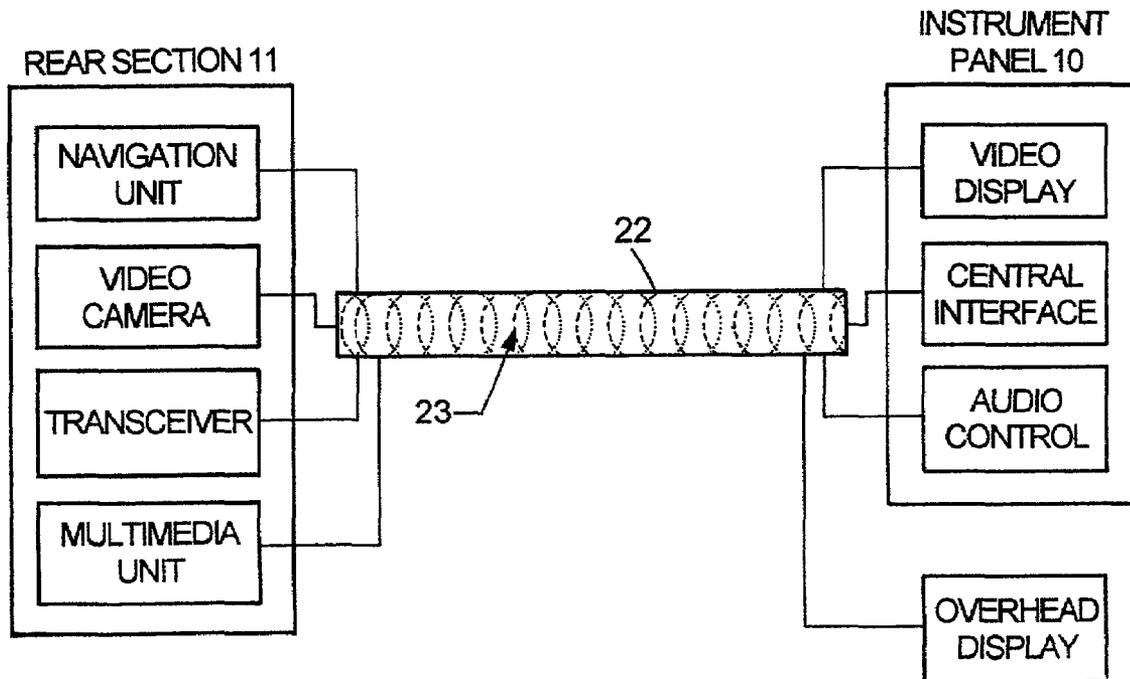

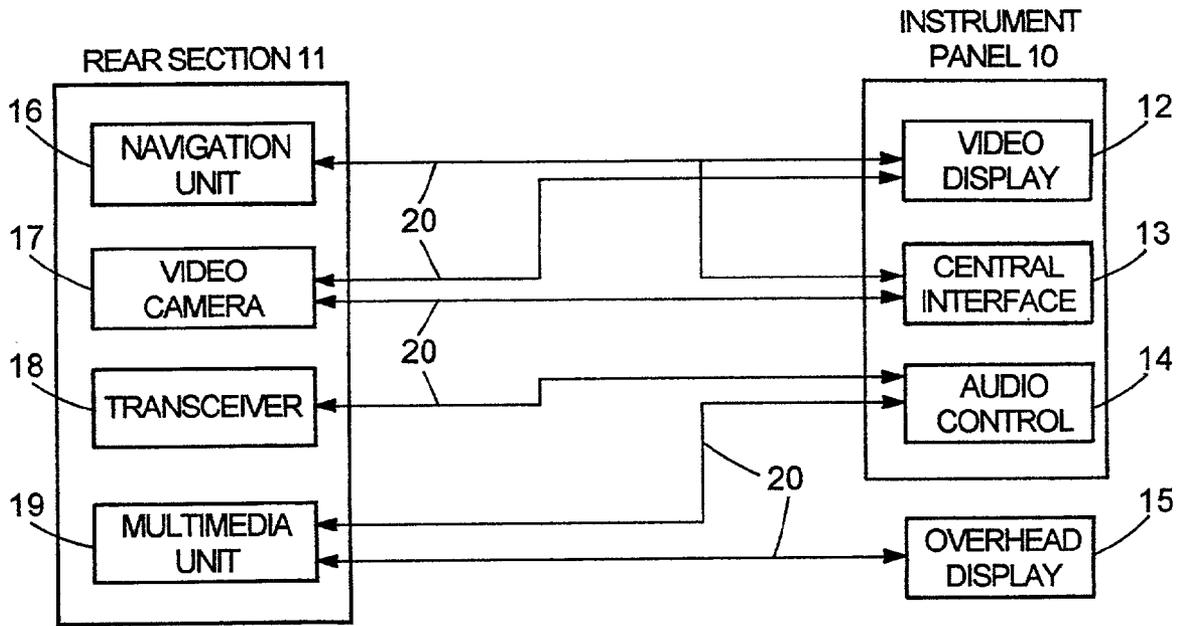


Fig. 1

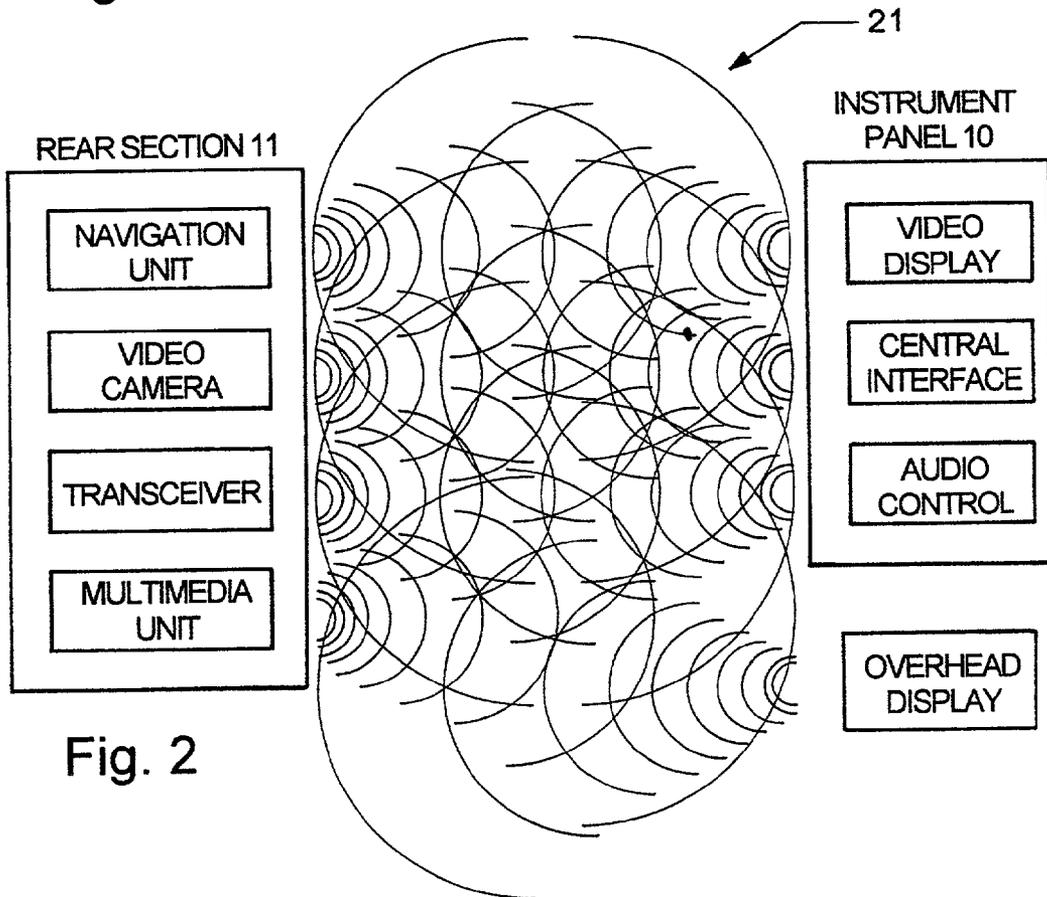


Fig. 2

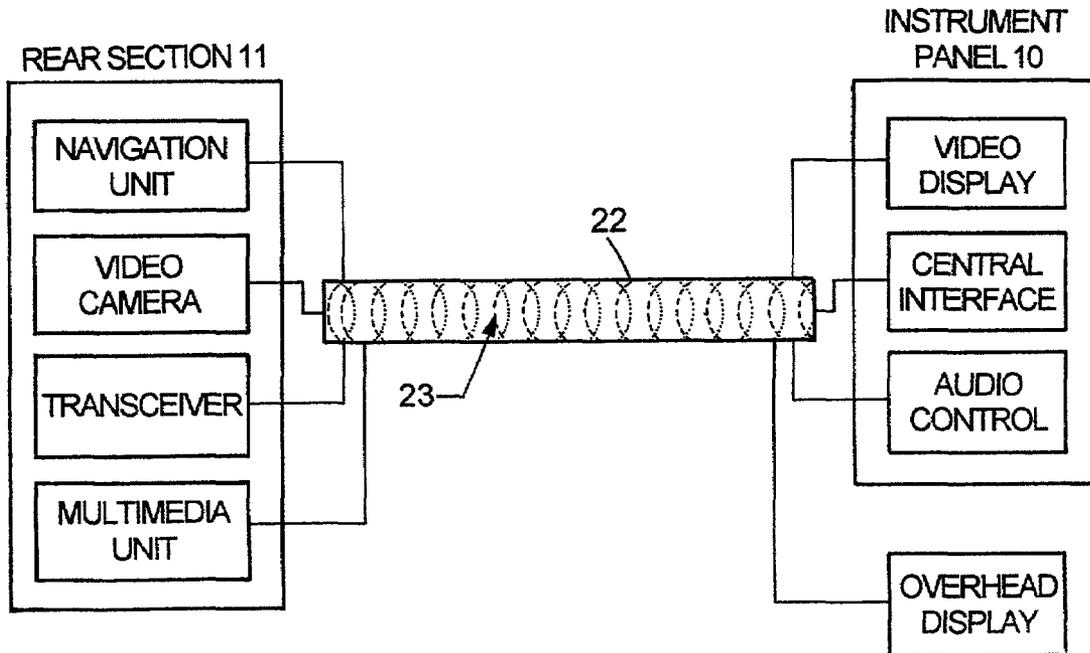


Fig. 3

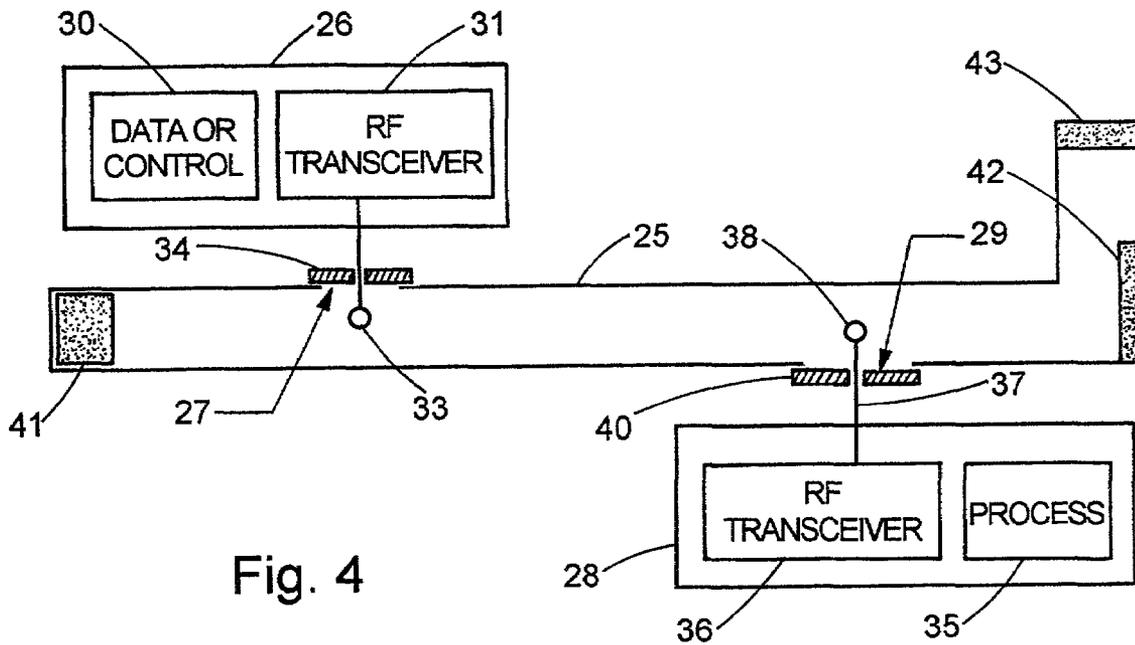
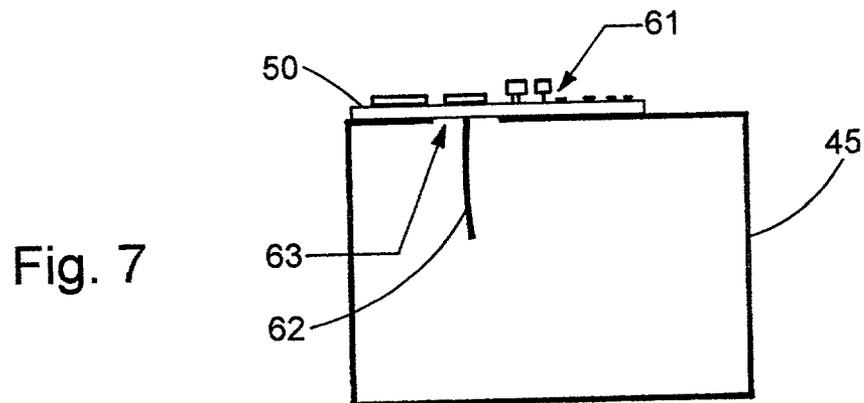
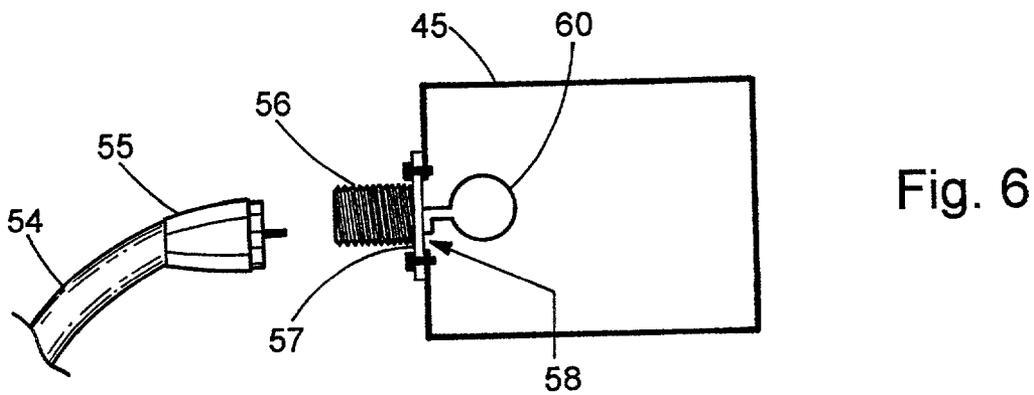
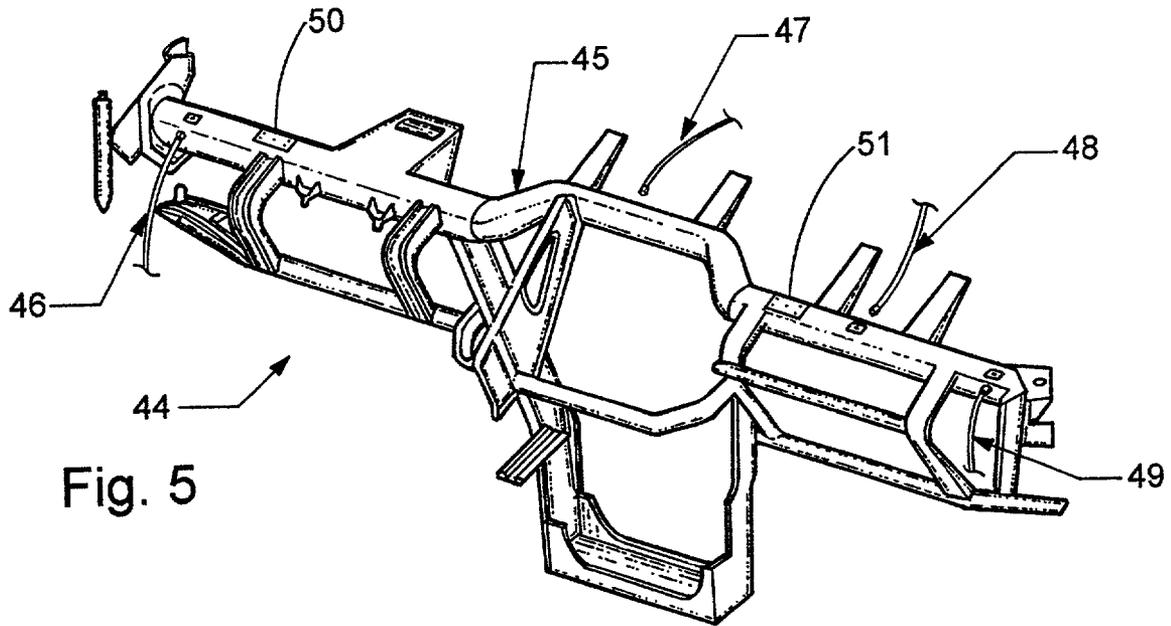


Fig. 4



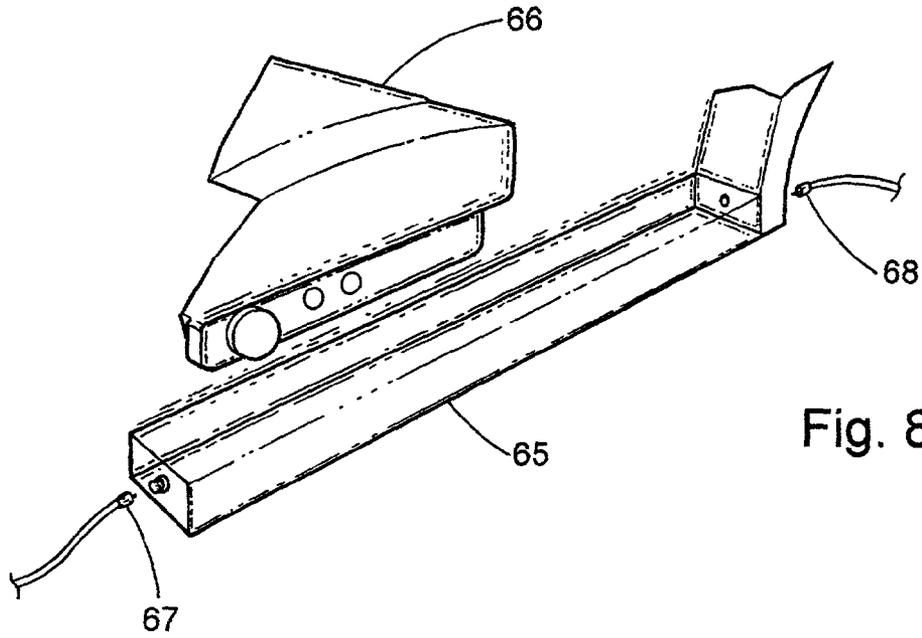


Fig. 8

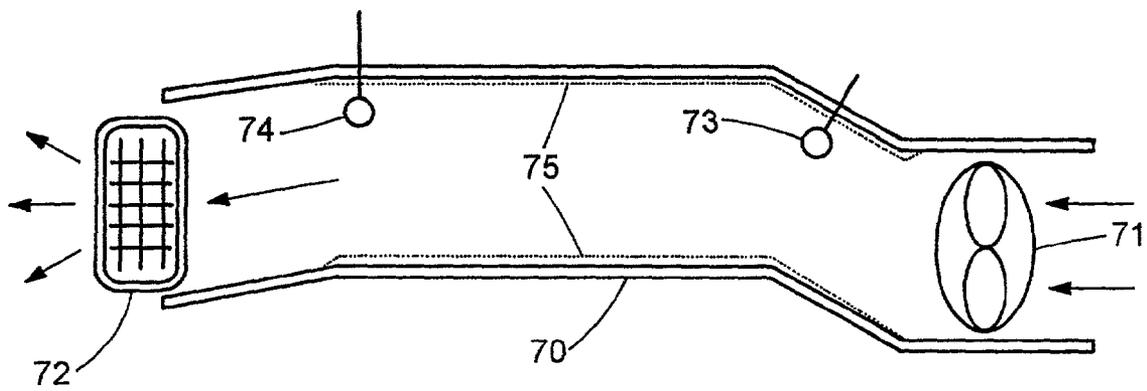


Fig. 9

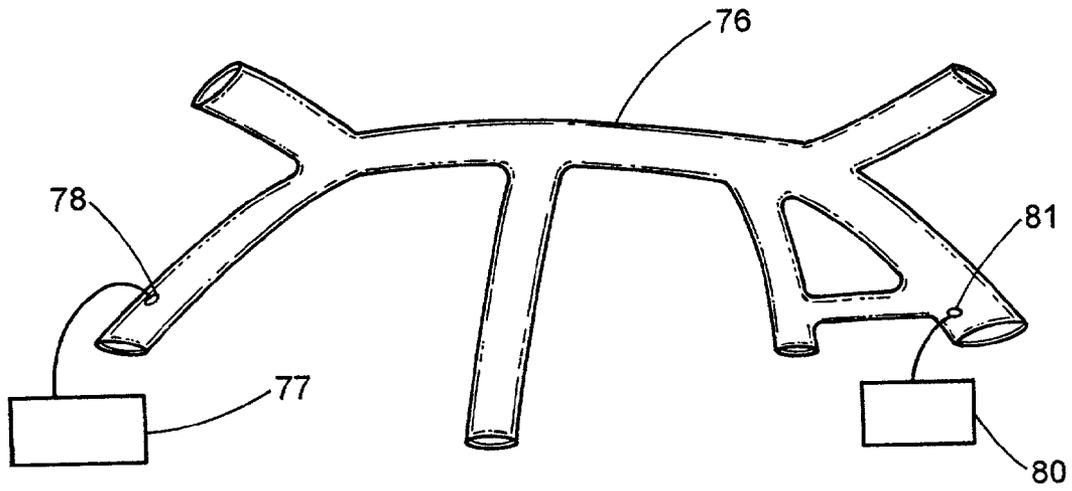


Fig. 10

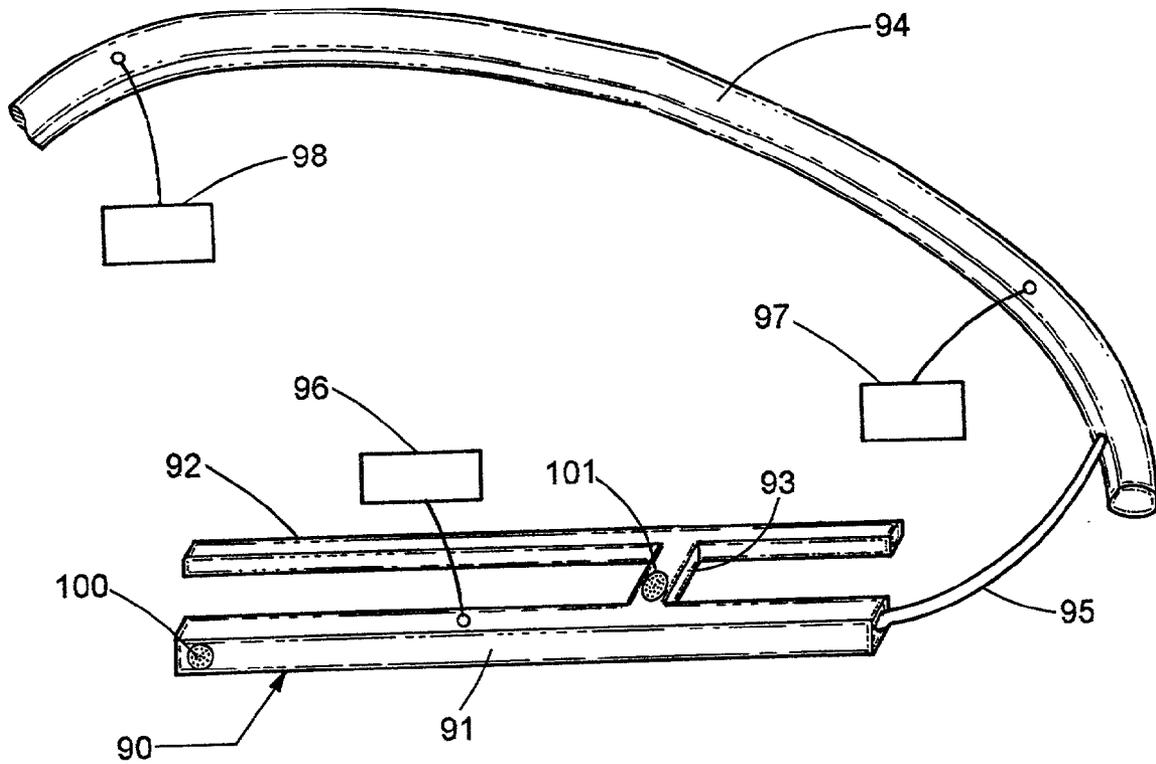


Fig. 11

1

**LOW POWER, HIGH SPEED DATA COMMUNICATIONS IN VEHICLES****CROSS REFERENCE TO RELATED APPLICATIONS**

Not applicable.

**STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH**

Not applicable.

**BACKGROUND OF THE INVENTION**

The present invention relates in general to low power, high speed wireless data communications, and, more specifically, to providing high speed wireless communication links in structures such as motor vehicles with reduced interference, reduced human exposure, and low cost.

Due to the advancement of controls and the various electronic accessories being installed in motor vehicles, data transfer rates must be used which exceed the capacity of simple twisted wire (or coaxial cable) multiplex networks to carry. High data rate devices such as video cameras or radar sensors may be deployed at the exterior of a vehicle while the high speed data they create needs to be sent elsewhere in the vehicle for processing or display. As the number of electronic modules increases, the complexity and cost associated with the wire, connectors, and the routing of the wires becomes excessive. In addition, mechanical failures of wires in large wire bundles can be difficult to isolate and costly to repair. Fiber optic cables may be employed for high speed communication channels, but they result in high costs and may not be well suited to the harsh automotive environment.

Wireless technologies, such as Bluetooth and the IEEE standard 802.11 for wireless networks, can be used in vehicles but certain disadvantages have slowed their adoption. The radio-frequency (RF) radiation produced by a wireless transmitter in a vehicle can cause interference for and undesired interoperation with other systems in the same vehicle or in other nearby vehicles. The wireless receiver is susceptible to interference from other wireless devices as well as other man-made and natural interference such as lightning. Power output drivers for the transmitter must operate at sufficiently high power in order to overcome potential sources of interference. Furthermore, existing systems are omni-directional and radiate in substantially all directions into free space even though only a small portion of the radiated power is used by the intended receiver(s). The size of the output drivers that have been required to provide the necessary amount of power has resulted in high transmitter cost.

**SUMMARY OF THE INVENTION**

The present invention has the advantage of providing high speed wireless communications at lower power with lower cost, reduced susceptibility to interference, and less interference created for other devices. It employs an enclosed cavity to transport RF signals between wireless devices within a structure, such as a vehicle. Preferably, the cavity or transmission guide may be an enclosed, elongated space within a structural member of the structure.

In one aspect of the present invention, a method is provided for distributing information from a first electronic module to a second electronic module, wherein the first and

2

second electronic modules are in physically separated locations within a structure. A structural member forming a portion of the structure is selected for use as a transmission guide having an enclosed, elongated space with first and second openings substantially proximate to the first and second electronic modules, respectively. The information is encoded in the first electronic module into a radio-frequency signal. The radio-frequency signal is coupled from the first electronic module into the transmission guide at the first opening. The radio-frequency signal is coupled from the transmission guide at the second opening to the second electronic module. The radio-frequency signal is decoded in the second electronic module to recover the information.

As used herein, structural member refers to any component part that is fixed within a vehicle and creates an enclosed space, including but not limited to any load-bearing members, ducts, or other pre-existing components serving other purposes in the vehicle.

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a block diagram showing high speed data devices hardwired together in a vehicle.

FIG. 2 is a block diagram wherein the devices of FIG. 1 utilize wireless communications in free space.

FIG. 3 is a block diagram showing the transmission guide of the present invention for carrying the wireless signals between devices.

FIG. 4 shows a wireless communication link of the invention in greater detail.

FIG. 5 is a perspective view of a cross-car beam for providing a transmission guide with several wireless transceivers coupled thereto.

FIG. 6 shows a cabled antenna connection to the transmission guide in greater detail.

FIG. 7 shows an electronic module integrally mounted to the structural member with an antenna extending from the module into the transmission guide.

FIG. 8 is a perspective view of a body side rail or channel for providing a transmission guide.

FIG. 9 is a side cross section of a vehicle air duct providing a transmission guide.

FIG. 10 is a side perspective view of a roof pillar structure for providing a transmission guide.

FIG. 11 is a perspective view showing composite structures including an auxiliary tube for providing a transmission guide.

**DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

The invention is particularly adapted for use in structures wherein permanent, fixed transmission guides can be easily provided, and it is especially useful in motor vehicles where it 1) reduces the cost and power requirements of electronic modules, 2) shields the communication channel from outside electromagnetic interference, and 3) allows the propagation of emissions to be substantially restricted to desired regions away from people and electronic devices not in the intended network. The transmission guides used herein are similar to known waveguides, but the typical stringent size and shape requirements associated with waveguides (due to the need to control transmission modes, etc.) need not be met in the present invention. The advantages of lower power requirements and decreased interference are obtained without the usual constraints on waveguide construction. In other words, the present invention can tolerate some losses due to

non-optimal transmission guide geometries yet still provide significant improvements versus unbounded free space transmission.

Referring to the hardwired system of FIG. 1, an instrument panel **10** located at the front end of a vehicle passenger compartment includes various electronic modules that interface with other electronic modules located in a rear section **11** of the vehicle (e.g., a rear package tray, a rear seat console, and/or a luggage compartment). A video display **12**, a central control interface **13** (e.g., a vehicle command center such as an in-car personal computer), and an audio control or head unit **14** are incorporated into instrument panel **10**. An overhead display **15** may be located in the vehicle headliner. Electronic modules in rear section **11** include a navigation unit **16**, a video camera **17**, a cellular telephone transceiver **18**, and a multimedia unit **19**. Extensive hardwiring via wire bundles **20** is required to support the connectivity of these modules. For example, navigation unit **16** may exchange signals with central interface **13** to obtain input data for a desired destination address and with video display **12** to provide map displays and turn-by-turn instructions. Video display **12** is also connected to video camera **17** to provide a view of blind spots around the vehicle. Audio control unit **14** may include media playback mechanisms (e.g., CD audio, DVD, and cassette tape) that send playback signals to multimedia unit **19** which includes an amplifier and speakers. Multimedia unit **19** may also include a playback mechanism (e.g., a DVD player) and may provide video signals (e.g., movies) to overhead display **15**. Central interface **13** may include hands-free telephone functionality for conducting voice and/or data calls through transceiver **18** with a cellular network. In order to reproduce hands-free speaker signals, central interface **13** and/or transceiver **18** may also be interconnected with multimedia unit **19**.

The systems in FIG. 1 show just some examples of electronic modules relying on high speed communications. Many other vehicle systems can be employed in the present invention, such as engine control units, sensors, actuators, vehicle radar systems, supplemental restraint systems, and others.

Thus, it can be seen that large amounts of high speed data need to be transported within a vehicle. Using hardwiring for such data transport creates problems due to the large number of wires and connectors that are necessary. Dedicated output connections in each module for a dedicated wiring path to each separate other module with which it interacts further increases module costs. Use of a simple multiplex network reduces the number of output connections, but it is costly to obtain the required data speeds in a simple wired configuration or may not be technically feasible. Thus, wireless RF communication could be considered as shown in FIG. 2. Using wireless data transfer over free air, however, leads to the higher power requirements and increased interference problems described above as radiation **21** permeates the vehicle space.

The problems of the prior art are solved using the invention as shown in FIG. 3. A transmission guide **22** substantially confines and guides radiation **23** among and between any electronic modules coupled to guide **22**, with at most only short wiring paths being required between a module and a respective antenna deployed within guide **22**.

FIG. 4 shows an example of two communicating modules in greater detail. A structural member **25** may be a body or frame member of a vehicle, a duct, or a panel enclosure, for example. Either a structural member performing an already existing structural function or a member dedicated to use

only as a transmission guide can be employed. All that is necessary is that the structural member provide an enclosed, elongated space of sufficient dimensions to carry the wireless RF signal (i.e., the transmission guide cross section must be sufficiently large based on the wavelength of the RF signal) and that it be made of an electrically conducting material (e.g., metal, such as iron, nickel, aluminum) to reflect the RF radiation. In order to transport high speed data, an RF frequency of greater than about 1 GHz may preferably be used. For instance, an IEEE 802.11 system in the range of 5.1 to 5.3 GHz can be used, resulting in a minimum transmission guide cross-sectional dimension of about 5 cm. Greater cross-sectional dimensions for the transmission guide are permissible, since it is just the minimum actual cross-section that determines the cutoff frequency of the transmission guide.

A first electronic module **26** is located near a first opening **27** in member **25** and a second electronic module **28** is located near a second opening **29**. Structural member **25** between openings **27** and **29** functions as a transmission guide for channeling RF signals between modules **26** and **28**. First module **26** includes a data or control block **30** which generates information (e.g., high speed video data) to be shared with second module **28**. The information is encoded and amplified into an RF signal in a transceiver **31**. The RF signal is conducted by a cable **32** through opening **27** to an antenna **33** which radiates the RF signal into the transmission guide. In a preferred embodiment, opening **27** is sealed in order to maximize confinement of the RF radiation, thereby reducing power requirements and interference. Thus, a plate **34** of electrically conductive material is provided to seal opening **27**. Second module **28** includes a process block **35** for receiving and using the shared information. A transceiver **36** is connected by a cable **37** and an antenna **38** in order to receive the RF signals radiated by antenna **33**. In most embodiments, antenna **38** also radiates RF signals from transceiver **36** to antenna **33** for coupling to transceiver **31**, at least for purposes of acknowledgement or other wireless protocol signals (if not for sharing system information from second module **28** to first module **26**). A seal **40** also covers opening **29**.

Since structural member **25** may preferably be serving structural support or other functions, its overall shape might not be (and need not be) ideal as a waveguide, provided that a minimum cross-sectional dimension is met in the guide paths between antennas. Although FIG. 4 shows the transmission guide as a straight segment along structural member **25**, the transmission guide need not be straight or have any other particular layout. The cross-section can deviate from square, round, or straight and can possess complex geometries. If a particular shape being used is such that certain surfaces of the enclosed, elongated space cause undesirable reflections (e.g., causing self-interference), however, then RF absorbing material can be added in the enclosed space to limit the undesirable reflections. Thus, RF absorbing material **41**, **42**, and **43**, are strategically located in member **25** to inhibit potentially undesirable reflections at the positions shown in FIG. 4. Known RF absorbing materials can be used such as ferrite tiles or polyurethane foam impregnated with carbon.

FIG. 5 shows a cross-car beam having several access points for modules to create a wireless network. A cross-car beam is usually mounted from side to side in a vehicle body. A front cross-car beam may provide support for an instrument panel and a rear cross-car beam may provide rear seat support. Cross-car beam **44** in FIG. 5 includes a tubular frame with a main crossbeam **45** to which remote cable

## 5

connections **46**, **47**, and **48** are made. In addition, printed circuits board modules **50** and **51** are mounted substantially directly on crossbeam **45** over respective openings.

FIG. **6** shows a cable connection in greater detail. A threaded coaxial SMA-type connector includes a plug **55** mounted on the end of a cable **54** and a socket **56** having a flange **57** mounted to crossbeam **45** over an opening **58**. An antenna element **60** extends from socket **56** and may have the shape of a loop, for example.

As shown in FIG. **7**, circuit board **50** includes electronic devices **61** for providing an RF transceiver together with the other intended functions of the particular module (a module cover and other connections such as a power connection are not shown for clarity). Board **50** is mounted over an opening **63** and has an antenna **62** projecting through opening **63** into the transmission guide within crossbeam **45**, thus avoiding the need for a cable feed.

FIG. **8** illustrates a structural member comprising a side rail **65** formed in a vehicle body along the vehicle floor near the edge of a seat **66**. Rail **65** can be an integral part of a vehicle body stamping or can be added after stamping. Antenna connections **67** and **68** are made for respective electronic modules (not shown).

As shown in FIG. **9**, an air duct **70** for carrying air from a blower fan **71** to a grille **72** can provide the structural member for creating a transmission guide between antennas **73** and **74**. An automotive air duct is typically formed of molded plastic and is not electrically conductive. Therefore, a conductive coating **75** is added to duct **70**, at least for the portion of duct **70** between antennas **73** and **74**. The coating may be added using known techniques such as vapor deposition or spray forming of a layer or by affixing a conductive sheet using adhesive, for example.

The ends of air duct **70** must be open for free flow of air, such that confinement of the RF signal is reduced and some power is lost. Nevertheless, performance is still markedly improved over free air propagation, including reduced power requirements and reduced interference.

FIG. **10** shows a roof pillar structure **76** for providing a transmission guide between a first module **77** having an antenna placed in a first opening **78** and a second module **80** having an antenna placed in a second opening **81**.

Various body panels, such as a door panel, are also suitable for providing transmission guides. For purposes of the present invention, the elongated space for providing a transmission guide need not be tubular but can have complex geometry with significant width or height in one or more directions perpendicular to the intended direction of propagation of RF signals between antennas (e.g., between points in a door panel).

FIG. **11** shows a composite structure where a plurality of structural members cooperate to form the transmission guide. A vehicle frame **90** is comprised of a hollow tubular steel structure including side rails **91** and **92** and a transverse beam **93** which provide support for a vehicle body. A roof pillar **94** is a steel tubular member extending along the top of the vehicle for supporting a roof. An open-ended auxiliary tube **95** comprised of conductive material is connected between respective openings in rail **91** and pillar **94** to create a continuous, elongated space for acting as a transmission guide. Several electronic modules have respective RF antennas mounted within the transmission guide, thereby forming a wireless network within the vehicle. RF absorbing material **100** and **101** is mounted within predetermined positions in frame **90** to reduce undesired reflections.

The invention described herein exploits waveguide-like properties of an enclosed RF cavity to transport RF signals

## 6

from point to point within a vehicle or other structure. Since very low RF energy loss is achieved, very low-power RF driver circuits can be used. By confining the RF communication channel within a shielded cavity, the RF link is protected from jamming by other sources and the creation of interference for other systems is also reduced. Almost any structural member forming an enclosed space within a surface of electrically conducting material can be used as a transmission guide. Many already existing vehicle members, such as cross-car beams, already satisfy the necessary characteristics for a transmission guide. For example, existing cross-car beams have been found to carry RF signals having frequencies greater than about 4 GHz without any modifications.

What is claimed is:

**1.** A method of distributing information from a first electronic module to a second electronic module, said first and second electronic modules being in physically separated locations within a transportation vehicle, said method comprising the steps of:

selecting a structural member forming a portion of said transportation vehicle for use as a transmission guide having an enclosed, elongated space with first and second openings substantially proximate to said first and second electronic modules, respectively;

encoding said information in said first electronic module into a radio-frequency signal;

coupling said radio-frequency signal from said first electronic module into said transmission guide at said first opening;

coupling said radio-frequency signal from said transmission guide at said second opening to said second electronic module; and

decoding said radio-frequency signal in said second electronic module to recover said information.

**2.** The method of claim **1** wherein said structural member is comprised of an electrically conductive metal.

**3.** The method of claim **1** wherein said structural member is comprised of a nonconductive material having a coating of electrically conductive material.

**4.** The method of claim **1** further comprising the step of: providing RF absorptive material on selected surfaces of said structural member to reduce non-useful reflections of said radio-frequency signal.

**5.** The method of claim **1** further comprising the step of: mounting at least one of said first and second electronic modules substantially directly to said structural member at said corresponding opening, said at least one electronic module having a fixed antenna extending from said electronic module into said corresponding opening.

**6.** The method of claim **1** further comprising the steps of: mounting a radio-frequency antenna element in association with one of said openings; and

coupling said antenna element with a corresponding one of said electronic modules by a wire cable.

**7.** The method of claim **1** wherein said structure is comprised of a motor vehicle.

**8.** A wireless communication system for communicating within a transportation vehicle, comprising:

a first electronic module being a source of information to be communicated, said first electronic module encoding said information into a radio-frequency signal;

a second electronic module being a recipient of said information, said first and second electronic modules being in physically separated locations within said

7

transportation vehicle, said second electronic module decoding said radio-frequency signal to recover said information;

a structural member forming a transmission guide having an enclosed, elongated space with first and second openings substantially proximate to said first and second electronic modules, respectively, wherein said structural member is selected from the group comprising a portion of a body of said transportation vehicle and a portion of a frame of said transportation vehicle; a first coupler for coupling said radio-frequency signal from said first electronic module into said transmission guide at said first opening; and a second coupler for coupling said radio-frequency signal from said transmission guide at said second opening to said second electronic module.

9. The system of claim 8 wherein said structural member is comprised of an electrically conductive metal.

10. The system of claim 8 wherein said structural member is comprised of a nonconductive material having a coating of electrically conductive material.

11. The system of claim 8 further comprising RF absorptive material on selected inside surfaces of said transmission guide to reduce non-useful reflections of said radio-frequency signal.

12. The system of claim 8 wherein said structural member comprises a cross-car beam.

13. The system of claim 8 wherein said structural member comprises a rail.

14. The system of claim 8 wherein said structural member comprises a body panel.

15. The system of claim 8 wherein said structural member comprises a rocker panel.

16. The system of claim 8 wherein said structural member comprises a roof pillar.

8

17. The system of claim 8 wherein said structural member comprises an air duct.

18. The system of claim 8 wherein said structural member comprises an auxiliary tube mounted to said structure.

19. The system of claim 8 wherein said transmission guide comprises a combination of sub-members joined so that said elongated space is uninterrupted.

20. The system of claim 8 wherein said elongated space is substantially sealed.

21. The system of claim 8 wherein said first and second couplers are comprised of respective antenna wires suspended within said transmission guide.

22. The system of claim 21 wherein at least one of said antenna wires is comprised of a loop.

23. The system of claim 21 wherein at least one of said antenna wires is comprised of a straight probe.

24. The system of claim 21 further comprising at least one coaxial cable coupling one of said antenna wires to a respective electronic module.

25. The system of claim 21 wherein one of said electronic modules is mounted substantially directly upon said structural member and wherein said antenna wire projects from said electronic module into said respective opening.

26. The system of claim 8 further comprising at least a third electronic module for communicating said information and a third coupler for coupling said radio-frequency signal from said transmission guide at a third opening.

27. The system of claim 26 wherein said first, second, and third electronic modules each provides two-way communication via said transmission guide.

\* \* \* \* \*