

(19)



(11)

EP 2 596 647 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

06.01.2016 Bulletin 2016/01

(21) Application number: **10737554.5**

(22) Date of filing: **23.07.2010**

(51) Int Cl.:

H04R 25/00 (2006.01)

(86) International application number:

PCT/EP2010/060756

(87) International publication number:

WO 2012/010218 (26.01.2012 Gazette 2012/04)

(54) HEARING SYSTEM AND METHOD FOR OPERATING A HEARING SYSTEM

HÖRSYSTEM UND VERFAHREN ZUM BETREIBEN EINES HÖRSYSTEMS

SYSTÈME AUDITIF ET PROCÉDÉ D'EXPLOITATION D'UN SYSTÈME AUDITIF

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

(43) Date of publication of application:

29.05.2013 Bulletin 2013/22

(73) Proprietor: **Sonova AG**

8712 Stäfa (CH)

(72) Inventor: **WALDMANN, Bernd**

CH-8124 Maur (CH)

(74) Representative: **Troesch Scheidegger Werner AG**

**Schwäntenmos 14
8126 Zumikon (CH)**

(56) References cited:

**WO-A1-2004/008801 WO-A2-2009/118424
US-A1- 2007 239 294 US-A1- 2010 098 262**

- **Telecommunication standarization sector of ITU: "ITU-T Recommendation P.563"[Online] 31 May 2004 (2004-05-31), XP002622511 Retrieved from the Internet: URL:<http://www.itu.int/ITU-T/index.html>> [retrieved on 2011-02-14]**

EP 2 596 647 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present invention is related to a hearing system comprising at least one hearing device and optionally one or more external accessories. More specifically it is related to a hearing system capable of assisting a user of the hearing system to achieve satisfactory hearing performance. Furthermore, the invention relates to a corresponding method for assisting a user of the hearing system to achieve satisfactory hearing performance.

BACKGROUND OF THE INVENTION

[0002] Communication inside a bustling restaurant or other crowded or reverberant location is one of the most difficult tasks for a hearing impaired person. The high level of background noise due to surrounding conversations reduces the signal-to-noise ratio (SNR) for the speech signal from the desired communication partner. Impulse-like noises created by cutlery clanging against plates may cause unwanted reactions in the hearing aid, such as sudden changes in amplification. Restaurants are often decorated with hard surfaces, such as glass partitions between sections of the locality, which are intended to create a sense of privacy, but which also cause highly reverberant conditions with long echo time constants both for the interfering background noise as well as for the speech signal from the desired communication partner.

[0003] In order to help improve the hearing capability of a hearing impaired person modern hearing devices provide a number of means to reduce the adverse effects encountered in difficult listening environments such as restaurants. For instance US 3,946,168 discloses a hearing aid with a directional microphone that is capable of emphasizing the speech from the front, i.e. from the direction where the desired communication partner is usually located, thereby increasing the signal-to-noise ratio. Further, US 5,473,701 discloses a method and apparatus for enhancing the signal-to-noise ratio of a microphone array by adjusting its directivity pattern. Alternatively, the communication partner can wear a microphone where the microphone signal is transmitted to the hearing device via a wireless link, with the intention of emphasizing the direct component of the speaker's voice, picked up close to the speaker's mouth, thereby reducing noise and reverberation. Such solutions are for instance disclosed in WO 2005/086801 A2 and EP 1 460 769 A1. As a further means, EP 1 469 703 A2 discloses a reverberation cancelling algorithm that reduces the effect of long echo time constants. Moreover, WO 2007/014795 A2 discloses a method for acoustic shock detection and its application in a system applying anti-shock gain reduction when a shock event has been indicated, for instance to reduce the unpleasant sounds produced by clashing cutlery and plates. As yet a further means, US 6,104,822 discloses

a hearing aid providing a plurality of manually selectable hearing programs adapted for a variety of listening situations. A further improvement of such a multi-program hearing device is disclosed in WO 02/32208 A2 where a method for determining an acoustic environment situation is described, which enables the automatic selection by the hearing device of a hearing program suitable for processing the audio input signal in the momentary listening situation. Alternatively, EP 1 753 264 A1 discloses a method for the determination of room acoustics, so that the signal processing in a hearing device can be automatically adapted to the current room acoustics. Moreover, US 7,599,507 discloses a means for estimating speech intelligibility in a hearing aid in order to adjust the settings of the hearing aid. Despite the fact that the existing solutions for improving signal-to-noise ratio and reducing reverberation are effective to some extent, especially when applied in combination, the problem of reduced speech intelligibility under adverse listening conditions, such as encountered in restaurants, remains.

[0004] WO 2009/118424 discloses a hearing assistance system with wireless audio transmission comprising a receiver unit with a speech quality indicator unit comprising means for assessing the speech quality of the received audio signals and means for providing an signal representative of the assessed speech quality.

[0005] Within a noisy and reverberant environment such as a busy restaurant, some locations will be better suited for a hard of hearing person than others, because the level of background noise or reverberation will be lower than elsewhere. During the fitting and counselling procedure the audiologist or other hearing care specialist will often try to instruct the user of a hearing system on how to select an optimum location in a restaurant. However, such optimisation is difficult to understand and follow for someone who is not well versed in room acoustics and audiology.

SUMMARY OF THE INVENTION

[0006] It is therefore an object of the present invention to provide further means for assisting a user of a hearing system to achieve satisfactory hearing performance.

[0007] Within the present context hearing (or auditory) performance refers to an individual's ability, here specifically with the aid of a hearing device, to discern a desired sound signal, for example a speech signal originating from a communication partner, and to extract information conveyed by it within an acoustic environment typically comprising further, unwanted sound signals which are regarded as noise or interference. A person's hearing performance can for instance be expressed in terms of qualitative measures such as speech intelligibility, speech discrimination, speech recognition, speech perception, etc. and assessed in terms of quantitative measures such as the articulation index (AI), the speech intelligibility index (SII), the speech recognition threshold (SRT), etc.

[0008] At least this object is achieved by the features recited in the characterising part of claim 1. Preferred embodiments as well as a method are given in the further claims.

[0009] The present invention provides a hearing system according to claim 1.

[0010] Such a hearing system according to the invention is capable of assisting a user of the hearing system to find a location where satisfactory hearing performance is achievable. By indicating to the user of the hearing system a degree of suitability of the current location to achieve satisfactory hearing performance the hearing system can help the user to avoid unsuitable locations and support the user in selecting a location where a satisfactory hearing performance is achievable with the hearing system in the current acoustic environment. Accordingly, instead of merely trying to optimise the processing of the audio input signal by the hearing system in an attempt to improve the hearing performance of the user, the hearing system additionally provides information based upon which the user can find a location where the acoustic environment is such that the user can achieve a satisfactory hearing performance with the audio signal amplification and further audio signal processing provided by the hearing system.

[0011] In one embodiment of the hearing system according to the present invention the at least one parameter representative for the current acoustic environment is one of the following:

- average noise level;
- reverberation time;
- direct-to-reverberant ratio;
- rate of acoustic shock events.

[0012] Each of these parameters can be readily determined by the hearing system and provides reliable information for assessing the suitability of the current acoustic environment to achieve satisfactory hearing performance.

[0013] In further embodiments, the hearing system according to the present invention further comprises a third means for determining from the at least one parameter a figure of merit regarding the suitability of the current location to achieve satisfactory hearing performance.

[0014] A figure of merit regarding the suitability of the current location to achieve satisfactory hearing performance takes the single parameter or brings together multiple parameters representative of the current acoustic environment at the current location and translates them into a form that can be more easily interpreted by the user in terms of the achievable hearing performance. For instance, the figure of merit can be based on an estimate of speech intelligibility. With a figure of merit that represents a direct measure of the achievable hearing per-

formance at a certain location under the momentarily prevailing acoustic conditions the user can more readily decide whether to remain there or whether it would be better to move to another location where possibly a higher hearing performance is achievable.

[0015] In variants of the previous embodiments of the hearing system according to the invention the third means is adapted to compute the figure of merit based on at least one of the following:

- a linear function of a single parameter representative for the current acoustic environment;
- a linear combination of multiple parameters representative for the current acoustic environment;
- a non-linear function, such as for instance a sigmoid function, of at least one parameter representative for the current acoustic environment.

[0016] Such transformations allow to appropriately account for the relevance of the individual parameters and combine them in such a way that provides the most meaningful and useful information regarding the hearing performance achievable at the present location. A weighted combination of parameters allows to deemphasize parameters providing only secondary information regarding the achievable hearing performance and to emphasize those that have a strong influence on the achievable hearing performance. Furthermore, weighting of the parameters can also be employed in order to decrease the impact of old data when assessing the achievable hearing performance at a certain location over an extended period of time whilst the acoustic environment may gradually be changing. By applying a non-linear function, such as for instance a sigmoid function, step-like function (as typically used for quantising continuous quantities) or a function with a hysteresis characteristic, to at least one parameter representative for the current acoustic environment, it is possible to provide more definite, discrete indications regarding the achievable hearing performance, e.g. a binary indication such as "satisfactory" or "non-satisfactory" instead of an indication on a continuous scale. The advantage of the former is that it is much easier for the user of the hearing system to apprehend than the latter.

[0017] In further embodiments of the hearing system according to the invention the second means is capable of providing an indication of the suitability of the current location to achieve satisfactory hearing performance in the form of an acoustic signal via the output transducer, wherein for instance the acoustic signal comprises one or a combination of the following:

- one or more tones;
- one or more beeps;

- a jingle or melody;
- a voice message.

[0018] In this way information regarding the suitability of the current location to achieve satisfactory hearing performance is provided to the user of the hearing system in an inconspicuous manner so that it can only be perceived by the user. The type of acoustic signal used to indicate the suitability of the current location to achieve satisfactory hearing performance can be selected according to the preferences of the user. The provision of certain types of acoustic signals may depend on the resources available in the at least one hearing device. Tones and beeps can be easily generated even in simple hearing devices, whereas melodies or voice messages are more complex to reproduce and may only be feasible in high-end hearing devices.

[0019] In further embodiments of the hearing system according to the invention the second means is capable of varying in dependence of the degree of suitability of the current location to achieve satisfactory hearing performance at least one of the following properties of the acoustic signal:

- volume;
- pitch or frequency;
- modulation;
- repetition rate;
- composition of the jingle or melody;
- content of the voice message.

[0020] In this way, a high degree of suitability of the current location to achieve satisfactory hearing performance could for instance be indicated by an acoustic signal with a high volume or a tone with a high pitch or a beep with a high repetition rate. Such a representation is especially suitable for indicating the degree of suitability on a continuous scale. Furthermore, it allows to continuously guide the user as he moves around since improvements of the suitability of the current location relative to the previous location can for instance be perceived as an increase in the volume or frequency of the acoustic signal. On the other hand different melodies, e.g. a pleasant sounding one and an awkward sounding one, respectively, could be employed to distinguish between suitable and unsuitable locations with respect to achievable hearing performance, as could be two specific voice messages such as for instance the commands "stay here" when at a suitable location, versus "move on" when located at an unsuitable location.

[0021] In further embodiments of the hearing system according to the invention indication of the suitability of

the current location to achieve satisfactory hearing performance is provided to the user of the hearing system continuously or at regular intervals.

[0022] In further embodiments of the hearing system according to the invention indication of the suitability of the current location to achieve satisfactory hearing performance is provided to the user of the hearing system only if the figure of merit is above or below a certain threshold. In this way, information regarding the suitability of the current location to achieve satisfactory hearing performance is only provided to the user of the hearing system when the current position is clearly suitable, e.g. indicated by a voice message such as "stay here", or clearly unsuitable, e.g. indicated by a voice message such as "avoid this location" or "move on".

[0023] The second means is capable of indicating a difference between the degree of suitability of the current location and that of at least a further location to achieve satisfactory hearing performance, for instance in the form of a relative difference, such as an indication of increased or decreased suitability to achieve satisfactory hearing performance.

[0024] In this way, the user can try out multiple locations in a specific locality and then request the hearing system to provide an indication of the change of suitability between two or more locations. For instance, the user can try out one location and then compare the suitability of this reference location with another location. If the other location is better suited this location is then used as the new reference location. This process can be continued until the user has determined that no new location is more suitable than the reference location, whereupon he returns to the reference location, since it is the location within the specific locality where the most satisfactory hearing performance is achievable.

[0025] In further embodiments of the hearing system according to the invention the second means is capable of adapting the indication of the degree of suitability of the current location to achieve satisfactory hearing performance based on feedback provided by the user.

[0026] In this way, the user can influence the information regarding the degree of suitability of the current location to achieve satisfactory hearing performance provided by the hearing system, thus allowing him to adjust it according to his personal perception. If for instance the hearing system is indicating to the user that hearing performance achievable at the current location is sufficient, and the user is not able to understand his communication partner sufficiently well, the user can provide feedback to the hearing system indicating, e.g. that the information provided regarding the suitability of the current location to achieve satisfactory hearing performance is too positive. Alternatively, the user could provide his personal assessment to the hearing system as feedback so that it can learn from this how the user actually perceives the situation. In this way the hearing system can gradually adapt the indication of the degree of suitability provided to the user to that which is then truly perceived by the

user. Thus, the information provided to the user regarding the suitability of the current location to achieve a certain degree of hearing performance becomes more and more accurate over time. This also allows to account for a change in the user's perception as time goes by, for instance due to a progressive decrease of his hearing ability.

[0027] In further embodiments of the hearing system according to the invention the hearing system further comprises one or more external accessories, such as for instance a remote control unit, a mobile telephone or a personal digital assistant (PDA), which are operationally connectable to the at least one hearing device, wherein at least one of the following applies:

- the second means is located at the at least one hearing device;
- the second means is located at the at least one accessory or the at least one accessory comprises a further second means capable of indicating to the user of the hearing system the degree of suitability of the current location to achieve satisfactory hearing performance, wherein for instance the indication of the degree of suitability of the current location is in the form of a visual presentation on a display of the accessory or in the form of a vibration signal, for instance from a piezoelectric vibration unit at the accessory.

[0028] In this way, the information regarding the suitability of the current location to achieve a certain degree of hearing performance can for instance also be provided by an accessory such as a remote control unit, a mobile telephone or a personal digital assistant, which is separate from the at least one hearing device and can for example display the information visually, e.g. in the form of text or numbers on a screen, or a light signal generated by a multi-colour LED (light emitting diode). Such visual information can also be seen by a care-person accompanying the hearing impaired user of the hearing system, allowing the care-person to help the hearing impaired user of the hearing system, such as for instance a child, to find a location where satisfactory hearing performance can be achieved. Instead of a visual presentation a tactile presentation of the indication regarding the suitability of the current location to achieve a satisfactory hearing performance can be provided to the user in the form of a vibration signal, thus again allowing to provide the indication in an inconspicuous and convenient manner, for instance whilst the accessory is located in a pocket of the user's clothing.

[0029] In further embodiments of the hearing system according to the invention the hearing system further comprises a user control for initiating a request for information regarding the suitability of the current location to achieve satisfactory hearing performance.

[0030] In this way, the user can press a button for in-

stance on the at least one hearing device or on an accessory whenever he would like the hearing system to provide him with information regarding the suitability of the current location to achieve satisfactory hearing performance.

Thus, the user can determine when such information is desirable and avoid being disturbed by unwanted information, especially when the indication regarding the suitability of the current location to achieve satisfactory hearing performance is being provided as an acoustic signal via the transducer of the at least one hearing device. Furthermore, the user can provide feedback to the hearing system for adapting the indication of the degree of suitability via the user control or a further one or more user controls.

[0031] In further embodiments of the hearing system at least one of the following applies:

- the user control is located at the at least one hearing device;
- the user control is located at the at least one accessory or the at least one accessory comprises a second user control for initiating a request for information regarding the suitability of the current location to achieve satisfactory hearing performance.

[0032] By providing multiple user controls at an accessory the user can more easily provide feedback to the hearing system for adapting the indication of the degree of suitability than if only a single user control is available at the at least one hearing device. A visual display such as on a screen present at an accessory further simplifies that task of providing feedback since the hearing system can thus assist the user in entering data by for instance providing appropriate requests or instructions.

[0033] Furthermore, the present invention provides a method for assisting a user of a hearing system to find a location where satisfactory hearing performance is achievable as defined in claim 10.

[0034] In one embodiment of the method according to the present invention the at least one parameter representative for the current acoustic environment is one of the following:

- average noise level;
- reverberation time;
- direct-to-reverberant ratio;
- rate of acoustic shock events.

[0035] In further embodiments the method according to the invention further comprises determining from the at least one parameter a figure of merit regarding a suitability of the current location to achieve satisfactory hearing performance.

[0036] For instance, the figure of merit can be based on an estimate of speech intelligibility.

[0037] In further embodiments the method according to the invention the determining from the at least one parameter a figure of merit comprises one of the following:

- relating the figure of merit with a single parameter representative for the current acoustic environment;
- relating the figure of merit with a linear combination of multiple parameters representative for the current acoustic environment;
- relating the figure of merit with a value of a non-linear function, such as for instance a sigmoid function, of at least one parameter representative for the current acoustic environment;
- relating the figure of merit to an estimate of speech intelligibility.

[0038] In further embodiments the method according to the invention the indication of the suitability of the current location to achieve satisfactory hearing performance is provided in one or several of the following forms:

- an acoustic signal via the output transducer of the hearing system, wherein for instance the acoustic signal comprises one or a combination of the following:
 - one or more tones;
 - one or more beeps;
 - a jingle or melody;
 - a voice message;
- a visual presentation on a display;
- a vibration signal.

[0039] The method according to the invention the indication of the degree of suitability provided to the user is an indication of a difference between the degree of suitability of the current location and that of at least a further location, for instance in the form of a relative difference, such as an indication of increased or decreased suitability.

[0040] In further embodiments the method according to the invention the indication of the degree of suitability is adapted based on feedback provided by the user.

[0041] In further embodiments the method according to the invention further comprises initiating via a user control a request for information regarding the suitability of the current location to achieve satisfactory hearing per-

formance

[0042] It is expressly pointed out that any combination of the above-mentioned embodiments, or combinations of combinations, is subject of a further combination. Only those combinations are excluded that would result in a contradiction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0043] For the purpose of facilitating the understanding of the present invention, exemplary embodiments thereof are illustrated in the accompanying drawings which are to be considered in connection with the following description. Thus, the present invention may be more readily appreciated.

Fig. 1 shows a block diagram of a hearing system according to the present invention; and

Fig. 2 shows a schematic representation of a hearing system according to present the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0044] Fig. 1 depicts a block diagram of a hearing device 11, 12 of the hearing system according to the invention. The hearing device 11, 12 picks up the ambient sound by an input transducer in the form of a microphone 20 that produces an electrical signal, i.e. the audio input signal, which is processed (after analogue-to-digital conversion; not shown) by a digital signal processor (DSP) 30, the output of which is then applied (after digital-to-analogue conversion; not shown) to an output transducer in the form of a miniature speaker also referred to as a receiver 40. The sound from the receiver is subsequently supplied to an ear drum of the user. Other input and output transducers can be employed, especially in conjunction with implantable hearing devices such as bone anchored hearing aids (BAHAs), middle ear or cochlear implants.

[0045] In order to assist the user of the hearing device 11, 12 to find a location where satisfactory hearing performance can be achieved, the signal from the microphone 20 is provided to an analysing unit 50 which determines at least one parameter 60 representative of a current acoustic environment at the current location. The parameter 60 determined by the analysing unit 50 can for instance be an average noise level, a reverberation time (e.g. the time required for the sound level produced by a source to decrease by a certain amount after the source stops generating the sound), a direct-to-reverberant ratio (e.g. the ratio of the energy in the first sound wave front to the reflected sound energy) or the rate of acoustic shock events (e.g. sound impulses whose amplitude changes within a very short time duration to a high energy level such as caused by a slamming door, or glasses or pieces of cutlery hitting against one another).

[0046] In case this data 60 is not a direct measure of

the degree of suitability of the current location to achieve satisfactory hearing performance or if for instance the user desires another, more easily interpretable measure, the data 60 characterising the current acoustic environment is converted into a figure of merit regarding the suitability of the current location to achieve satisfactory hearing performance by the computing unit 80. For instance, the computation of the figure of merit could be based on the following parameters: the measured noise level, i.e. data 60 characterizing the current acoustic environment, the expected speech level of a normal hearing person as perceived at a distance of 1 m being a typical spacing between two communication partners, i.e. data characteristic for the hearing situation such as a conversation in a restaurant, and the sound pressure level required to achieve 50% speech recognition (= speech recognition threshold, SRT) for the particular user of the hearing system, i.e. data depending on his hearing ability when supported by the hearing system. The SRT may have been determined from the hearing threshold of this user using well known data from the literature (see e.g. R. Plomp, "A signal-to-noise ratio model for the speech-reception threshold of the hearing impaired," J. Speech Hearing Res. 29 (1986), pp. 146-154), or it may have been measured by a hearing health care professional. The expected signal-to-noise ratio (SNR) is then determined as the ratio of the expected speech level to the measured noise level, which is then used together with the SRT to predict the level of speech recognition for the particular user of the hearing system. Then for instance, a sigmoid function whose characteristic is chosen such that the function approaches a maximum value when the expected SNR is more than 6 dB above the user's SRT and the function approaches a minimum when the expected SNR is more than 6 dB below the user's SRT, can be applied to the predicted level of speech recognition. In this way the resulting figure of merit substantially discriminates between two situations namely those in which speech will be poorly recognised, i.e. hearing performance is insufficient, because the SNR is too low and those in which speech will be well recognised, i.e. hearing performance is sufficient. Between these two distinct situations, where speech recognition is either possible or not, lies a transitional region where the speech recognition is marginal, very likely making speech communication difficult. Based on such a figure of merit the user of the hearing system 1 can more definitely identify locations where satisfactory hearing performance is achievable, than with a figure of merit based on a linear scale that gradually progresses from a value indicating low achievable hearing performance to a value indicating high achievable hearing performance. The transitional region in the above mentioned figure of merit function can however help to guide the user of the hearing system towards a location where sufficient hearing performance is achievable since the gradient characteristic of the transitional region can be used to identify an improvement or degradation of the achievable hearing performance when changing locations.

[0047] The figure of merit or alternatively a parameter representative of the current acoustic environment at a current location is then applied to an appropriate means which is capable of providing an indication of the suitability of the current location to achieve satisfactory hearing performance. This means can for instance be the receiver 40 generating one or more tones or beeps or a melody or voice message as a function of the figure of merit or the parameter. The dependency on the figure of merit or the parameter, i.e. the degree of suitability of the current location to achieve satisfactory hearing performance, can be indicated to the user for instance by changing the volume or frequency of the tone, or the repetition rate of the beeps, or the kind of melody or voice message generated accordingly. If the hearing device 11, 12 features a wireless interface 90 the figure of merit or parameter can additionally or alternatively be transmitted to a separate accessory such as a remote control unit 13, as shown in Fig. 2, equipped with a screen 201 or other form of display or optical indicator such as an LED (light emitting diode) 202, preferably a multi-colour LED for generating a multitude of different optical signals. The figure of merit or parameter can then be displayed on the screen 201 of the remote control unit 13 or with the aid of the LED 202 located at the remote control unit 13.

[0048] The user of the hearing system 1 can initiate a request for information regarding, i.e. an indication of the suitability of the current location to achieve a satisfactory hearing performance by operating a user control 100 such as press button or toggle switch at the hearing device 100. Alternatively, a corresponding user control 102 can be provided at the remote control unit 13. Moreover, further user controls 101, 103, 104 can be provided at the hearing device 11, 12 and/or at the remote control unit 13 in order to allow the user of the hearing system 1 to provide feedback regarding the suitability of the current location to achieve satisfactory hearing performance. With the aid of the numeric keypad 104 and/or the arrow keys 103 the user can provide information to the hearing system 1 for instance regarding how he perceives the degree of suitability of the current location to achieve satisfactory hearing performance. Based on this feedback the hearing system 1 can adapt its indication of the degree of suitability of the current location to achieve satisfactory hearing performance. For instance, if the hearing system 1 is indicating to the user that the current location is suited to achieve satisfactory hearing performance whilst the user is unable to understand what his communication partner is saying, the user can provide feedback to the hearing system 1, for example in the form of a rating, e.g. from 0 to 9, input via the keypad, or in relative terms, e.g. "indication too high/low", input via the arrow keys (up/down). The hearing system 1 can then learn from this feedback how the user perceives the actual situation at the current location and is able to adapt its future indication of the degree of suitability of the current location to achieve satisfactory hearing performance accordingly.

[0049] Once the user of the hearing system has arrived at a location where he is achieving satisfactory hearing performance, he may want to save relevant information thereto, such as the exact position of the location as well as a measure of the degree of suitability of that location to achieve satisfactory hearing performance, for future use, e.g. by himself or by someone else seeking a location where satisfactory hearing performance is achievable. The exact position can for instance be determined by an appropriate positioning device such as a GPS (Global Positioning System) module within a mobile phone, e.g. operating as part of the hearing system. Exact positioning is even possible indoors by using so-called "local positioning technologies" based on evaluating radio frequency (RF) signals originating from cellular base stations, Wi-Fi access points, broadcasting towers, etc. The position information is then sent together with information regarding the degree of suitability of that location to achieve satisfactory hearing performance by the mobile phone for example to a central database from which it can be retrieved by users in search of a location providing satisfactory hearing performance in a specific area. The position information may then be employed by a navigation system, which could again be part of a mobile phone, to guide such a user to a suitable hearing location. In this way even users of a conventional hearing system without the advanced capability of a hearing system according to present invention can profit from the location information along with information regarding the degree of suitability of that location to achieve satisfactory hearing performance provided by users of a hearing system according to the invention.

LIST OF REFERENCE SYMBOLS

[0050]

1	Hearing system
11, 12	Hearing device
13	Remote control (external accessory)
20	Microphone
30	DSP (digital signal processor)
40	Receiver (miniature speaker)
50	Analysing unit (= first means)
60	Data characterising current acoustic environment
70	Control unit
80	Computing unit for computing a figure of merit
90	Wireless interface
100, 102	User control
101	Further user control
103	Arrow keys & selection button (further user controls)
104	Numeric keypad (further user controls)
200	Screen/display
201	LED (light emitting diode)

Claims

1. A hearing system (1) comprising at least one hearing device (11, 12) with:

- 5 - an input transducer (20);
- an output transducer (40); and
- a processing unit (30) operatively connected to the input transducer (20) as well as to the output transducer (40);

wherein the hearing system (1) further comprises:

- 15 - a first means (50) for determining from a signal of the input transducer (20) at least one parameter (60) representative of a current acoustic environment at a current location; and
- a second means for indicating to a user of the hearing system (1) a degree of suitability of the current location to achieve satisfactory hearing performance based on the at least one parameter (60);

characterized in that the second means is capable of indicating an increased or decreased suitability to achieve satisfactory hearing performance at the current location compared to a further location.

2. The hearing system (1) of claim 1, wherein the at least one parameter (60) representative for the current acoustic environment is one of the following:

- 35 - average noise level;
- reverberation time;
- direct-to-reverberant ratio;
- rate of acoustic shock events.

3. The hearing system (1) of claim 1 or 2, further comprising a third means (80) for determining from the at least one parameter (60) a figure of merit regarding the suitability of the current location to achieve satisfactory hearing performance.

4. The hearing system (1) of one of the claims 1 to 3, wherein the second means is capable of providing an indication of the suitability of the current location to achieve satisfactory hearing performance in the form of an acoustic signal via the output transducer (40), wherein for instance the acoustic signal comprises one or a combination of the following:

- 55 - one or more tones;
- one or more beeps;
- a jingle or melody;
- a voice message.

5. The hearing system (1) of one of the claims 1 to 4, wherein the second means is capable of varying in

dependence of the degree of suitability of the current location to achieve satisfactory hearing performance at least one of the following properties of the acoustic signal:

- volume;
- pitch or frequency;
- modulation;
- repetition rate;
- composition of the jingle or melody;
- content of the voice message.

6. The hearing system (1) of one of the claims 1 to 5, wherein the second means is capable of adapting the indication of the degree of suitability of the current location to achieve satisfactory hearing performance based on feedback provided by the user.

7. The hearing system (1) of one of the claims 1 to 6, further comprising one or more external accessories (13), such as for instance a remote control unit (13), a mobile telephone or a personal digital assistant, which are operationally connectable to the at least one hearing device (11, 12), wherein at least one of the following applies:

- the second means is located at the at least one hearing device (11, 12);
- the second means is located at the at least one accessory (13) or the at least one accessory (13) comprises a further second means capable of indicating to the user of the hearing system (1) the degree of suitability of the current location to achieve satisfactory hearing performance, wherein for instance the indication of the degree of suitability of the current location is in the form of a visual presentation on a display (200, 201) of the accessory (13) or in the form of a vibration signal, for instance from a piezoelectric vibration unit at the accessory (13).

8. The hearing system (1) of one of the claims 1 to 7, further comprising a user control (100, 102) for initiating a request for information regarding the suitability of the current location to achieve satisfactory hearing performance.

9. The hearing system (1) of claim 7 or 8, wherein at least one of the following applies:

- the user control (100) is located at the at least one hearing device (11, 12);
- the user control (102) is located at the at least one accessory (13) or the at least one accessory (13) comprises a second user control (102) for initiating a request for information regarding the suitability of the current location to achieve satisfactory hearing performance.

10. A method for assisting a user of a hearing system (1) to find a location where satisfactory hearing performance is achievable comprising the steps of:

- 5 - determining from a signal of an input transducer (20) of the hearing system (1, 11, 12) at least one parameter (60) representative of a current acoustic environment of a current location; and
- 10 - indicating to the user of the hearing system (1) a degree of suitability of the current location to achieve satisfactory hearing performance based on the at least one parameter (60);

wherein the indication of the degree of suitability provided to the user is an indication of an increased or decreased suitability to achieve satisfactory hearing performance at the current location compared to a further location.

11. The method of claim 10, wherein the at least one parameter (60) representative for the current acoustic environment is one of the following:

- 20 - average noise level;
- 25 - reverberation time;
- direct-to-reverberant ratio;
- rate of acoustic shock events.

12. The method of claim 10 or 11, further comprising determining from the at least one parameter (60) a figure of merit regarding a suitability of the current location to achieve satisfactory hearing performance.

13. The method of one of the claims 10 to 12, wherein the indication of the suitability of the current location to achieve satisfactory hearing performance is provided in one or several of the following forms:

40 - an acoustic signal via the output transducer (40) of the hearing system (1, 11, 12), wherein for instance the acoustic signal comprises one or a combination of the following:

- 45 - one or more tones;
- one or more beeps;
- a jingle or melody;
- a voice message;

50 - a visual presentation on a display (200, 201);

- a vibration signal.

14. The method according to one of the claims 10 to 13, wherein the indication of the degree of suitability is adapted based on feedback provided by the user.

15. The method of claim 10 or 14, further comprising initiating via a user control (100, 102) a request for

information regarding the suitability of the current location to achieve satisfactory hearing performance.

Patentansprüche

1. Ein Hörsystem (1) umfassend mindestens ein Hörgerät (11, 12) mit:

- einem Eingangswandler (20);
- einem Ausgangswandler (40); und
- einer Verarbeitungseinheit (30), welche mit dem Eingangswandler (20) und dem Ausgangswandler (40) wirkverbunden ist;

wobei das Hörsystem (1) weiter umfasst:

- eine erste Einrichtung (50) zur Bestimmung aus einem Signal vom Eingangswandler (20) mindestens eines Parameters (60), welcher repräsentativ ist für eine aktuelle akustische Umgebung bei einem aktuellen Standort; und
- eine zweite Einrichtung zur Angabe an einen Benutzer des Hörsystems (1) eines Grades der Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung basierend auf dem mindestens einen Parameter (60),

dadurch gekennzeichnet, dass die zweite Einrichtung in der Lage ist, eine erhöhte oder verringerte Eignung zur Erzielung einer zufriedenstellenden Hörleistung anzugeben am aktuellen Standort verglichen mit einem weiteren Standort.

2. Das Hörsystem (1) nach Anspruch 1, wobei der zumindest eine Parameter (60), welcher repräsentativ ist für die aktuelle akustische Umgebung, einer der folgenden ist:

- mittlerer Rauschpegel;
- Nachhallzeit;
- Direkt-zu-Hall-Verhältnis;
- Rate der akustischen Schockereignisse.

3. Das Hörsystem (1) nach Anspruch 1 oder 2, weiter umfassend eine dritte Einrichtung (80) zur Bestimmung aus dem mindestens einen Parameter (60) eines Gütemasses betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung.

4. Das Hörsystem (1) nach einem der Ansprüche 1 bis 3, wobei die zweite Einrichtung in der Lage ist, die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung in Form eines akustischen Signals über den Ausgangswandler (40) anzugeben, wobei das akustische Signal zum Beispiel eines oder eine Kombination der folgenden umfasst:

- ein oder mehrere Töne;
- ein oder mehrere Signaltöne;
- ein Jingle oder eine Melodie;
- eine Sprachnachricht.

5. Das Hörsystem (1) nach einem der Ansprüche 1 bis 4, wobei die zweite Einrichtung in der Lage ist, mindestens eine der folgenden Eigenschaften des akustischen Signals in Abhängigkeit des Grades der Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung zu variieren:

- Lautstärke;
- Tonhöhe oder -Frequenz;
- Modulation;
- Wiederholungsrate;
- Zusammensetzung des Jingle oder der Melodie;
- Inhalt der Sprachnachricht.

6. Das Hörsystem (1) nach einem der Ansprüche 1 bis 5, wobei die zweite Einrichtung in der Lage ist, die Angabe betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung basierend auf Feedback vom Benutzer anzupassen.

7. Das Hörsystem (1) nach einem der Ansprüche 1 bis 6, weiter umfassend eine oder mehrere externe Zusatzeinheiten (13), wie beispielsweise eine Fernsteuereinheit (13), ein Mobiltelefon oder einen persönlichen digitalen Assistenten, welche mit dem mindestens einen Hörgerät (11, 12) wirkverbunden sind, wobei mindestens eines der folgenden zutrifft:

- die zweite Einrichtung sich an dem mindestens einen Hörgerät (11, 12) befindet;
- die zweite Einrichtung sich an dem mindestens einen Zusatzeinheit (13) befindet oder das mindestens eine Zusatzeinheit (13) eine weitere zweite Einrichtung umfasst, welche in der Lage ist, dem Benutzer des Hörsystems (1) den Grad der Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung anzugeben, wobei zum Beispiel die Angabe des Grades der Eignung des aktuellen Standorts die Form einer visuellen Präsentation auf einer Anzeige (200, 201) auf dem Zusatzeinheit (13) oder die Form eines Vibrationssignals, zum Beispiel von einer piezoelektrischen Vibrationseinheit am Zusatzeinheit (13) aufweist.

8. Die Hörsystem (1) nach einem der Ansprüche 1 bis 7, weiter umfassend eine Benutzersteuerung (100, 102) zur Auslösung einer Anfrage betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung.

9. Das Hörsystem (1) nach Anspruch 7 oder 8, wobei zumindest eines der folgenden zutrifft:

- die Benutzersteuerung (100) sich an dem mindestens einen Hörgerät befindet (11, 12);
- die Benutzersteuerung (102) sich an dem mindestens einen Zusatzeinheit (13) befindet oder das mindestens eine Zusatzeinheit (13) eine zweite Benutzersteuerung (102) zum Auslösen einer Anfrage betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung aufweist.

10. Verfahren zur Unterstützung eines Benutzers eines Hörsystems (1) zum Auffinden eines Orts, wo eine zufriedenstellende Hörleistung erzielbar ist, mit den folgenden Schritten:

- Bestimmen aus einem Signal von einem Eingangswandler (20) des Hörsystems (1, 11, 12) mindestens eines Parameters (60), welcher repräsentativ ist für eine aktuelle akustische Umgebung bei einem aktuellen Standort; und
- Angabe an den Benutzer des Hörsystems (1) eines Grades der Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung basierend auf dem mindestens einen Parameter (60),

wobei die Angabe betreffend den Grad der Eignung, welche dem Benutzer bereitgestellt wird, eine Angabe betreffend eine erhöhte oder verringerte Eignung zur Erzielung einer zufriedenstellenden Hörleistung am aktuellen Standort verglichen mit einem weiteren Standort ist.

11. Verfahren nach Anspruch 12, wobei der mindestens eine Parameter (60), welcher repräsentativ ist für die aktuelle akustische Umgebung, einer der folgenden ist:

- mittlerer Rauschpegel;
- Nachhallzeit;
- Direkt-zu-Hall-Verhältnis;
- Rate der akustischen Schockereignisse.

12. Verfahren nach Anspruch 11 oder 12, weiter umfassend das Bestimmen aus dem mindestens einen Parameter (60) eines Gütemasses betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung.

13. Verfahren nach einem der Ansprüche 10 bis 12, wobei die zweite Einrichtung in der Lage ist, die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung in Form eines akustischen Signals über den Ausgangswandler (40) anzugeben, wobei das akustische Signal zum Beispiel

eines oder eine Kombination der folgenden umfasst:

- ein oder mehrere Töne;
- ein oder mehrere Signaltöne;
- ein Jingle oder eine Melodie;
- eine Sprachnachricht.

14. Verfahren nach einem der Ansprüche 10 bis 13, wobei die Angabe betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung basierend auf Feedback vom Benutzer angepasst wird.

15. Verfahren nach Anspruch 10 oder 14, weiter umfassend das Auslösen über eine Benutzersteuerung (100, 102) einer Anfrage betreffend die Eignung des aktuellen Standorts zur Erzielung einer zufriedenstellenden Hörleistung.

Revendications

1. Système auditif (1) comprenant au moins un dispositif auditif (11, 12) comprenant:

- un transducteur d'entrée (20);
- un transducteur de sortie (40); et
- une unité de traitement (30) raccordée de façon fonctionnelle au transducteur d'entrée (20) ainsi qu'au transducteur de sortie (40);

le système auditif (1) comprenant en outre:

- un premier moyen (50) pour déterminer à partir d'un signal du transducteur d'entrée (20) au moins un paramètre (60) représentant un environnement acoustique actuel à un emplacement actuel; et
- un deuxième moyen pour indiquer à un utilisateur du système auditif (1) un degré d'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante sur la base du au moins un paramètre (60);

caractérisé en ce que le deuxième moyen est capable d'indiquer une augmentation ou une diminution de l'aptitude à obtenir une performance auditive satisfaisante de l'emplacement actuel par rapport à un autre emplacement.

2. Système auditif (1) selon la revendication 1, dans lequel le au moins un paramètre (60) représentant l'environnement acoustique actuel est l'un des paramètres suivants:

- le niveau de bruit moyen;
- le temps de réverbération;
- le rapport son direct/réverbération;

- le taux d'événements de chocs acoustiques.
3. Système auditif (1) selon la revendication 1 ou 2, comprenant en outre un troisième moyen (80) pour déterminer à partir du au moins un paramètre (60) un indicateur de qualité en ce qui concerne l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante. 5
4. Système auditif (1) selon l'une des revendications 1 à 3, dans lequel le deuxième moyen est capable de fournir une indication sur l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante sous la forme d'un signal acoustique via le transducteur de sortie (40), le signal acoustique comprenant par exemple un des éléments suivants ou une combinaison de ces éléments: 10
- un ou plusieurs sons;
 - un ou plusieurs bips;
 - un jingle ou une mélodie;
 - un message vocal.
5. Système auditif (1) selon l'une des revendications 1 à 4, dans lequel le deuxième moyen est capable, en fonction du degré d'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante, de varier au moins l'une des propriétés suivantes du signal acoustique: 25
- le volume;
 - le niveau de fréquence;
 - la modulation;
 - le taux de répétition;
 - la composition du jingle ou de la mélodie;
 - le contenu du message vocal. 30
6. Système auditif (1) selon l'une des revendications 1 à 5, dans lequel le deuxième moyen est capable d'adapter l'indication du degré d'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante sur la base d'un retour fourni par l'utilisateur. 40
7. Système auditif (1) selon l'une des revendications 1 à 6, comprenant en outre un ou plusieurs accessoires externes (13), comme par exemple une télécommande (13), un téléphone portable ou un assistant numérique personnel, lesquels accessoires peuvent être raccordés de façon opérationnelle au dispositif auditif au moins unique (11, 12), dans lequel on applique l'une des choses suivantes: 45
- le deuxième moyen est situé au niveau du au moins un dispositif auditif (11, 12);
 - le deuxième moyen est situé au niveau du au moins un accessoire (13) ou bien le au moins un accessoire (13) comprend un autre deuxième- 50
- me moyen capable d'indiquer à l'utilisateur du système auditif (1) le degré d'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante, l'indication du degré d'aptitude de l'emplacement actuel se présentant par exemple sous la forme d'une présentation visuelle sur un écran (200, 201) de l'accessoire (13) ou sous la forme d'un signal de vibration, par exemple à partir d'une unité de vibration piézoélectrique au niveau de l'accessoire (13).
8. Système auditif (1) selon l'une des revendications 1 à 7, comprenant en outre une commande utilisateur (100, 102) pour initier une demande pour avoir des informations quant à l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante. 15
9. Système auditif (1) selon la revendication 7 ou 8, dans lequel on applique l'une des choses suivantes: 20
- la commande utilisateur (100) est située au niveau du au moins un dispositif auditif (11, 12);
 - la commande utilisateur (102) est située au niveau du au moins un accessoire (13) ou bien le au moins un accessoire (13) comprend une deuxième commande utilisateur (102) pour initier une demande pour avoir des informations sur l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante. 30
10. Procédé pour aider un utilisateur d'un système auditif (1) à trouver un emplacement où une performance auditive satisfaisante peut être obtenue, comprenant les étapes consistant à: 35
- déterminer à partir d'un signal d'un transducteur d'entrée (20) du système auditif (1, 11, 12) au moins un paramètre (60) représentatif d'un environnement acoustique actuel d'un emplacement actuel; et
 - indiquer à l'utilisateur du système auditif (1) un degré d'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante sur la base du au moins un paramètre (60);
- dans lequel l'indication du degré d'aptitude fournie à l'utilisateur est une indication d'une aptitude accrue ou réduite à obtenir une performance auditive satisfaisante à l'emplacement actuel par rapport à un autre emplacement.
11. Procédé selon la revendication 10, dans lequel le au moins un paramètre (60) représentatif de l'environnement acoustique actuel est l'un des paramètres suivants: 55
- le niveau de bruit moyen;

- le temps de réverbération;
 - le rapport son direct/réverbération;
 - le taux d'événements de chocs acoustiques.
- 12.** Procédé selon la revendication 10 ou 11, consistant en outre à déterminer à partir du au moins un paramètre (60) un indicateur de qualité quant à l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante. 5
- 10
- 13.** Procédé selon l'une des revendications 10 à 12, dans lequel l'indication de l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante est fournie sous une ou plusieurs des formes suivantes: 15
- un signal acoustique via le transducteur de sortie (40) du système auditif (1, 11, 12), le signal acoustique comprenant par exemple un des éléments suivants ou une combinaison de ces éléments: 20
 - un ou plusieurs sons;
 - un ou plusieurs bips;
 - un jingle ou une mélodie; 25
 - un message vocal;
 - une présentation visuelle sur un écran (200, 201);
 - un signal de vibration. 30
- 14.** Procédé selon l'une des revendications 10 à 13, dans lequel l'indication du degré d'aptitude est adaptée sur la base d'un retour fourni par l'utilisateur. 35
- 15.** Procédé selon la revendication 10 ou 14, consistant en outre à initier, via une commande utilisateur (100, 102), une demande pour avoir des informations quant à l'aptitude de l'emplacement actuel à obtenir une performance auditive satisfaisante. 40
- 45
- 50
- 55

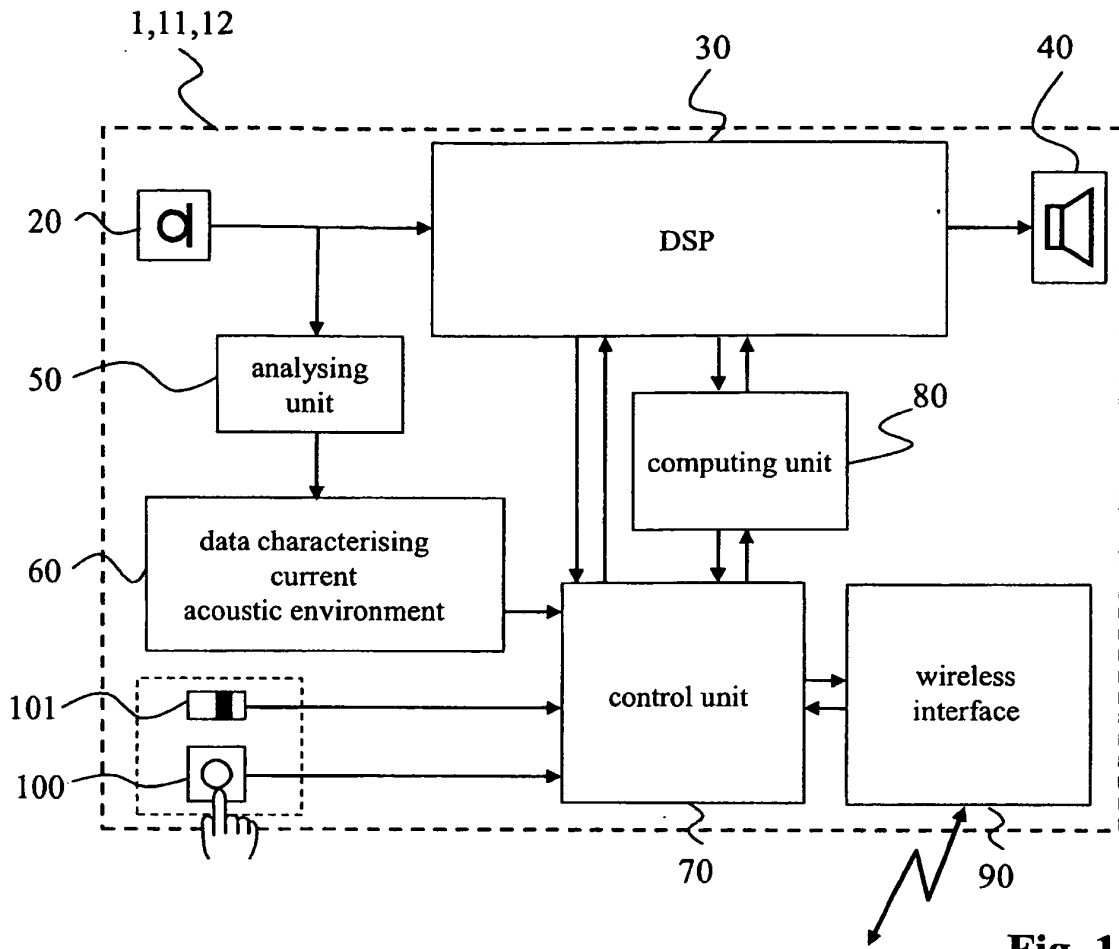


Fig. 1

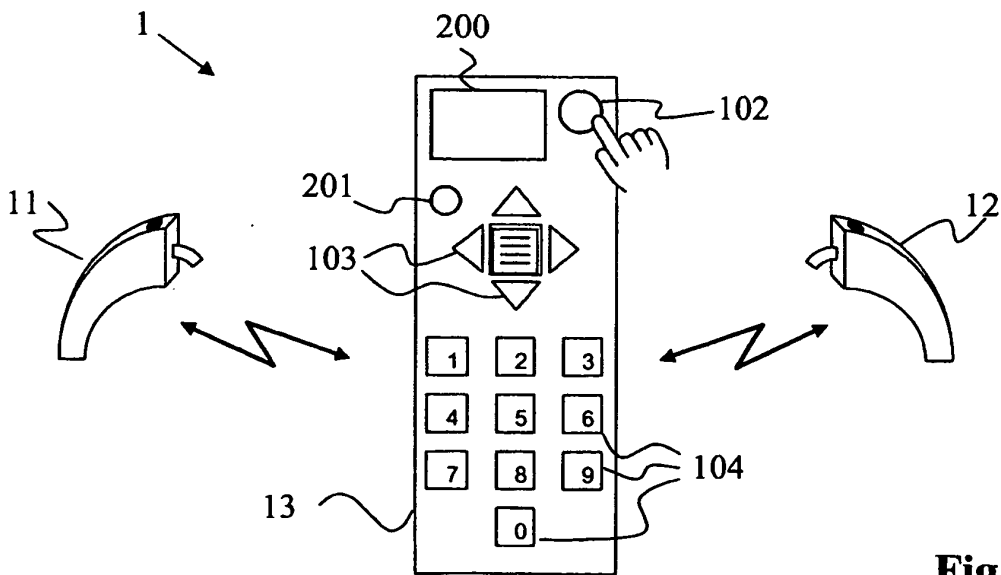


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3946168 A [0003]
- US 5473701 A [0003]
- WO 2005086801 A2 [0003]
- EP 1460769 A1 [0003]
- EP 1469703 A2 [0003]
- WO 2007014795 A2 [0003]
- US 6104822 A [0003]
- WO 0232208 A2 [0003]
- EP 1753264 A1 [0003]
- US 7599507 B [0003]
- WO 2009118424 A [0004]

Non-patent literature cited in the description

- **R. PLOMP.** A signal-to-noise ratio model for the speech-reception threshold of the hearing impaired. *J. Speech Hearing Res.*, 1986, vol. 29, 146-154 [0046]