

FASCICULE DE BREVET D'INVENTION

21 Numéro de dépôt : 1201600126
PCT/EP2014/071500

22 Date de dépôt : 08/10/2014

30 Priorité(s) :
FR n° 13 59844 du 10/10/2013

24 Délivré le : 05/05/2021

45 Publié le : 10/08/2021

73 Titulaire(s) :

COURTIN Karine,
16, rue Salomon Reinach,
92100 BOULOGNE BILLANCOURT (FR)

72 Inventeur(s) :

COURTIN Karine (FR)

74 Mandataire : Cabinet CAZENAVE SARL,
B.P. 500, YAOUNDE (CM).

54 Titre : Device for dispensing and protecting a fluid, comprising a slit stopper.

57 Abrégé :

The invention relates to a device for dispensing a fluid product, comprising a body (12), a slit stopper (18) arranged in the body (12) which is made of a resiliently deformable material and which is defined by an external surface (20) and an internal surface (22), the slit stopper (18) comprising a slit (30) substantially parallel to the main plane (A) of the device (10), which extends from the internal surface (22) to the external surface (20), and which comprises two mutually facing walls (30a, 30b) which are in contact with one another, and which are capable of spreading apart in a movement perpendicular to the main plane (A) of the device (10) using the pressure of the product to be dispensed, by resilient deformation of the slit stopper (18), characterized in that the slit stopper (18) comprises a groove (32) produced in the internal surface (22), which comprises two inclined surfaces (34) each extending toward the internal a wall (30a, 30b) of the slit (30). The invention also relates to a dispensing device (10) comprising a layer of material having bactericidal or bacteriostatic properties on the external surface thereof.

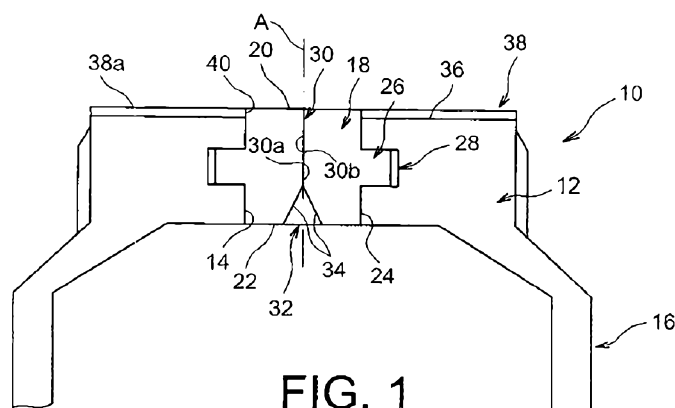


FIG. 1

Fig. 1

DEVICE FOR DISPENSING AND PROTECTING A FLUID, COMPRISING A SLIT STOPPER**DESCRIPTION****TECHNICAL DOMAIN**

5 The invention relates to a fluid dispensing device with the purpose of limiting risks of pollution of the preparation to be dispensed by air or particularly by contaminating bacteria.

 For example, the invention relates to a device for dispensing a product being in the form of a cream, a paste, a gel or a liquid for the pharmaceutical, cosmetic,
10 chemical or food processing industry, contained in a semi-rigid tube or a jar.

STATE OF PRIOR ART

 Many products in paste or liquid form are contained in a receptacle that both protects and dispenses the product.

 The product is usually preserved by means of a receptacle hermetically
15 sealed against air and also by adding preservatives, antioxidants, bactericides, etc., into the product.

 There is also a product pollution source located at the dispensing device. The dispensing device comprises a product outlet opening at which air can penetrate inside the container and pollute the product.

20 Furthermore, the product is drawn off by sliding over the outside surface of the device, for example using the finger. This sliding action adds bacteria or other pollutants onto the outside surface but also disseminates them.

 Document WO-A-2013/039482 discloses a slit stopper that can completely close off the opening in the dispensing device, thus preventing air from
25 entering into the container.

 The slit stopper consists of a disk made of an elastic deformable material with a slit at the centre, for example a cross-shaped slit.

When pressure is applied on the container, the pressure within the product to be dispensed increases, thus causing deformation of the stopper at the slit. Elastic parts formed by the slit deform elastically along a forwards axial and outwards radial movement, following the movement of the product.

5 When pressure on the container is released, the product contact pressure with the stopper is not sufficient, and the stopper then returns to its original position. When the stopper has elastically returned to its initial shape, a certain quantity of product that was in contact with external air and various pollutants that could pollute the product, returns inside the container.

10 Therefore, the product is not fully protected by such a stopper.

The purpose of the invention is to disclose a dispensing device with a slit stopper made so as to completely protect the product contained in the receptacle against ingress of air and pollutants, to guarantee that the product will not be deteriorated the next time it is used.

15 **PRESENTATION OF THE INVENTION**

The invention discloses a dispensing device for a fluid product comprising a body that extends in a plane orthogonal to a principal plane of the device, that comprises a central housing,

20 a slit stopper arranged in the central housing of the body, that is made from an elastically deformable material and that is delimited by an external face, an internal face and a peripheral wall,

the slit stopper comprising a slit approximately parallel to the principal plane of the device, that extends from the internal face to the external face, and that comprises two facing walls that bear in contact with each other and that can move apart
25 following a movement perpendicular to the principal plane of the device under pressure from the product to be dispensed, by elastic deformation of the slit stopper,

characterised in that the slit stopper comprises a groove made in the internal face, that comprises two inclined faces each of which extends a wall of the slit in the inwards direction.

Due to the relative movement of the two walls formed by the slit, such an embodiment of the dispensing device prevents part of the product that might have been in contact with an external pollutant as the result of opening and closing the dispensing orifice, from returning into the container. The groove formed on the back face of the slit stopper facilitates separation of the two walls, due to pressure applied by the product.

Preferably, the slit stopper comprises a rib projecting from its peripheral wall that fits into an associated groove in the central housing, and in that there is a radial clearance present between the bottom of the radial groove and the free end of the rib.

Preferably, the body comprises an external face covered by a layer made of a bactericide or at least bacteriostatic material and the material layer comprises a central opening through which the slit stopper passes such that the external face of the slit stopper is flush with the external face of the material layer.

Preferably, the material layer is made by metallic deposition on the external face of the body.

Preferably, the material layer consists of a metal plate crimped onto the body, covering the external face of the body.

Preferably, the material layer is made from copper or silver.

Preferably, the external face of the material layer and the external face of the slit stopper form a plane, concave or convex application surface.

Preferably, the device is made from a single part with a receptacle containing the product.

Preferably the receptacle is rigid and comprises a moving wall and a fixed wall on which the device is fixed.

Preferably, the receptacle is rigid and comprises a moving wall on which the device is fixed.

BRIEF DESCRIPTION OF THE DRAWINGS

Other characteristics and advantages of the invention will become clear after reading the following detailed description that can be more easily understood by referring to the appended figures among which:

- 5 - figure 1 is a diagrammatic axial sectional view of a device according to the invention;
- figure 2 is a view similar to that in figure 1, in which the walls of the slit are moved apart during dispensing of the product;
- figure 3 is a view similar to that in figure 1, in which the metallic
- 10 layer is formed by a plate crimped onto the body of the device;
- figure 4 is a view similar to that in figure 3, in which the device consists of an add-on element on the receptacle;
- figures 5A, 5B, 5C are diagrammatic views showing the various possible shapes of the slit stopper;
- 15 - figures 6A and 6B are views similar to that in figure 1, in which the dispensing surface of the device is curved and convex or concave;
- figures 7A and 7B are cross-sections of rigid receptacles comprising a moving rigid wall and in which the device is or is not installed on the moving wall.

DETAILED DESCRIPTION OF PARTICULAR EMBODIMENTS

20 Figures 1 and 2 show a dispensing device 10, for dispensing a fluid such as a paste, cream, gel or liquid solution for example.

The device 10 comprises a median principal plane A located at its centre.

25 The device 10 comprises a principal body 12 that has a principal orientation perpendicular to the principal plane A and that comprises a central housing 14.

The device 10 forms part of a receptacle 16 inside which the product to be dispensed is contained. For example, the receptacle consists of a tube made from a

semi-rigid or soft elastic material, or the receptacle 16 is composed of a rigid receptacle such as a jar, shown for example in figures 7A and 7B.

A slit stopper 18 is arranged inside the housing 14 and hermetically closes the housing 14.

5 The slit stopper 18 consists of an elastically deformable element installed in the housing 14. It is delimited by an external face 20, at which the product leaves the receptacle 16, an inside face 22 that is in contact with the product contained in the receptacle 16 and a peripheral wall 24 that is in sealing contact with the wall of the housing 14.

10 The peripheral wall 24 comprises a rib 26 that fits into an associated groove 28 made in the housing 14. The rib 26 projects from the peripheral wall 24 and it can extend over its entire periphery, as can be seen for example in figures 5A to 5C, or over only part of it. The rib 26 and the groove 28 associated with it retain the slit stopper 18 in the housing 14 by elastic insertion.

15 The slit stopper 18 also comprises a slit 30 that extends parallel to the principal plane A and preferably in this principal plane A from the internal face 22 as far as the external face 20. The slit 30 comprises two walls 30a, 30b facing each other, that are adjoined to each other when the stopper 18 is in a closed position shown in figure 1, and move away from each other when the stopper 18 is in an open position shown in
20 figure 2, enabling the product to flow through the slit 30.

 The slit 30 is opened under the action of pressure from the product contained in the receptacle 16. When this pressure becomes sufficiently high, it causes separation of the two walls 30a, 30b facing each other. When the pressure reduces, the walls 30a, 30b facing each other move towards each other until they bear in contact with
25 each other.

 In this case, the relative movement of the walls 30a, 30b facing each other consists of a movement of the walls in opposite directions orthogonal to the principal plane A of the device 10. This relative movement is achieved by making a slit stopper 18 for which the distance between the internal face 22 and the external face 20 is

sufficiently large in comparison with the dimension of the slit stopper 18 along a direction perpendicular to the principal plane A.

Such a relative movement of the walls 30a, 30b when the pressure in the product contained in the receptacle 16 is released, is sufficient to compress the product film present between the walls 30a, 30b. The product is then forced inwards into the receptacle 16 through the internal face 22 and also outwards through the external face 20.

The product that might have been in contact with pollutants or with air, is thus forced outwards, and cannot contaminate the remainder of the product that returns inside the receptacle 16.

During the relative movement of the walls 30a, 30b facing each other, the slit stopper 18 deforms elastically. To achieve this, the stopper is made from an elastically deformable material for example such as an elastomer, natural or synthetic rubber or polytetrafluoroethylene (Teflon®).

There is a clearance between the bottom of the groove 28 and the associated free end of the rib 26. This clearance reduces during the elastic deformation of the slit stopper and the separation of the walls 30a, 30b.

The slit stopper 18 comprises a groove 32 formed in the internal face 22, that extends the slit 30 inwards, to facilitate separation of the walls under the action of the product pressure. In this case, the groove 32 is "V"-shaped, and thus comprises two faces 34 inclined from the principal plane A, each of which extends one wall 30a, 30b of the slit 30 inwards.

Due to this groove 32, pressure applied by the product on each of the inclined faces 34 of the groove 32 creates a resultant force inclined from the internal face and moving away from the principal plane A of the device 10.

The receptacle 16 is preferably made from an elastic deformable material. Thus, to dispense a given quantity of product, the user applies pressure on the walls of the receptacle 16, causing an increase in the product pressure inside the receptacle until the walls 30a, 30b facing each other separate, and the product dispensing orifice opens and product can come out of the receptacle.

When a given quantity of product has been dispensed, the user stops pressing on the walls of the receptacle 16. The product pressure in the receptacle reduces, the walls 30a, 30b of the slit 30 return elastically to their initial position in which they bear in contact with each other, thus closing the dispensing orifice.

5 The bearing contact of the walls 30a, 30b facing each other is sufficient to close the dispensing orifice that is sealed against air and pollutants. Thus, the receptacle 16 that was also compressed to dispense the product, tends to return elastically to its initial shape, causing some suction. This suction is the result of the reduction in the quantity product present in the receptacle 16 due to the quantity of
10 product that has been dispensed, and this prevents the receptacle 16 from returning to its initial shape.

Suction then further forces the walls 30a, 30b of the slit 30 to bear in contact with each other, to further improve closing of the product dispensing orifice and prevent air from entering the receptacle 16.

15 In order to achieve hygienic dispensing of the product, the device 10 is made from a material that limits proliferation of bacteria at its external product dispensing face.

This purpose is achieved by the external face 20 of the slit stopper 18 being smooth, in other words having a low roughness. Thus, it does not contain any rough
20 surfaces in which the product could be retained and in which bacteria could develop.

This purpose can also be achieved by the use of a material with a bactericide effect, or at least a bacteriostatic effect, in other words a material that limits the development of bacteria. For example, such a material may be copper, silver or an alloy based on one of these materials.

25 This material is placed on the device 10, covering the external face 36 of the body 12 and forming a material layer 38.

According to the embodiment shown in figures 1 and 2, the material layer 38 is deposited on the application face 36 for example by electrolysis or more particularly by electroplating.

According to another embodiment shown in figures 3 and 4, the material layer 38 is in the form of a thin plate crimped onto the body 12.

The material layer 38, that may be the deposited layer or the thin plate, comprises a central orifice 40 through which the external end of the slit stopper 18
5 passes.

As shown in figures 5A to 5C, the slit stopper 18, and consequently the central orifice 40 of the material layer 38, may have different shapes, complementary to each other.

Thus for example, the shapes of the slit stopper 18 and the central
10 orifice 40 are mainly circular as shown in figure 5A, or oval or oblong as shown in figure 5B, or rectangular as shown in figure 5C.

The external face 20 of the slit stopper 18 is flush with the external face 38a of the material layer 38, which limits roughness at the connection between the two external faces 20, 38a, in which the product could have been retained and bacteria could
15 have developed.

According to the embodiment shown in figures 1 to 3, the dispensing device 10 is made from a single part with the rest of the receptacle 16.

According to the embodiment shown in figure 4, the dispensing device 10 consists of an add-on element on the remainder of the receptacle 16 that is fixed for
20 example by crimping, gluing or bonding.

According to the embodiments shown in figures 1 to 4, the application face of the dispensing device 10, formed by the external face 20 of the slit stopper 18 and the external face 38a of the material layer 38, is plane. It will be understood that the invention is not limited to this embodiment and that it may be convex as shown in figure
25 6A, or concave as shown in figure 6B.

Figures 7A and 7B also show another variant embodiment of the dispensing device 10 that is used in association with a rigid receptacle 16.

According to these embodiments, the receptacle 16 comprises a wall 42 installed free to slide to make the product move outwards when a user applies pressure
30 on this wall 42. When the product has been dispensed, the user stops pressing on the wall

42, the slit stopper 18 automatically closes the dispensing orifice as described above, which retains the sliding wall 42 in its position.

Sealing means 44 are also provided between the moving wall 42 and the remainder of the receptacle 16.

5 According to the embodiment shown in figure 7A, the moving wall 42 is a bottom wall of the receptacle 16 that is opposite the wall of the receptacle comprising the dispensing device according to the invention.

 According to the embodiment shown in figure 7B, the moving wall 42 is the top wall of the receptacle 16 in which the dispensing device 18 is installed.

CLAIMS

1. Device (10) for dispensing a fluid product, comprising a body (12) that extends in a plane orthogonal to a principal plane (A) of the device (10), that
5 comprises a central housing (14),

a slit stopper (18) arranged in the central housing (14) of the body (12), that is made from an elastically deformable material and that is delimited by an external face (20), an internal face (22) and a peripheral wall (24),

the slit stopper (18) comprising a slit (30) approximately parallel to the
10 principal plane (A) of the device (10), that extends from the internal face (22) to the external face (20), and that comprises two facing walls (30a, 30b) that bear in contact with each other and that can move apart following a movement perpendicular to the principal plane (A) of the device (10) under pressure from the product to be dispensed, by elastic deformation of the slit stopper (18),

15 characterised in that the slit stopper (18) comprises a groove (32) made in the internal face (22), that comprises two inclined faces (34) each of which extends a wall (30a, 30b) of the slit (30) in the inwards direction.

2. Device (10) according to the previous claim, characterised in that
20 the slit stopper (18) comprises a rib (26) projecting from its peripheral wall (24) that fits into an associated groove (28) in the central housing (14), and in that there is a radial clearance present between the bottom of the radial groove (28) and the free end of the rib (26).

25 3. Device (10) according to any one of the previous claims, characterised in that the body (12) comprises an external face (20) covered by a layer (38) made of a bactericide or at least bacteriostatic material, and in that the material layer (38) comprises a central opening (40) through which the slit stopper (18) passes such that

the external face (20) of the slit stopper (18) is flush with the external face (20) of the material layer (38).

4. Device (10) according to the previous claim, characterised in that
5 the material layer (38) is made by metallic deposition on the external face (36) of the body (12).

5. Device (10) according to claim 3, characterised in that the material
layer (38) consists of a metal plate crimped onto the body (12), covering the external face
10 (36) of the body (12).

6. Device (10) according to any one of claims 3 to 5, characterised in
that the material layer (38) is made from copper or silver.

7. Device (10) according to any one of claims 3 to 6, characterised in
15 that the front face (38a) of the material layer (38) and the external face (20) of the slit stopper (18) form a plane, concave or convex application surface.

8. Device (10) according to any one of the previous claims,
20 characterised in that it is made from a single part with a receptacle (16) containing the product.

9. Device (10) according to either claim 7 or 8, characterised in that
the receptacle is rigid and comprises a moving wall (42) and a fixed wall on which the
25 device (10) is fixed.

10. Device (10) according to either claim 7 or 8, characterised in that
the receptacle is rigid and comprises a moving wall (42) on which the device (10) is fixed.

ABSTRACT

The invention relates to a device for dispensing a fluid product, comprising a body (12), a slit stopper (18) arranged in the body (12) which is made of a resiliently deformable material and which is defined by an external surface (20) and an internal surface (22), the slit stopper (18) comprising a slit (30) substantially parallel to the main plane (A) of the device (10), which extends from the internal surface (22) to the external surface (20), and which comprises two mutually facing walls (30a, 30b) which are in contact with one another, and which are capable of spreading apart in a movement perpendicular to the main plane (A) of the device (10) using the pressure of the product to be dispensed, by resilient deformation of the slit stopper (18), characterized in that the slit stopper (18) comprises a groove (32) produced in the internal surface (22), which comprises two inclined surfaces (34) each extending toward the internal a wall (30a, 30b) of the slit (30). The invention also relates to a dispensing device (10) comprising a layer of material having bactericidal or bacteriostatic properties on the external surface thereof.

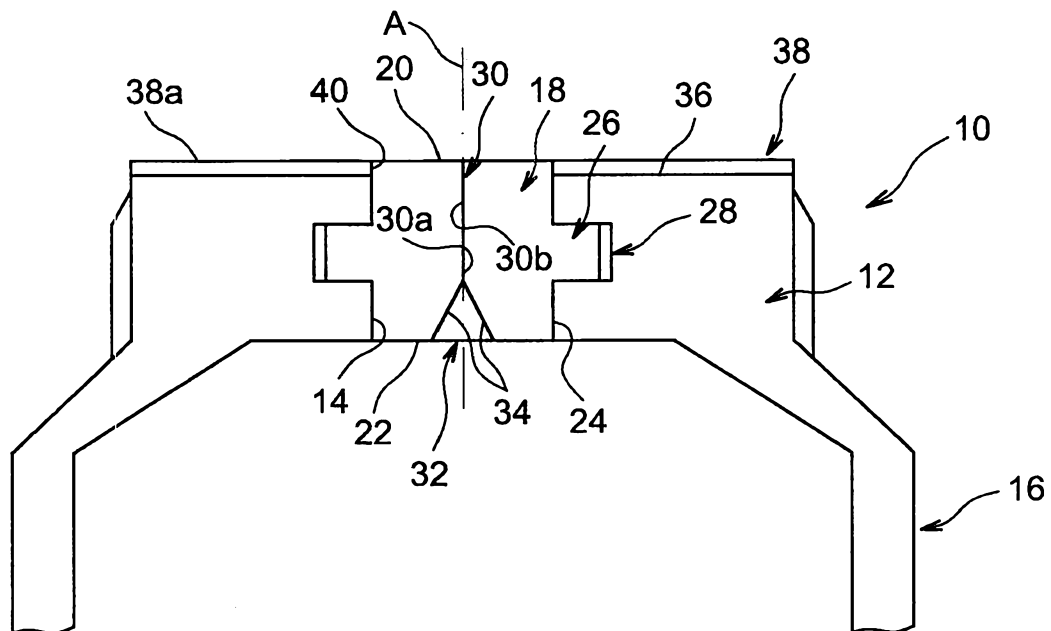


FIG. 1

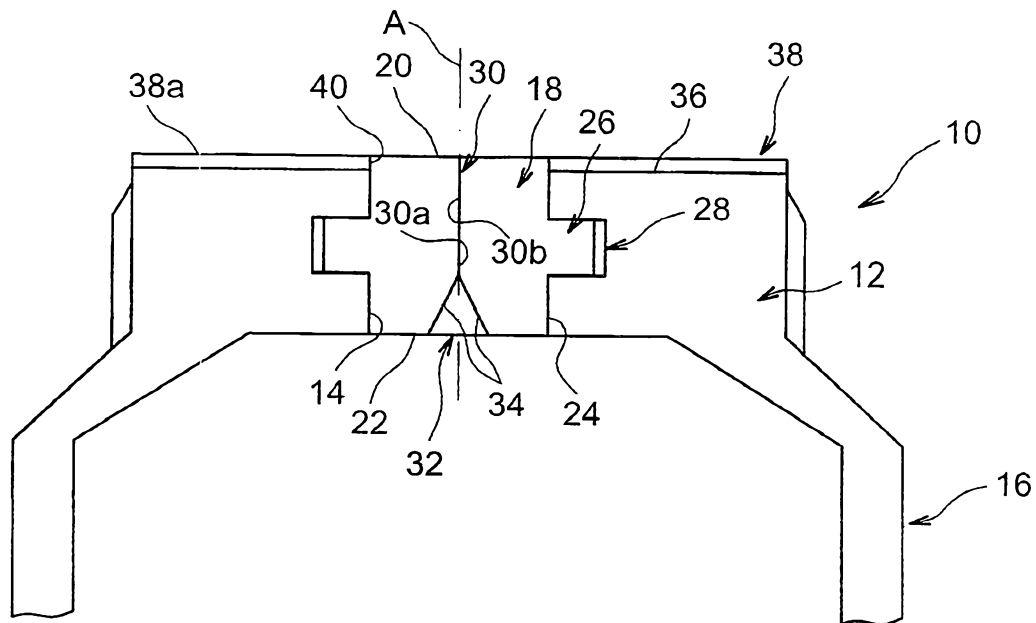


FIG. 1

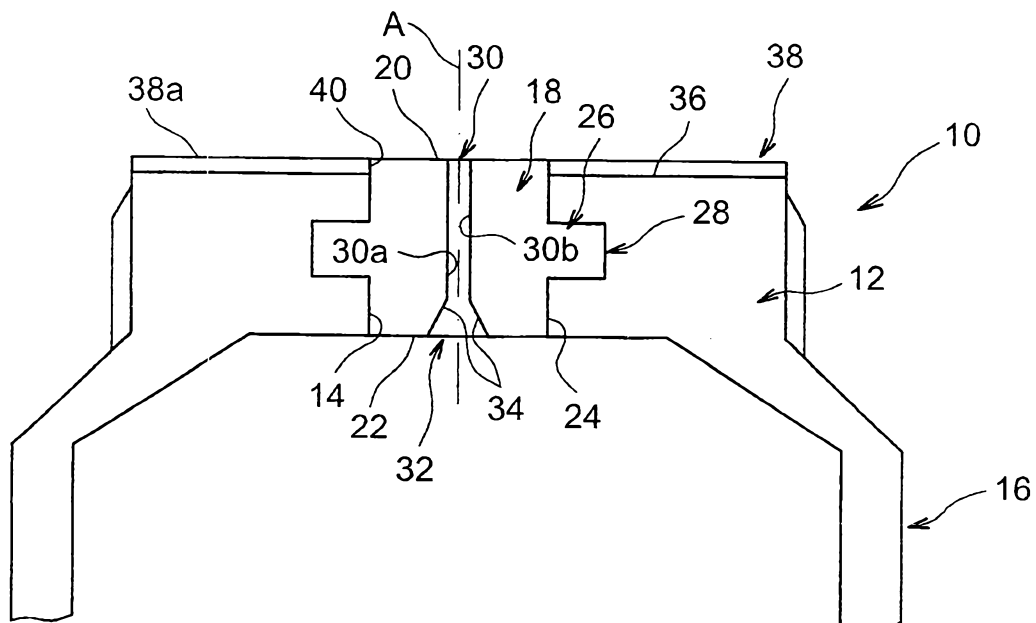


FIG. 2

2 / 5

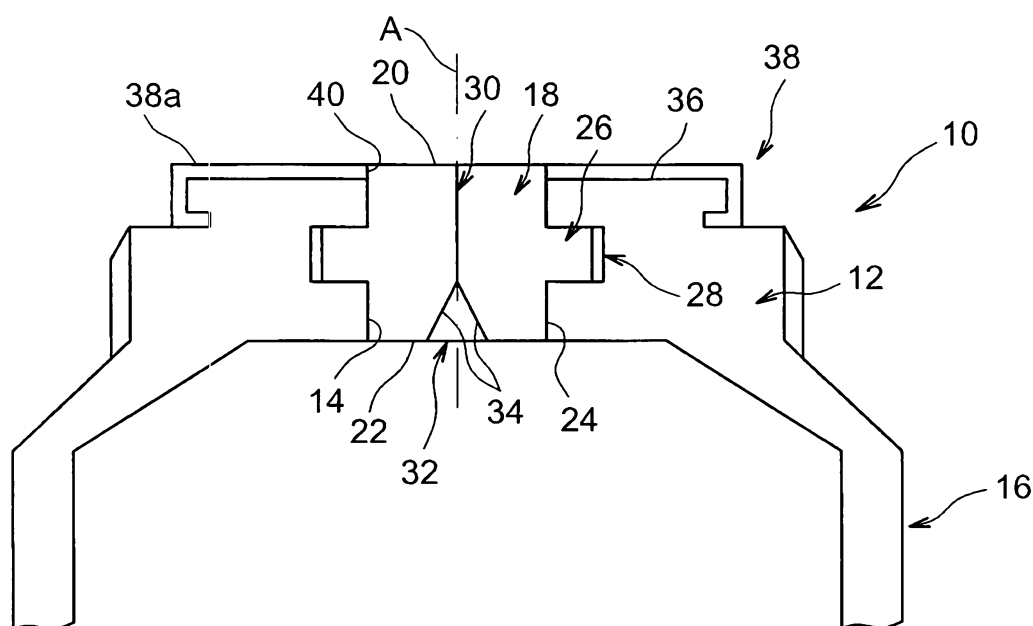


FIG. 3

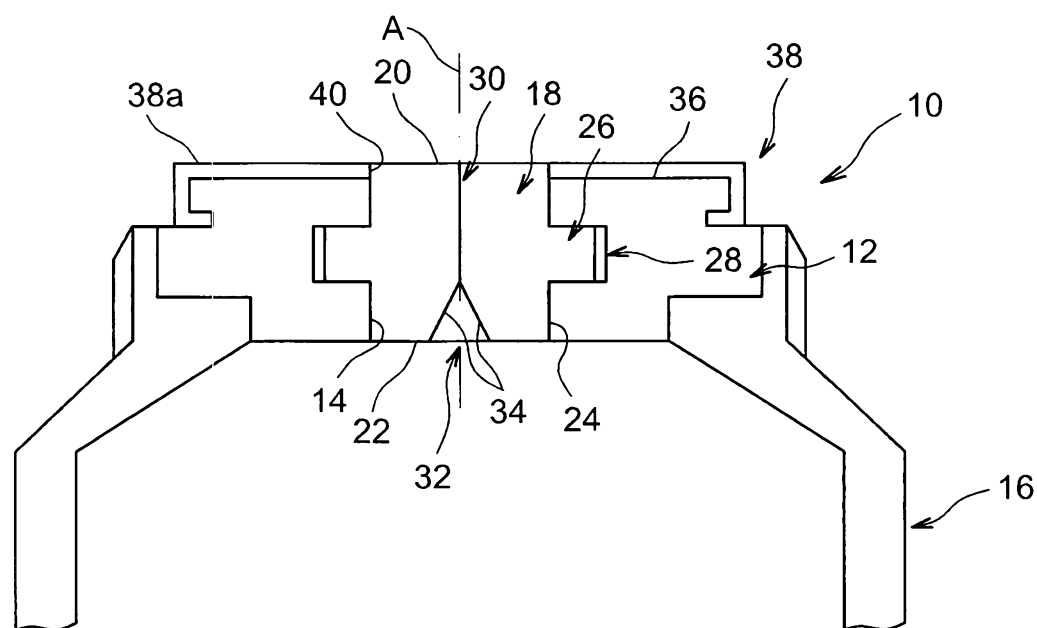


FIG. 4

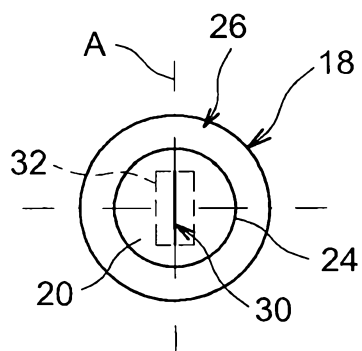


FIG. 5A

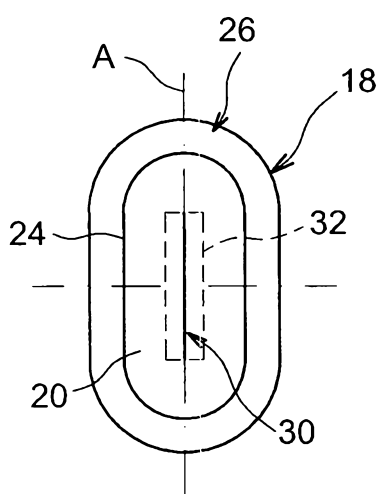


FIG. 5B

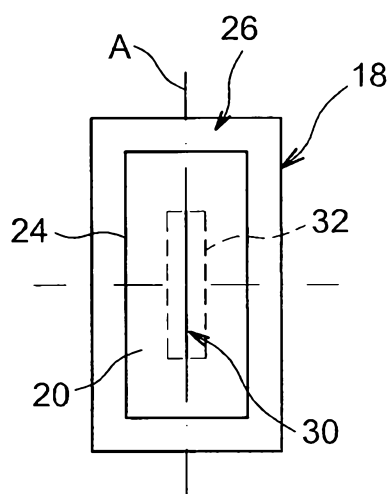


FIG. 5C

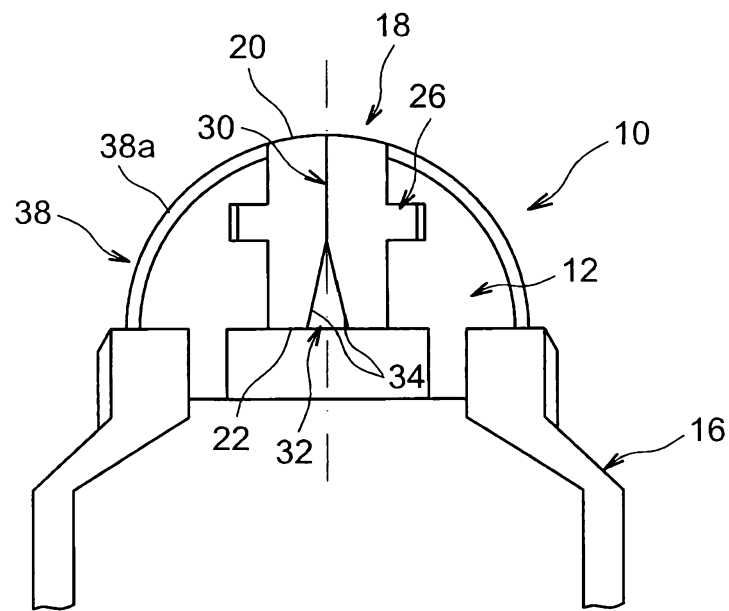


FIG. 6A

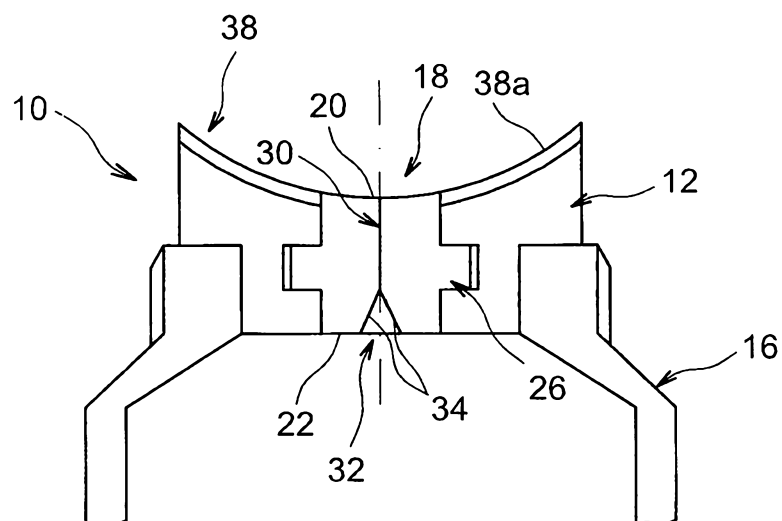


FIG. 6B

5 / 5

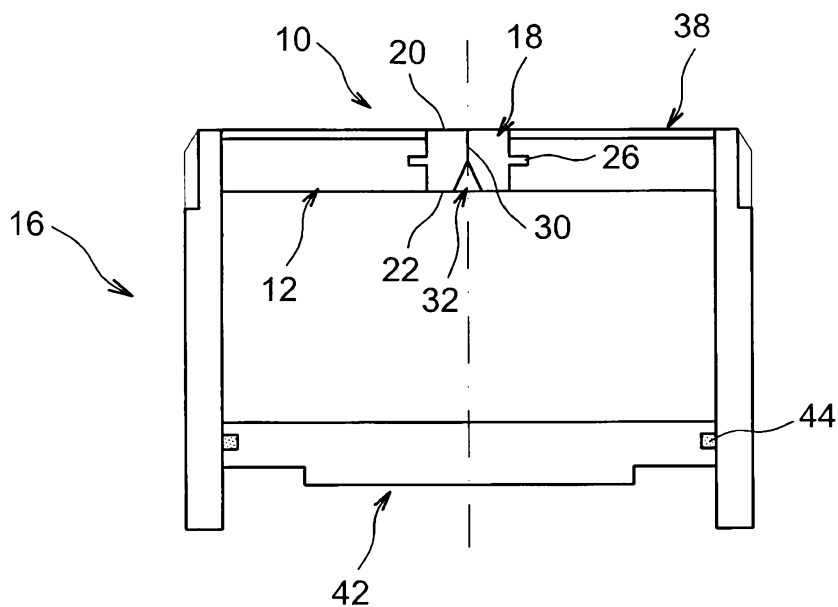


FIG. 7A

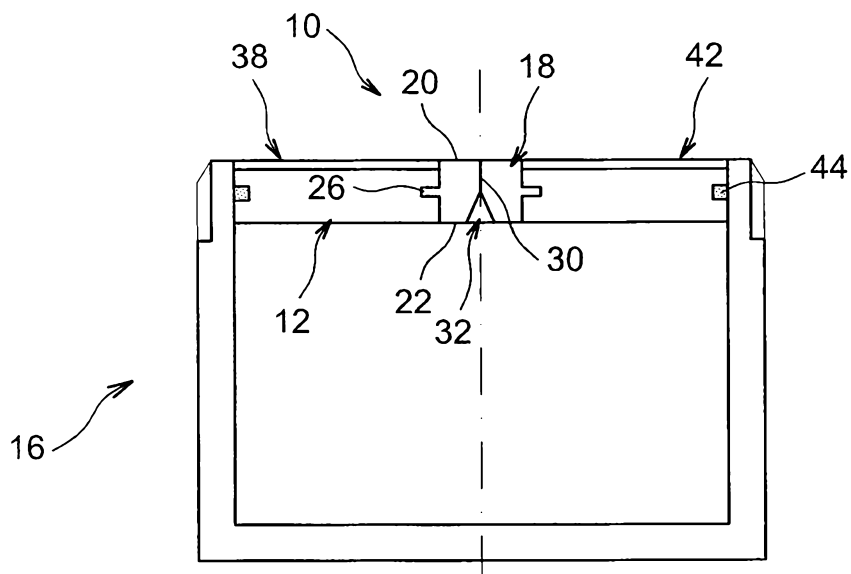


FIG. 7B