



(43) International Publication Date
6 September 2013 (06.09.2013)

- (51) **International Patent Classification:**
A47C 7/40 (2006.01) *A47C 7/68* (2006.01)
- (21) **International Application Number:**
PCT/US2013/027711
- (22) **International Filing Date:**
26 February 2013 (26.02.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/604,816 29 February 2012 (29.02.2012) US
13/775,766 25 February 2013 (25.02.2013) US
- (71) **Applicant:** KNOLL, INC. [US/US]; 1235 Water Street,
East Greenville, Pennsylvania 18041 (US).
- (72) **Inventors:** UDAGAWA, Masamichi; 33 Rector Street,
Unit 3, New York, New York 10006 (US).
MOESLINGER, Sigrid; 33 Rector Street, Unit 3, New
York, New York 10006 (US). VAN HEKKEN, Hendrik
R.; 3760 Manchester Road, Allentown, Pennsylvania
18104 (US).
- (74) **Agent:** FISCHER, Ralph G.; Buchanan Ingersoll &
Rooney PC, One Oxford Centre, 301 Grant Street, 20th
Floor, Pittsburgh, Pennsylvania 15219 (US).

(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** A CHAIR AND A METHOD OF USING THE CHAIR

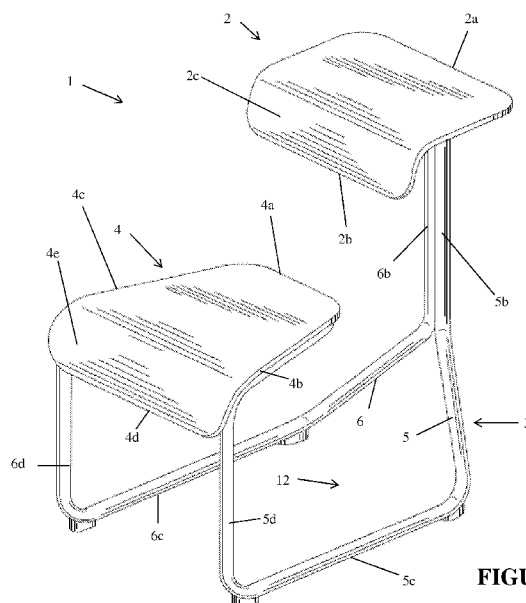


FIGURE 1

(57) **Abstract:** A chair (1) includes a tablet (2) and a seat (4). The tablet (2) and seat (4) are configured such that a user may sit for-
wardly on the seat so that his or her arms may rest on the tablet (2) and a device or paper may be positioned on the tablet (2) such
that the person may look at the device or paper. The tablet (2) and seat (4) are also arranged such that the person may sit rearwardly
on the seat (4) so that the person's back rests on a bottom portion (2c) of the tablet.

A CHAIR AND A METHOD OF USING THE CHAIR

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims priority to U.S. Patent Application No. 13/775,766, which was filed on February 25, 2013 and U.S. Provisional Patent Application No. 61/604,816, which was filed on February 29, 2012.

FIELD OF INVENTION

The present invention relates to chairs and methods of using a chair.

BACKGROUND OF THE INVENTION

Chairs often include a base that supports a seat. The base may also support a backrest in some chair designs. The backrest may recline. Examples of such chair designs may be appreciated from U.S. Patent No. 8,029,060.

Some chairs are configured as a tablet chair. Such chairs often include a base that supports both a seat and a tablet. The tablet may be a planar surface that is supported in front of and above a seat so that a person sitting in the seat of the chair may read a document on the tablet, use a device on the tablet, write notes on paper supported by the tablet or perform other types of work on the tablet. Examples of tablet chair designs may be appreciated from U.S. Patent Nos. 7,059,670, 6,102,475, 5,931,528, 4,529,247, 4,203,624, 3,467,432, 3,156,498, 3,020,086, 1,691,053, 719,338, 411,553, D589,725, D505,022, D170,331, and D170,005 and U.S. Patent Application Publication No. 2003/0230914.

Typically, tablet chair designs fail to permit a user to have multiple different seating options. For example, such chairs are usually designed to require a user to sit facing forwardly by facing the desk or tablet of the chair. Prolonged sitting in such an arrangement, however, may be uncomfortable or undesirable to a user. We have determined that a new chair design is

needed that may permit a user to sit in a chair multiple ways so that the chair may be more easily and acceptably used in various different settings and permit multiple different organizational arrangements for purposes of collaboration, participating in meetings, or otherwise performing work.

SUMMARY OF THE INVENTION

A chair includes a tablet and a seat. The tablet and seat may be configured such that a user may sit forwardly on the seat so that his or her arms may rest on the tablet and a device, paper, or other material may be positioned on the tablet such that the person may look at the device or paper or perform work on the surface of the tablet. The tablet and seat are also arranged such that the person may sit rearwardly on the seat so that the person's back rests on a downwardly projecting bottom portion of the tablet.

In some embodiments of the chair, the bottom portion of the tablet may be immediately adjacent a downwardly curved portion of the tablet that may function as an upper surface for supporting a user's back when the user is seated rearwardly. The seat may also have a curved bottom portion for providing a surface for supporting an upper portion of a user's legs when the user is seated rearwardly.

A method of using the chair is also provided. The method may include a user sitting on the chair forwardly and subsequently turning around on the seat to sit on the seat rearwardly so that the user's back rests on the bottom portion of the tablet and legs rest upon or engage a downwardly projecting bottom portion of the seat.

In one embodiment of the chair, the chair includes a base, a seat supported by the base, and a tablet supported by the base. The tablet is above and forward of the seat (e.g. in front of the seat). The tablet has an upper front edge, a bottom rear edge, and a curved portion between

the front edge and the bottom rear edge. The curved portion of the tablet may extend upwardly from adjacent the rear bottom edge to a position adjacent to a front portion of the tablet.

The seat may have a number of different configurations. In some embodiments, the seat may have a front edge and a rear edge. The rear edge of the seat may be lower than the front edge of the seat. The seat can also have a curved portion between the rear edge of the seat and the front edge of the seat. The curved portion of the seat can extend upwards from the rear edge of the seat to define a curved surface of the seat. In addition, the curved portion of the tablet may extend from the rear edge of the tablet to the front portion of the tablet to define a curved surface of the tablet.

The base of the chair can include a number of different designs or arrangements. For instance, the base may include at least one sled member. For example, the base may include a first sled member and a second sled member. The first and second sled members may support both the seat and the tablet. The first sled member may have a tablet supporting portion for engaging or attachment to the tablet, a front vertical member extending from the tablet supporting portion, a horizontal member extending from the front vertical member to a rear vertical member, and a lateral seat supporting portion extending from the rear vertical member for engaging a first side of the seat or attachment to the first side of the seat. The second sled member may have a tablet supporting portion for engaging or attachment to the tablet, a front vertical member extending from the tablet supporting portion, a horizontal member extending from the front vertical member to a rear vertical member, and a lateral seat supporting portion extending from the rear vertical member for engaging a second side of the seat or attachment to the second side of the seat, the second side of the seat being opposite the first side of the seat. In some embodiments of the chair, the horizontal and front vertical members of the first and second

sled members may be sized and configured to define space between the horizontal and front vertical members of the first and second sled members. The space may be sized and configured to provide an opening for a user's feet when the user sits on the seat so that a chest of the user faces toward the tablet. The rear vertical member of the first sled member may be positioned below the seat and no portion of the horizontal member of the first sled member may extend rearwardly of the lower rear edge of the seat in some embodiments of the chair. For such embodiments, the rear vertical member of the second sled member may also be positioned below the seat and no portion of the horizontal member of the second sled member may extend rearwardly of the lower rear edge of the seat.

In other embodiments of our chair, the chair includes a base, a seat supported by the base, and a tablet supported by the base. The seat has a front edge and a rear edge. The rear edge is lower than the front edge. The seat also has a curved portion between the rear edge and the front edge. The curved portion of the seat extends upwards from the rear edge of the seat to define a curved surface of the seat. The tablet is above and forward of the seat and has an upper front edge, a bottom rear edge, and a curved portion between the front edge of the tablet and the bottom rear edge of the tablet. The curved portion of the tablet extends upwardly from the rear bottom edge of the tablet to a position adjacent to a front portion of the tablet to define a curved surface of the tablet. In some embodiments of this chair, the tablet is molded or formed as a unitary structure and the seat is molded or formed as a unitary structure.

A method of using a chair is also provided. The method includes the step of providing a chair that includes a base, a seat supported by the base, and a tablet supported by the base. The tablet may be above and forward of the seat and the tablet may have an upper front edge, a bottom rear edge, and a curved portion between the front edge and the bottom rear edge. The

curved portion of the tablet may extend upwardly from adjacent the rear bottom edge to a position adjacent to a front portion of the tablet. The method may also include the steps of sitting on the seat of the chair in a first sitting position such that a chest of a seated user faces toward the tablet and sitting on the chair in a second sitting position such that a back of the seated user engages the curved portion of the tablet. It should be understood that embodiments of the method may be configured so that an embodiment of our chair is used when practicing the method.

Other details, objects, and advantages of the invention will become apparent as the following description of certain present preferred embodiments thereof and certain present preferred methods of practicing the same proceeds.

BRIEF DESCRIPTION OF THE DRAWINGS

Present preferred embodiments of the chair are shown in the accompanying drawings. It should be appreciated that like reference numbers used in the drawings may identify like components.

Figure 1 is a perspective view of a first present preferred embodiment of a chair.

Figure 2 is a side view of the first present preferred embodiment of the chair.

Figure 3 is a front view of the first present preferred embodiment of the chair.

Figure 4 is a top view of the first present preferred embodiment of the chair.

Figure 5 is a rear view of the first present preferred embodiment of the chair.

Figure 6 is a flow chart illustrating one embodiment of a method of using the chair.

DETAILED DESCRIPTION OF PRESENT PREFERRED EMBODIMENTS

Referring to Figures 1-5, a chair 1 includes a tablet 2 supported by a base 3. The base 3 also supports a seat 4 that is positioned below and behind the tablet 2. The base 3 includes a first

sled member 5 and a second sled member 6. The sled members may be relatively rigid members that have vertically extending portions that extend from elongated horizontal portions configured to rest on the floor or ground. The sled members may be composed of aluminum, steel, or another kind of metal. It is contemplated that the sled members could also be composed of wood or a polymeric material such as a plastic material.

In some embodiments the sled members 5 and 6 may be tubular members that have different tubular segments interconnected to each other via welding or a fastening connection mechanism such as the use of mating threads for attaching immediately adjacent segments or one or more other types of connection mechanisms such as via fasteners, brackets, or other fastening devices. In other embodiments each sled member or both sled members may be formed as a unitary structure. For instance, each sled member may be cast or molded as a unitary structure to have a desired shape or structure or the sled members may be cast or molded to have a desired shape or structure.

The first sled member 5 includes an upper tablet support portion 5a that is connected to a first vertically extending portion 5b. The first vertically extending portion 5b is connected to a horizontally extending portion 5c that is configured for engaging the ground or a floor for supporting the seat 4 and tablet 2. A second vertically extending portion 5d is attached to a lateral seat supporting portion 5e, which is attached to or in engagement with a first side of the seat 4. A front seat supporting portion 5f may extend from the lateral seat supporting portion 5e as well and be positioned for attachment to or engagement with a bottom front portion of the seat 4.

The second sled member 6 has a first portion 6a that supports the tablet 2. A first vertical portion 6b extends from the first portion 6a to a horizontally extending portion 6c. The

horizontally extending portion 6c is also attached to a second vertically extending portion 6d. The second vertically extending portion 6d is attached to a seat supporting portion 6e. The lateral seat supporting portion 6e is adjacent a second side of the seat that is opposite the first side of the seat. The lateral seat supporting portion 6e is attached to or in engagement with the second side of the seat 4. A front seat supporting portion 6f may extend from the lateral seat supporting portion 6e as well for attachment to or engagement with a bottom front portion of the seat 4. The front seat supporting portion 6f may be attached to or integral with the front seat supporting portion 5f of the first sled member 5 as well.

The tablet 2 defines a work surface that includes a front surface that extends from a front edge 2a to a bottom edge 2b. The front portion of the tablet 2 may be substantially flat or may be a planar surface that is inclined. It is also contemplated that embodiments of the chair may utilize a tablet that is configured so that the front portion of the tablet has a declined surface.

A curved portion 2c of the tablet defines a curved surface that is positioned between the rear bottom edge 2b of the tablet surface and the upper front edge 2a. The curved portion 2c of the tablet 2 extends upwardly along a curve from the rear bottom edge 2b to define a curved surface. The curve along which the curved portion 2c may extend is preferably at an angle θ relative to vertical. The angle θ is preferably between 0° and 15° , but could be at other angles such as over 15° . The curved portion 2c is preferably curved such that the curved portion 2c that extends to the bottom edge 2b defines a curved back supporting surface as may be appreciated from a more detailed discussion of rearward sitting options afforded by the chair 1.

The tablet 2 is supported by the base 3. For example, the bottom of the tablet may be affixed or attached to the tablet supporting portions 5a and 6a of the first and second sled members 5, 6. For instance, at least one bracket or other connector may be used to attach the

tablet to the tablet supporting portions of the sled members. Alternatively, the sled members may include recesses for receiving portions of the tablet to hold the tablet. As yet another alternative, the tablet may be adhered or welded to the tablet supporting portions 5a and 6a of the first and second sled members. Combinations of such connection mechanisms may also be utilized for attaching the tablet 2 to the first and second sled members 5, 6.

The seat 4 may include a front portion that includes a front edge 4a. The seat 4 may extend from the front edge 4a to the bottom rear edge 4d. The front portion of the seat 4 may define a seating surface that is horizontal or may be inclined or declined. For instance, the front portion may be positioned so that the seating surface provided by the front portion of the seat is at a 1° incline (e.g. one degree above horizontal) or a 1° decline (e.g. one degree below horizontal). The degree of inclination or declination of the front portion of the seat 4 may be any of a number of suitable configurations, and is preferably within a range of a 10° incline and a 10° decline.

The seat 4 also has a first side 4b and a second side 4c opposite the first side 4b. A curved portion 4e of the seat is positioned between the rear bottom edge 4d and the front edge 4a. The curved portion 4e extends upwardly from the bottom edge 4d and is adjacent to the front portion of the seat 4. The curved portion 4e may be integral with this front portion and may be immediately adjacent to the front portion of the seat.

The curved portion 4e of the seat 4 may define a curved surface sized and configured to support a portion of a user's legs, such as a user's thighs, if a user sits so that their chest faces away from the tablet 2 or their back rests against the curved portion 2c of the tablet 2. A portion of the user's legs may therefore engage the curved portion 2c when rearwardly sitting on the seat 4 so that the user's back engages the curved portion 2c of the tablet 2 or faces the tablet 2.

In some embodiments, the curved portion 4e may be configured so that it provides no support to a user that is seated so that their chest faces the tablet 2 and feet are below the tablet 2. Such embodiments may be configured so that the curved surface defined by the curved portion 4e of the seat 4 engages the rear surface of a user's legs or contacts the rear surface of the user's legs only if the user sits so that their back faces toward the tablet or engages the curved portion 2c of the tablet 2 (e.g. rests upon, touches, contacts or is supported by the curved portion 2c).

The seat 4 is supported by the base 3. The seat supporting portions 5e and 6e of the first and second sled members may contact or engage the bottom of the seat to support the seat. Alternatively, the seat supporting portions 5e and 6e may be attached via a bracket or other connector to the seat 4 or may be welded or adhered to the seat 4. The front seat supporting portions 5f and 6f may also be in engagement with the bottom of the seat 4 or may alternatively be attached via a connector, welding, an adhesive, or other fastening mechanism to support the seat 4. Of course, alternative embodiments may utilize combinations of such connection mechanisms for attaching the seat 4 to sled members or other components of a base 3 of the chair.

The curved portions of the tablet 2 and seat 4 may be configured to help permit a user to sit at least two different ways on the chair 1. In a first sitting posture, or seated position, a user may sit so that their feet are positioned below the tablet 2 and their chest faces toward the tablet 2. Such a posture is a typical posture for a person sitting in a tablet chair. The front vertically extending portions 5b and 6b of the sled members and the horizontally extending members 5c and 6c may be shaped and configured to be spaced apart for defining a space 12 or opening below the tablet and between the horizontally extending portions 5c and 6c. The user's feet may be placed in this defined space 12 below the tablet when in the first seated position.

The chair 1 is also configured to permit a user to comfortably turn around and sit in another position. In the second sitting posture, or seated position, the user's legs extend from the rear of the seat and the user's back faces toward the tablet 2. The user's back may engage or rest upon the curved portion 2c of the tablet 2 and the user's thighs or upper portion of the user's legs may be supported by the curved portion 4e of the seat as well. In this way, the curved portion 2c of the tablet may provide back support to a user and the seat may be configured to provide a comfortable seating surface to the user when in the second seated position. In the second seated position, a user may be free to easily fold one leg over the other, kick his or her feet, or make other casual seated movements with their feet or lower legs.

The user may twist his or her body so that the user is able to move from the first sitting posture to the second sitting posture and vice versa without having to stand up (e.g. he or she may twist or rotate on the seat to adjust his or her position). In moving from the first sitting posture to the second sitting posture and vice versa, the user may have his or her legs extend off the side of the seat and away from the tablet. In yet alternative embodiments of a method of changing seated positions or sitting postures, it should be understood that the user may stand up to adjust his or her position as well.

The multiple different sitting positions are actively supported by the chair so that a user may utilize the chair comfortably in multiple positions. It is contemplated that the first seated position may be preferable for seating used in educational settings or instructional settings where a user may want to take notes or work on a laptop, internet appliance, or electronic tablet or need to refer to one or more books, such as text books. It is contemplated that the second seated position may be preferable for seating used in collaborative settings such as brain storming

sessions or design collaboration meetings or other meetings or conferences in which the work surface provided by the tablet may not be needed.

It is also contemplated that the front portion of the tablet 2 forward of the curved portion 2c may be flat so that the front portion can be used to store a bag, briefcase, or books that are not needed for reference when a user sits in the second seated position. Thus, the tablet may still offer a desired structure or functionality even when not used as a work surface. In contrast, when a user sits in the chair in the first seated position, the front portion of the tablet 2 may still provide a work surface for supporting a laptop or book, support note taking, or otherwise help facilitate the performance of work.

It should be appreciated that embodiments of the chair may utilize many different features. For example, the seat 4 may be a unitary structure composed of polymeric material or may be a structure that has many interconnected components, such as a foam member that is positioned between a fabric or leather covering and a rigid plate. For instance, the covering may be a fabric or mesh material that is sewn, adhered or otherwise attached to the rigid plate to enclose the foam member, such as a foam cushion. The tablet 2 may be composed of wood, metal, a composite material, a polymeric material or other material. The tablet 2 may be composed of interconnected members or be formed as a unitary structure. For instance, the tablet may be a wood member that includes a laminate surface or treated surface or may be a polymeric sheet or plate that is formed to include the curved portion 2c as being integral with the front portion of the tablet 2. As yet another example, it should be appreciated that the shape and configuration of the base 3 may be any of a number of different configurations needed to meet a particular design objective that permit the base to support both the seat 4 and the tablet 2.

Therefore it should be understood that while certain present preferred chairs and methods of making and using chairs have been discussed and illustrated herein, it is to be distinctly understood that the invention is not limited thereto but may be otherwise variously embodied and practiced within the scope of the following claims.

What is claimed is:

1. A chair comprising:
a base;
a seat supported by the base; and
a tablet supported by the base, the tablet being above and forward of the seat, the tablet having an upper front edge, a bottom rear edge, and a curved portion between the front edge and the bottom rear edge, the curved portion extending upwardly from adjacent the rear bottom edge to a position adjacent to a front portion of the tablet.
2. The chair of claim 1 wherein the seat has a front edge and a rear edge, the rear edge of the seat being lower than the front edge of the seat.
3. The chair of claim 2 wherein the seat also has a curved portion between the rear edge of the seat and the front edge of the seat, the curved portion of the seat extending upwards from the rear edge of the seat to define a curved surface of the seat.
4. The chair of claim 3 wherein the curved portion of the tablet extends from the rear edge of the tablet to the front portion of the tablet to define a curved surface of the tablet.
5. The chair of claim 1 wherein the base is comprised of at least one sled member.
6. The chair of claim 1 wherein the base is comprised of a first sled member and a second sled member, the first and second sled members supporting both the seat and the tablet.

7. The chair of claim 6 wherein the first sled member has:
- a tablet supporting portion for engaging or attachment to the tablet,
 - a front vertical member extending from the tablet supporting portion,
 - a horizontal member extending from the front vertical member to a rear vertical member, and
 - a lateral seat supporting portion extending from the rear vertical member for engaging a first side of the seat or attachment to the first side of the seat; and
- wherein the second sled member has:
- a tablet supporting portion for engaging or attachment to the tablet,
 - a front vertical member extending from the tablet supporting portion,
 - a horizontal member extending from the front vertical member to a rear vertical member, and
 - a lateral seat supporting portion extending from the rear vertical member for engaging a second side of the seat or attachment to the second side of the seat, the second side of the seat being opposite the first side of the seat.
8. The chair of claim 7 wherein the horizontal and front vertical members of the first and second sled members are sized and configured to define space between the horizontal and front vertical members of the first and second sled members, the space being sized and configured to provide an opening for a user's feet when the user sits on the seat so that a chest of the user faces toward the tablet.

9. The chair of claim 8 wherein the rear vertical member of the first sled member is positioned below the seat and no portion of the horizontal member of the first sled member extends rearwardly of the lower rear edge of the seat; and

wherein the rear vertical member of the second sled member is positioned below the seat and no portion of the horizontal member of the second sled member extends rearwardly of the lower rear edge of the seat.

10. A method of using a chair comprising:
providing a chair, the chair comprising:
a base,
a seat supported by the base, and
a tablet supported by the base, the tablet being above and forward of the seat, the tablet having an upper front edge, a bottom rear edge, and a curved portion between the front edge and the bottom rear edge, the curved portion extending upwardly from adjacent the rear bottom edge to a position adjacent to a front portion of the tablet;
sitting on the seat of the chair in a first sitting position such that a chest of a seated user faces toward the tablet; and
sitting on the chair in a second sitting position such that a back of the seated user engages the curved portion of the tablet.

11. The method of claim 10 wherein the seat has a front edge and a rear edge, the rear edge of the seat being lower than the front edge of the seat.

12. The method of claim 11 wherein the seat also has a curved portion between the rear edge of the seat and the front edge of the seat, the curved portion of the seat extending upwards from the rear edge of the seat to define a curved surface of the seat, an upper portion of legs of a user engaging the curved surface of the seat when the user is seated in the second sitting position.

13. The method of claim 12 wherein the curved portion of the tablet extends from the rear edge of the tablet to the front portion of the tablet to define a curved surface of the tablet.

14. The method of claim 10 wherein the base is comprised of at least one sled member.

15. The method of claim 10 wherein the base is comprised of a first sled member and a second sled member, the first and second sled members supporting both the seat and the tablet.

16. The method of claim 15 wherein the first sled member has:

- a tablet supporting portion for engaging or attachment to the tablet,
- a front vertical member extending from the tablet supporting portion,
- a horizontal member extending from the front vertical member to a rear vertical member, and
- a lateral seat supporting portion extending from the rear vertical member for engaging a first side of the seat or attachment to the first side of the seat; and

wherein the second sled member has:

a tablet supporting portion for engaging or attachment to the tablet,
a front vertical member extending from the tablet supporting portion,
a horizontal member extending from the front vertical member to a rear vertical member, and

a lateral seat supporting portion extending from the rear vertical member for engaging a second side of the seat or attachment to the second side of the seat; and
the second side of the seat being opposite the first side of the seat.

17. The method of claim 16 wherein the horizontal and front vertical members of the first and second sled members are sized and configured to define an opening between the horizontal and front vertical members of the first and second sled member, the opening being sized and configured to provide space for a user's feet when the user sits on the seat in the first seated position so that a chest of the user faces toward the tablet.

18. The method of claim 17 wherein the rear vertical member of the first sled member is positioned below the seat and no portion of the horizontal member of the first sled member extends rearwardly of the lower rear edge of the seat; and

wherein the rear vertical member of the second sled member is positioned below the seat and no portion of the horizontal member of the second sled member extends rearwardly of the lower rear edge of the seat.

19. A chair comprising:
a base;

a seat supported by the base, the seat having a front edge and a rear edge, the rear edge of the seat being lower than the front edge of the seat, the seat also having a curved portion between the rear edge of the seat and the front edge of the seat, the curved portion of the seat extending upwards from the rear edge of the seat to define a curved surface of the seat; and

a tablet supported by the base, the tablet being above and forward of the seat, the tablet having an upper front edge, a bottom rear edge, and a curved portion between the front edge of the tablet and the bottom rear edge of the tablet, the curved portion of the tablet extending upwardly from the rear bottom edge of the tablet to a position adjacent to a front portion of the tablet to define a curved surface of the tablet.

20. The chair of claim 19 wherein the tablet is molded or formed as a unitary structure and the seat is molded or formed as a unitary structure.

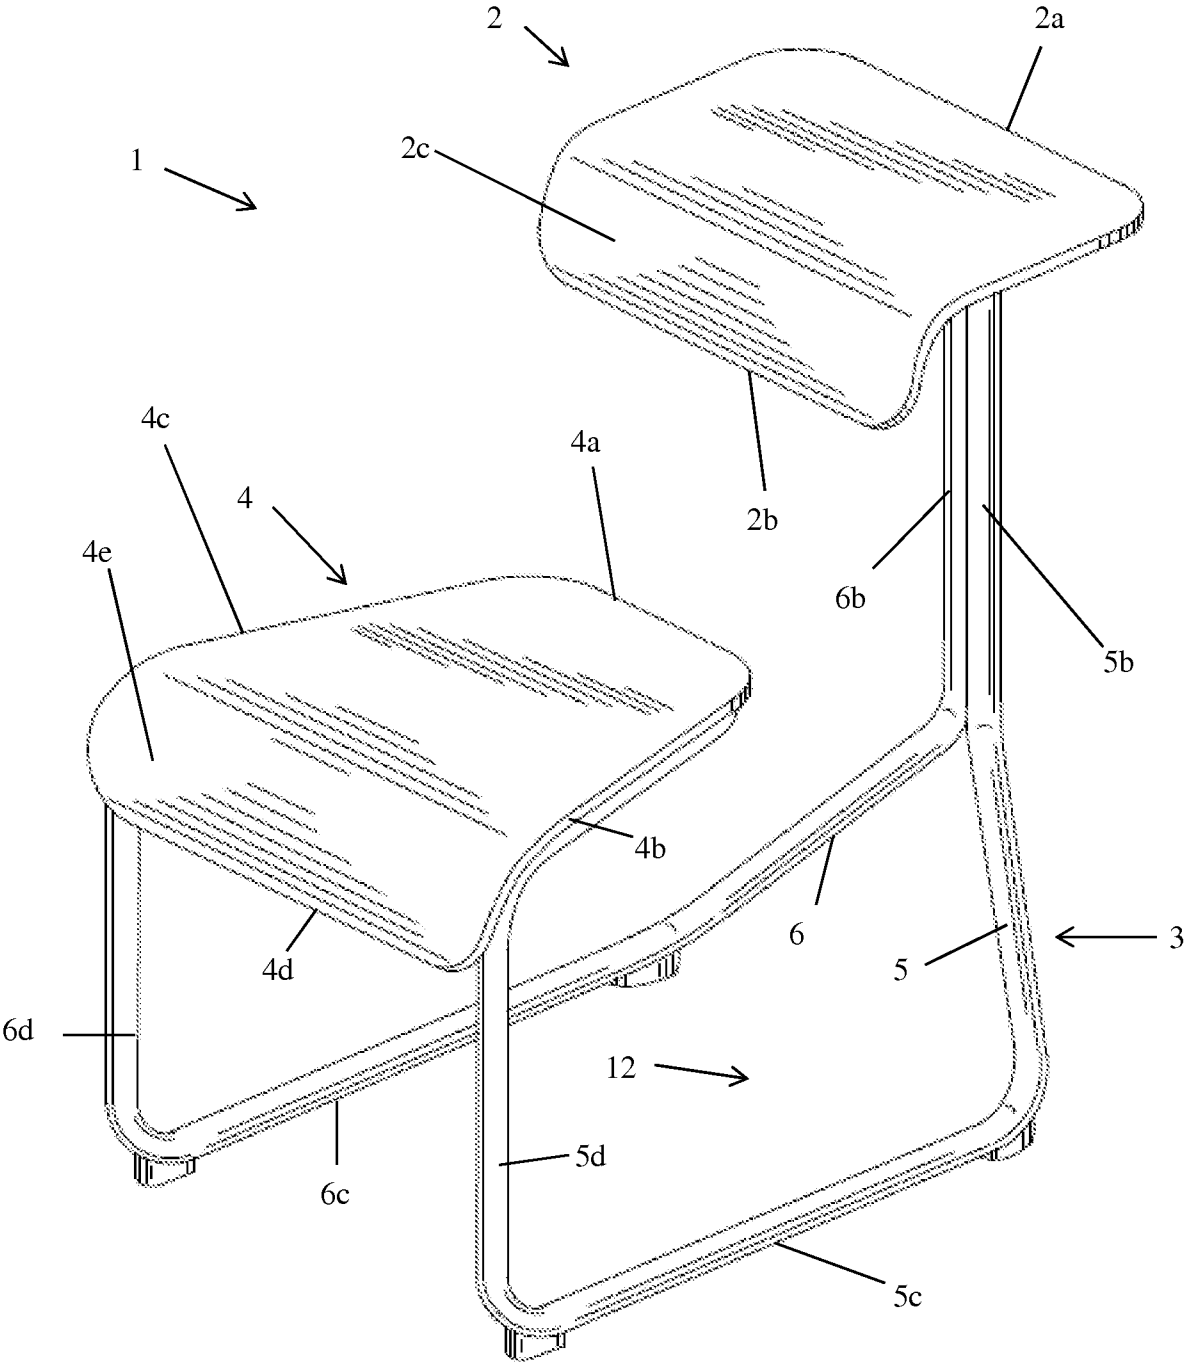
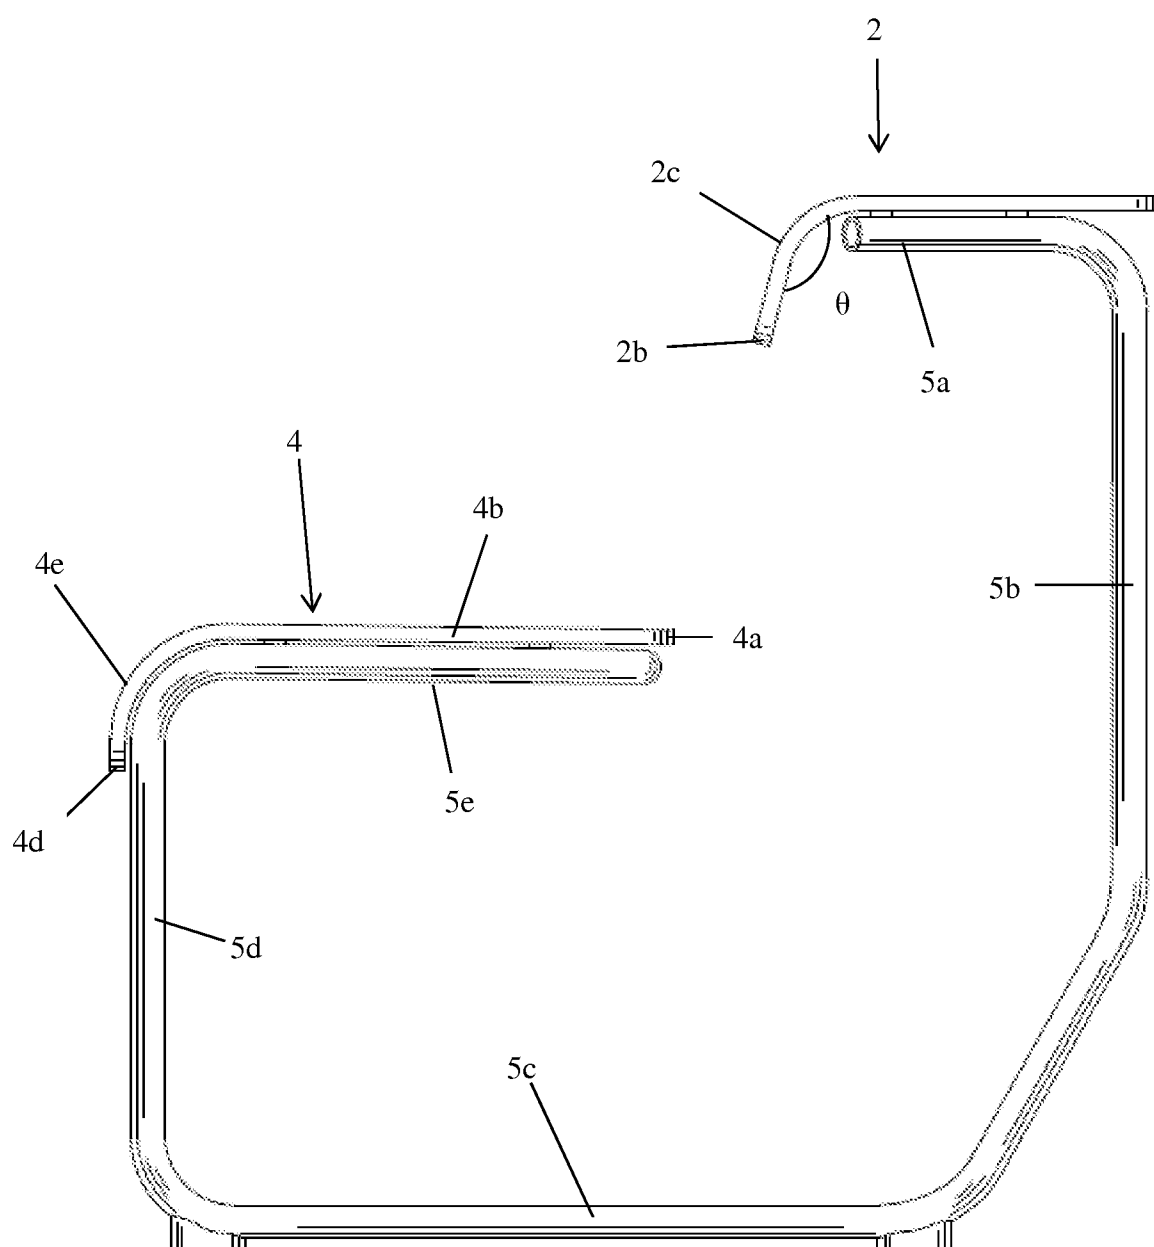
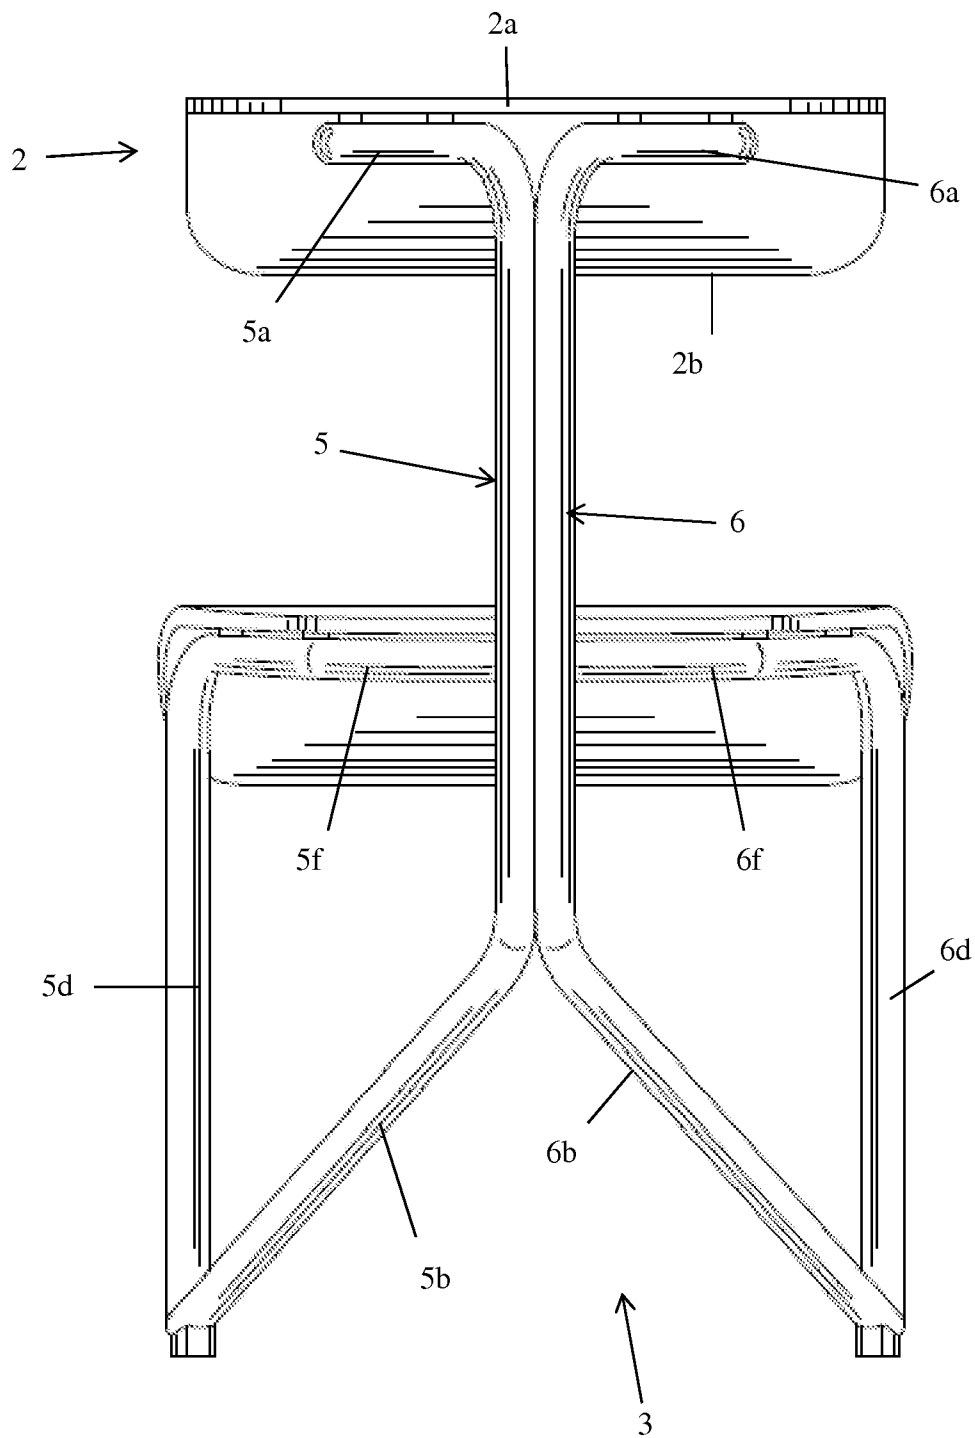


FIGURE 1

**FIGURE 2**

**FIGURE 3**

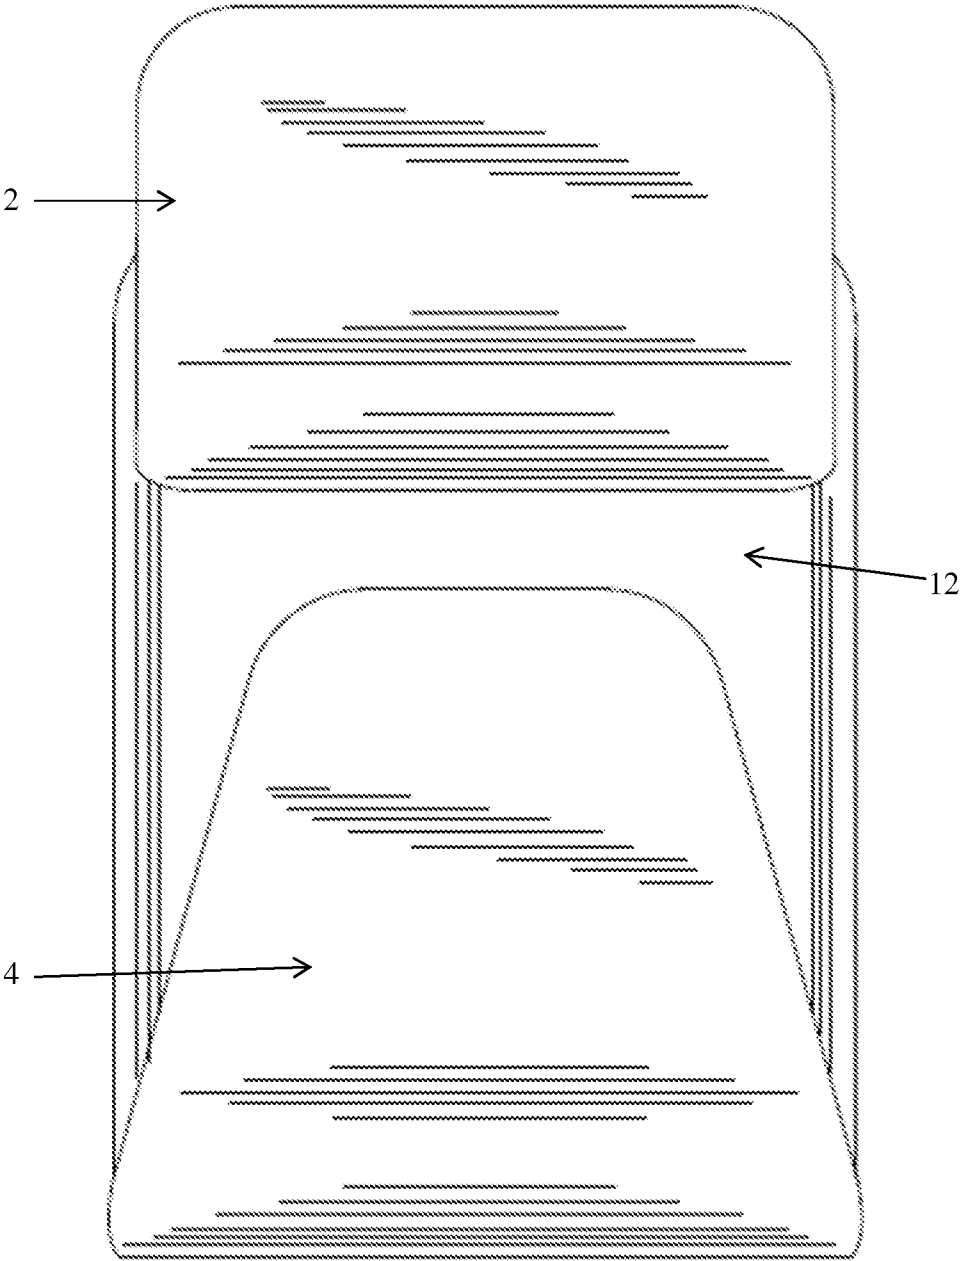


FIGURE 4

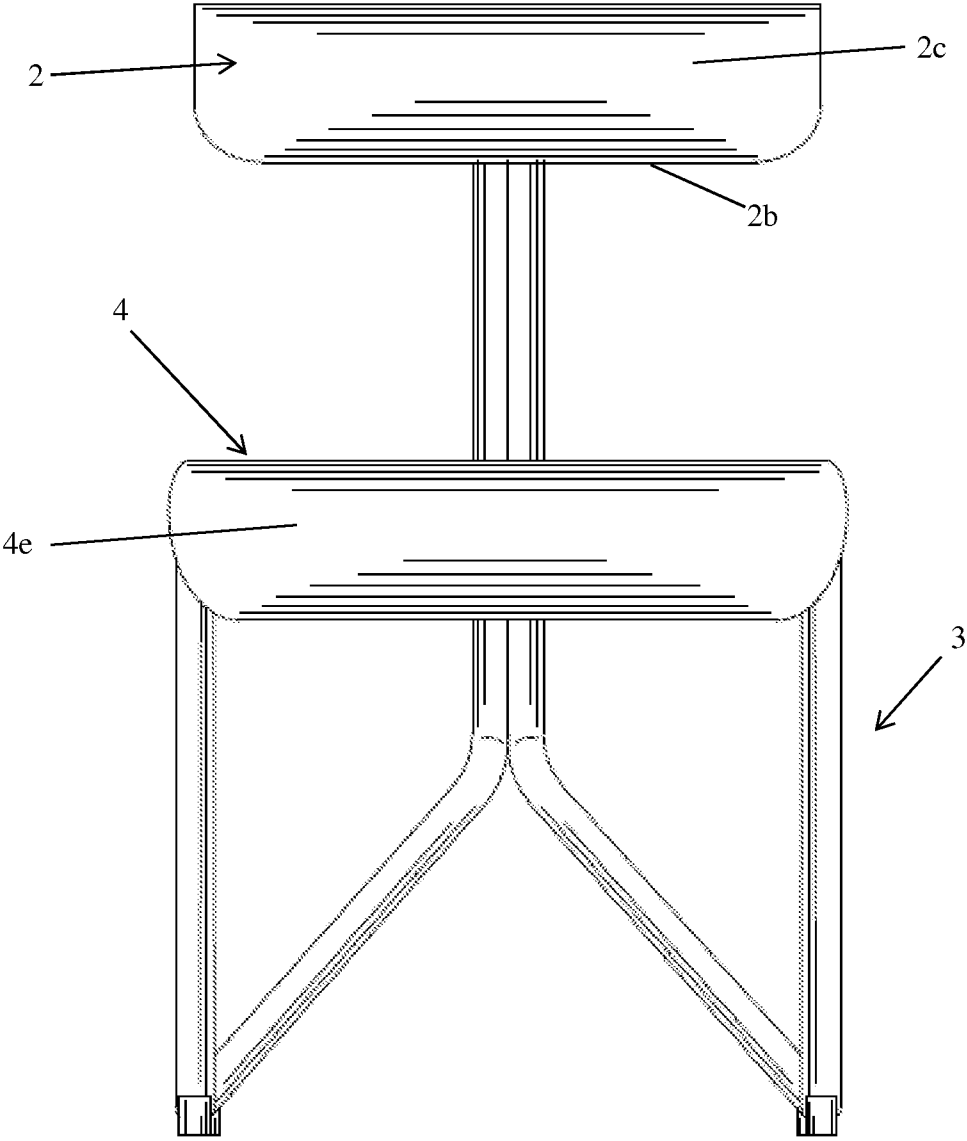
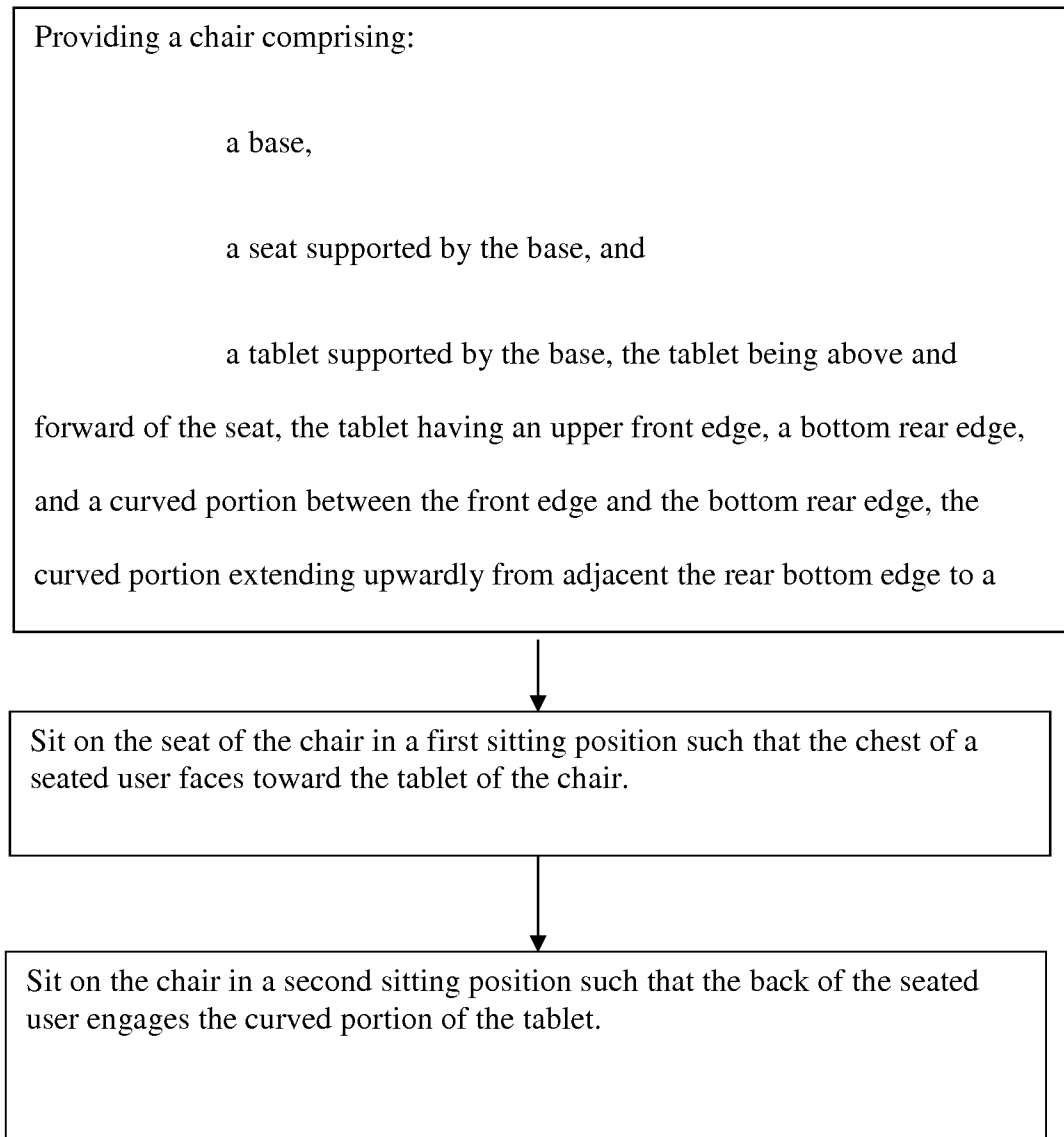


FIGURE 5

**FIG. 6**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/027711

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47C7/40 A47C7/68
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A47C A47B A47D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 228 190 A (CHELFUL LIMITED) 22 August 1990 (1990-08-22) figures	1-20
X	----- US 3 350 133 A (SCHAEFER) 31 October 1967 (1967-10-31) figures	1-4
X	----- EP 0 309 021 A1 (B & B ITALIA SPA) 29 March 1989 (1989-03-29) figures	1
X	----- US 2 702 584 A (WILLIAMS ET AL) 22 February 1955 (1955-02-22) column 2, line 76 - column 3, line 1; figures	1,10
	----- -/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 May 2013

Date of mailing of the international search report

06/06/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kis, Pál

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/027711

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 1 267 168 A (TECH MENAGERES) 21 July 1961 (1961-07-21) figures	10
A	----- DE 20 2012 000062 U1 (BENTEL) 8 February 2012 (2012-02-08) figures	1
A	----- DE 20 50 322 A1 (WILKHAHN WILKENING & HAHNE) 20 April 1972 (1972-04-20) figures	1
A	----- DE 91 02 851 U1 (MÖBELWERKE A. DECKER GMBH) 25 July 1991 (1991-07-25) figures	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/027711

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2228190	A	22-08-1990	NONE	
US 3350133	A	31-10-1967	NONE	
EP 0309021	A1	29-03-1989	AU 2222188 A EP 0309021 A1 IT 211827 Z2 JP H0189055 U	16-03-1989 29-03-1989 25-05-1989 12-06-1989
US 2702584	A	22-02-1955	NONE	
FR 1267168	A	21-07-1961	NONE	
DE 202012000062	U1	08-02-2012	NONE	
DE 2050322	A1	20-04-1972	NONE	
DE 9102851	U1	25-07-1991	NONE	