

**ΚΥΠΡΙΑΚΟ ΓΡΑΦΕΙΟ ΔΙΠΛΩΜΑΤΩΝ
ΕΥΡΕΣΙΤΕΧΝΙΑΣ
THE PATENT OFFICE OF CYPRUS**

**ΑΡΙΘΜΟΣ ΔΗΜΟΣΙΕΥΣΗΣ CY1601
PUBLICATION NUMBER**

ΑΡΙΘΜΟΣ ΔΗΜΟΣΙΕΥΣΗΣ
ΓΡΑΦΕΙΟΥ ΔΙΠΛΩΜΑΤΩΝ ΕΥΡΕΣΙΤΕΧΝΙΑΣ
ΗΝΩΜΕΝΟΥ ΒΑΣΙΛΕΙΟΥ
UK PATENT OFFICE
PUBLICATION NUMBER GB2201080

Το έγγραφο που παρουσιάζεται πιο κάτω καταχωρήθηκε στο «Γραφείο Διπλωμάτων Ευρεσιτεχνίας» στην Αγγλία σύμφωνα με το Νόμο Κεφ. 266 πριν την 1^η Απριλίου 1998. Δημοσίευση έγινε μετέπειτα από το Γραφείο Διπλωμάτων Ευρεσιτεχνίας του Ηνωμένου Βασιλείου μόνο στην Αγγλική γλώσσα.

**The document provided hereafter was filed at "The Patent Office"
in England under the law CAP.266 before the 1st of April 1998.
It was published afterwards by the UK patent office only in English.**

(12) **UK Patent Application** (19) **GB** (11) **2 201 080 A** (13)
 (43) Application published 24 Aug 1988

(21) Application No 8803849

(22) Date of filing 18 Feb 1988

(30) Priority data

(31) 8704197 (32) 23 Feb 1987 (33) GB

(71) Applicant

British-American Tobacco Company Limited

(Incorporated in United Kingdom)

Westminster House, 7 Millbank, London, SW1P 3JE

(72) Inventor

John Anthony Luke

(74) Agent and/or Address for Service

K J H MacLean

B A T (UK and Export) Limited, Patents Section

Research and Development Centre,

Regent's Park Road, Southampton, SO19 1PE

(51) INT CL⁴

A24B 3/14 15/14

(52) Domestic classification (Edition J):

A2C CE

(56) Documents cited

None

(58) Field of search

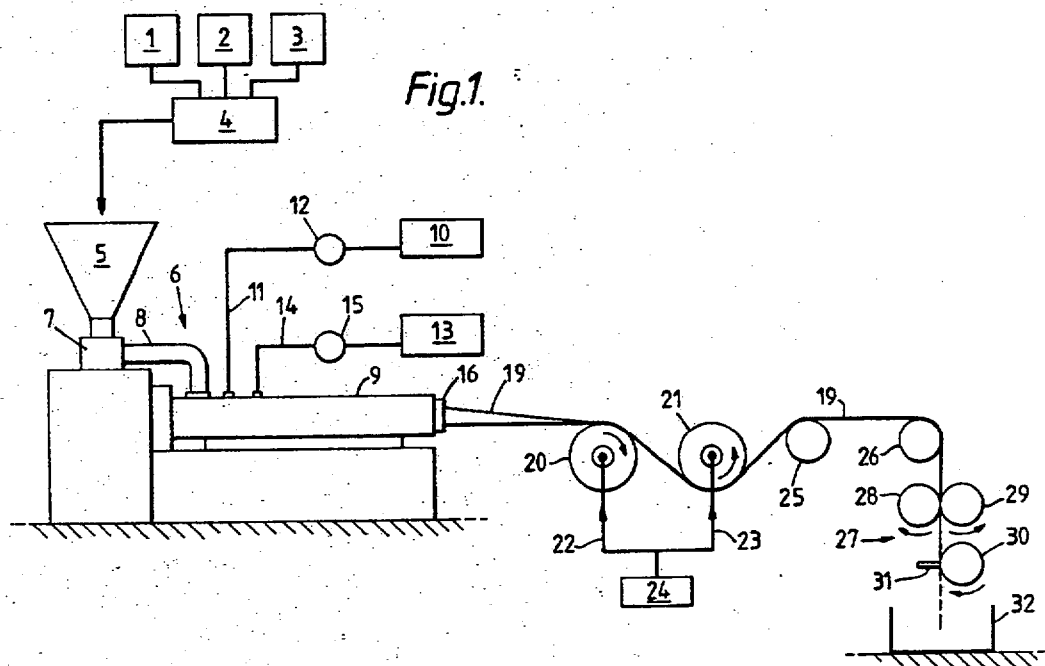
A2C

Selected US specifications from IPC sub-class

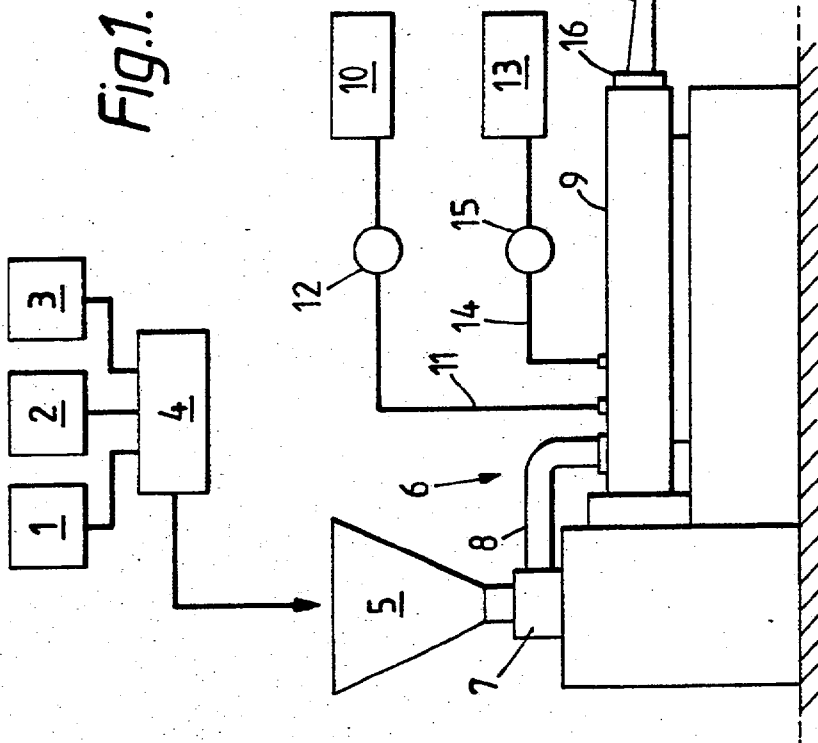
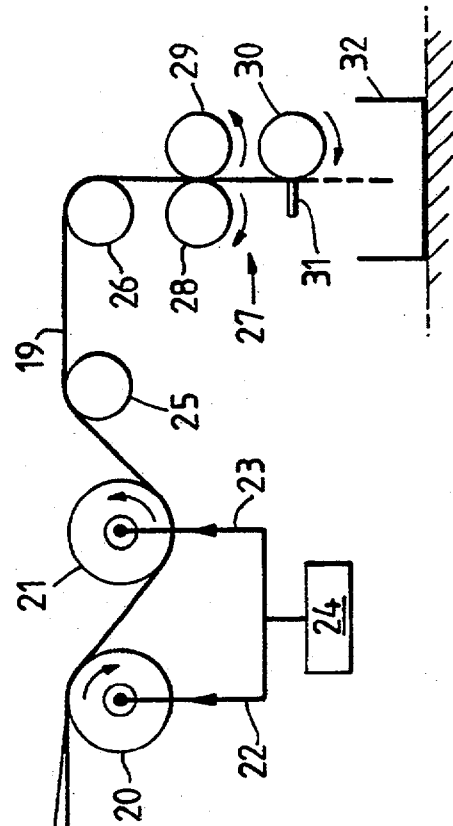
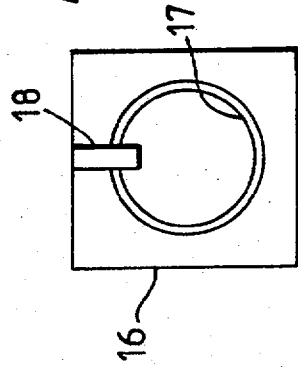
A24B

(54) **Tobacco reconstitution**

(57) Tobacco is reconstituted to provide a product of tobacco-filler size particles. Particulate tobacco, starch, binder (e.g. cellulosic) and water are fed to an extruder 9, the operating conditions being such that in the sheet form extrudate water flashes off to steam, thus to expand the extrudate. While in the plastic phase, the extrudate is subjected to a draw down step. The extrudate is then cut to particle size.



GB 2 201 080 A

*Fig.2.*

"IMPROVEMENTS RELATING TO TOBACCO RECONSTITUTION"

The invention the subject of this application relates to tobacco reconstitution.

There have been many prior proposals for the production of tobacco based material utilising particulate tobacco. According to these proposals, the particulate tobacco may be derived from a waste product of smoking article manufacturing processes, cigarette manufacturing processes for example, or may be obtained by grinding tobacco leaf lamina or stem portions. The materials produced from the particulate material may take the form of flat webs or sheets, rods, filaments or hollow cylinders. Processes producing these materials are commonly referred to as tobacco reconstitution processes.

It has been proposed to operate tobacco reconstitution processes to produce materials which can be used as smoking articles. Thus if the material is produced as a rod of open cell structure, of 8 mm. diameter say, it has been suggested that the rod can be smoked as a smoking article having a likeness to a cigarette or a cigar. It has though more usually been proposed that the products of tobacco reconstitution processes should be utilised, after having been cut or shredded, as constituents of cut filler for conventional smoking articles. A further use for reconstituted tobacco materials, when in web or sheet form, is as smoking article wrapping materials.

Components additional to tobacco which have been proposed for inclusion in materials produced by re-constitution processes are water; binding agents, e.g. pectin, starch, pullulan and cellulosic binders; fillers; 5 humectants; expansion agents; reinforcing agents; and flavorants.

Tobacco reconstitution processes may be carried out by subjecting the particulate tobacco and other component materials to a casting process, to an extrusion process or 10 to a paper-making type process.

Details of prior proposed tobacco reconstitution processes are to be found in the patent specifications next listed.

Australian Patent Specification No. 499,651.

15 Canadian Patent Specifications Nos. 711,529; 951,209; and 1,163,069.

European Patent Specifications Nos. 056,308, 113,595; 143,335, 167,370, 198,718, 208,566 and 238,298.

United Kingdom Patent Specifications Nos. 5367/98; 20 983,928; 1,013,303; 1,055,445; 1,059,470; 1,138,280; 1,234,786; 1,502,797; and 2,078,087A.

United States Patent Specifications Nos. 2,592,553; 3,098,492 and 3,166,078.

Smoking related defects which have been noted in 25 the product materials of prior tobacco reconstitution processes relate to factors such as taste, flavour, aroma, colour, ash and burn characteristics, density,

resilience and frangibility. In the use of such materials as constituents of smoking article filler, there has been noted the defect of low filling power as compared with orthodox cut leaf tobacco.

5 It is an object of the present invention to provide a tobacco reconstitution process by which there may be produced materials which in smoking qualities closely resemble those of the tobacco from which the material derives.

10 It is another object of the present invention to provide a tobacco reconstitution process by which there may be produced material of and a general appearance closely resembling cut leaf tobacco.

15 It is a further object of the present invention to provide a tobacco reconstitution process by which there may be produced material of filling power at least equivalent to that of cut leaf tobacco.

20 It is yet another object of the present invention to provide a tobacco reconstitution process by which there may be produced a cut material which is resilient and which resists degradation.

25 It is yet another object of the present invention to provide a tobacco reconstitution process by which there may be produced materials which can be blended with natural tobacco cigarette filler at the conclusion of the primary processing steps of tobacco filler manufacture.

The present invention provides a tobacco re-

constitution process, wherein a mixture of particulate tobacco, starch and binder, with the addition of water, is extruded, to provide a sheet form extrudate, under such extrusion conditions that the extrudate assumes a cross-section greater than that of the exit orifice of the extruder die, said extrudate in the plastic phase thereof is drawn down to reduce the thickness dimension thereof, the draw down ratio being at least 1.5, and the drawn down extrudate is cut to provide a product of tobacco-filler size particles.

The present invention also provides reconstituted-tobacco filler product consisting of particles each of which particles comprises a cellular interior and an integral skin extending over each of two opposite sides of the particle; the filler product having been made by a process wherein a mixture of particulate tobacco, starch and binder, with the addition of water, is extruded, to provide a sheet form extrudate, under such extrusion conditions that the extrudate assumes a cross-section greater than that of the exit orifice of the extruder die, said extrudate in the plastic phase thereof is drawn down to reduce the thickness dimension thereof, the draw down ratio being at least 1.5, and the drawn down extrudate is cut to provide said particles.

By drawing down the extrudate, as well as there being effected an increase in the machine direction dimension of the extrudate and a decrease in the thickness

thereof, an orientation is imparted to the extrudate and there may be produced cut product of enhanced strength and flexibility.

The draw down ratio, i.e. the ratio of the machine
5 direction velocity imparted to the extrudate downstream of the die to the velocity at the die, is suitably at least 10, is more suitably at least 20 and is yet more suitably at least 30.

In order to preserve the low density structure of
10 the extrudate the exertion thereon of draw down tensile force should not involve the application of lateral crushing forces, as would be the case were the extrudate to be nipped between a pair of opposed draw down rollers. We have found that an effective manner of drawing down
15 the extrudate with preservation of the low density structure thereof is for the extrudate, while at a sufficiently high temperature to ensure surface tackiness, to extend about a driven, unpaired, draw down roller. By ensuring an adequate degree of tackiness of the
20 extrudate and contact between the extrudate and the roller over a sufficient proportion of the circumference of the roller, the roller exerts a tractive force on the extrudate sufficient to draw down the extrudate. Suitably the peripheral contact surface of the roller is of plain
25 cylindrical and smooth form. The position of the roller relative to the extruder die is advantageously such that the extrudate in the travel thereof from the die to the

roller has not cooled sufficiently to prevent the extrudate from being tacky enough to adhere adequately to the roller. In order to ensure adequate tackiness of the extrudate at the location of the roller, the run
5 of the extrudate from the extruder die to the roller may be subjected to heating by, for example, the run being enclosed in a housing which is associated with heating means operable to maintain the interior of the housing at an elevated temperature. The provision of heating in
10 this manner may also be advantageous in prolonging the residence time of the extrudate in the plastic phase.

At a given die exit temperature of the extrudate and a given formulation of components fed to the extruder, the degree of draw down to which the extrudate is subjected
15 should preferably be so selected that the interior cells of the extrudate become elongated without the cells rupturing at, and fracturing the widthwise surfaces of the extrudate.

At the cutting stage of the sheet form extrudate the
20 temperature of the extrudate should advantageously be low enough to ensure that the extrudate is insufficiently tacky to cause problems in the operation of the cutter and also to ensure that the cellular structure of the extrudate has become adequately consolidated for the
25 cells to exhibit a pneumaticity requisite for the cells to resist the cutting forces, which forces might otherwise crush a significant proportion of the cells. It is

convenient in this regard to subject the extrudate to the cooling action of cooling means. Advantageously, a draw down roller may be adapted to provide the cooling means, provision being made for a coolant fluid to
5 circulate through the roller.

Suitably, the temperature of the extrudate at the cutting stage is within a range of 30°C to 50°C.

Advantageously, the sheet form extrudate is first operated upon at the cutting stage to slit the extrudate
10 longitudinally, i.e. in the machine direction. For this purpose there may be provided a multiplicity of slitting elements, disc knives for example, closely spaced transversely of the extrudate. The extrudate is next operated upon by severing means, a multi-bladed cylinder
15 cutter for example, so that the cut product takes the form of particles, each being a filament of rectilinear cross-section.

We have found that to best ensure that the cut product is of uniform structure there should be employed
20 a die the exit orifice of which is such that the extrudate upon first issuing from the die is of tubular or near-tubular cross-section. The extrudate is then opened to provide a flat sheet of uniform interior structure and uniform thickness. An alternative die exit orifice is
25 of a straight slit configuration.

The starch is preferably present in the tobacco/starch/binder mixture at a level within a range of 5% to

35% by weight and more preferably within a range of 10% to 20% by weight. The starch is preferably present in the mixture in an amount by weight exceeding that of binder by two times and more preferably by three or more
5 times. The level of binder in the mixture preferably does not exceed 10% by weight and more preferably does not exceed 5% by weight.

The starch may, for example, be maize or corn starch. The starch, or a proportion thereof, may be a modified
10 starch.

Suitably, the binder comprises a cellulosic binder. Preferred cellulosic binder materials for use in practising the present invention are hydroxypropyl cellulose and carboxymethyl cellulose, the former being
15 found to be especially effective. Other suitable cellulosic binder materials are hydroxyethyl cellulose, methyl cellulose and ethyl cellulose. Further suitable cellulosic binder materials will readily occur to those knowledgeable of prior proposed tobacco reconstitution
20 processes. Binder of the tobacco/starch/binder mixture may be provided by two or more binder materials, in which case it is advantageous that one of these materials is hydroxypropyl cellulose.

In addition to tobacco, starch and binder, sugar may
25 be fed to the extruder. The sugar, if present, may comprise one or more sugars, such for example as fructose, glucose and sucrose. Suitably, the sugar is present at

a level not exceeding about 5% by weight of the tobacco/starch/binder mixture, but may be present up to a level of about 10%.

Advantageously, the total water present in the
5 extruder is such that, without an extrudate drying step being utilised, the moisture content of the cut extrudate is within a range of 5% to 20% by weight (wet basis) and more preferably within a range of 10% to 16% by weight (wet basis). By "total water" is meant the sum of any
10 moisture present in the "dry" components of the tobacco/starch/~~cellulosic~~ binder mixture and any added water. Water may be added to one or more of the components of the mixture before the components are fed to the extruder and/or by way of injection via a barrel port(s) of the
15 extruder barrel. A convenient practice is to mix the components of the mixture and then to feed the mixture in a dry or substantially dry state to the extruder, water being added by injection into the extruder barrel.

Suitably, a plasticiser, such for example as glycerol
20 or propylene glycol is fed to the extruder with the components of the above referred to mixture and/or by way of injection into the extruder barrel. The inclusion level of the plasticiser may be within a range of 1 to 10% by weight on a wet basis.

25 We have found that products with optimised characteristics are obtained by ensuring that the processing within the extruder of the materials fed thereto takes

place adiabatically or close to adiabatically. It is also important to operate with an extruder barrel temperature profile up to the extruder die such that the temperature of the tobacco portion of the materials in the extruder does not attain a value which would be deleterious to the tobacco and is suitably in a range of 80°C to 180°C.

The processing must take place under such conditions that immediately upon its issuing from the die, the extrudate is expanded by water therein flashing off to steam. There is thereby effected an increase in the cross-section of the extrudate and the establishment of a cellular interior structure. The density of the extrudate may be in a range of 50 mg/cc to 500 mg/cc, and preferably not more than 300 mg/cc.

As will be readily appreciated by those skilled in the tobacco reconstitution art, possibilities arise for feeding flavorant materials to the extruder. Such materials may be nature-identical or artificial flavorants or botanical extracts.

The particulate tobacco used in the subject inventive process can be derived from the stem and/or the lamina portions of tobacco leaf and can be tobacco factory offal. We have found that the process can be fully adequately performed using offals in the condition as accumulated from any location in the primary or secondary manufacturing processes of a tobacco factory. Alternatively or in

addition to offals cut tobacco can be used.

By use of the inventive process there is readily obtained product the constituents of which have undergone substantially no chemical change relative to
5 the chemical constitution thereof when fed to the extruder.

The reconstituted-tobacco filler product should exhibit a replacement value for natural, i.e. un-reconstituted, and unexpanded tobacco filler of at
10 least 1:1.

In order that the present invention may be clearly understood and readily carried into effect reference will now be made, by way of example, to the drawing hereof, in which:-

15 Figure 1 shows a schematic of tobacco reconstitution apparatus; and

Figure 2 shows diagrammatically an outlet end view of the die of an extruder of the apparatus of Figure 1.

In operation of the apparatus shown schematically in
20 Figure 1 to produce a reconstituted tobacco product tobacco offal, starch and cellulosic binder are fed respectively from bins 1, 2 and 3 to a mixer unit 4, wherein the components are mixed without the addition of water. The formulation by weight of the mixture may be,
25 for example, 80% tobacco offal, 15% starch and 5% cellulosic binder. Factory offal may be readily used without any requirement for the offal to be ground. The

cellulosic binder may, for example, be constituted by three parts by weight hydroxypropyl cellulose and two parts by weight sodium carboxymethyl cellulose.

After the components have been thoroughly mixed in the mixer unit 4, the mixture is fed to hopper 5 of a twin-screw extruder generally designated by reference numeral 6. A feed unit 7 of the extruder 6 serves to feed the mixture through a feed pipe 8 to the inlet end of barrel 9 of the extruder 6. Water drawn from a tank 10 is injected into the barrel 9 through a line 11 under the action of a pump 12. Similarly, glycerol is drawn from a tank 13 and injected into the barrel 9 through a line 14 under the action of a pump 15.

If an addition of sugar is to be included, the sugar is conveniently fed to the mixer unit 4 with the materials from bins 1-3.

The flow rate of mixture to the barrel 9 from the hopper 5 may be, for example, 86 kg per hour, in which case the flow rates of water and glycerol through the lines 11 and 14 are suitably 10 and 5 kg per hour respectively. The total water in the wet mix in the barrel 9 may, for example, represent 16% by weight of the wet mix.

The barrel 9 is provided with heating means (not depicted in Figure 1) by the operation of which a desired temperature profile can be maintained along the barrel 9. The barrel temperature may, for example, be maintained at

40°C at the inlet end increasing to 95°C at the outlet end.

The pressure within the extruder must be maintained at a high enough value to ensure that water therein remains in the liquid phase. We have found that a
5 pressure within a range of 500 psig (3400 kPa) to 2000 psig (13600 kPa) is suitable.

At these temperatures and pressures the starch fed to the extruder is caused to gelatinize.

At the outlet end of the barrel 9 of the extruder 6
10 there is mounted an extruder die 16. As can be seen from Figure 2, the exit orifice of the die 16, designated by reference numeral 17, is of generally ring form. The orifice 17 does not have the form of a complete ring in that a block 18 set into the die 16 interrupts the orifice
15 17 at the twelve o'clock position thereof. Thus the extrudate, designated by reference numeral 19, when first issuing from the die 16 is of near-tubular cross-section.

As the extrudate 19 issues from the die 16 water in the extrudate 19 flashes off to steam, as a result of which
20 the cross-section of the extrudate 19 becomes greater than the cross-section of the exit orifice 17 of the die 16 and there is imparted to the extrudate 19 a substantially closed cell interior structure. The temperature of the extrudate 19 when measured adjacent the die 16 has been
25 found to be typically 115°C.

The extrudate 19 is passed about two plain cylindrical rollers 20 and 21, each of which comprises a polished,

stainless steel peripheral surface. Roller 20 is driven in a clockwise direction and roller 21 in an anticlockwise direction as viewing Figure 1, roller 21 being driven at the same speed as roller 20. Chilled water is circulated
5 through the rollers 20 and 21, via lines 22 and 23 respectively, from a chilling and pumping unit 24.

In the passage thereof from the die 16 to the roller 20, the extrudate 20 is opened from the near-tubular form at the die 16 to a flat sheet form at the roller 20. The
10 temperature of the extrudate 19 in contact with the roller 20 is such that the extrudate 19 is tacky and thus adheres to the surface of the drum 20 so that the drum 20, which is driven with a peripheral velocity in excess of the linear velocity of the extrudate 19 at exit from the die
15 16, exerts a tractive force on the extrudate 19 and draws down the extrudate 19. The draw down ratio may be, for example, ten.

The cooling effect of the chilled water circulated through the rollers 20 and 21 reduces the temperature of
20 the sheet form extrudate 19 so that the temperature thereof upon passing from the roller 21 is, for example, 40°C. The extrudate 19 passing from the roller 21 is of uniform width and thickness, 200 mm. and 0.7 mm. for example, and of a uniform structure across the section
25 of the extrudate 19, which structure comprises a closed cell interior and upper and lower outer skins. As a result of the draw down to which the extrudate 19 is

subjected while in the plastic phase thereof upstream of the roller 20, the cells within the extrudate 19 are elongated in the machine direction. As a result of the cooling action of the rollers 20, 21, the machine
5 direction oriented structure of the extrudate 19 is consolidated. The extrudate 19 passing from the roller 21 is, as a result of the drawing down and consolidation processes, of enhanced strength and flexibility.

Downstream of the roller 21 the sheet form extrudate
10 19 passes about guide rollers 25 and 26 before entering a cutter unit generally designated by reference numeral 27. Upon entering the cutter 27 the extrudate 19 first passes between a pair of slitters 28 and 29 each of which is comprised of a multiplicity of rotatably driven disc
15 knives. The slitters 28, 29 serve to slit the extrudate into continuous filaments of a width of, for example, 0.8 mm. The now filamentary extrudate passes between a multi-bladed, rotatably driven cylinder 30 and a co-operating stationary blade 31, whereby the continuous
20 filaments are severed to provide discrete filaments of a length of, for example, 40 mm., which discrete filaments are collected in a skip 32.

Typically, the moisture content of the filaments as collected is 15% by weight.

25 The product collected in the skip 32 is eminently suitable for blending with natural tobacco cigarette filler. Moreover, the blending can take place at the

conclusion of the primary processing steps of tobacco manufacture, this being in contradistinction to currently available reconstituted products which have to be passed through the primary processing steps and are
5 therein subject to degradation.

Alternative formulations, on a dry weight basis, of particulate materials which may be fed to an extruder in carrying out the process of the present inventions are as follows.

10

FORMULATION I

Tobacco 80%, Starch 15%, Hydroxypropyl Cellulose 3%,
Sucrose 2%.

FORMULATION II

15 Tobacco 76%, Starch 15%, Hydroxyethyl Cellulose 3%,
Carboxymethyl Cellulose 2%, Sucrose 4%.

Products obtained by the process of the present invention have been found to possess a combination of properties, including smoking character, superior to the products of previously practised tobacco reconstitution
20 processes.

Products produced by use of the inventive process have been of excellent appearance and natural colour and aroma. Quantitative tests have shown that the colour shift of the products from the initial dry mixes fed to
25 the extruder are minimal. Other tests have shown that the levels of nicotine and total and reducing sugars in the products are similar to those of the tobacco as fed

to the extruder.

Products of filling power equivalent to or in excess of that of unexpanded cut leaf tobacco are readily produced by the inventive process.

C L A I M S

1. A tobacco reconstitution process, wherein a mixture of particulate tobacco, starch and binder, with the addition of water, is extruded, to provide a sheet form extrudate, under such extrusion conditions that the
5 extrudate assumes a cross-section greater than that of the exit orifice of the extruder die, said extrudate in the plastic phase thereof is drawn down to reduce the thickness dimension thereof, the draw down ratio being at least 1.5, and the drawn down extrudate is cut to
10 provide a product of tobacco-filler size particles.
2. A process as claimed in Claim 1, wherein said draw down ratio is at least 10.
3. A process as claimed in Claim 2, wherein said draw down ratio is at least 20.
- 15 4. A process as claimed in Claim 3, wherein said draw down ratio is at least 30.
5. A process as claimed in any one of the preceding claims, wherein the drawing down of said extrudate takes place without said extrudate being subjected to lateral
20 crushing forces.
6. A process as claimed in any one of the preceding claims, wherein the drawing down of said extrudate is effected by said extrudate being in contact, while at a sufficiently high temperature to ensure surface tackiness,
25 with a driven, unpaired, draw down roller.

7. A process as claimed in Claim 6, wherein a coolant fluid is circulated through said roller so as to effect cooling of said extrudate.

8. A process as claimed in any one of the preceding
5 claims, wherein said extrudate, when cut to provide said product, is in sheet form.

9. A process as claimed in Claim 8, wherein said extrudate issues from said die in a tubular or near tubular form, said extrudate being opened to a sheet form
10 configuration.

10. A process as claimed in Claim 8 or 9, wherein said extrudate is cut in the machine direction thereof and transversely of the machine direction thereof so as to provide said particles; said particles being elongate in
15 the machine direction.

11. A process as claimed in any one of the preceding claims, wherein said starch is present in the tobacco/starch/binder mixture in an amount by weight exceeding the presence in said mixture of said binder by at least
20 two times.

12. A process as claimed in any one of the preceding claims, wherein said binder comprises a cellulosic binder.

13. A process as claimed in any one of the preceding claims, wherein a plasticiser is fed to said extruder.

25 14. A reconstituted-tobacco filler product consisting of particles each of which particles comprises a cellular interior and an integral skin extending over each of two

opposite sides of the particle, the filler product having been made by a process wherein a mixture of particulate tobacco, starch and binder, with the addition of water, is extruded, to provide a sheet form extrudate, .
5 under such extrusion conditions that the extrudate assumes a cross-section greater than that of the exit orifice of the extruder die, said extrudate in the plastic phase thereof is drawn down to reduce the thickness dimension thereof, the draw down ratio being at least 1.5, and the
10 draw down extrudate is cut to provide said particles.

15. A product as claimed in Claim 14, which product exhibits a replacement value for natural tobacco filler of at least 1:1.

16. A tobacco reconstitution process substantially as
15 hereinabove described with reference to the drawing hereof.