

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199535158 B2
(10) Patent No. 712601

(54) Title
Method for downhole cyclone separation

(51)⁶ International Patent Classification(s)
E21B 043/38

(21) Application No: **199535158**

(22) Application Date: **1995.09.27**

(87) WIPO No: **WO96/41065**

(30) Priority Data

(31) Number	(32) Date	(33) Country
08/478440	1995.06.07	US

(43) Publication Date : **1996.12.30**

(43) Publication Journal Date : **1997.02.20**

(44) Accepted Journal Date : **1999.11.11**

(71) Applicant(s)
Centre for Engineering Research Inc.

(72) Inventor(s)
Bruce R Peachey

(74) Agent/Attorney
CARTER SMITH and BEADLE, Qantas House, 2 Railway Parade, CAMBERWELL VIC 3124

(56) Related Art
US 5296153
WO 94/13930
WO 95/09970




(51) International Patent Classification 6 : E21B 43/38	A1	(11) International Publication Number: WO 96/41065 (43) International Publication Date: 19 December 1996 (19.12.96)
(21) International Application Number: PCT/CA95/00549 (22) International Filing Date: 27 September 1995 (27.09.95) (30) Priority Data: 08/478,440 7 June 1995 (07.06.95) US (71) Applicant: CENTRE FOR ENGINEERING RESEARCH INC. [CA/CA]; 200 Karl Clark Road, Edmonton, Alberta T6N 1E2 (CA). (72) Inventor: PEACHEY, Bruce, R.; 10444 - 20 Avenue, Edmonton, Alberta T6J 5A1 (CA). (74) Agent: THOMPSON, Douglas, B.; THOMPSON LAMBERT, #204, 10328 - 81 Avenue, Edmonton, Alberta T6E 1X2 (CA).		(81) Designated States: AU, JP, NO, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: METHOD FOR DOWNHOLE CYCLONE SEPARATION

(57) Abstract

A method of downhole cyclone separation that is less prone to problems associated with gas breakout. This method include the following steps. Firstly, placing a cyclone separator (12) downhole in an oil well (14) producing a mixed stream of oil, water and gas. The cyclone separator (12) includes a separation chamber (16) wherein liquids of differing densities are separated, at least one mixed liquids inlet (18) through which liquids pass into the separation chamber (16), a first outlet (20) for liquids of a first density range to pass from the separation chamber (16), and a second outlet (22) for liquids of a second density range to pass from the separation chamber (16). Secondly, connecting the first outlet (20) to a recovery conduit (24) extending to surface. Thirdly, connecting the second outlet (22) to a disposal conduit (26) extending to a selected disposal site. The method being characterized by the further step of, fourthly, connecting the at least one mixed liquids inlet (18) to a pump (28) and pumping a mixed stream of oil, water and gas into the separation chamber (16) of the cyclone separator (12). The mixed stream is separated into a recovery stream of oil with a reduced water content which flows out of the first outlet (20) and along the recovery conduit (24) to the surface and a disposal stream of mainly water which flows out of the second outlet (22) and along the disposal conduit (26) to the selected disposal site.

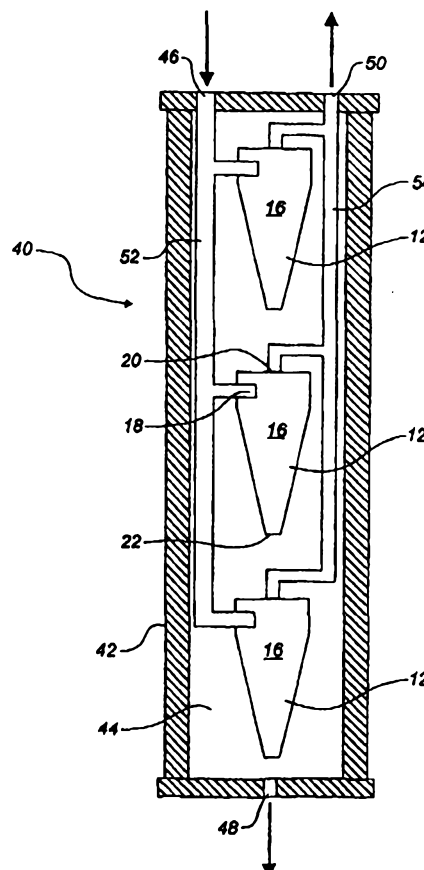

METHOD FOR DOWNHOLE CYCLONE SEPARATION**FIELD OF THE INVENTION**

5

The present invention relates to a method for downhole cyclone separation and, in particular, a method that can be used for oil/water separation in producing oil wells.

10

BACKGROUND OF THE INVENTION

United States Patent number 5,296,153 teaches a method of reducing the amount of formation water in oil recovered from an oil well through the insertion of a cyclone separator downhole in an oil well producing a stream of mixed oil and water. In accordance with the described method, a first outlet of the cyclone separator is connected to a recovery conduit extending to surface. The recovery conduit conveys a recovery stream of oil with a reduced water content to surface. A second outlet of the cyclone separator is connected to a disposal conduit. The disposal conduit conveys a disposal stream of mainly water to a disposal site, which is usually a

15

20

25

downhole formation chosen to be a disposal zone. The reference goes on to describe various pumping configurations which, when used in combination with the cyclone separator, can further enhance recovery.

United States patent 4,822,551 which issued to Pendergast in 1989 and United States patent 5,154,826 which issued to Pendergast et al in 1992 an apparatus for cyclone separation that utilizes multiple cyclone separators. PCT Application WO 94/13930 filed by Read Process Engineering and published June 23, 1994 describes the use of cyclone separators downhole in producing oil and gas wells.

When the production stream from the oil well has a high gas content, great care must be taken in the selection of the pumping configuration. During downhole processing through the cyclone separator and the pump, "gas breakout" inevitably occurs. Gas breakout involves the release of entrained gases from the liquid being pumped. This gas breakout can adversely affect the efficiency of the pumping configuration and may also impact the operation and efficiency of the cyclone separator.

SUMMARY OF THE INVENTION

What is required is an improved method for downhole cyclone separation that is less prone to problems associated with gas breakout.


In one aspect, the present invention provides a method for reducing the amount of water in an oil-and-water stream to be produced from an oil well wherein the stream includes dissolved gas, comprising the steps of:

(a) providing a cyclone separator device sized to fit within the well bore for separating the oil-and-water stream into a higher density stream and a lower density stream, the separator device having an inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;

(b) providing a first pump for pumping fluids into the inlet of the separator device;

(c) connecting the first outlet of the separator device to a lower density fluid conduit for producing the lower density stream;

(d) connecting the second separator device outlet to a higher density fluid



conduit for conducting the higher density stream to an underground formation;

(e) placing the separator device, the first pump and the lower density fluid conduit and the higher density fluid conduit in the well; and

(f) activating the pump so as to move the fluids through the separator device
5 and into the lower density and higher density fluid conduits without allowing gas breakout to occur.

In a second aspect, the present invention provides a method for reducing the amount of water in an oil and water stream to be produced from an oil well bore in which the stream includes dissolved gas, the method including the steps of:

10 providing an oil-and-water stream to plural cyclone separator devices disposed one above the other within an interior cavity of a multiple downhole separator housing, the multiple downhole separator housing having a housing inlet, a disposal stream outlet and a recovery stream outlet;

15 separating the oil-and-water stream into a higher density stream and a lower density stream with the plural cyclone separator devices, each cyclone separator device having a cyclone inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;

20 channelling the oil-and-water stream to each cyclone inlet by a first conduit; channelling recovery fluid from each first outlet to the recovery stream outlet by a second conduit;

25 channelling disposal fluid from each second outlet to the disposal stream outlet by a third conduit; and

the multiple downhole separator housing forming one of the first, second and third conduits.

25 In a third aspect, the present invention provides a method for reducing the amount of water in an oil-and-water stream to be produced from an oil well wherein the stream includes dissolved gas, comprising the steps of:

30 providing a cyclone separator device sized to fit within the well for separating the oil-and-water stream into a higher density stream and a lower density stream, the separator device having an inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;



providing a first pump for pumping fluids into the inlet of the separator device;




connecting the first outlet of the separator device to a first conduit for producing the lower density stream;

- 5 connecting the second separator device outlet to a second conduit for conducting the higher density stream to an underground formation;

placing the separator device, first pump and first and second conduits in the well; and

- 10 activating the pump so as to move the fluids through the separator device and the first and second conduits..

According to the present invention there is provided a method of downhole cyclone separation. This method



include the following steps. Firstly, placing a cyclone separator downhole in an oil well producing a mixed stream of oil, water and gas. The cyclone separator includes a separation chamber wherein liquids of differing densities are separated, at least one mixed liquids inlet through which liquids pass into the separation chamber, a first outlet for liquids of a first density range to pass from the separation chamber, and a second outlet for liquids of a second density range to pass from the separation chamber. Secondly, connecting the first outlet to a recovery conduit extending to surface. Thirdly, connecting the second outlet to a disposal conduit extending to a selected disposal site. The method being characterized by the further step of, fourthly, connecting the at least one mixed liquids inlet to pumping means and pumping a mixed stream of oil, water and gas into the separation chamber of the cyclone separator. The mixed stream is separated into a recovery stream of oil with a reduced water content which flows out of the first outlet and along the recovery conduit to the surface and a disposal stream of mainly water which flows out of the second outlet and along the disposal conduit to the selected disposal site.

Gas breakout adversely affecting pumping operation occurs due to pressure drop and agitation as the mixed stream passes through the separation chamber of the cyclone separator. Placing pumping means upstream of the cyclone separator, as described above, is a more effective pumping configuration. The pump, being upstream, is isolated from whatever gas breakout may occur as the mixed stream passes through the separation chamber and is separated into the recovery stream and the disposal stream. Pumping fluids through the separator

reduces gas breakout, as it increases the pressure of fluids within the separator and forces the gas to remain in solution.

5

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, wherein:

FIGURE 1 is a schematic diagram of a first form of pumping configuration in accordance with the described method.

FIGURE 2 is a schematic diagram of an enhanced form of pumping configuration in accordance with the described method.

FIGURE 3 is a side elevation view in longitudinal section of an apparatus developed for use with the described method.

FIGURE 4 is a schematic diagram of a pumping configuration involving the apparatus illustrated in FIGURE 3.

FIGURE 5 is a side elevation view in longitudinal section of a plurality of the apparatus illustrated in FIGURE 3 connected in series.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

30

A method of downhole cyclone oil/water separation will now be described with reference to FIGURES 1 through 5.

Referring to **FIGURE 1**, the preferred method includes the following steps. Firstly, place a cyclone separator 12 downhole in an oil well 14 producing a mixed stream of oil, water and gas. Cyclone separator 12 includes a separation chamber 16 wherein liquids of differing densities are separated, a mixed liquids inlet 18 through which liquids pass into separation chamber 16, a first outlet 20 for liquids of a first density range to pass from separation chamber 16 and a second outlet 22 for liquids of a second density range to pass from separation chamber 16. Secondly, connect first outlet 20 to a recovery conduit 24 extending to surface (not shown). Thirdly, connect second outlet 22 to a disposal conduit 26 extending to a selected disposal site (not shown). Fourthly, connect mixed liquids inlet 18 to a pump 28 and pump a mixed stream of oil, water and gas into separation chamber 16 of cyclone separator 12. The mixed stream is separated in separation chamber 16 into a recovery stream of oil with a reduced water content which flows out of first outlet 20 and along recovery conduit 24 to the surface and a disposal stream of mainly water which flows out of second outlet 22 and along disposal conduit 26 to the selected disposal site.

Referring to **FIGURE 2**, an enhanced pumping configuration is disclosed in which a backpressure valve 30 is positioned on disposal conduit 26. The use of backpressure valve 30 ensures that there is sufficient pressure maintained to get the disposal stream into an underground disposal formation selected as a disposal site, while at the same time ensuring that the pump and cyclone separator are both operating within their most efficient operating ranges. It also enables a more accurate assessment to be made as to the amount of fluid

being pumped into the disposal site. There are other backpressure control means that can be used such as a flow restriction orifice. Backpressure valve 30 is preferred as it prevents a reversal of flow when pump 28 is turned off. In field installations which include pumps adversely affected by a reverse flow when stopped, the flow reversing the pump motor turns backward preventing the pump from being restarted. Referring to **FIGURE 2**, there is also provided a secondary pump 32 is positioned on the recovery conduit 24. Secondary pump 32 is intended to assist in conveying the recovery stream to the surface. The problem of gas breakout, previously described, does not adversely affect the operation of secondary pump 32 due to the fact that pump 28 provides sufficient pressure to maintain the majority of the gas in solution.

An apparatus for downhole cyclone separation, generally identified by reference numeral 40, been especially developed for use with the described method. When apparatus 40 is used with the described method separation capacity and production flow rates can be greatly increased. This apparatus will now be described with reference to **FIGURE 3**. Apparatus 40 includes a multiple cyclone separator housing 42 having an interior cavity 44, an mixed liquids inlet 46, a disposal stream outlet 48 and a recovery stream outlet 50. Although single inlets and outlets are illustrated, it will be appreciated that multiple inlets or outlets into housing 42 could be utilized depending upon the installation environment. A plurality of cyclone separators 12 are disposed in interior cavity 44 of multiple cyclone separator housing 42. As previously described, each of cyclone separators 12 has a separation chamber 16 wherein

liquids of differing densities are separated, a mixed liquids inlet 18 through which liquids pass into separation chamber 16, a first outlet 20 for liquids of a first density range to pass from separation chamber 16, and a second outlet 22 for liquids of a second density range to pass from separation chamber 16. Some means must be used for channelling the various flow streams flowing into mixed liquids inlet 18 and out of first outlet 20 and second outlet 22. The channelling means illustrated in FIGURE 3 is by way of conduits 52 and 54. It should be noted that only two conduit are required as in the illustrated embodiment interior cavity 44 of multiple cyclone separator housing 42 can serve as one of the channelling means. Conduit 52 has been connected as an inlet conduit allowing liquids to pass from mixed liquids inlet 46 in multiple cyclone separator housing 42 to mixed liquids inlets 18 of each of cyclone separators 12. Conduit 54 has been connected as an outlet conduit allowing liquids to pass from first outlet 20 of each of cyclone separators 12 to recovery stream outlet 50 of multiple cyclone separator housing 42. Second outlet 22 of each of cyclone separators 12 discharges directly into interior cavity 44, so that interior cavity 44 serves to connect second outlet 22 of each of cyclone separators 12 with disposal stream outlet 48.

When apparatus 40 is used with the described method the following steps are taken, as illustrated in FIGURE 4. Firstly, multiple cyclone separator housing 42 is placed downhole in an oil well producing a mixed stream of oil, water and gas. Secondly, recovery stream outlet 50 of multiple cyclone separator housing 42 is connected to recovery conduit 24 extending to surface. Thirdly, disposal stream outlet 48 of multiple cyclone separator

housing 42 is connected to disposal conduit 26 extending to a selected disposal site. Fourthly, a mixed stream of oil, water and gas is pumped by means of pump 28 into mixed liquids inlet 46 of multiple cyclone separator housing 42. The mixed stream of oil, water and gas is channelled by inlet conduit 50 to mixed liquid inlets 18 of each of cyclone separators 12, whereupon the oil and water is separated in separation chamber 16 of cyclone separators 12. A recovery stream of oil with a reduced water content passes through first outlet 20 of each of cyclone separators 12 for channelling by outlet conduit 54 to recovery stream outlet 50 in multiple cyclone separator housing 42 for conveyance through recovery conduit 24 to the surface. A disposal stream of water is discharged from second outlet 22 of each of cyclone separators 12 into interior cavity 44 for channelling to disposal stream outlet 48 of multiple cyclone separator housing 42 for disposal through disposal conduit 26 to the selected disposal site.

20

The use of apparatus 40 provides numerous advantages. The flow rate is increased. The pressure drop across each of separators 12 is reduced, which reduces the power requirements and reduces the chance of gas breakout downstream. Multiple cyclone separators 12 provide a redundancy, if any one cyclone separator ceases to function, the remaining cyclone separators can continue to function.

30

A cyclone separator has a separation ratio that the percentage of the fluids flowing through first outlet 20 bears to the entire volume of fluids flowing through separation chamber 16. There is no minimum percentage. This means that in wells with an extremely high water

content, the majority of the fluids (ie. the water) can be left downhole. There is however a maximum percentage of approximately 25 percent of the total volume leaving via first outlet 20. At this maximum percentage
5 approximately 75 percent of the fluids are leaving via second outlet 22. This creates a problem with oil wells having a low water content. There is a danger that a portion of the oil can be pumped into the disposal zone along with the water. Referring to **FIGURE 5**, in oil
10 wells with a low water content, a plurality of apparatus 40 containing multiple cyclone separators can be connected in series. In this way a sequential reduction in the oil content can occur prior to pumping the disposal stream to the selected disposal site.


15

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as defined by the Claims.

20

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for reducing the amount of water in an oil-and-water stream to be produced from an oil well wherein the stream includes dissolved gas, comprising the steps of:
 - 5 (a) providing a cyclone separator device sized to fit within the well bore for separating the oil-and-water stream into a higher density stream and a lower density stream, the separator device having an inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;
 - (b) providing a first pump for pumping fluids into the inlet of the separator
10 device;
 - (c) connecting the first outlet of the separator device to a lower density fluid conduit for producing the lower density stream;
 - (d) connecting the second separator device outlet to a higher density fluid conduit for conducting the higher density stream to an underground formation;
 - 15 (e) placing the separator device, the first pump and the lower density fluid conduit and the higher density fluid conduit in the well; and
 - (f) activating the pump so as to move the fluids through the separator device and into the lower density and higher density fluid conduits without allowing gas breakout to occur.
- 20 2. The method of claim 1 wherein the first pump is selected to provide sufficient pressure in the oil-and-water stream passing through the pump to retain the majority of dissolved gas in solution while the stream passes through the pump and the housing.
3. The method of claim 1 or claim 2 additionally comprising the step of
25 providing a backpressure control in the higher density fluid conduit.
4. The method of claim 3 wherein the backpressure control is a valve.
5. The method of claim 3 wherein the backpressure control is an orifice.
6. The method of any one of the previous claims additionally comprising the step of providing reverse flow control in the higher density conduit.
- 30 7. The method of any one of the previous claims additionally comprising the



step of providing a second pump between the first outlet of the separator device and the lower density conduit for assisting in movement of the lower density stream for production of the stream and selecting and operating the first pump to retain the majority of dissolved gas in solution thus without allowing gas breakout to occur while the stream passes through the first pump, the separator device, and into the second pump.

8. A method for reducing the amount of water in an oil-and water stream substantially as hereinbefore described with reference to the accompanying drawings.

9. A method for reducing the amount of water in an oil and water stream to be produced from an oil well bore in which the stream includes dissolved gas, the method including the steps of:

providing an oil-and-water stream to plural cyclone separator devices disposed one above the other within an interior cavity of a multiple downhole separator housing, the multiple downhole separator housing having a housing inlet, a disposal stream outlet and a recovery stream outlet;

separating the oil-and-water stream into a higher density stream and a lower density stream with the plural cyclone separator devices, each cyclone separator device having a cyclone inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;

channelling the oil-and-water stream to each cyclone inlet by a first conduit;

channelling recovery fluid from each first outlet to the recovery stream outlet by a second conduit;

channelling disposal fluid from each second outlet to the disposal stream outlet by a third conduit; and

the multiple downhole separator housing forming one of the first, second and third conduits.

10. The method of claim 9 in which at least one of the cyclone inlet, first outlet and second outlet of each cyclone separator device is vertically oriented.



11. The method of claim 9 in which the disposal stream outlet and recovery stream outlet are at opposed vertical ends of the multiple downhole separator housing.

12. The method of claim 9 further characterised by comprising a pump operably
5 connected to pump fluids into each cyclone inlet.

13. The method of claim 12 in which the pump is selected to provide sufficient pressure in the oil-and-water stream passing through the pump to retain the majority of dissolved gas in solution while the stream passes through the pump and cyclone separator.

10 14. The method of claim 13 further characterised by a backpressure control on each first outlet.

15. A method for reducing the amount of water in an oil-and-water stream to be produced from an oil well wherein the stream includes dissolved gas, comprising the steps of:

15 providing a cyclone separator device sized to fit within the well for separating the oil-and-water stream into a higher density stream and a lower density stream, the separator device having an inlet, a first outlet for the lower density stream and a second outlet for the higher density stream;

20 providing a first pump for pumping fluids into the inlet of the separator device;

connecting the first outlet of the separator device to a first conduit for producing the lower density stream;

connecting the second separator device outlet to a second conduit for conducting the higher density stream to an underground formation;

25 placing the separator device, first pump and first and second conduits in the well; and

activating the pump so as to move the fluids through the separator device and the first and second conduits.

30 16. The method of claim 15 wherein the first pump is selected to provide sufficient pressure in the oil-and-water stream passing through the pump to retain



majority of dissolved gas in solution while the stream passes through the pump and the separator device.

17. The method of claim 15 additionally comprising the step of providing backpressure control in the second conduit.

5 18. The method of claim 17 wherein the backpressure control is a valve.

19. The method of claim 17 wherein the backpressure control is an orifice.

20. The method of claim 15 additionally comprising the step of providing reverse flow control in the second conduit.


21. The method of claim 15 additionally comprising the step of providing a
10 second pump between the first outlet of the separator device and the first conduit for assisting in movement of the lower density stream for production of the stream and selecting the first pump to retain the majority of dissolved gas in solution while the stream passes through the first pump, the separator device, and into the second pump.

15 22. The method of claim 15 wherein the cyclone separator device is a single cyclone separator.

23. The method of claim 15 wherein the cyclone separator device is a plurality of
cyclone separators mounted within a housing wherein the housing includes an inlet
for receiving fluids from the pump, a first housing outlet for conducting fluids to the
20 first fluid conduit and a second housing outlet for conducting fluid to the second
conduit and wherein each cyclone separator inlet is in fluid communication with the
housing inlet, each cyclone separator first outlet is in fluid communication with the
first housing outlet and each cyclone separator second outlet is in fluid
communication with the second housing outlet.

24. The method of claim 23 wherein each cyclone separator inlet is in fluid
25 communication with the housing inlet by way of a conduit mounted within the
housing and wherein each cyclone separator second outlet is in fluid communication
with the second housing outlet by way of a flow channel defined by open space
within the housing.

30 25. The method of claim 23 further comprising the steps of providing a plurality
of separator devices having their inlets and outlets connected in series to provide



sequential separation of the higher density stream and the lower density stream before they are conducted through the first conduit to the surface and through the second conduit to the underground formation.




DATED: 2 September 1999

5

CARTER SMITH & BEADLE
Patent Attorneys for the Applicants:

CENTRE FOR ENGINEERING RESEARCH INC.

10



1/4

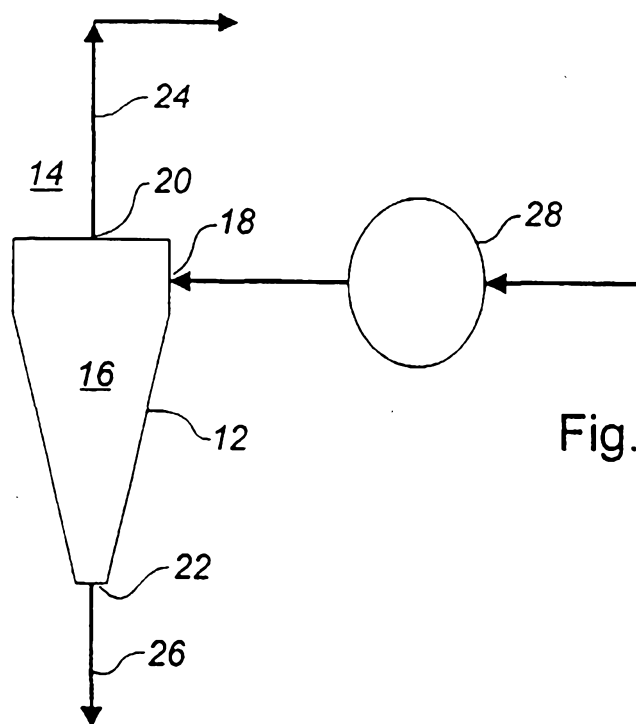


Fig. 1.

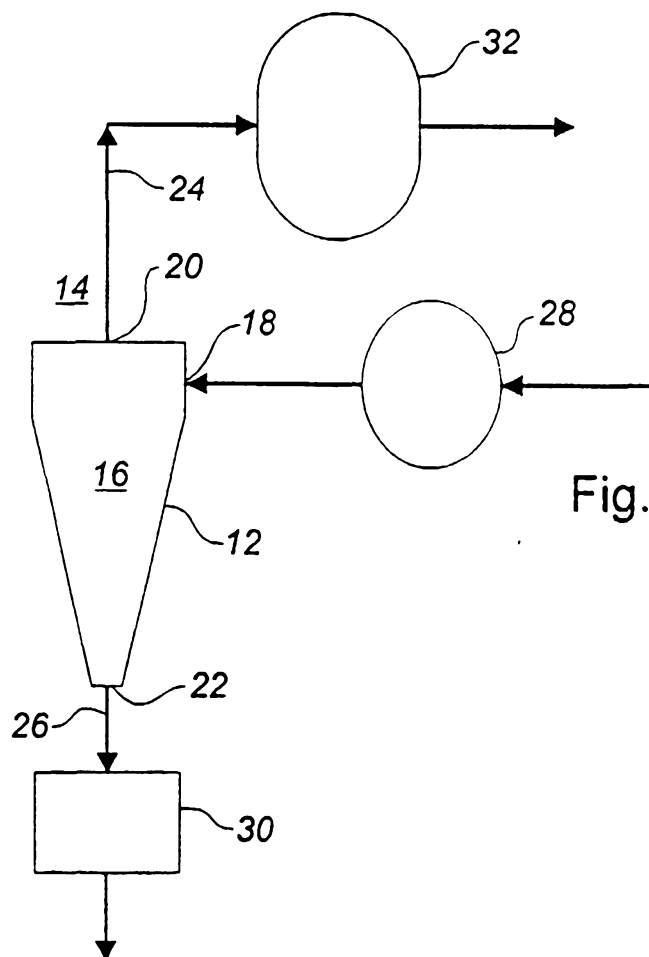


Fig. 2.


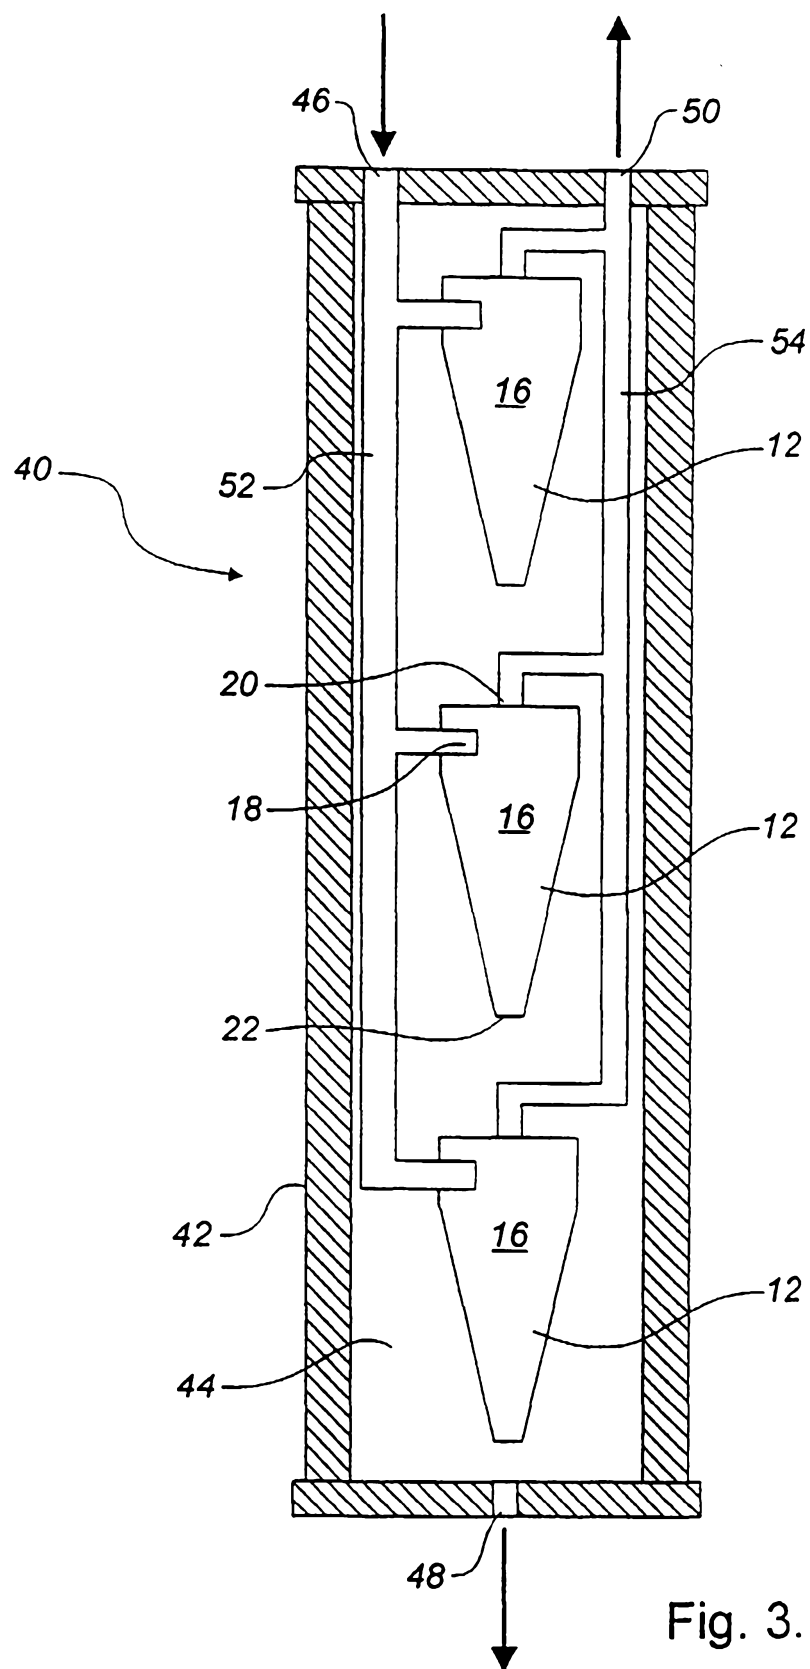


Fig. 3.

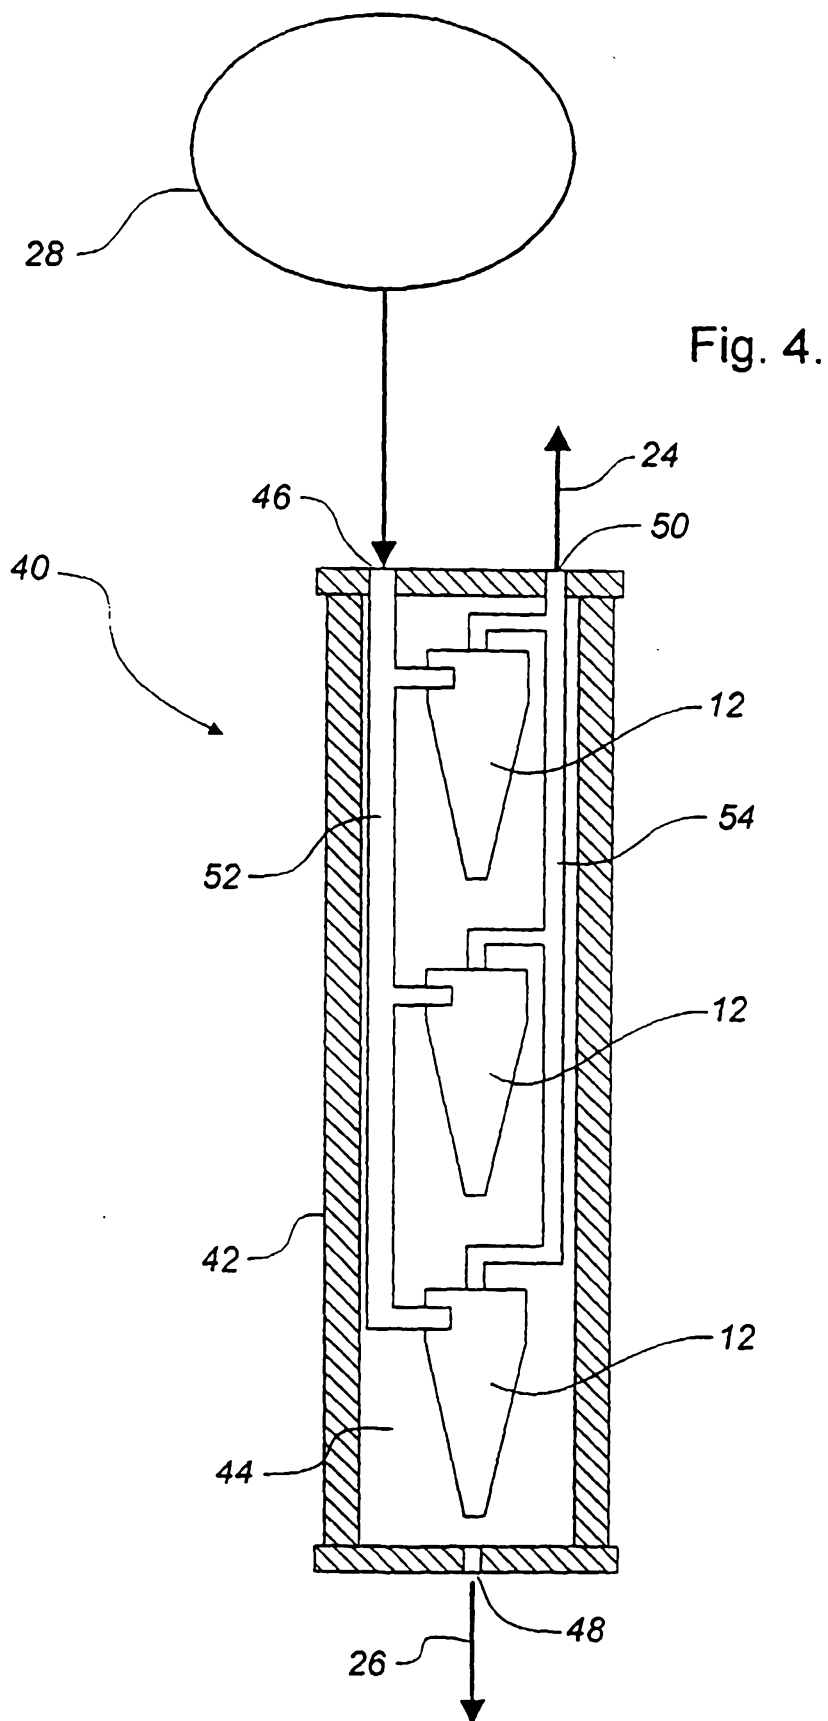

4/4

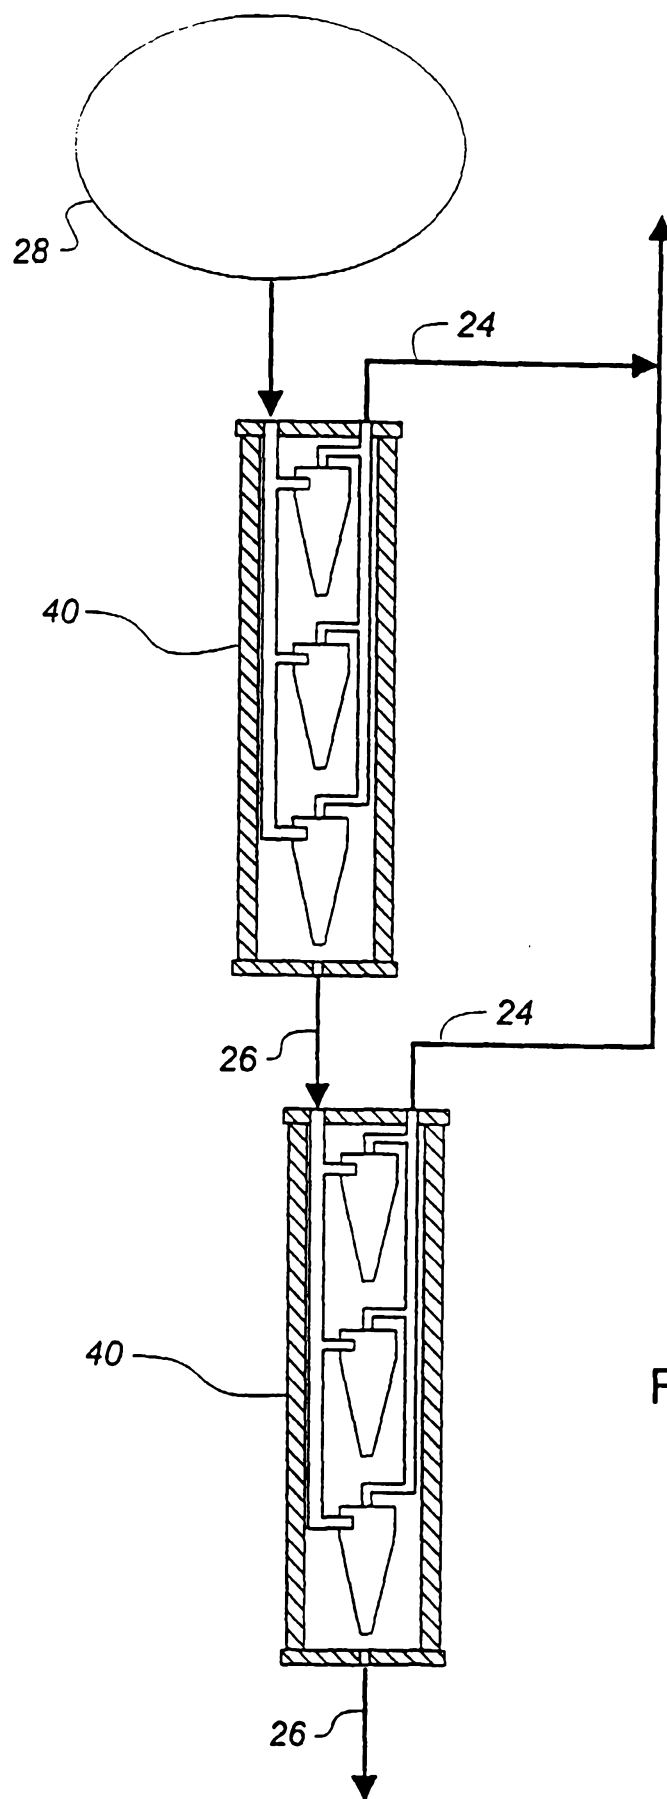


Fig. 5

SUBSTITUTE SHEET (RULE 26)