



(51) International Patent Classification:

E21B 33/12 (2006.01) E21B 17/00 (2006.01)

(21) International Application Number:

PCT/US2017/033992

(22) International Filing Date:

23 May 2017 (23.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/192,206 24 June 2016 (24.06.2016) US

(71) Applicant: **BAKER HUGHES INCORPORATED**  
[US/US]; 17021 Aldine Westfield, Houston, Texas 77073  
(US).

(72) Inventors: **WEBBER, Andrew**; 17021 Aldine Westfield,  
Houston, Texas 77073 (US). **BRYANT, Drayton W.**;  
17021 Aldine Westfield, Houston, Texas 77073 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,  
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,  
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,  
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,  
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

(54) Title: METHOD AND APPARATUS TO UTILIZE A METAL TO METAL SEAL

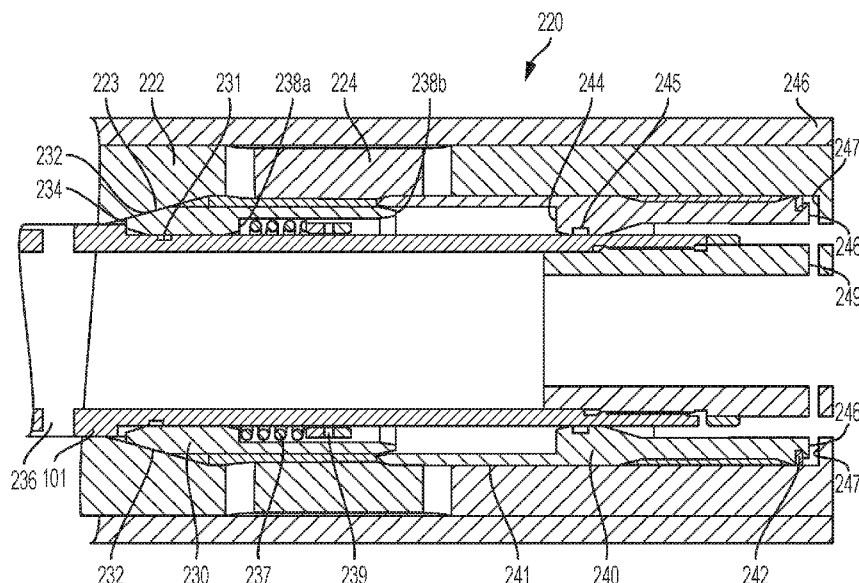


FIG. 2

(57) Abstract: In one aspect, a downhole device for use in a wellbore to selectively isolate a first pressure and a second pressure is disclosed, including a first piston including: a first sealing face to selectively isolate the first pressure and the second pressure; a first pressure face to receive the first pressure; and a second pressure face to receive the second pressure; and a second piston selectively coupled to the first piston, the second piston including a third pressure face to receive the second pressure; and a fourth pressure face to receive the first pressure, wherein the fourth pressure face is larger than the first pressure face.



**Published:**

— *with international search report (Art. 21(3))*

## METHOD AND APPARATUS TO UTILIZE A METAL TO METAL SEAL

## CROSS REFERENCE TO RELATED APPLICATIONS

[0001]This application claims the benefit of U.S. Application No. 15/192206, filed on June 24, 2016, which is incorporated herein by reference in its entirety.

## BACKGROUND

## Field of the Disclosure

[0002]This disclosure relates generally to metal to metal seals and devices that utilize the same for downhole applications.

## Background of the Art

[0003]Wellbores are drilled in subsurface formations for the production of hydrocarbons (oil and gas). In many operations it is required to selectively isolate fluid pressure from the annulus from fluid pressure within tubing as desired. Sealing devices are often utilized to isolate fluid pressures for both when annular pressure is greater than tubular pressure and when tubular pressure is greater than annular pressure. Certain sealing devices can be exposed to varying pressure differentials, requiring the use of multiple seals. Such sealing devices may not provide sufficient durability or robustness when exposed to varying pressure differentials. It is desired to provide a metal to metal seal that can allow for sufficient sealing while providing sufficient durability.

[0004]The disclosure herein provides metal to metal seals and downhole devices that utilize the same for downhole applications.

## SUMMARY

[0005]In one aspect, a downhole device for use in a wellbore to selectively isolate a first pressure and a second pressure is disclosed, including a first piston including: a first sealing face to selectively isolate the first pressure and the second pressure; a first pressure face to receive the first pressure; and a second pressure face to receive the second pressure; and a second piston selectively coupled to the first piston, the second piston including: a third pressure face to receive the second pressure; and a fourth pressure face to receive the first pressure, wherein the fourth pressure face is larger than the first pressure face.

[0006]In another aspect, a method to selectively isolate a first pressure and a second pressure in a wellbore is disclosed, including receiving the first pressure via a first pressure face of a first piston; receiving the second pressure via a second pressure face of the first

piston; receiving the second pressure via a third pressure face of a second piston; receiving the first pressure via a fourth pressure face of the second piston, wherein the fourth pressure face is larger than the first pressure face; selectively coupling the first piston and the second piston; and selectively isolating the first pressure and the second pressure via a first sealing face of the first piston.

[0007]In another aspect a downhole system for use in a wellbore is disclosed, including a casing disposed in the wellbore; a tubular disposed in the casing to define an annulus, the tubular having a tubular pressure and the annulus having an annular pressure; and a downhole device, including: a seal body; a first piston associated with the seal body, the first piston including: a first sealing face to selectively isolate the tubular pressure and the annular pressure; a first pressure face to receive the tubular pressure; and a second pressure face to receive the annular pressure; and a second piston selectively coupled to the first piston, the second piston including: a third pressure face to receive the annular pressure; and a fourth pressure face to receive the tubular pressure, wherein the fourth pressure face is larger than the first pressure face.

[0008]Examples of certain features of the apparatus and method disclosed herein are summarized rather broadly in order that the detailed description thereof that follows may be better understood. There are, of course, additional features of the apparatus and method disclosed hereinafter that will form the subject of the claims appended hereto.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0009]The disclosure herein is best understood with reference to the accompanying figures, wherein like numerals have generally been assigned to like elements and in which:

**FIG. 1** is a schematic cross sectional diagram of an exemplary downhole system that includes a sealing device according to embodiments of the disclosure;

**FIG. 2** is a schematic diagram of the sealing device according to one embodiment of the disclosure, wherein annular pressure is greater than tubular pressure;

**FIG. 3** is a schematic diagram of the sealing device of **FIG. 2**, wherein tubular pressure is greater than annular pressure;

**FIG. 4** is a schematic diagram of the sealing device of **FIG. 2**, wherein the sealing device is partially retracted by a tool; and

**FIG. 5** is a schematic diagram of the sealing device of **FIG. 2**, wherein the sealing device is fully retracted by the tool.

## DESCRIPTION OF THE EMBODIMENTS

[0010] **FIG. 1** shows an exemplary embodiment of a downhole system to facilitate the production of oil and gas. In certain embodiments, system **100** allows for operations to facilitate production of oil and gas. System **100** includes a wellbore **106** formed in formation **104** with casing **108** disposed therein.

[0011] In an exemplary embodiment, a wellbore **106** is drilled from a surface **102** to a downhole location **110**. Casing **108** may be disposed within wellbore **106** to facilitate production. Wellbore **106** may be a vertical wellbore, a horizontal wellbore, a deviated wellbore or any other suitable type of wellbore or any combination thereof. In the illustrated embodiment, a tubular **101** can be disposed within the wellbore **106** to form an annulus **103**. In the illustrated embodiment, the tubular **101** can carry a tubular flow within and the annulus **103** can carry an annular flow outside the tubular **101** within the casing **108**. The tubular flow and the annular flow can each have pressures that can be isolated or equalized as desired.

[0012] To facilitate downhole operations, such as fracturing operations, other isolation operations etc., packers **116**, sealing device **120** or other suitable downhole components are utilized within casing string **108**. In certain embodiments, other downhole components can include, but are not limited to casing, mandrels, and housings for downhole tools, etc. In certain embodiments, annular fluid flow may be received from the formation **104** via perforations **114** in the casing **108**. In the illustrated embodiment, a sealing device **120** can be used to selectively isolate flow within the tubular **101** from the annulus **103**.

[0013] Referring to **FIG. 2**, a sealing device **220** is shown. In the illustrated embodiment, the sealing device **220** includes a seal body **222**, a sealing piston **230**, and an energizing piston **240**. In the illustrated embodiment, the sealing device **220** can selectively isolate tubular flow and pressure from the tubular **101** and annular flow and pressure from the annulus **103**. In certain embodiments, the sealing device **220** can be disengaged to allow tubular pressure and annular pressure to be equalized. Advantageously, the sealing device **220** utilizes a self-energizing metal to metal seal to allow for a durable sealing surface while allowing for sufficient isolation between the tubular pressure and the annular pressure.

[0014] In the illustrated embodiment, the seal body **222** contains the sealing piston **230** and the energizing piston **240**. The seal body **222** can be affixed to the tubular **101**. In certain embodiments, the seal body **222** can be integrated with other downhole components. In the illustrated embodiment, the seal body **222** is exposed to the annulus **103**. In the illustrated embodiment, the annular pressure port **224** can allow annular pressure from the

annulus **103** to communicate with the sealing piston **230** and the energizing piston **240**. In certain embodiments, the seal body **222** can include multiple annular pressure ports **224** to allow for annular flow therethrough.

[0015]In the illustrated embodiment, the sealing piston **230** is disposed within the seal body **222** and is further disposed around the tubular **101**. In the illustrated embodiment, the sealing piston **230** can slide or otherwise translate along the tubular **101**. The sealing piston **230** includes a first sealing face **232**, a tubular pressure face **234**, annular pressure faces **238a**, **238b**, and a preload device **237**. In the illustrated embodiment, the sealing piston **230** urges or otherwise energizes the first sealing face **232** into a seal interface **223** of the seal body **222** to isolate the annular pressure from the tubular pressure. Advantageously, the first sealing face **232** allows for a metal to metal seal to allow for durability while allowing for a self-energizing seal as described herein.

[0016]In the illustrated embodiment, the first sealing face **232** engages the seal interface **223** of the seal body **222** to selectively isolate the tubular pressure from the annular pressure. The first sealing face **232** can be formed from a metal. Similarly, the seal interface **223** of the seal body **222** can be formed from metal to allow for a metal to metal seal. In the illustrated embodiment, the sealing piston **230** is energized by annular pressure, tubular pressure, and the preload device **237** to engage the first sealing face **232** into the seal interface **223**. Advantageously, the first sealing face **232** can provide a durable seal while utilizing a single seal to isolate the annular pressure and the tubular pressure regardless of the pressure differential, such as when the annular pressure is greater than the tubular pressure and when the tubular pressure is greater than the annular pressure.

[0017]In the illustrated embodiment, the tubular pressure face **234** of the sealing piston **230** receives tubular pressure from the tubular **101** via a tubular flow port **236**. The tubular pressure face **234** has a smaller piston area or face area than the tubular pressure face **246** of the energizing piston **240**. As further described herein, the smaller face area of the tubular pressure face **234** allows for the first sealing face **232** to seal in varying pressure differentials as described herein.

[0018]In the illustrated embodiment, the sealing piston **230** can further include an inner pressure seal **231** to isolate the annular pressure from the tubular pressure. The inner pressure seal **231** can be formed of a conventional construction. In certain embodiments, the inner pressure seal **231** is an elastomeric seal. Advantageously, the inner pressure seal **231** is fully contained by the sealing piston **230** to allow for greater durability.

[0019]In the illustrated embodiment, the annular pressure faces **238a,238b** can receive annular pressure from the annulus **103**. Annular fluid can flow from the annulus **103** to the annular pressure faces **238a,238b** via the annular flow port **224** of the seal body **222**. In certain embodiments, the annular pressure can act upon multiple annular pressure faces **238a,238b**, while in other embodiments, the annular pressure may generally or in majority act upon a single annular pressure face **238a**.

[0020]In the illustrated embodiment, a preload device **237** can provide an initial sealing or energization of the first sealing face **232**. The preload device **237** can urge the first sealing face **232** to the seal interface **223** in the absence of sufficient annular pressure or tubular pressure. In the illustrated embodiment, the preload device **237** is a spring that urges the sealing piston **230** toward the seal interface **223**. The spring can be of any suitable strength or force to provide adequate preload. In certain embodiments, the preload device **237** can utilize a spring mount **239** that acts against the tubular **101** to urge the sealing piston **230** towards the seal interface **223**.

[0021]In the illustrated embodiment, the energizing piston **240** is selectively coupled to the sealing piston **230**. The energizing piston includes a sleeve portion **241**, an annular pressure face **244**, an energizing seal **242**, and a tubular pressure face **246**. The energizing piston **240** can selectively couple with the sealing piston **230** to further energize the first seal face **232** by urging the sealing piston **230** towards the seal interface **223**. In the illustrated embodiment, the energizing piston **240** can slide along the tubular **101** to engage with the sealing piston **230** or rest against the energizing piston stop **247** at the opposite end of travel.

[0022]In the illustrated embodiment, the sleeve portion **241** can be a cylindrical shape designed to at least partially overlap the sealing piston **230** along the tubular **101**. Advantageously, the sleeved portion **241** of the energizing piston **240** can minimize the size of the energizing piston **240** and the overall size of the sealing device **220**.

[0023]In the illustrated embodiment, an annular pressure face **244** of the energizing piston **240** can receive annular pressure from the annulus **103** via the annular pressure port **224**. The annular pressure face **244** can receive annular pressure and apply a force to the energizing piston **240**.

[0024]In the illustrated embodiment, the energizing piston **240** can further include an inner pressure seal **245** to isolate the annular pressure from the tubular pressure. The inner pressure seal **245** can be formed of a conventional construction. In certain embodiments, the inner pressure seal **245** is an elastomeric seal. Advantageously, the inner pressure seal **245** is fully contained by the energizing piston **240** to allow for greater durability.

[0025] In the illustrated embodiment, the energizing piston **240** can further include an energizing pressure seal **242** to isolate the annular pressure from the tubular pressure. The energizing pressure seal **242** can be formed of a conventional construction. In certain embodiments, the energizing pressure seal **242** is an elastomeric seal. Advantageously, the energizing pressure seal **242** is fully contained by the energizing piston **240** to allow for greater durability.

[0026] In the illustrated embodiment, the tubular pressure face **246** of the energizing piston **240** receives tubular pressure from the tubular **101** via a tubular flow port **249**. The tubular pressure face **246** has a larger piston area or face area than the tubular pressure face **236** of the sealing piston **230**. Therefore, as described herein, when the tubular pressure face **236** and the tubular pressure face **246** are exposed to the tubular pressure from the tubular **101**, the tubular pressure face **246** will provide a greater force to the energizing piston **240** than the opposite force from the tubular pressure face **236**, therefore urging the energizing piston **240** into the sealing piston **230** and urging the first sealing face **232** into the sealing interface **223**.

[0027] In the illustrated embodiment, the energizing piston **240** can be limited in travel by the energizing piston stop **247**. The tubular pressure face **246** can rest or be stopped by the energizing piston stop **247** when the energizing piston **240** is spaced apart from the sealing piston **230**.

[0028] Referring to **FIGS. 2** and **3**, operation of the sealing device **220** is shown. Referring to **FIG. 2**, in the illustrated embodiment, the annular pressure of the annulus **103** is greater than the tubular pressure of the tubular **101**. In order to maintain isolation between the tubular pressure and the annular pressure, the first sealing face **232** is energized by the sealing piston **230**. In **FIG. 2**, the annular pressure faces **238a**, **238b** receive annular pressure. The annular pressure acts upon the annular pressure faces **238a**, **238b** to create a force that urges the sealing piston **230** and therefore the first sealing face **232** toward the sealing interface **223** to energize the first sealing face **232**. In the illustrated embodiment, the annular pressure forces can overcome forces provided by the tubular pressure.

[0029] Further, the annular pressure acts upon the annular pressure face **244** of the energizing piston **240**. In **FIG. 2**, the annular pressure face **244** receives an annular pressure to provide a force to the energizing piston **240** to space the energizing piston **240** away from the sealing piston **230**. The energizing piston **240** travel can be stopped by the energizing piston stop **247**. In the illustrated embodiment, the annular pressure forces can overcome forces provided by the tubular pressure.

[0030]Referring to **FIG. 3**, operation of the sealing device **220** is shown when tubular pressure of the tubular **101** is greater than annular pressure of the annulus **103**. In order to maintain isolation between the tubular pressure and the annular pressure, the first sealing face **232** is energized by the sealing piston **230**. In **FIG. 3**, the annular pressure faces **238a**, **238b** receive annular pressure. The annular pressure acts upon the annular pressure faces **238a**, **238b** to create a force that urges the sealing piston **230** and therefore the first sealing face **232** toward the sealing interface **223** to energize the first sealing face **232**. However, since tubular pressure is greater than annular pressure, the tubular pressure can attempt to push the tubular pressure face **234** and the sealing piston **230** away from the sealing interface **223**.

[0031]Advantageously, both tubular pressure faces **234** and **246** are exposed to tubular pressure. In the illustrated embodiment, the tubular pressure face **234** of the sealing piston **230** is smaller than the tubular pressure face **246** of the energizing piston **240**. As a result, when exposed to the same tubular pressure, the tubular pressure face **234** of the sealing piston **230** produces a first force that may urge the sealing piston **230** away from the sealing interface **223**. However, the tubular pressure face **246** of the energizing piston **240** receives the same tubular pressure, and creates a greater second force that translates the energizing piston **240** into the sealing piston **230**. In the illustrated embodiment, the annular pressure faces **238a** and **244** can be engaged or otherwise in contact. As a result, the energizing piston **240** urges the sealing piston **230** and the first sealing face **232** into the sealing interface **223** to maintain a seal even when the tubular pressure is greater than the annular pressure.

[0032]Referring to **FIG. 4**, the sealing device **220** can be retracted by a tool **250** to allow tubular pressure from the tubular **101** and annular pressure from the annulus **103** to be equalized. In the illustrated embodiment, a tool **250** can engage and act upon the tubular **101** to push the tubular **101**. The tool **250** can push against the preload device **237** and the tubular and annular pressure to disengage the first sealing face **232** from the seal interface **223** to equalize the tubular and annular pressure as desired. In the illustrated embodiment, the tool **250** can translate the sealing piston **230** and the energizing piston **240** away from the sealing interface **223**. Advantageously, as shown in **FIG. 4**, the sealing device **220** can be initially partially disengaged to prevent damage to the first sealing face **232** to allow for long term viability.

[0033]Referring to **FIG. 5**, the tool **250** is shown fully retracting the sealing device **220**. In the illustrated embodiment, the sealing piston **230** and the energizing piston **240** are

fully translated away from the seal interface **223**. The sealing device **220** can be fully opened to allow for equalized pressure between the tubular **101** and the annulus **103**.

[0034] In one aspect, a downhole device for use in a wellbore to selectively isolate a first pressure and a second pressure is disclosed, including a first piston including: a first sealing face to selectively isolate the first pressure and the second pressure; a first pressure face to receive the first pressure; and a second pressure face to receive the second pressure; and a second piston selectively coupled to the first piston, the second piston including: a third pressure face to receive the second pressure; and a fourth pressure face to receive the first pressure, wherein the fourth pressure face is larger than the first pressure face. In certain embodiments, the first piston and the second piston are spaced apart in response to the second pressure being greater than the first pressure. In certain embodiments, first piston and the second piston are coupled in response to the first pressure being greater than the second pressure. In certain embodiments, the third pressure face of the second piston engages the second pressure face of the first piston in response to the first pressure being greater than the second pressure. In certain embodiments, the downhole device includes a preload device to engage the first sealing face. In certain embodiments, the preload device is a spring coupled to the first piston. In certain embodiments, the first sealing face is metal. In certain embodiments, the second piston is a sleeved piston and is at least partially disposed around the first piston. In certain embodiments, a tool translates the first piston and the second piston.

[0035] In another aspect, a method to selectively isolate a first pressure and a second pressure in a wellbore is disclosed, including receiving the first pressure via a first pressure face of a first piston; receiving the second pressure via a second pressure face of the first piston; receiving the second pressure via a third pressure face of a second piston; receiving the first pressure via a fourth pressure face of the second piston, wherein the fourth pressure face is larger than the first pressure face; selectively coupling the first piston and the second piston; and selectively isolating the first pressure and the second pressure via a first sealing face of the first piston. In certain embodiments, the method includes spacing apart the first piston and second piston in response to the second pressure being greater than the first pressure. In certain embodiments, the method includes coupling the first piston and the second piston in response to the first pressure being greater than the second pressure. In certain embodiments, the method includes engaging the third pressure face of the second piston to the second pressure face of the first piston in response to the first pressure being greater than the second pressure. In certain embodiments, the first sealing face is metal.

[0036] In another aspect a downhole system for use in a wellbore is disclosed, including a casing disposed in the wellbore; a tubular disposed in the casing to define an annulus, the tubular having a tubular pressure and the annulus having an annular pressure; and a downhole device, including: a seal body; a first piston associated with the seal body, the first piston including: a first sealing face to selectively isolate the tubular pressure and the annular pressure; a first pressure face to receive the tubular pressure; and a second pressure face to receive the annular pressure; and a second piston selectively coupled to the first piston, the second piston including: a third pressure face to receive the annular pressure; and a fourth pressure face to receive the tubular pressure, wherein the fourth pressure face is larger than the first pressure face. In certain embodiments, the first sealing face is engaged to the seal body to isolate the annular pressure from the tubular in response to the annular pressure being greater than the tubular pressure. In certain embodiments, the first piston and the second piston are coupled and the first sealing face is engaged to the seal body in response to the tubular pressure being greater than the annular pressure. In certain embodiments, third pressure face of the second piston engages the second pressure face of the first piston in response to the tubular pressure being greater than the annular pressure. In certain embodiments, the downhole device is disposed around the tubular. In certain embodiments, the first sealing face is metal.

[0037] The foregoing disclosure is directed to certain specific embodiments for ease of explanation. Various changes and modifications to such embodiments, however, will be apparent to those skilled in the art. It is intended that all such changes and modifications within the scope and spirit of the appended claims be embraced by the disclosure herein.

## CLAIMS

1. A downhole device for use in a wellbore to selectively isolate a first pressure and a second pressure, the downhole device comprising:

a first piston including:

a first sealing face to selectively isolate the first pressure and the second pressure;

a first pressure face to receive the first pressure; and

a second pressure face to receive the second pressure; and

a second piston selectively coupled to the first piston, the second piston including:

a third pressure face to receive the second pressure; and

a fourth pressure face to receive the first pressure, wherein the fourth pressure face is larger than the first pressure face.

2. The downhole device of claim 1, wherein the first piston and the second piston are spaced apart in response to the second pressure being greater than the first pressure.

3. The downhole device of claim 1, wherein first piston and the second piston are coupled in response to the first pressure being greater than the second pressure.

4. The downhole device of claim 3, wherein third pressure face of the second piston engages the second pressure face of the first piston in response to the first pressure being greater than the second pressure.

5. The downhole device of any of claims 1-3 further comprising a preload device to engage the first sealing face.

6. The downhole device of any of claims 1-5, wherein the second piston is a sleeved piston and is at least partially disposed around the first piston.

7. The downhole device of any of claims 1-6, wherein the first sealing face is a meal.

8. The downhole device of any of claims 1-6, wherein a tool translates the first piston and the second piston.

9. A method to selectively isolate a first pressure and a second pressure in a wellbore, the method comprising:

receiving the first pressure via a first pressure face of a first piston;

receiving the second pressure via a second pressure face of the first piston;

receiving the second pressure via a third pressure face of a second piston;

receiving the first pressure via a fourth pressure face of the second piston, wherein the fourth pressure face is larger than the first pressure face;

selectively coupling the first piston and the second piston; and

selectively isolating the first pressure and the second pressure via a first sealing face of the first piston.

10. The method of claim 9, further comprising:

spacing apart the first piston and second piston in response to the second pressure being greater than the first pressure.

11. The method of claim 9 further comprising coupling the first piston and the second piston in response to the first pressure being greater than the second pressure.

12. The method of claim 10 or 11 further comprising engaging the third pressure face of the second piston to the second pressure face of the first piston in response to the first pressure being greater than the second pressure.

13. A downhole system for use in a wellbore, comprising:

a casing disposed in the wellbore;

a tubular disposed in the casing to define an annulus, the tubular having a tubular pressure and the annulus having an annular pressure; and

a downhole device, including:

a seal body;

a first piston associated with the seal body, the first piston including:

a first sealing face to selectively isolate the tubular pressure and the annular pressure;

a first pressure face to receive the tubular pressure; and

a second pressure face to receive the annular pressure; and

a second piston selectively coupled to the first piston, the second piston including:

a third pressure face to receive the annular pressure; and

a fourth pressure face to receive the tubular pressure, wherein the fourth pressure face is larger than the first pressure face.

14. The downhole system of claim 13, wherein the first sealing face is engaged to the seal body to isolate the annular pressure from the tubular in response to the annular pressure being greater than the tubular pressure.

15. The downhole system of claim 13 or 14, wherein the first piston and the second piston are coupled and the first sealing face is engaged to the seal body in response to the tubular pressure being greater than the annular pressure.

16. The downhole system of claim 13 or 14, wherein third pressure face of the second piston engages the second pressure face of the first piston in response to the tubular pressure being greater than the annular pressure.

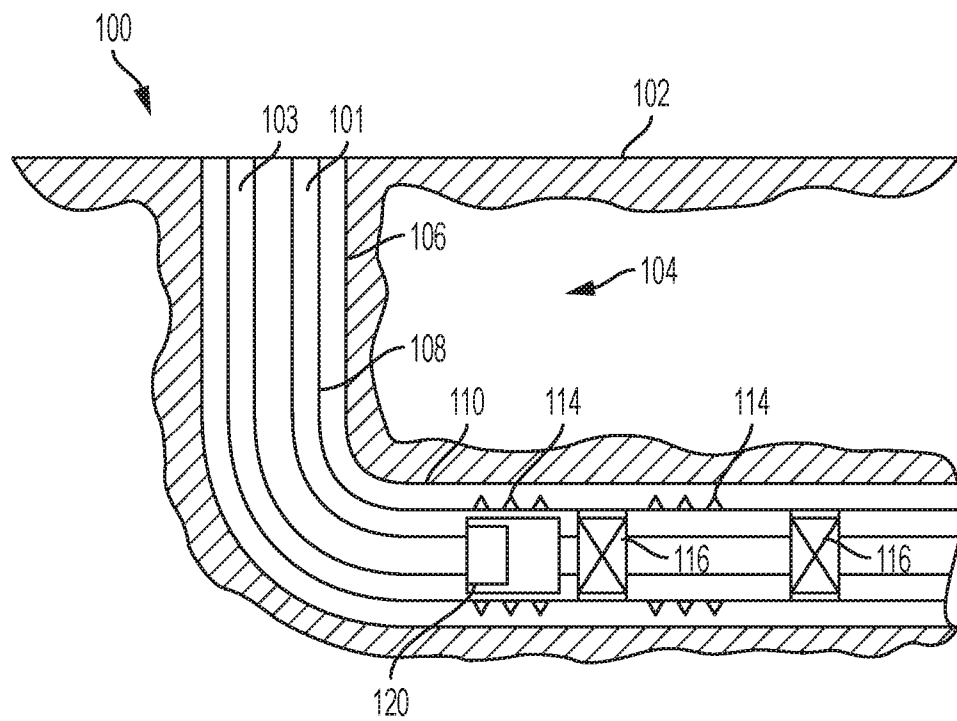


FIG. 1

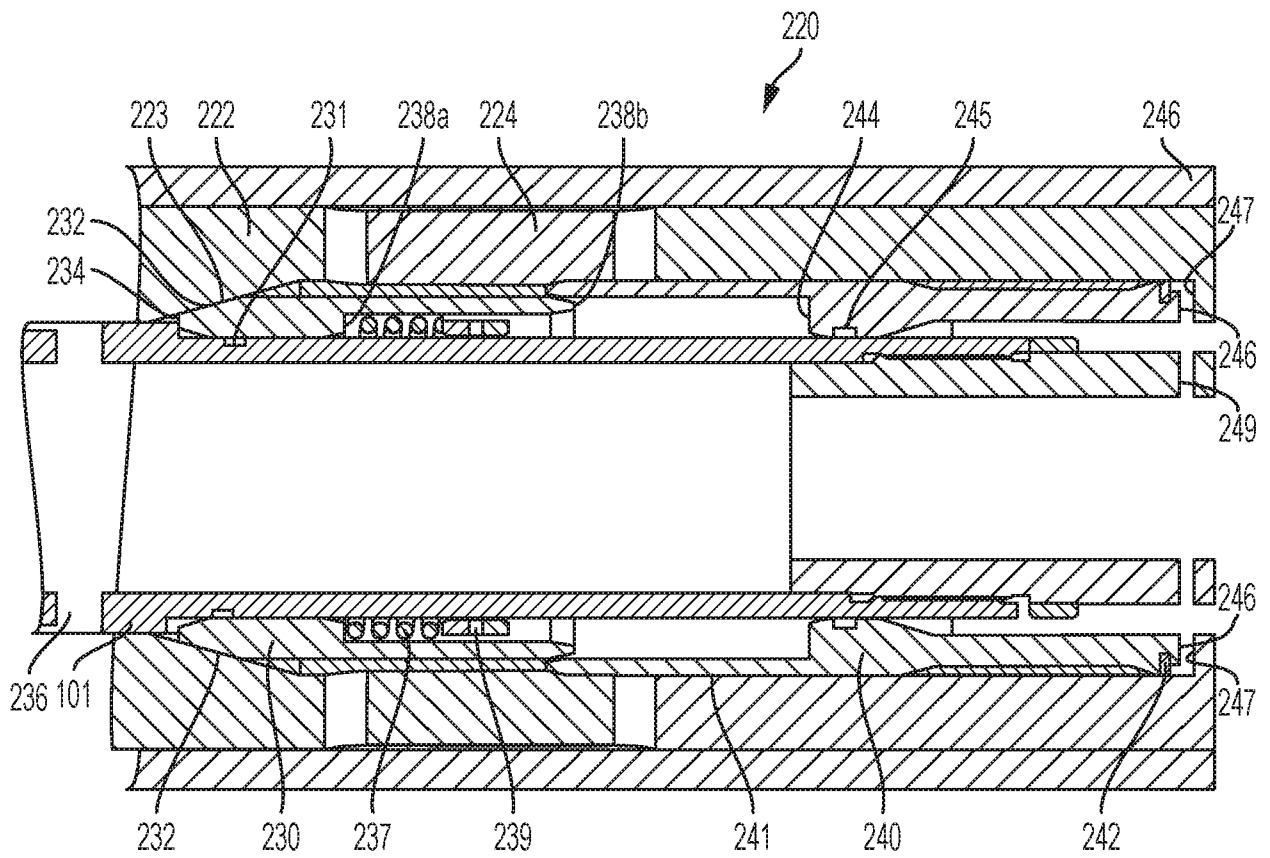


FIG. 2

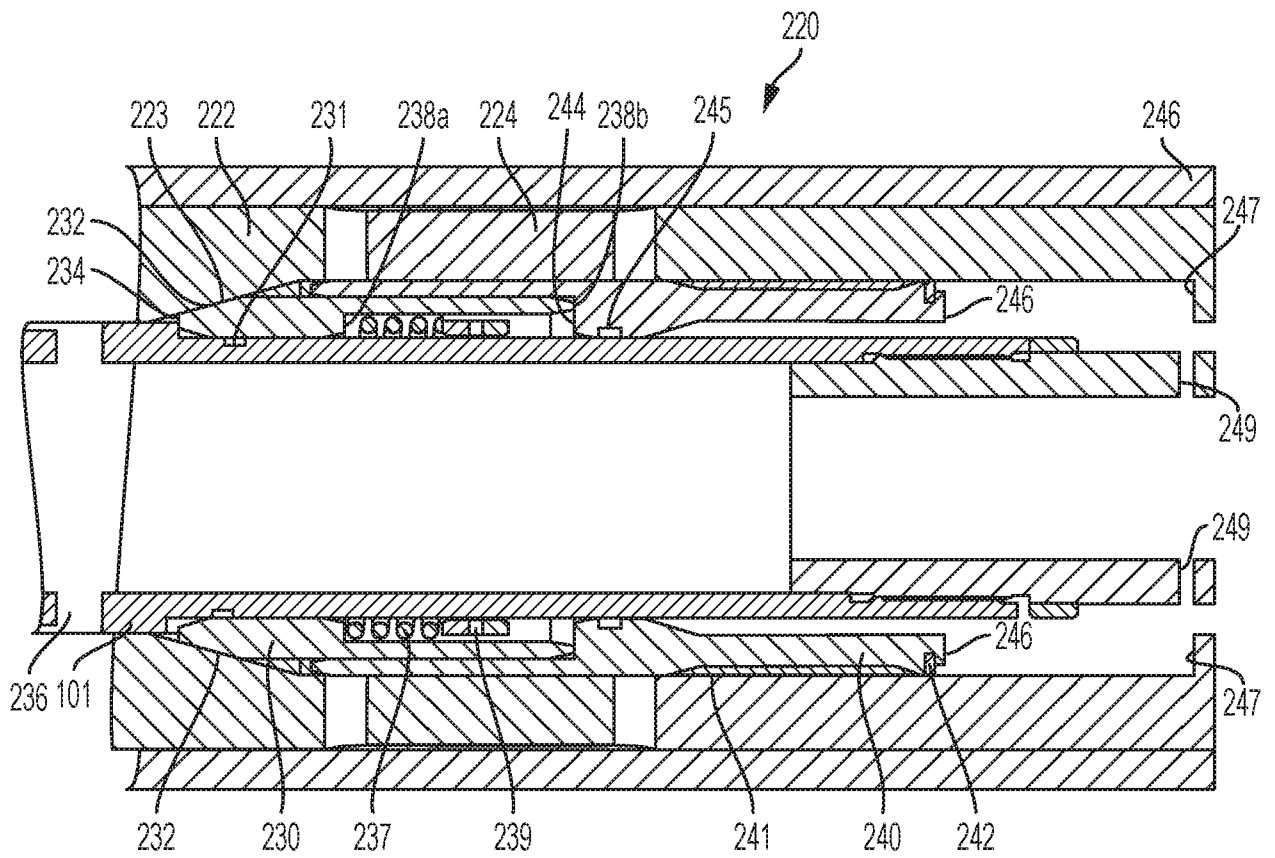


FIG. 3

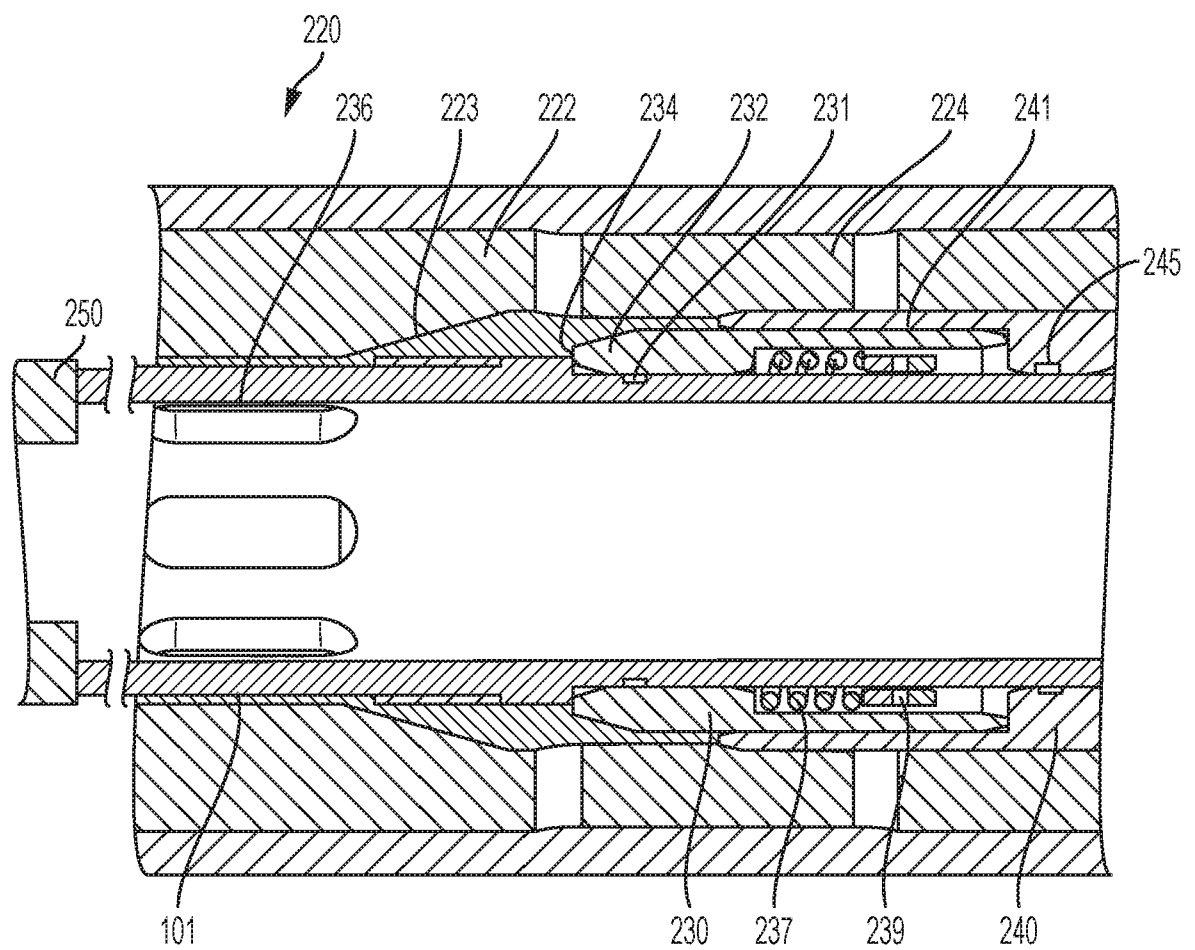


FIG. 4

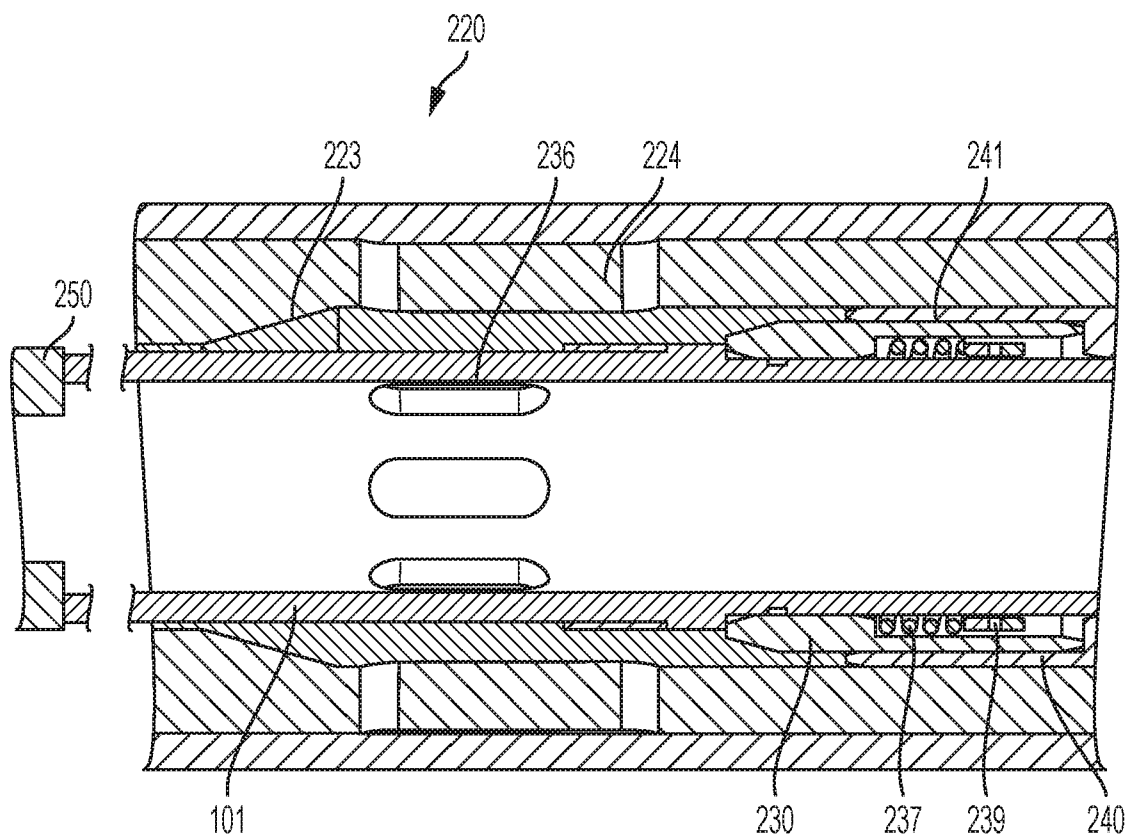


FIG. 5

**A. CLASSIFICATION OF SUBJECT MATTER****E21B 33/12(2006.01)i, E21B 17/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

E21B 33/12; E21B 33/128; E21B 23/06; E21B 34/06; E21B 34/00; E21B 33/14; E21B 34/14; E21B 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: metal seal, sealing piston, pressure face, energizing piston, moveable sleeve, annular pressure, tubular pressure and pressure differential

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                             | Relevant to claim No. |
|-----------|----------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 2006-0260820 A1 (WHITSITT et al.) 23 November 2006<br>See paragraphs [0005], [0045]-[0048] and figures 1-5. | 1-4, 6-16             |
| Y         |                                                                                                                | 5                     |
| Y         | US 2015-0330189 A1 (PACKERS PLUS ENERGY SERVICES INC.) 19 November 2015<br>See paragraph [0040] and figure 2A. | 5                     |
| A         | US 2015-0191991 A1 (EZELL, MICHAEL DALE) 09 July 2015<br>See paragraphs [0036]-[0048] and figures 2A-5D.       | 1-16                  |
| A         | US 2005-0284642 A1 (WONG, FEDRICK SUN-VEOW) 29 December 2005<br>See paragraphs [0056]-[0062] and figures 4-9.  | 1-16                  |
| A         | US 6325151 B1 (VINCENT et al.) 04 December 2001<br>See column 3, line 28 - column 5, line 27 and figures 1-2.  | 1-16                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 August 2017 (18.08.2017)

Date of mailing of the international search report

**18 August 2017 (18.08.2017)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

PARK, Tae Wook

Telephone No. +82-42-481-3405



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2017/033992**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                                                                                                                              | Publication<br>date                                                                                                        |
|-------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| US 2006-0260820 A1                        | 23/11/2006          | BR PI0602133 A<br>CA 2544657 A1<br>CA 2544657 C<br>GB 2437525 A<br>GB 2437525 B<br>NO 20061803 A<br>NO 339283 B1<br>US 2009-0283279 A1<br>US 7591321 B2 | 17/07/2007<br>25/10/2006<br>29/07/2008<br>31/10/2007<br>17/12/2008<br>26/10/2006<br>21/11/2016<br>19/11/2009<br>22/09/2009 |
| US 2015-0330189 A1                        | 19/11/2015          | CA 2778720 A1<br>US 2012-0247767 A1<br>US 9121255 B2<br>US 9650868 B2<br>WO 2011-057416 A1                                                              | 19/05/2011<br>04/10/2012<br>01/09/2015<br>16/05/2017<br>19/05/2011                                                         |
| US 2015-0191991 A1                        | 09/07/2015          | AR 091659 A1<br>AU 2012-384526 A1<br>CA 2877683 A1<br>EP 2867446 A1<br>WO 2014-007794 A1                                                                | 18/02/2015<br>22/01/2015<br>09/01/2014<br>06/05/2015<br>09/01/2014                                                         |
| US 2005-0284642 A1                        | 29/12/2005          | US 2007-0144744 A1<br>US 7191843 B2<br>US 7472756 B2                                                                                                    | 28/06/2007<br>20/03/2007<br>06/01/2009                                                                                     |
| US 6325151 B1                             | 04/12/2001          | AU 2001-38880 A1<br>AU 2001-38880 B2<br>AU 3888001 A<br>CA 2345586 A1<br>CA 2345586 C<br>GB 2364537 A<br>GB 2364537 B<br>NO 20012092 A<br>NO 323534 B1  | 01/11/2001<br>24/11/2005<br>01/11/2001<br>28/10/2001<br>29/03/2005<br>30/01/2002<br>05/05/2004<br>29/10/2001<br>04/06/2007 |