



(11) **EP 3 412 366 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
26.01.2022 Bulletin 2022/04

(51) International Patent Classification (IPC):
B05C 17/005^(2006.01)

(21) Application number: **18176705.4**

(52) Cooperative Patent Classification (CPC):
B05C 17/0052; B05C 17/00546; B05C 17/00526

(22) Date of filing: **08.06.2018**

(54) **RAPID HEATING TIP FOR A HOT-MELT GLUE GUN AND A HOT-MELT GLUE GUN**

SCHNELLHEIZSPITZE FÜR EINE HEISSSCHMELZKLEBEPISTOLE UND HEISSSCHMELZKLEBEPISTOLE

POINTE DE CHAUFFAGE RAPIDE DESTINÉE À UN PISTOLET À COLLE THERMOFUSIBLE ET PISTOLET À COLLE THERMOFUSIBLE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **08.06.2017 CN 201720666043 U**

(43) Date of publication of application:
12.12.2018 Bulletin 2018/50

(73) Proprietor: **Hangzhou Kelong Electrical Appliance Tools Co. Ltd**
Jiande City, Zhejiang 311604 (CN)

(72) Inventors:
• **Chen, Jian**
Jiande City, Zhejiang 311604 (CN)
• **Cui, Yuqun**
Jiande City, Zhejiang 311604 (CN)

(74) Representative: **2s-ip Schramm Schneider Bertagnolli**
Patent- und Rechtsanwälte Part mbB
Postfach 86 02 67
81629 München (DE)

(56) References cited:
US-A- 6 142 207

EP 3 412 366 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD**

[0001] The present disclosure relates to the field of electric power tools, and more particularly relates to a rapid heating tip for a hot-melt glue gun.

BACKGROUND

[0002] A hot-melt glue gun is a tool that melts a solid hot-melt glue stick into a liquid-state glue by electrical heating and applies the glue liquid to an object surface which needs to be bonded; due to its small size, convenience to carry, and flexibility to use, the hot-melt glue gun is a common glue squeezing tool for individuals, households, and factories. Glue jetting speed is an important performance indicator of hot-melt glue guns. In the prior art, a hot-melt glue gun uses a PTC heating sheet to heat a melt glue tube to melt the glue; a power cord is connected to the PTC electrodes, respectively; and a heating body is formed after wrapping the PTC with an insulative material. Due to wrapping with the insulative material outside of the PTC heating sheet, this solution has drawbacks such as a low heat conduction efficiency and a long heating time, which generally takes 3-5 minutes or even longer.

[0003] US 6 142 207 A relates to a rapid heating gun tip according to the preamble of claim 1.

SUMMARY

[0004] To overcome the drawbacks in the prior art, the present disclosure provides a rapid heating gun tip for a hot-melt glue gun, which addresses the problem of low heat conduction efficiency and long heating time.

[0005] To solve the technical problem above, the present disclosure adopts a technical solution below:

A rapid heating gun tip for a hot-melt glue gun, comprising a glue loading sleeve and a glue jetting nozzle, a transition tube being formed between the glue jetting nozzle and the glue loading sleeve; wherein the rapid heating gun tip for a hot-melt glue gun further comprising an electrode sheet and a plurality of heating bodies, the transition tube having a plurality of heat conduction planes, the heat conduction planes being inclined relative to an axial line of the glue loading sleeve, and the electrode sheets tightly press-fitting the heating bodies against outer sides of the heat conduction planes.

[0006] In the rapid heating gun tip for a hot-melt glue gun, the rapid heating gun tip for a hot-melt glue gun further comprises a connecting sheet, wherein the transition tube is a conductor, and the transition tube is connected to an external wire via the connecting sheet.

[0007] Further embodiments of the invention may be configured as follows:

In the rapid heating gun tip for a hot-melt glue gun, the heating body is a PTC heating sheet. In the rapid heating

gun tip for a hot-melt glue gun, the transition tube may be an aluminum tube.

[0008] In the rapid heating gun tip for a hot-melt glue gun, the rapid heating gun tip for a hot-melt glue gun may further comprise a heat insulating sheath in which the electrode sheet, the heating body and the transition tube are accommodated.

[0009] In the rapid heating gun tip for a hot-melt glue gun, the rapid heating gun tip for a hot-melt glue gun further comprises a cutter, the cutter being disposed in the transition tube to axially cut a glue stick, the transition tube and the cutter conducting heat to facilitate the cutter to heat the cut glue stick.

[0010] In the rapid heating gun tip for a hot-melt glue gun, the cutter comprises at least two cutting blades distributed in a radial mode, radial inner ends of the at least two cutting blades being interconnected and converged at a central axis of the transition tube, and radial outer ends of the at least two cutting blades conducting heat with the transition tube.

[0011] In the rapid heating gun tip for a hot-melt glue gun, a side of the cutting blade distant from the glue jetting nozzle is thinned to form a cutting edge.

[0012] In the rapid heating gun tip for a hot-melt glue gun, the cutter and the transition tube are integrally formed; or the cutter and the transition tube are separately formed, the cutter being fixedly mounted in the transition tube.

[0013] The present disclosure further provides a hot-melt glue gun, comprising a rapid heating gun tip for a hot-melt glue gun according to any technical solution above.

[0014] The present disclosure has the following advantages:

The rapid heating gun tip for a hot-melt glue gun according to the present disclosure comprises: a glue loading sleeve and a glue jetting nozzle, a transition tube being formed between the glue jetting nozzle and the glue loading sleeve; the rapid heating gun tip for a hot-melt glue gun further comprises an electrode sheet and a plurality of heating bodies, wherein the transition tube has a plurality of heat conduction planes, the heat conduction planes being inclined relative to an axial line of the glue loading sleeve, and the electrode sheets tightly press-fitting the heating bodies against outer sides of the heat conduction planes.

[0015] The transition tube is shaped such that the amount of hot-melt glue accommodated in the transition tube is less than that accommodated in a straight tube; the electrode sheets tightly press-fit the heating bodies against the outer sides of the heat conduction planes; the transition tube is sufficiently wrapped with the heating body, such that the heating body directly heats the hot-melt glue in the transition tube, which causes the hot-melt glue in the transition tube to be heated uniformly, thereby improving heating efficiency. Compared with reference document 1 CN205731892U, the heating sheet in the present disclosure is attached to an inclined cavity

outer wall formed by the transition tube, while in reference document 1, the PTC is attached to a straight cavity outer wall; consequently, in a unit time, the amount of glue that needs to be heated in the present disclosure is less than that needed to be heated in the reference document 1, thereby improving the heating efficiency.

[0016] In the present disclosure, the heated hot-melt glue directly reaches the glue jetting nozzle, which facilitates retaining of the glue jetting's temperature; however, in reference document 1, the heated hot-melt glue has to pass along a certain distance before reaching the glue jetting nozzle, which is adverse to retaining the glue jetting temperature. Compared with reference document 2 CN205587248U, in the present disclosure, a wall thickness at a position of heating the hot-melt glue is smaller than that in reference document 2, such that the present disclosure has a less heat loss but a higher heating efficiency.

[0017] An existing hot-melt glue gun (e.g., the utility model patent with a publication number of CN203389820U) implements heating of the gun tip by disposing heating bodies continuously along an entire circumference; a consequence is that to realize a different heating temperature, the heating bodies have to be changed, which not only increases the cost, but also causes a smaller temperature adjustment range; in contrast, the rapid heating gun tip of the present disclosure may change the heating capacity of one or more heating bodies within a unit time according to actual needs (e.g., changing the size, material, and the like of the heating bodies); in this way, the heating temperature of the transition tube may be adjusted more conveniently and flexibly, which expands the temperature adjustment range of the rapid heating gun tip, causing the hot-melt glue gun to be suitable for glue sticks and wax sticks of various temperature types.

[0018] The heating body is a PTC heating sheet: the PTC has a relatively strong anti-oxidization and anti-attenuation capacity and thus has a very good high-temperature stability. The energized surface will produce a high temperature, such that it has a faster heat response, a smaller thermal inertia, and a smaller power consumption than traditional electrically heating elements. In the present disclosure, the PTC heating element adopts a plane-shaped current-carrying approach, which has an extremely high reliability, ease of processing, and a lower manufacturing cost.

[0019] The rapid heating gun tip for a hot-melt glue gun further comprises a connecting sheet, wherein the transition tube is a conductor, and the transition tube is connected to an external wire via the connecting sheet: the transition tube may be directly used as an electrode sheet of the heating body, such that the heating body directly heats the hot-melt glue in the transition tube without a need of being wrapped with an insulative material, thereby further enhancing the heating efficiency.

[0020] The transition tube is an aluminum tube: among a few of metal materials with a relatively high heat con-

duction efficiency, aluminum has the lowest cost; while among a few of metals with a relatively low cost, aluminum has the highest heat conductive efficiency.

[0021] The rapid heating gun tip for a hot-melt glue gun further comprises a heat insulating sheath in which the electrode sheet, the heating body and the transition tube are accommodated: the heat insulating sheath concentrates the heat produced by the heating body at its inside, which avoids heat loss and meanwhile may avoid scalding the user.

[0022] The rapid heating gun tip for a hot-melt glue gun further comprises a cutter, the cutter being disposed in the transition tube to axially cut a glue stick, wherein the transition tube and the cutter conduct heat to facilitate the cutter to heat the cut glue stick. Firstly, the cutter cuts the glue stick entering the transition tube into a plurality of pieces. Compared with an entire glue stick, a smaller piece will be melted more easily under a same heating temperature, which facilitates the glue stick to be melted rapidly within a short time. Secondly, due to the heat conduction between the transition tube and the cutter, besides heating of the outer circumference of the glue stick by the transition tube, the cutter may abut against the cut face of the glue stick to heat, which increases the heated area of the cut portion of the glue stick, such that the cut portion of the glue stick is rapidly melted within a short time, thereby improving the glue melting efficiency of the rapid heating gun tip and realizing rapid glue jetting.

[0023] A side of the cutting blade distant from the glue jetting nozzle is thinned to form a cutting edge. With thrust of the glue stick, the cutting edge may quickly cut the glue stick, thereby decreasing the thrust resistance for the glue stick; besides, local thinning of the cutting blade may reduce heat loss of the cutting blade per se, such that more heat is applied for heating the glue stick.

[0024] The present disclosure further provides a hot-melt glue gun, comprising a rapid heating gun tip for a hot-melt glue gun according to any of the above mentioned. The advantageous effects achieved by the hot-melt glue gun are identical to those that may be achieved by the rapid heating gun tip for a hot-melt glue gun described above; because their deduction processes are similar, the advantageous effects achieved by the hot-melt glue gun will not be detailed here.

[0025] These characteristics and advantages of the present disclosure will be disclosed in detail in the preferred embodiments and the accompanying drawings below. The best modes or means of carrying out the present disclosure will be illustrated in detail with reference to the accompanying drawings but are not intended to limit the technical solution of the present disclosure. Additionally, each of the features, elements and components appearing in the following text and drawings is provided in plurality, and for the convenience of representation, they are labelled with different symbols or numbers; however, they all represent parts with same or similar structures or functions.

[0026] These characteristics and advantages of the

present disclosure will be disclosed in detail in the preferred embodiments and the accompanying drawings below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] Hereinafter, the present disclosure will be described in further detail with reference to the accompanying drawings:

Fig. 1 is an explosive view of Embodiment 1 of the present disclosure;

Fig. 2 is a schematic diagram of a transition tube and a glue jetting nozzle in Embodiment 1 of the present disclosure;

Fig. 3 is a sectional view of Embodiment 1 of the present disclosure;

Fig. 4 is a side view of Embodiment 1 of the present disclosure;

Fig. 5 is a sectional view of the transition tube in Embodiment 2 of the present disclosure;

Fig. 6 is a stereoscopic view of a cutter in Embodiment 2 of the present disclosure;

Fig. 7 is a stereoscopic view of another kind of cutter in Embodiment 2 of the present disclosure;

Fig. 8 is a stereoscopic view of a further kind of cutter in Embodiment 2 of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

[0028] Hereinafter, the technical solutions of the embodiments of the present disclosure will be explained and illustrated with reference to the accompanying drawings corresponding to the embodiments of the present disclosure. However, the embodiments are only preferred embodiments of the present disclosure, not all of them. Other embodiments obtained by those skilled in the art without exercise of inventive work based on the examples in the embodiments all fall within the protection scope of the present disclosure.

[0029] In the description of the present disclosure, it needs to be understood that the oriental or positional relationships indicated by the terms "center," "longitudinal," "transverse," "length," "width," "thickness", "upper," "lower," "front," "rear," "left," "right," "vertical," "horizontal," "top," "bottom," "inner," "clockwise," "counterclockwise," etc. are oriental and positional relationships based on the drawings, which are intended only for facilitating or simplifying description of the present disclosure, not for indicating or implying that the devices or elements have to possess those specific orientations and have to

be configured and operated with those specific orientations; therefore, they should not be understood as limitations to the present disclosure.

[0030] Besides, the terms "first" and "second" are only used for description purposes, which shall not be understood as indicating or implying an importance or implicitly indicating the number of technical features as indicated. Therefore, the features limited by "first" and "second" may explicitly or implicitly include one or more of the features. In the description of the present disclosure, unless otherwise indicated, "plurality" indicates two or above.

[0031] In the present disclosure, unless otherwise explicitly provided and limited, the terms such as "mount," "connected," "connection," and "fix" should be understood broadly, which, for example, may refer to a secured connection, a detachable connection, or an integral connection; which may be a mechanical connection or an electrical connection; which may be a direct connection or an indirect connection via an intermediate medium; which may also be a communication between the insides of two elements. To a person of normal skill in the art, specific meanings of the above terms in the present disclosure may be understood based on specific situations.

[0032] In the present disclosure, unless otherwise explicitly provided and limited, that a first feature is "above" or "below" a second feature may include a direct contact between the first feature and the second feature or may include a case where although the first feature and the second feature do not contact directly, they contact via a further feature therebetween. Moreover, that the first feature is "above" or "over" or "on" the second feature includes a case where the first feature is exactly or generally over the second feature or only indicates that the horizontal height of the first feature is higher than the second feature. That the first feature is "under" or "below" or "beneath" the second feature includes a case where the first feature is exactly or generally below the second feature or only indicates that the horizontal height of the first feature is lower than the second feature.

Embodiment 1

[0033] With reference to Figs. 1~4, a rapid heating gun tip for a hot-melt glue gun comprises a glue loading sleeve 3 and a glue jetting nozzle 2, a transition tube 1 being formed between the glue jetting nozzle 2 and the glue loading sleeve 3; in this embodiment, the transition tube 1 and the glue jetting nozzle 2 are integrally formed. The transition tube 1 further comprises a connecting part 12 for connecting with the glue loading sleeve 3, wherein the connection between the connecting part 12 and the glue loading sleeve 3 may be integrally formed or connected via threaded connection, snap-fit, etc.; the present disclosure preferably adopts a snap-fit manner. The transition tube 1 has four heat conduction planes 11. Because the diameter of the glue jetting nozzle 2 is smaller than that of the connecting part 12, the four heat conduction planes 11 are inclined relative to the axial line of

the glue loading sleeve 3; a melt glue cavity enclosed by the four heat conduction planes 11 is in a conical shape with a square cross section. The hot-melt glue gun further comprises an electrode sheet 5 and four heating bodies, wherein the electrode sheet 5 is of an annular shape. In this embodiment, the heating body is preferably a PTC heating sheet 4. The four PTC heating sheets 4 are closely attached to the outer sides of the 4 heat conduction planes 11 of the transition tube 1, respectively; and the electrode sheet 5 tightly press-fits the PTC heating sheets 4 against the outer sides of the heat conductive planes 11 to cause them fixed and stationary. The electrode sheet 5 is connected to an external power supply via a wire 6. The transition tube 1 is a conductor. The present disclosure preferably adopts an aluminum tube. Due to the high heat conduction efficiency of the aluminum, the heating efficiency is ensured with a lower manufacturing cost. The rapid heating gun tip for a hot-melt glue gun further comprises a connecting sheet 9, wherein the wire 7 is connected to the connecting sheet 9, the connecting sheet 9 is fixedly mounted on the transition tube 1, the transition tube 1 is connected to the wire 7 via the connecting sheet 9, and the wire 7 is connected to the external power supply. Till now, both of the cathode and anode of the PTC heating sheet 4 are connected to the power supply.

[0034] The rapid heating gun tip for a hot-melt glue gun further comprises a heat insulating sheath 8 in which the electrode sheet 5, the PTC heating sheets 4 and the transition tube 1 are accommodated: the heat insulating sheath 8 concentrates the heat produced by the PTC heating sheets at its inside, which avoids heat loss and meanwhile may avoid scalding the user.

[0035] According to the solution of this embodiment, it may be envisaged that the transition tube may have 6 heat conductive planes, and to match therewith, 6 PTC heating sheets are provided, wherein the 6 PTC heating sheets are closely attached to the outer sides of the 6 heat conductive planes of the transition tube; or the transition tube may have 8 heat conductive planes, and to match therewith, 8 PTC heating sheets are provided, wherein the 8 PTC heating sheets are closely attached to the outer sides of the 8 heat conductive planes of the transition tube.

Embodiment 2

[0036] With reference to Fig. 5, this embodiment differs from Embodiment 1 in that the rapid heating gun tip for a hot-melt glue gun further comprises a cutter 13, the cutter 13 being provided in the transition tube 1 to axially cut a glue stick 10; the transition tube 1 and the cutter 13 conduct heat such that the cutter 13 heats the cut glue stick 10. For example, with reference to Fig. 6, the cutter 13 and the transition tube 1 are separately formed; the cutter 13 is fixedly mounted in the transition tube 1, e.g., by interference fitting, welding fixation, etc.; the cutter 13 includes three cutting blades 131 in a radial distribution,

wherein the radial outer ends of the three cutting blades 131 contact with the transition tube 1 to conduct heat, the three cutting blades 131 being circumferentially arranged at intervals, with an included angle between two adjacent cutting blades 131 being 120°; in this way, a cylindrical glue stick 10 is cut into three sectored glue sticks with a uniform size. Compared with an entire glue stick, a smaller piece cut from the glue stick is more easily melted under a same heating temperature, which facilitates rapid melting of the glue stick in a short time. Secondly, due to the heat conduction between the transition tube 1 and the cutter 13, besides heating of the transition tube 1 with respect to the outer circumferential face of the glue stick, the cutting blade 131 may abut against the cut face of the glue stick to heat, which increases the heated area of the cut portion of the glue stick, such that the cut portion of the glue stick may be melted rapidly in a short time, thereby improving the glue melting efficiency of the rapid heating gun tip and realizing rapid glue jetting.

[0037] To better cut the glue stick, a side of each cutting blade 131 distant from the glue jetting nozzle is thinned to form a cutting edge 132. With thrust of the glue stick, the cutting edge 132 may quickly cut the glue stick, thereby decreasing the thrust resistance for the glue stick; besides, local thinning of the cutting blade 131 may reduce heat loss of the cutting blade per se, such that more heat is applied for heating the glue stick.

[0038] According to the solution in this embodiment, it may be envisaged that the cutting blade 131 of the cutter may be provided in two, wherein the two cutting blades 131 are symmetrically distributed about a central axis of the transition tube, forming a cutter with a "—"-shaped cross section, as shown in Fig. 7. The cutting blades 131 of the cutter may be provided in four, wherein the four cutting blades 131 are arranged circumferentially at even intervals, the included angle between two adjacent cutting blades 131 being 90°, forming a cutter with a "+"-shaped cross section, as shown in Fig. 8. Dependent on actual needs, the number of the cutting blades of the cutter may also be 5, 6, or more.

[0039] It may be envisaged from the solution of this embodiment that both of the cutter and the transition tube are made of a metal material and thus may be formed into an integral structure.

Embodiment 3

[0040] This embodiment discloses a hot-melt glue gun, comprising a rapid heating gun tip for hot-melt glue gun according to any of the embodiment above. Other structures of the hot-melt glue gun are well known to those skilled in the art, which will not be detailed in this embodiment.

[0041] What have been described above are only preferred embodiments of the present disclosure; however, the protection scope of the present disclosure is not limited thereto. A person skilled in the art should understand

that the present disclosure includes, but not limited to the contents described in the drawings and the preferred embodiments. Any modifications without departing from the functions and structural principles of the present disclosure will be included within the scope of the claims.

Claims

1. A rapid heating gun tip for a hot-melt glue gun, comprising a glue loading sleeve (3) and a glue jetting nozzle (2), a transition tube (1) being formed between the glue jetting nozzle (2) and the glue loading sleeve (3); wherein the rapid heating gun tip for a hot-melt glue gun further comprises an electrode sheet (5) and a plurality of heating bodies, the transition tube (1) having a plurality of heat conduction planes (11), the heat conduction planes (11) being inclined relative to an axial line of the glue loading sleeve (3), and the electrode sheet (5) tightly press-fitting the heating bodies against outer sides of the heat conduction planes (11),

characterized in that

- the rapid heating gun tip for a hot-melt glue gun further comprises a connecting sheet (9), and the transition tube (1) is a conductor, and the transition tube (1) is connected to an external wire (7) via the connecting sheet (9).
2. The rapid heating gun tip for a hot-melt glue gun according to claim 1, wherein the heating body is a PTC heating sheet (4).
3. The rapid heating gun tip for a hot-melt glue gun according to claim 1, wherein the transition tube (1) is an aluminum tube.
4. The rapid heating gun tip for a hot-melt glue gun according to any one of claims 1-3, wherein the rapid heating gun tip for a hot-melt glue gun further comprises a heat insulating sheath (8) in which the electrode sheet (5), the heating body and the transition tube (1) are accommodated.
5. The rapid heating gun tip for a hot-melt glue gun according to any one of claims 1~3, wherein the rapid heating gun tip for a hot-melt glue gun further comprises a cutter (13), the cutter (13) being disposed in the transition tube (1) to axially cut a glue stick, the transition tube (1) and the cutter (13) conducting heat to facilitate the cutter (13) to heat the cut glue stick.
6. The rapid heating gun tip for a hot-melt glue gun according to claim 5, wherein the cutter (13) comprises at least two cutting blades (131) distributed in a radial mode, radial inner ends of the at least two

cutting blades (131) being interconnected and converged at a central axis of the transition tube (1), and radial outer ends of the at least two cutting blades (131) conducting heat with the transition tube.

7. The rapid heating gun tip for a hot-melt glue gun according to claim 6, wherein a side of the cutting blade (131) distant from the glue jetting nozzle is thinned to form a cutting edge.
8. The rapid heating gun tip for a hot-melt glue gun according to claim 7, wherein the cutter (13) and the transition tube (1) are integrally formed; or the cutter (13) and the transition tube (1) are separately formed, the cutter (13) being fixedly mounted in the transition tube (1).
9. A hot-melt glue gun, comprising a rapid heating gun tip for a hot-melt glue gun according to any of claims 1~8.

Patentansprüche

1. Schnellheizspitze für eine Heißschmelzklebepistole, aufweisend eine Klebstoff-Ladehülle (3) und eine Klebstoff-Ausstoßdüse (2), eine Übergangsröhre (1), ausgebildet zwischen der Klebstoff-Ausstoßdüse (2) und der Klebstoff-Ladehülle (3); wobei die Schnellheizspitze für eine Heißschmelzklebepistole weiter aufweist ein Elektrodenblatt (5) und eine Anzahl von Heizkörpern, wobei die Übergangsröhre (1) eine Anzahl von Hitzeleitungsebenen (11) umfasst, wobei die Hitzeleitungsebenen (11) geneigt sind mit Bezug auf eine axiale Linie der Klebstoff-Ladehülle (3), und wobei das Elektrodenblatt (5) die Heizkörper gegen äußere Seiten der Hitzeleitungsebenen (11) in Presspassung drückt,
- dadurch gekennzeichnet, dass** die Schnellheizspitze für eine Heißschmelzklebepistole des Weiteren ein Verbindungsblatt (9) aufweist, und die Übergangsröhre (1) ein Leiter ist, und die Übergangsröhre (1) mit einer externen Leitung (7) über das Verbindungsblatt (9) verbunden ist.
2. Schnellheizspitze für eine Heißschmelzklebepistole gemäß Anspruch 1, wobei der Heizkörper ein PTC-Heizblatt (4) ist.
3. Schnellheizspitze für eine Heißschmelzklebepistole gemäß Anspruch 1, wobei die Übergangsröhre (1) eine Aluminium-Röhre ist.
4. Schnellheizspitze für eine Heißschmelzklebepistole gemäß einem der Ansprüche 1 bis 3, wobei die

Schnellheizspitze für eine Heißschmelzklebepistole des Weiteren einen hitzeisolierenden Mantel (8) aufweist, in welchem das Elektrodenblatt (5), der Heizkörper und die Übergangsröhre (1) aufgenommen sind.

5. Schnellheizspitze für eine Heißschmelzklebepistole gemäß einem der Ansprüche 1 bis 3, wobei die Schnellheizspitze für eine Heißschmelzklebepistole des Weiteren eine Schneide (13) aufweist, wobei die Schneide (13) in der Übergangsröhre (1) angeordnet ist, um einen Klebestab axial zu schneiden, wobei die Übergangsröhre (1) und die Schneide (13) Hitze leiten, um es der Schneide (13) zu ermöglichen, den Klebstoffstab zu schneiden.
6. Schnellheizspitze für eine Heißschmelzklebepistole gemäß Anspruch 5, wobei die Schneide (13) zumindest zwei Schneidblätter (131) aufweist, welche in einer radialen Weise verteilt sind, wobei die radialen inneren Enden der zumindest zwei Schneidblätter (131) miteinander verbunden sind und an einer zentralen Achse der Übergangsröhre (1) zusammengeführt sind, und wobei die radialen äußeren Enden der zumindest zwei Schneidblätter (131) Hitze mit der Übergangsröhre führen.
7. Schnellheizspitze für eine Heißschmelzklebepistole gemäß Anspruch 6, wobei eine Seite des Schneidblattes (131) entfernt von der Klebstoffausstoßdüse verengt ist, um eine Schneidkante zu bilden.
8. Schnellheizspitze für eine Heißschmelzklebepistole gemäß Anspruch 7, wobei die Schneide (13) und die Übergangsröhre (1) integral ausgebildet sind; oder die Schneide (13) und die Übergangsröhre (1) separat ausgebildet sind, wobei die Schneide (13) fest an der Übergangsröhre (1) montiert ist.
9. Heißschmelzklebepistole, umfassend eine Schnellheizspitze für eine Heißschmelzklebepistole gemäß einem der Ansprüche 1 bis 8.

Revendications

1. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible, comprenant un manchon de chargement de colle (3) et une buse de projection de colle (2), un tube de transition (1) étant formé entre la buse de projection de colle (2) et le manchon de chargement de colle (3) ; où la pointe de chauffage rapide destinée à un pistolet à colle thermofusible comprenant en outre une feuille d'électrode (5) et une pluralité de corps de chauffe, le tube de transition (1) comprenant une pluralité de plans conducteurs de chaleur (11), les plans conducteurs de chaleur (11) étant inclinés relative à une ligne axiale du

manchon de chargement de colle (3), et la feuille d'électrode (5) serrant ajustement les corps de chauffe vers des cotés extérieurs des plans conducteurs de chaleur (11),

caractérisée en ce que

la pointe de chauffage rapide destinée à un pistolet à colle thermofusible comprend en outre a une feuille connexion (9), et le tube de transition (1) est un conducteur, et le tube de transition (1) est connecté à un fil externe (7) via la feuille de connexion (9).

2. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon la revendication 1, où the corps de chauffe est une feuille de chauffe PTC (4).
3. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon la revendication 1, où tube de transition (1) est un tube d'aluminium.
4. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon l'une quelconque des revendications 1~3, où la pointe de chauffage rapide destinée à un pistolet à colle thermofusible comprend en outre une feuille d'isolation thermique (8) dans laquelle la feuille d'électrode (5), le corps de chauffe et le tube de transition (1) sont accommodés.
5. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon l'une quelconque des revendications 1~3, où la pointe de chauffage rapide destinée à un pistolet à colle thermofusible comprend en outre un coupeur (13), le coupeur (13) étant arrangé dans le tube de transition (1) pour couper en direction axiale un bâton de colle, le tube de transition (1) et le coupeur (13) conduisant de chaleur pour to aider le coupeur (13) à chauffer le bâton de colle.
6. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon la revendication 5, où the coupeur (13) comprend au moins deux lames coupantes (131) distribuées dans une façon radiale, des extrémités radiales intérieures des au moins deux lames coupantes (131) étant interconnectées et convergées à un axe central du tube de transition (1), et des extrémités radiales extérieures des au moins deux lames coupantes (131) conduisant la chaleur avec le tube de the transition.
7. Pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon la revendication 6, où un coté de la lame coupante (131) éloigné de la buse de projection de colle est aminci pour former un bord coupant.
8. Pointe de chauffage rapide destinée à un pistolet à

colle thermofusible selon la revendication 7, où le coupeur (13) and le tube de transition (1) sont formés intégralement ; ou le coupeur (13) et le tube de transition (1) sont formés séparément, le coupeur (13) étant monté de manière fixe dans le tube de transition (1). 5

9. Pistolet à colle thermofusible, comprenant une pointe de chauffage rapide destinée à un pistolet à colle thermofusible selon l'une quelconque des revendications 1~8. 10

15

20

25

30

35

40

45

50

55

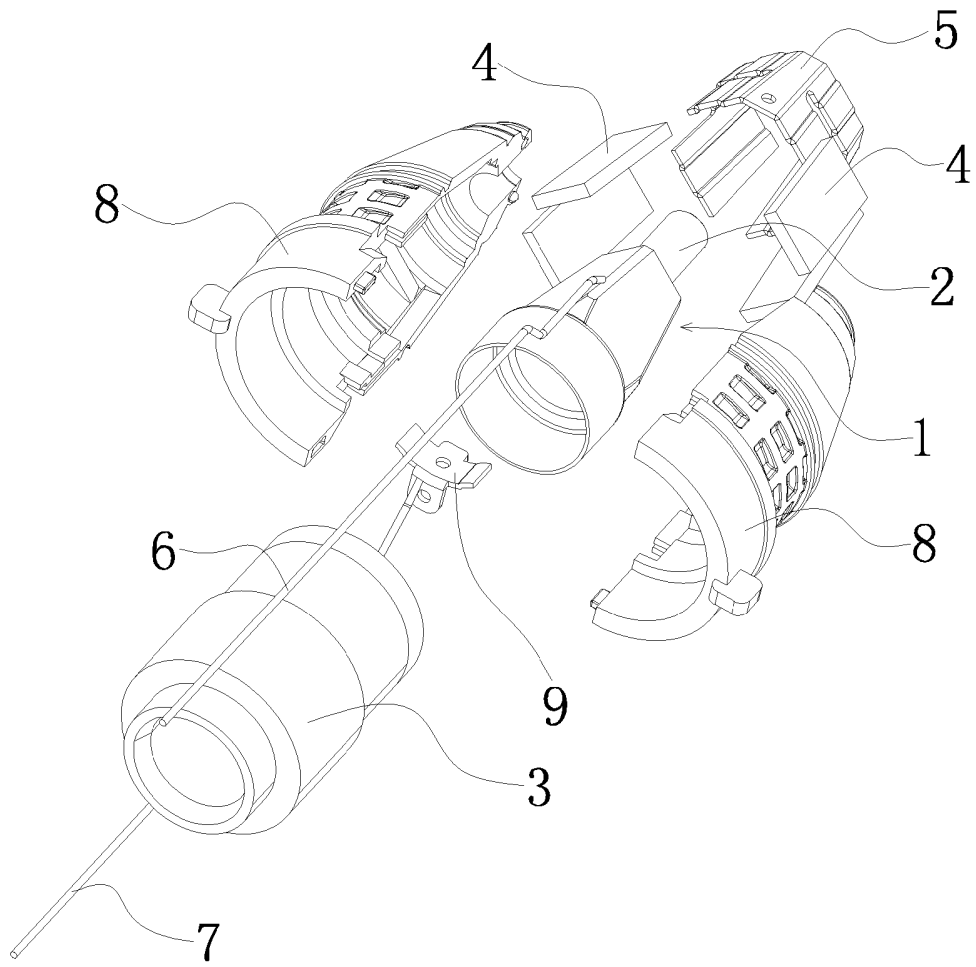


Fig. 1

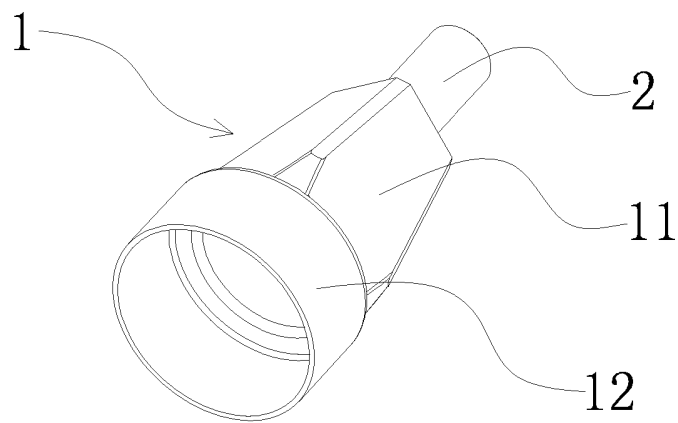


Fig. 2

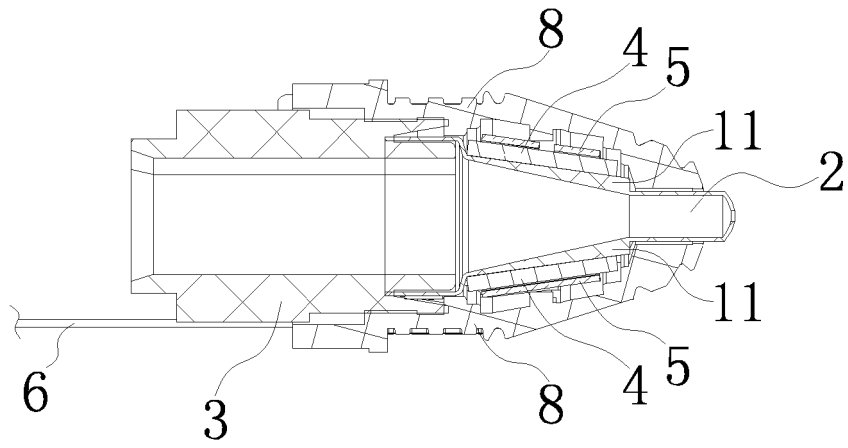


Fig. 3

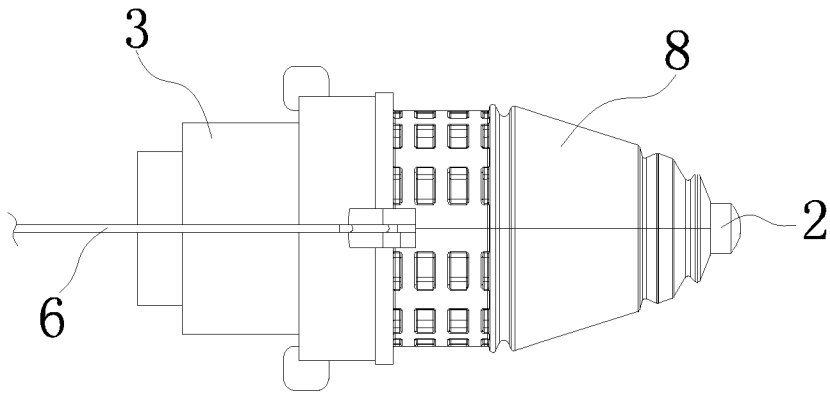


Fig. 4

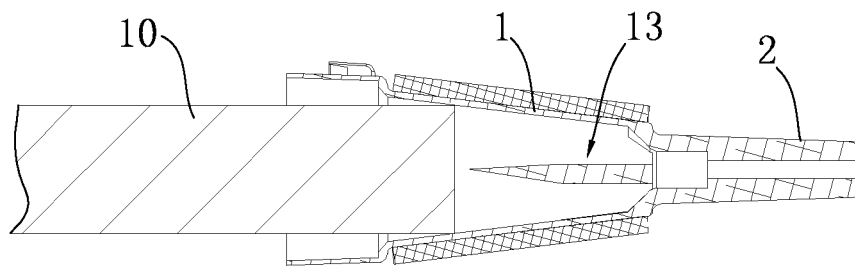


Fig. 5

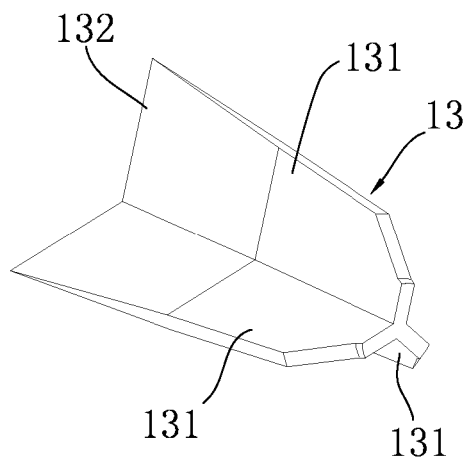


Fig. 6

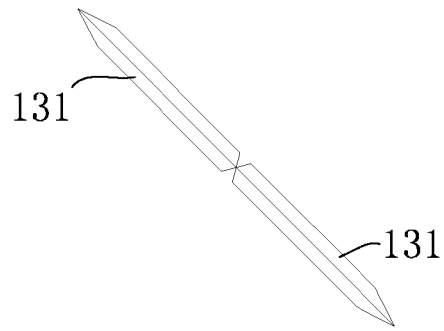


Fig. 7

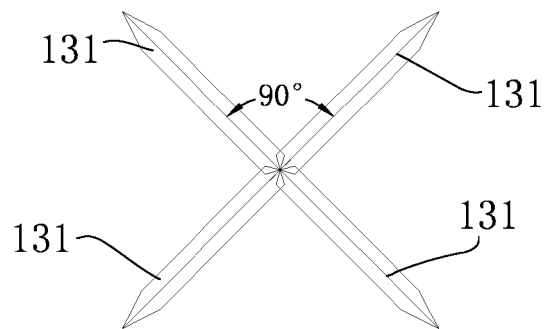


Fig. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6142207 A [0003]
- CN 205731892 U [0015]
- CN 205587248 U [0016]
- CN 203389820 U [0017]