



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2655063 C 2016/05/24

(11)(21) **2 655 063**

(12) **BREVET CANADIEN  
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2007/03/14  
(87) Date publication PCT/PCT Publication Date: 2008/01/03  
(45) Date de délivrance/Issue Date: 2016/05/24  
(85) Entrée phase nationale/National Entry: 2008/12/11  
(86) N° demande PCT/PCT Application No.: EP 2007/052391  
(87) N° publication PCT/PCT Publication No.: 2008/000528  
(30) Priorité/Priority: 2006/06/26 (DE10 2006 029 613.3)

(51) Cl.Int./Int.Cl. *B32B 27/30* (2006.01),  
*B32B 27/40* (2006.01)


(72) **Inventeurs/Inventors:**  
HOESS, WERNER, CN;  
ZIETEK, MICHAEL, DE;  
ENDERS, MICHAEL, DE;  
EBERLE, CHRISTIAN, DE;  
SCHROEBEL, SVEN, DE;  
ALBRECHT, KLAUS, DE;  
BLASS, RUDOLF, DE;  
...

(73) **Propriétaire/Owner:**  
EVONIK ROEHM GMBH, DE

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA

(54) Titre : COMPOSITE TRANSPARENT A BASE DE MATIERES PLASTIQUES

(54) Title: TRANSPARENT PLASTICS COMPOSITE

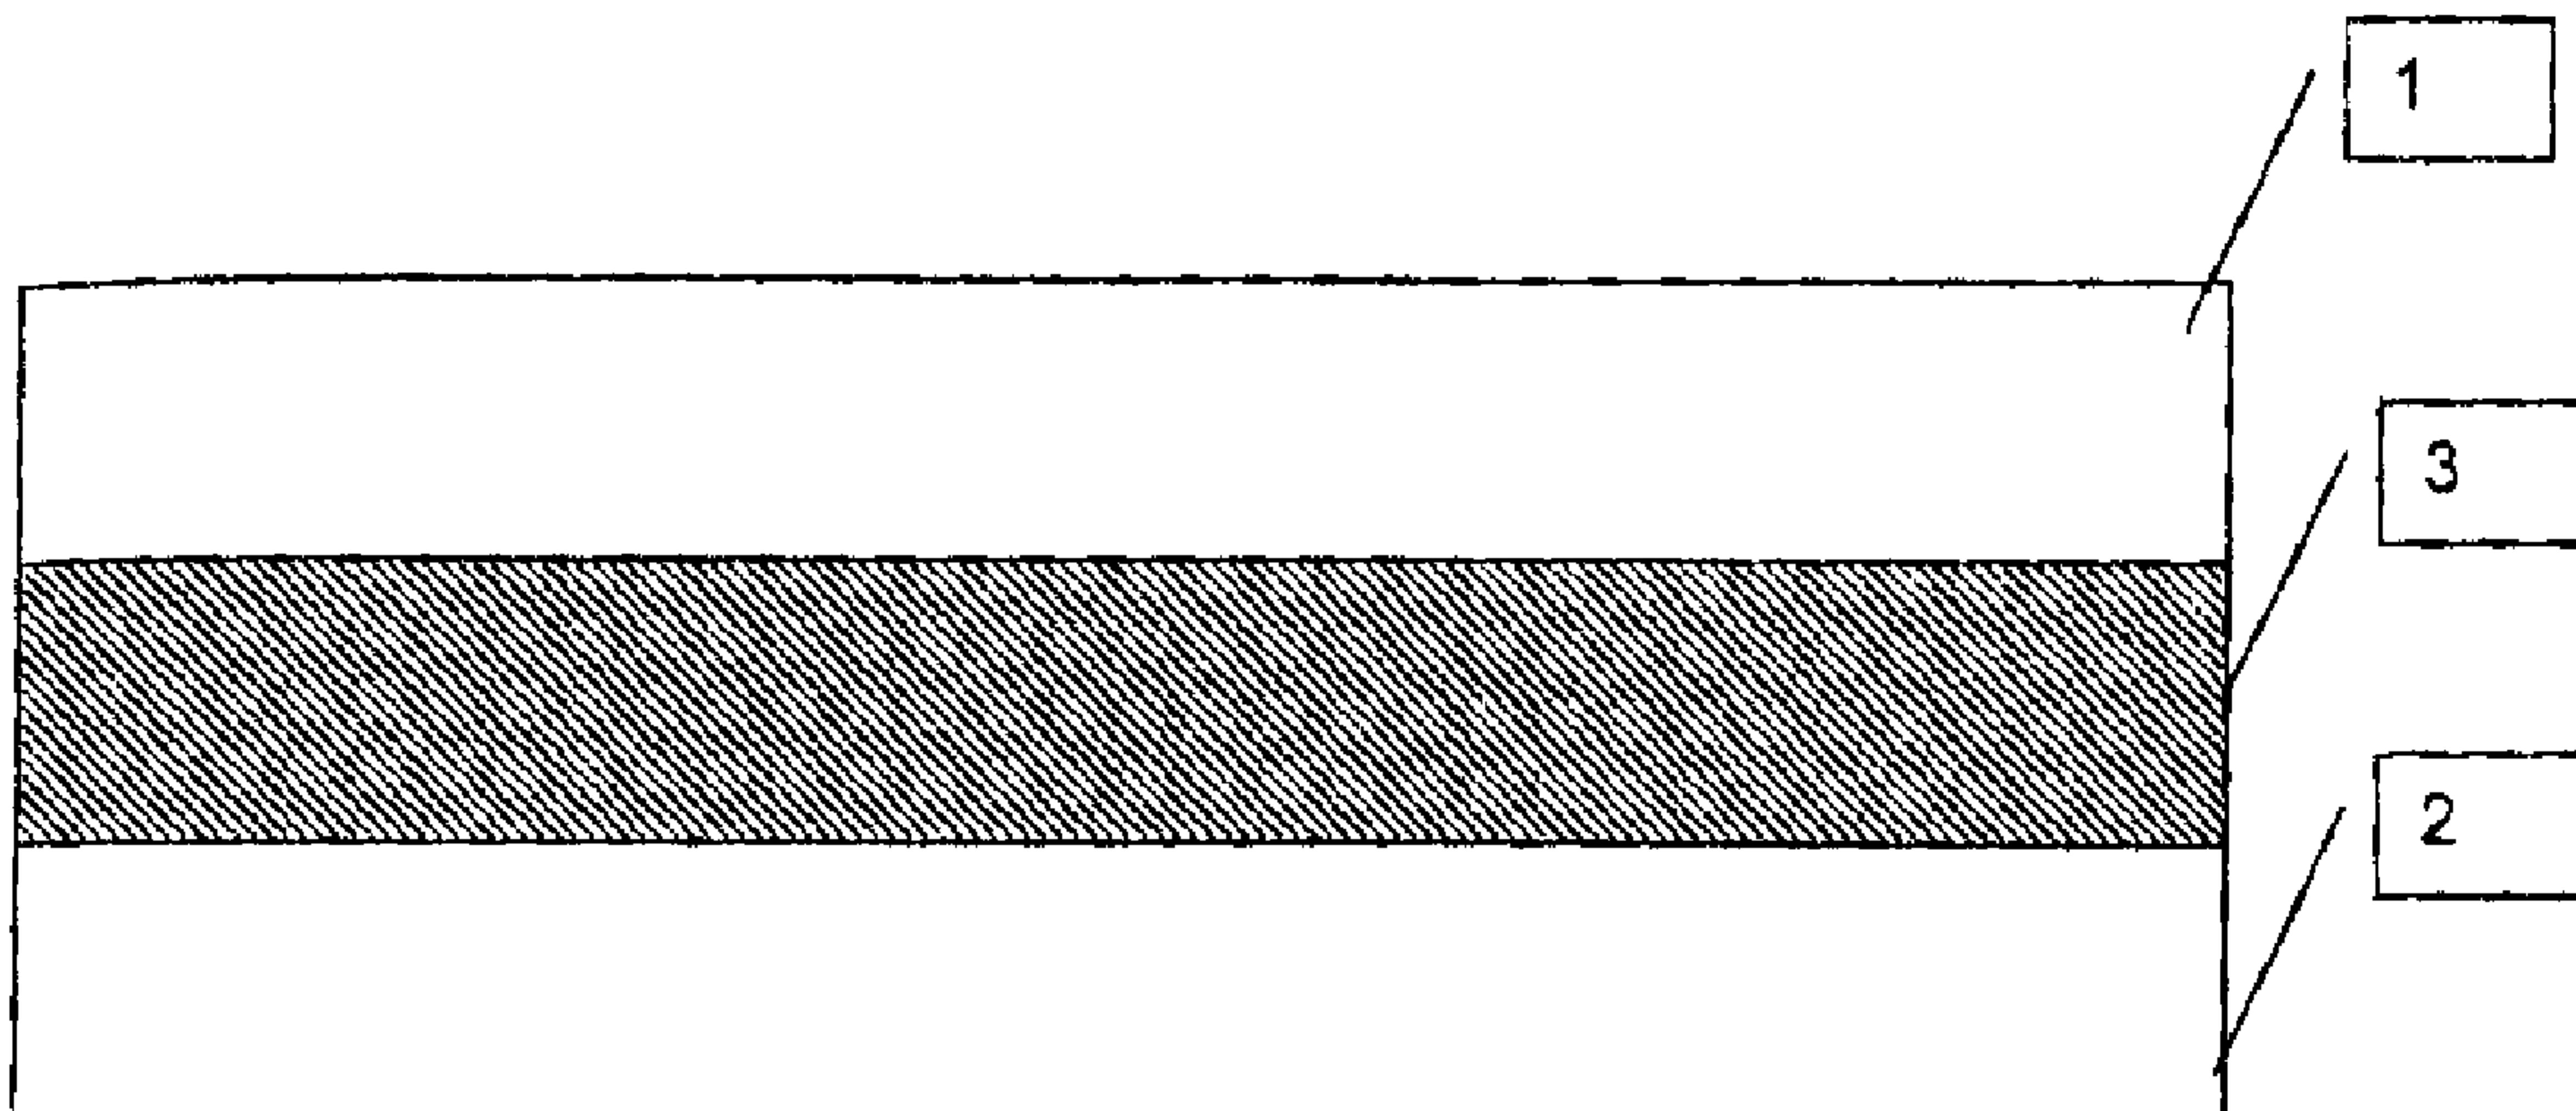

**(57) Abrégé/Abstract:**

The invention describes a transparent plastics composite composed of poly (meth) acrylate and TPU with excellent mechanical properties.

(72) Inventeurs(suite)/Inventors(continued): SCHULTES, KLAUS, DE; SCHMIDT, ARNE, DE

(74) Agent(suite/continued): LLP/S.E.N.C.R.L., S.R.L.

**Abstract**

The invention describes a transparent plastics composite composed of poly (meth) acrylate and TPU with excellent mechanical properties.

**Transparent plastics composite****Subject matter of the invention**

5 The subject matter of the invention is a plastics composite. The composite is composed by way of example of three layers, where the two external layers are composed of transparent polymethyl methacrylate (PMMA) and the inner layer is composed of a thermoplastic  
10 polyurethane (TPU). The plastics composite passes the ECE R43 (Annex 3, 2) falling-ball test and, when compared with standard plastics of identical dimensions, has improved acoustic properties.

**15 Prior art**

EP 1 577 084 (KRD Coatings GmbH) describes a plastics composite sheet for vehicle glazing with an internal side and with an external side, where the internal side  
20 is composed of polycarbonate (PC) and the external side is composed of poly(meth)acrylate (PMMA). The intermediate layer, intended to absorb the different coefficients of thermal expansion of the plastics PC and PMMA, is composed of a thermoplastic polyurethane  
25 (TPU). No data concerning mechanical strength are stated.

WO 02/47908 (VTEC Technologies) describes a glazing element composed of three layers of different plastics, where one layer is composed of PMMA, the intermediate layer is composed of a polyurethane (PU) or of polyvinyl butyral (PVB), and the further layer is composed of PC. The external sides of the glazing element have a scratch-resistant coating. There are no  
30 data concerning the mechanical strength or other mechanical properties of the glazing element, other than data on scratch resistance.

WO 96/13137 (Decoma International) describes a glazing element which is intended for vehicles and into which heating elements have been integrated, as in the rear windows of vehicles, for example. There are no data 5 concerning mechanical strength.

### Object

In principle, single-layer glazing composed of PC could 10 comply with the mechanical requirements of ECE R43 even without TPU or PMMA layer. However, these sheets have to be provided with a scratch-resistant and UV-resistant layer. The production process here causes very high rejection rates, and this is highly 15 uneconomic. Furthermore, UV-resistant coating and scratch-resistant coating are applied together in one layer to the PC, and this in turn reduces the scratch resistance of the system. A solution described for this comprises systems in which the PC is finished with an 20 outer layer composed of UV-resistant PMMA. A layer composed of TPU or PVB serves here as bonding layer and in essence has the function of generating adhesion between PC and PMMA layer. Furthermore, the TPU layer in these systems has the function of compensating, via 25 its high elasticity, for the different coefficients of linear expansion of the two materials (PC and PMMA). This type of layer also provides an opportunity of integrating heating wires for rear-window heating systems. Straight PMMA sheets do not pass the falling- 30 ball test.

It is an object of the invention to provide a transparent plastics composite which passes the ECE R43 (Annex 3, 2) falling-ball test and, when compared with 35 standard plastics composites of the same dimensions, has improved acoustic properties.

**Summary of the Invention**

In one aspect, there is provided a plastic composite,  
5 comprising: a first poly(meth)acrylate layer; a second  
poly(meth)acrylate layer; and a layer comprising a  
thermoplastic polyurethane provided in a sandwich  
construction between the first poly(meth)acrylate layer  
and the second poly(meth)acrylate layer, wherein the first  
10 poly(meth)acrylate layer is free of copolymerized 1-alkene  
monomer and of polyurethane elastomers; the second  
poly(meth)acrylate layer is free of copolymerized 1-alkene  
monomer and of polyurethane elastomers; a thickness of the  
first poly(meth)acrylate layer is from 0.5 to 6 mm; a  
15 thickness of the second poly(meth)acrylate layer is from  
0.5 to 6 mm; and a thickness of the layer comprising the  
thermoplastic polyurethane is from 0.5 to 5 mm.

**Brief Description of the Drawings**

20 Figure 1 illustrates a plastics composite of an embodiment  
of present invention, wherein (1) is PMMA, (2) is PMMA and  
(3) is TPU.

**Detailed Description**

The inventive plastics composite is composed of at least three layers composed of plastics, where the two external layers (1) and (2) are composed of transparent polymethyl methacrylate (PMMA) and the inner layer is 5 composed of a thermoplastic polyurethane (TPU) (3) (see Figure 1).

Layer thicknesses of (1) and (2) can be in the range from 0.5 to 6 mm, preferably from 1 mm to 3 mm, and 10 those of (3) can be in the range from 0.5 to 5 mm, preferably from 0.5 to 1.5 mm. The layer thicknesses of (1) and (2) may be identical or different. It is preferable that the external side of the plastics composite has been designed to be thicker than the 15 internal side of the plastics composite.

In principle it is also conceivable to produce a non-transparent, coloured variant of the material and to use it as bodywork add-on parts. The two external 20 layers (1) and (2) composed of transparent polymethyl methacrylate (PMMA) can in turn themselves, if appropriate, be composed of a composite composed of at least two layers composed of PMMA.

25 Furthermore, the layers (1) and (2) can be composed of blends of PMMA and TPU, of PMMA and styrene-acrylonitrile copolymers (SAN), or of blends composed of PMMA and of impact-modified PMMA. Polymethyl methacrylate (PMMA), impact-modified PMMA (imPMMA),

30 blends composed of PMMA or composed of imPMMA and of fluorine polymers, e.g. polyvinylidene fluoride (PVDF), where the mixing ratio between PMMA or imPMMA and PVDF is, for example, from 10:90 to 90:10 parts by weight.

35 The composite can also, if appropriate, be provided with a scratch-resistant layer and with further functional layers.

5 The two external layers (1) and (2) composed of transparent polymethyl methacrylate (PMMA) can have been provided with UV absorbers, with UV stabilizers, with IR-reflective pigments and additives or a mixture thereof.

The advantages of the invention are that the PMMA/TPU/PMMA composite system

- 10 • meets the mechanical requirements of ECE R43, in particular the falling-ball test, without a polycarbonate layer.
- 15 • has better acoustic properties when compared with a single-layer plastics sheet with comparable dimensions.
- unlike PC composite systems, does not have to be equipped with a combined UV- and scratch-resistant layer.
- 20 • unlike impact-resistant PMMA variants, does not become turbid even when subjected to a rising or falling temperature.
- when compared with PC, has better modulus of elasticity (better stiffness) and
- 25 • unlike PC/TPU/PMMA composites, generates no problems with internal stresses (induced via different coefficients of linear expansion).

**Production of composite:**

30 Variant 1:

The composite sheet was produced via hot pressing of (1) 300 x 300 x 2 mm PLEXIGLAS® XT20700 glass-clear, (3) 300 x 300 x 1 mm TPU foil (Krystalflex™ PE 429 or 35 PE 501, Huntsman) and (2) 300 x 300 x 2 mm PLEXIGLAS® XT 20700. The press temperature was from 80°C to 140°C, and the heating time was from 30 to 60 sec, and the pressure was from 10 to 100 kN and was applied for from

20 to 60 sec. PLEXIGLAS<sup>®</sup> XT grades are marketed by Röhm GmbH.

Variant 2

5

It is also conceivable that the composite is produced via a 3-component injection-moulding process. A possible method here uses a decorative effect to print on a PLEXIGLAS<sup>®</sup> foil, which is then reverse-coated with 10 TPU and PMMA by an injection-moulding process.

Variant 3

15 A further possibility produces the inventive plastics moulding by using PMMA (2) for reverse coating by an injection-moulding process on a laminate composed of a PMMA foil or PMMA sheet (1) and a TPU foil (3).

**Materials used**

20

**PMMA**

25 A preferred plastic for the plastics composite encompasses poly(meth)acrylates. These polymers are generally obtained via free-radical polymerization of mixtures which comprise (meth)acrylates. The expression (meth)acrylates encompasses methacrylates and acrylates and mixtures of the two.

30 These monomers are well known. They include (meth)acrylates derived from saturated alcohols, for example methyl acrylate, ethyl (meth)acrylate, propyl (meth)acrylate, n-butyl (meth)acrylate, tert-butyl (meth)acrylate, pentyl (meth)acrylate and 2-ethylhexyl (meth)acrylate; (meth)acrylates derived from unsaturated alcohols, for example oleyl (meth)acrylate, 2-propynyl (meth)acrylate, allyl (meth)acrylate, vinyl (meth)acrylate; aryl (meth)acrylates, such as benzyl (meth)acrylate or phenyl (meth)acrylate, where in each

case the aryl radicals may be unsubstituted or have up to four substituents; cycloalkyl (meth)acrylates, such as 3-vinylcyclohexyl (meth)acrylate, bornyl (meth)acrylate; hydroxyalkyl (meth)acrylates, such as 5 3-hydroxypropyl (meth)acrylate, 3,4-dihydroxybutyl (meth)acrylate, 2-hydroxyethyl (meth)acrylate, 2-hydroxypropyl (meth)acrylate; glycol di(meth)-acrylates, such as 1,4-butanediol (meth)acrylate, (meth)acrylates of ether alcohols, for example tetra-10 hydrofurfuryl (meth)acrylate, vinyloxyethoxyethyl (meth)acrylate; amides and nitriles of (meth)acrylic acid, for example N-(3-dimethylaminopropyl)-(meth)acrylamide, N-(diethylphosphono)(meth)acrylamide, 1-methacryloylamido-2-methyl-2-propanol; sulphur-15 containing methacrylates, such as ethylsulphinylethyl (meth)acrylate, 4-thiocyanatobutyl (meth)acrylate, ethylsulphonylethyl (meth)acrylate, thiocyanatomethyl (meth)acrylate, methylsulphinylmethyl (meth)acrylate, bis((meth)acryloyloxyethyl) sulphide; polyfunctional 20 (meth)acrylates, such as trimethyloylpropane tri(meth)acrylate.

According to a preferred aspect of the present invention, these mixtures comprise at least 40% by 25 weight, preferably at least 60% by weight, and particularly preferably at least 80% by weight of methyl methacrylate, based on the weight of the monomers.

30 Besides the abovementioned (meth)acrylates, the compositions to be polymerized may also comprise other unsaturated monomers copolymerizable with methyl methacrylate and the abovementioned (meth)acrylates.

35 They include 1-alkenes, such as 1-hexene, 1-heptene; branched alkenes, such as vinylcyclohexane, 3,3-di-methyl-1-propene, 3-methyl-1-diisobutylene, 4-methyl-1-pentene; acrylonitrile; vinyl esters, such as vinyl acetate; styrene, substituted styrenes having an alkyl

substituent in the side chain, e.g.  $\alpha$ -methylstyrene and  $\alpha$ -ethylstyrene, substituted styrenes having an alkyl substituent on the ring, such as vinyltoluene and p-methylstyrene, halogenated styrenes, such as mono-  
5 chlorostyrenes, dichlorostyrenes, tribromostyrenes and tetrabromostyrenes; heterocyclic vinyl compounds, such as 2-vinylpyridine, 3-vinylpyridine, 2-methyl-5-vinylpyridine, 3-ethyl-4-vinylpyridine, 2,3-dimethyl-5-vinylpyridine, vinylpyrimidine, vinylpiperidine,  
10 9-vinylcarbazole, 3-vinylcarbazole, 4-vinylcarbazole, 1-vinylimidazole, 2-methyl-1-vinylimidazole, N-vinylpyrrolidone, 2-vinylpyrrolidone, N-vinylpyrrolidine, 3-vinylpyrrolidine, N-vinylcaprolactam, N-vinylbutyrolactam, vinylloxolane, vinylfuran, vinylthiophene,  
15 vinylthiolane, vinylthiazoles and hydrogenated vinylthiazoles, vinylloxazoles and hydrogenated vinylloxazoles; vinyl and isoprenyl ethers; maleic acid derivatives, such as maleic anhydride, methylmaleic anhydride, maleimide, methylmaleimide; and dienes, such  
20 as divinylbenzene.

The amount generally used of these comonomers is from 0 to 60% by weight, preferably from 0 to 40% by weight, and particularly preferably from 0 to 20% by weight,  
25 based on the weight of the monomers, and these compounds may be used individually or in the form of a mixture.

The polymerization is generally initiated using known free-radical initiators. Among the preferred initiators are, inter alia, the azo initiators well-known to the person skilled in the art, for example AIBN and 1,1-azobiscyclohexanecarbonitrile, and also peroxy compounds, such as methyl ethyl ketone peroxide, 35 acetylacetone peroxide, dilauroyl peroxide, tert-butyl 2-ethylperhexanoate, ketone peroxide, methyl isobutyl ketone peroxide, cyclohexanone peroxide, dibenzoyl peroxide, tert-butyl peroxybenzoate, tert-butylperoxy-isopropyl carbonate, 2,5-bis(2-ethylhexanoylperoxy)-

2,5-dimethylhexane, tert-butyl 2-ethylperoxyhexanoate, tert-butyl 3,5,5-trimethylperoxyhexanoate, dicumyl peroxide, 1,1-bis(tert-butylperoxy)cyclohexane, 1,1-bis(tert-butylperoxy)-3,3,5-trimethylcyclohexane, cumyl hydroperoxide, tert-butyl hydroperoxide, bis(4-tert-butylcyclohexyl) peroxydicarbonate, and UV initiators such as 1,2-diphenyl-2,2-dimethoxyethanone, mixtures of two or more of the abovementioned compounds with one another, and also mixtures of the abovementioned compounds with compounds not mentioned but likewise capable of forming free radicals.

The amount often used of these compounds is from 0.01 to 10% by weight, preferably from 0.5 to 3% by weight, based on the weight of the monomers.

The abovementioned polymers can be used individually or as a mixture.

The inventive plastics sheets can by way of example be produced from moulding compositions of the abovementioned polymers. Thermoplastic shaping processes, such as extrusion or injection moulding, are usually used here.

The weight-average molar mass  $M_w$  of the homo- and/or copolymers to be used according to the invention as moulding compositions for producing the plastics sheets may vary within a wide range, the molar mass usually being matched to the intended use and to the mode of processing of the moulding composition. However, it is generally in the range from 20 000 to 1 000 000 g/mol, preferably from 50 000 to 500 000 g/mol and particularly preferably from 80 000 to 300 000 g/mol, with no intended resultant restriction.

Particularly preferred moulding compositions which encompass poly(meth)acrylates are available

commercially from Röhm GmbH with the trademark PLEXIGLAS® XT.

The plastics sheets particularly preferable encompass 5 at least 80% by weight, in particular at least 90% by weight, of poly(meth)acrylates, based on the total weight of the sheet. It is particularly preferable that the plastics sheets are composed of polymethyl methacrylate, and this polymethyl methacrylate can 10 comprise conventional additives. These plastics sheets composed of polymethyl methacrylate are commercially available inter alia from Röhm GmbH with the trademark PLEXIGLAS® XT.

15 The plastics sheets can moreover be produced via cell casting processes. Here, by way of example, suitable acrylic resin mixtures are placed in a mould and polymerized. Sheets thus produced are commercially available from Röhm GmbH with the trademark 20 PLEXIGLAS® GS.

### Additives

The moulding compositions to be used for production of 25 the plastics sheets can moreover, as also can the acrylic resins, comprise conventional additives of any type. Among these are inter alia antistatic agents, antioxidants, mould-release agents, flame retardants, lubricants, dyes, flow improvers, fillers, light 30 stabilizers and organophosphorus compounds, such as phosphites or phosphonates, pigments, weathering stabilizers and plasticizers. However, the amount of additives is subject to restriction relevant to the intended use.

35

These sheets can be transparent or coloured sheets. Colouring of the sheets can by way of example be achieved via dyes or pigments. Accordingly, any desired plastics sheets can be combined with one another

according to the process of the present invention. By way of example, it is possible to combine PLEXIGLAS® XT sheets with PLEXIGLAS® GS sheets and/or PLEXIGLAS® GS sheets with PLEXIGLAS® SZ sheets and/or PLEXIGLAS® LSW sheets with PLEXIGLAS® XT sheets, and it is possible here to combine a colourless sheet with a coloured sheet or to combine two colourless sheets or to combine two coloured sheets with one another.

## 10 **Fluorine polymers**

For the purposes of the present invention, fluorine polymers are polymers which can be obtained via free-radical polymerization of olefinically unsaturated monomers which have at least one fluorine substituent at their double bond. Copolymers are also included here. These copolymers can contain, alongside one or more fluorine-containing monomers, further monomers which are copolymerizable with these fluorine-containing monomers.


Among the fluorine-containing monomers are inter alia chlorotrifluoroethylene, fluorovinylsulphonic acid, hexafluoroisobutylene, hexafluoropropylene, perfluorinated vinyl methyl ether, tetrafluoroethylene, vinyl fluoride and vinylidene fluoride. Among these, particular preference is given to vinylidene fluoride.

## **Thermoplastic polyurethane**

30 The thermoplastic polyurethane used comprises a product having aliphatic or aromatic units within the compound.


Polyurethanes (PUs) are polymers whose macromolecules 35 have linkage of the repeat units via urethane groups -NH-CO-O-. Polyurethanes are generally obtained via polyaddition from di- or polyhydric alcohols and isocyanates according to

- 11 -

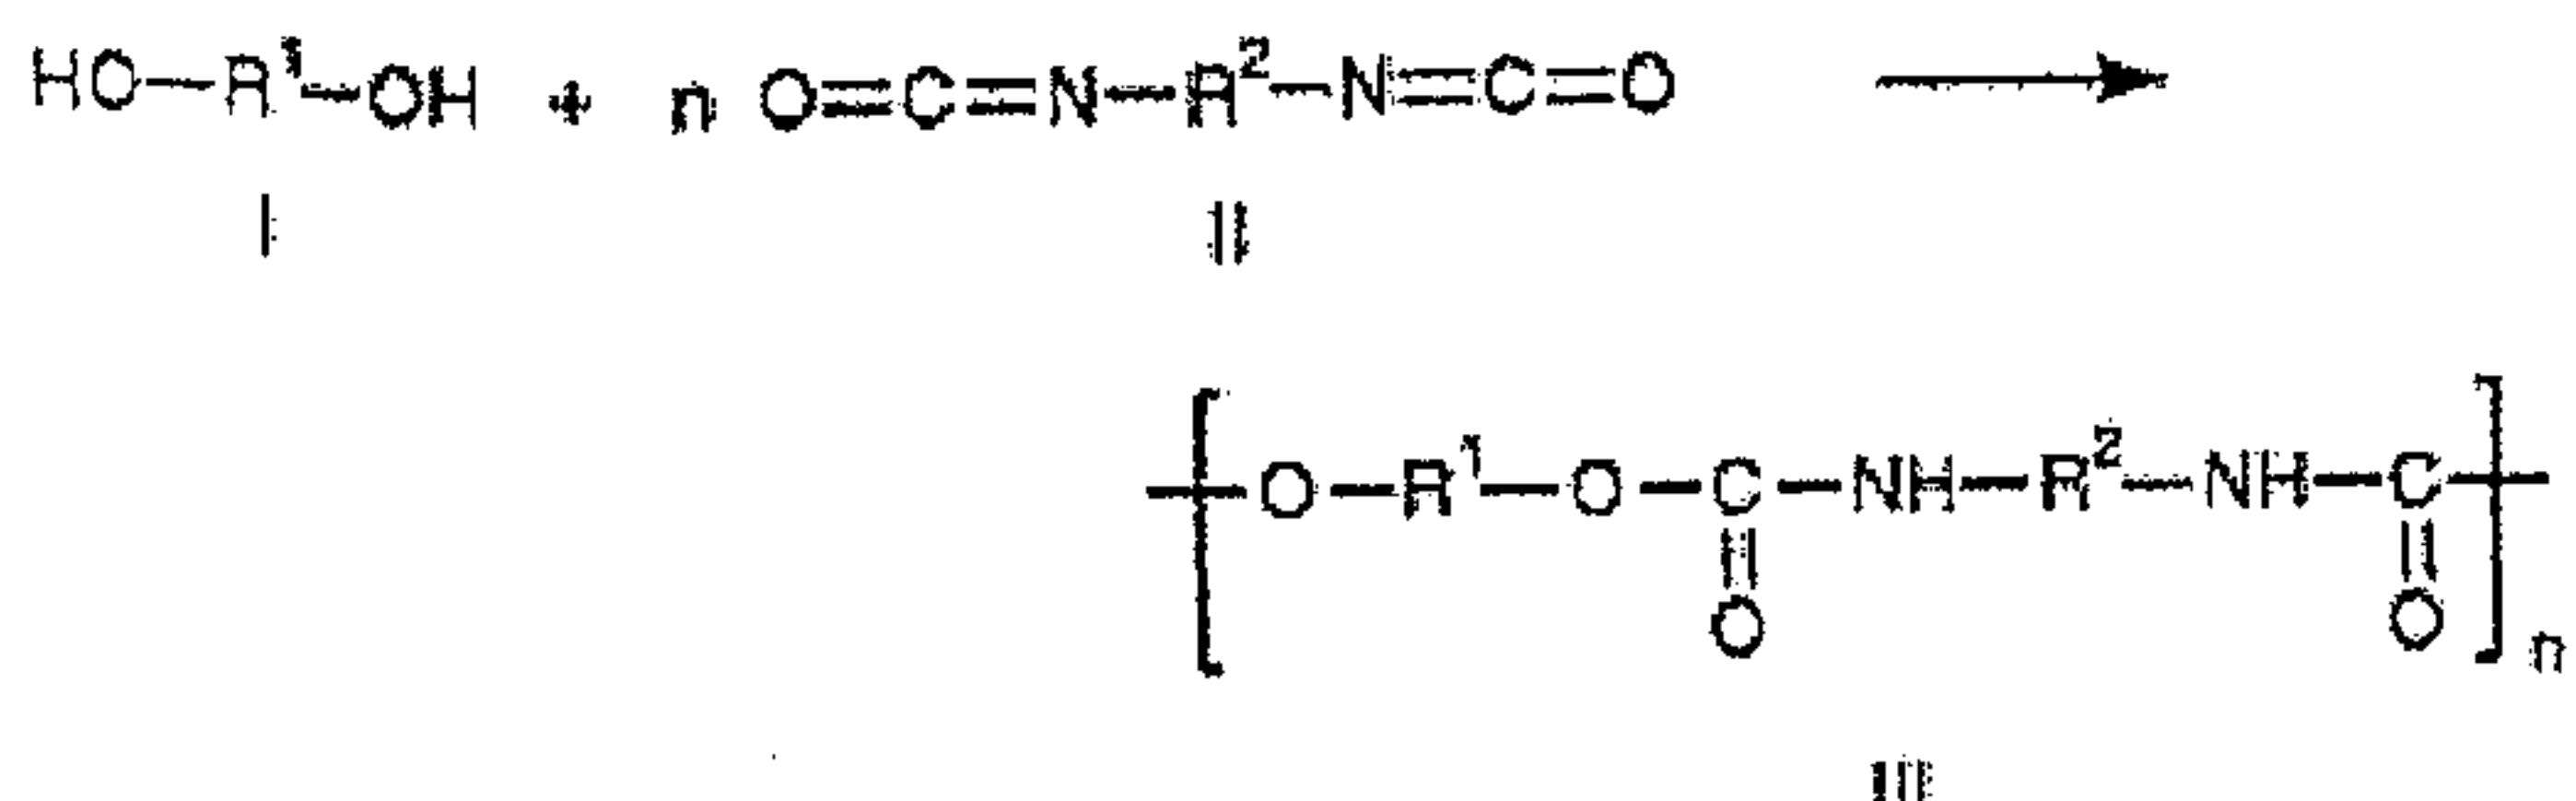


R<sub>1</sub> and R<sub>2</sub> here can be low-molecular-weight or even polymeric aliphatic or aromatic groups. Industrially important PUs are produced from polyesterdiols and/or 5 polyetherdiols and, for example, tolylene 2,4- or 2,6-diisocyanate (TDI, R<sup>2</sup> = C<sub>6</sub>H<sub>3</sub>-CH<sub>3</sub>), 4,4'-methylenediphenylisocyanate (MDI, R<sup>2</sup> = C<sub>6</sub>H<sub>4</sub>-CH<sub>2</sub>-C<sub>6</sub>H<sub>4</sub>), 4,4'-methylenedicyclohexyl isocyanate (HMDI, R<sup>2</sup> = C<sub>6</sub>H<sub>10</sub>-CH<sub>2</sub>-C<sub>6</sub>H<sub>10</sub>) or hexamethylene diisocyanate [HDI, R<sup>2</sup> = 10 (CH<sub>2</sub>)<sub>6</sub>].

The PUs can generally be synthesized without solvent or in inert organic solvents. Certain amines or organotin compounds are widely used as catalysts for the 15 polyaddition reaction. Use of equimolar ratios of difunctional alcohols and isocyanates leads to linear PUs. If starting materials of higher functionality are used or else if there is an excess of isocyanate, branched and crosslinked products are produced, where 20 isocyanate groups react with the urethane groups or urea groups to form allophanate structures or, respectively, biuret structures, e.g.:

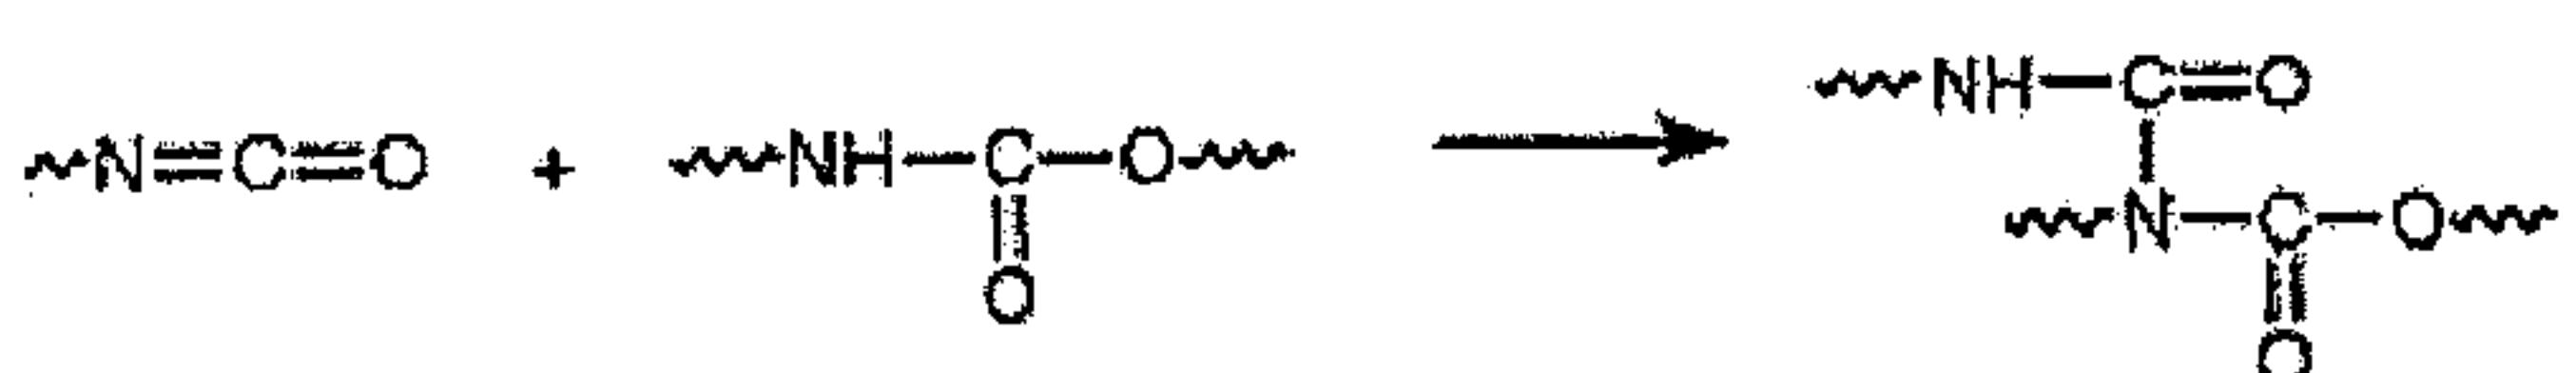

25 allophanate structure

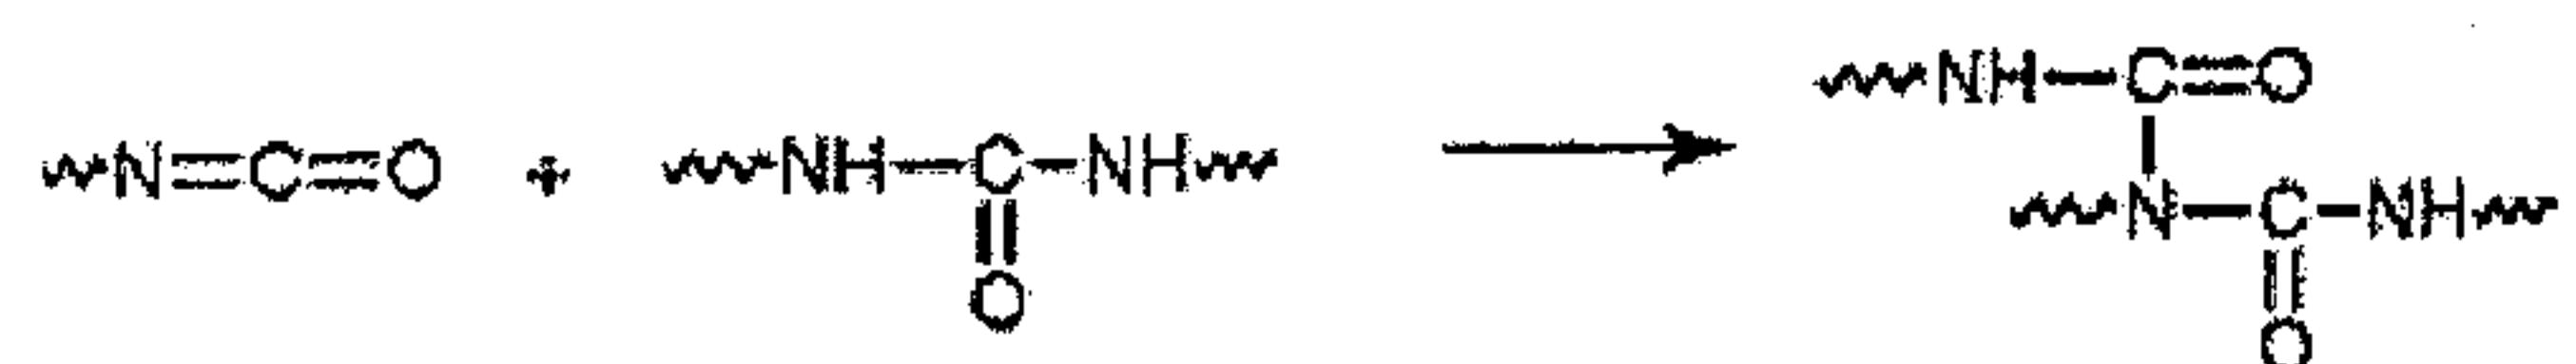

biuret structure

30 As a function of the selection and stoichiometric ratio of the starting materials, PUs with very different mechanical properties are produced, these being used as

constituents of adhesives and of coatings (polyurethane resins), as ionomers, as thermoplastic material for bearing parts, rollers, tyres, and rolls, and as elastomers of varying hardness in fibre form (elastic fibres, PUE being the abbreviation for these elastane or spandex fibres) or as polyether- or polyester-urethane rubber (the abbreviation to DIN ISO 1629: 1981-10 being EU and, respectively, AU), as thermoset casting resins (including those which are glass-fibre-reinforced), etc., and also as foam plastics; see also polyurethane rubbers, polyurethane coatings, polyurethane resins. PUs have moreover been described inter alia in Kunststoffe 85, 1616 (1995), Batzer 3, 158-170 Batzer 3, 158-170; Domininghaus (5.), pp. 1140 et seq.; Encycl. Polym. Sci. Eng. 13, 243-303; Houben-Weyl E 20/2, 1561-1721.

#### Infrared-reflective pigments

20 By using various infrared-reflective, inorganic colour pigments in PMMA moulding compositions it is possible to use these moulding compositions to produce dark-coloured plastics mouldings and to coat other plastics mouldings with the abovementioned PMMA moulding compositions, these having a markedly lower rate of heating on insolation than mouldings which are composed of conventionally dark-coloured PMMA or have been coated therewith.

25

30 The following pigments can be used, for example:

CAS number	C.I. name	C.I. number	Chemical name
68186-85-6	C.I. Pigment Green 50	C.I. 77377	Cobalt titanite green spinel
1308-38-9	C.I. Pigment Green 17	C.I. 77288	Chromium oxide
109414-04-2	C.I. Pigment Brown 29		Chromium iron oxide

68187-09-7	C.I. Pigment Brown 35	C.I. 77501	Iron chromite brown spinel
71631-15-7	C.I. Pigment Black 30	C.I. 77504	Nickel iron chromite black spinel

C.I. nomenclature from Colour Index, The Society of Dyers and Colourists (SDC)

### **Studies on specimens**

5

Samples produced from Variant 1 successfully passed the ECE R43 (Annex 3, paragraph 2.1 and Annex 14, paragraph 5) falling-ball test.

10 The drop height of the ball was 4.37 m, the weight of the ball was 225 g and its diameter was 38 mm. In each case, 5 specimens were tested at 23 degrees Celsius and five specimens were tested at -18 degrees Celsius.

15 Results: In none of the tested samples did the ball penetrate the material, and no splintering of fragments occurred. The test was passed.

20 In comparison with the measurements at higher temperature, an exploratory experiment at minus 40 degrees specimen temperature gave markedly shorter cracks in the test specimen.

## Claims

1. A plastic composite, comprising:

a first poly(meth)acrylate layer;

a second poly(meth)acrylate layer; and

a layer comprising a thermoplastic polyurethane provided in a sandwich construction between the first poly(meth)acrylate layer and the second poly(meth)acrylate layer,

wherein the first poly(meth)acrylate layer is free of copolymerized 1-alkene monomer and of polyurethane elastomers;

the second poly(meth)acrylate layer is free of copolymerized 1-alkene monomer and of polyurethane elastomers;

a thickness of the first poly(meth)acrylate layer is from 0.5 to 6 mm;

a thickness of the second poly(meth)acrylate layer is from 0.5 to 6 mm; and

a thickness of the layer comprising the thermoplastic polyurethane is from 0.5 to 5 mm.

2. The plastic composite according to claim 1, wherein a scratch-resistant layer is provided on at least one of a surface of the first poly(meth)acrylate layer opposite from the layer comprising the thermoplastic polyurethane and a surface of the second poly(meth)acrylate layer opposite from the layer comprising the thermoplastic polyurethane.

3. Use of the plastic composite according to claim 1 or 2 as a glazing.

4. Use of the plastic composite according to claim 1 or 2 as component for a noise barrier.
5. The plastic composite according to claim 1, wherein at least one of the first poly(meth)acrylate layer and the second poly(meth)acrylate layer is colored.
6. The plastic composite according to claim 1, wherein at least one of the first poly(meth)acrylate layer and the second poly(meth)acrylate layer comprises an IR-reflective pigment.
7. The plastic composite according to claim 1, wherein at least one of the first poly(meth)acrylate layer and the second poly(meth)acrylate layer comprises a UV absorber.
8. The plastic composite according to claim 1, wherein at least one of the first poly(meth)acrylate layer and the second poly(meth)acrylate layer comprises an impact modifier.
9. Use of the plastic composite according to any one of claims 1, 2, 5, 6, 7 and 8 for a bodywork construction.
10. A bodywork component, equipped with the plastic composite according to any one of claims 1, 2, 5, 6, 7 and 8.
11. A process for production of the plastic composite according to claim 1, comprising:  
coating of the first poly(meth)acrylate layer with the layer comprising a thermoplastic polyurethane and the second poly(meth)acrylate layer by an injection molding process.


12. The plastic composite according to claim 1, wherein a thickness of the first poly(meth)acrylate layer and a thickness of the second poly(meth)acrylate layer are the same.


13. A process for production of the plastic composite according to claim 1, comprising:

coating of a laminate of the first poly(meth)acrylate layer and the layer comprising a thermoplastic polyurethane with the second poly(meth)acrylate layer by an injection molding process.

1/1

Figure 1

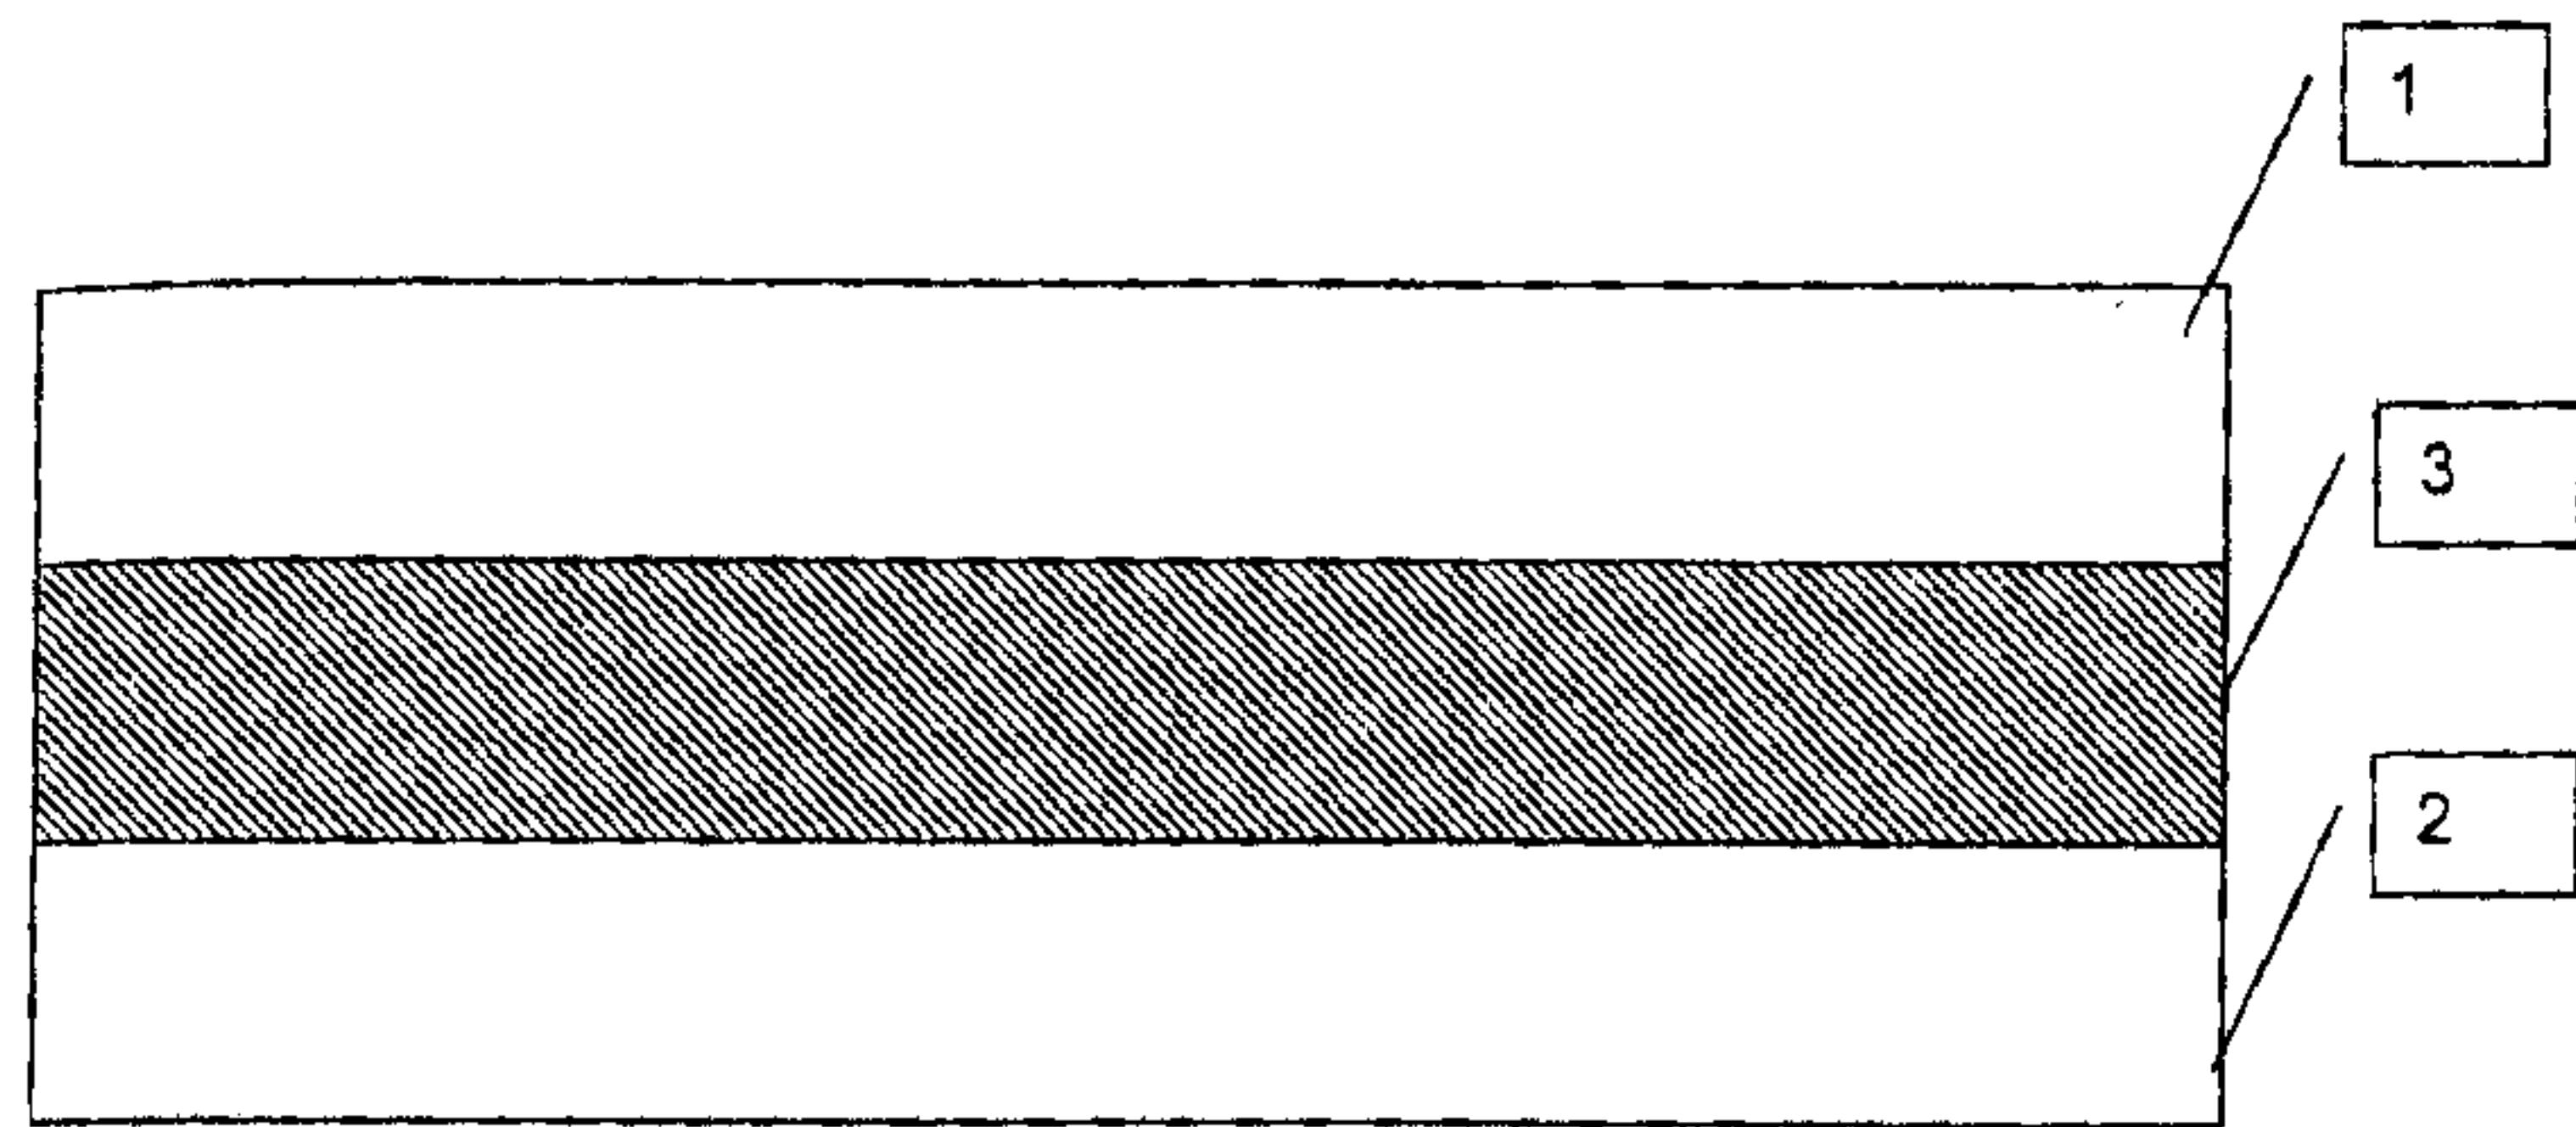

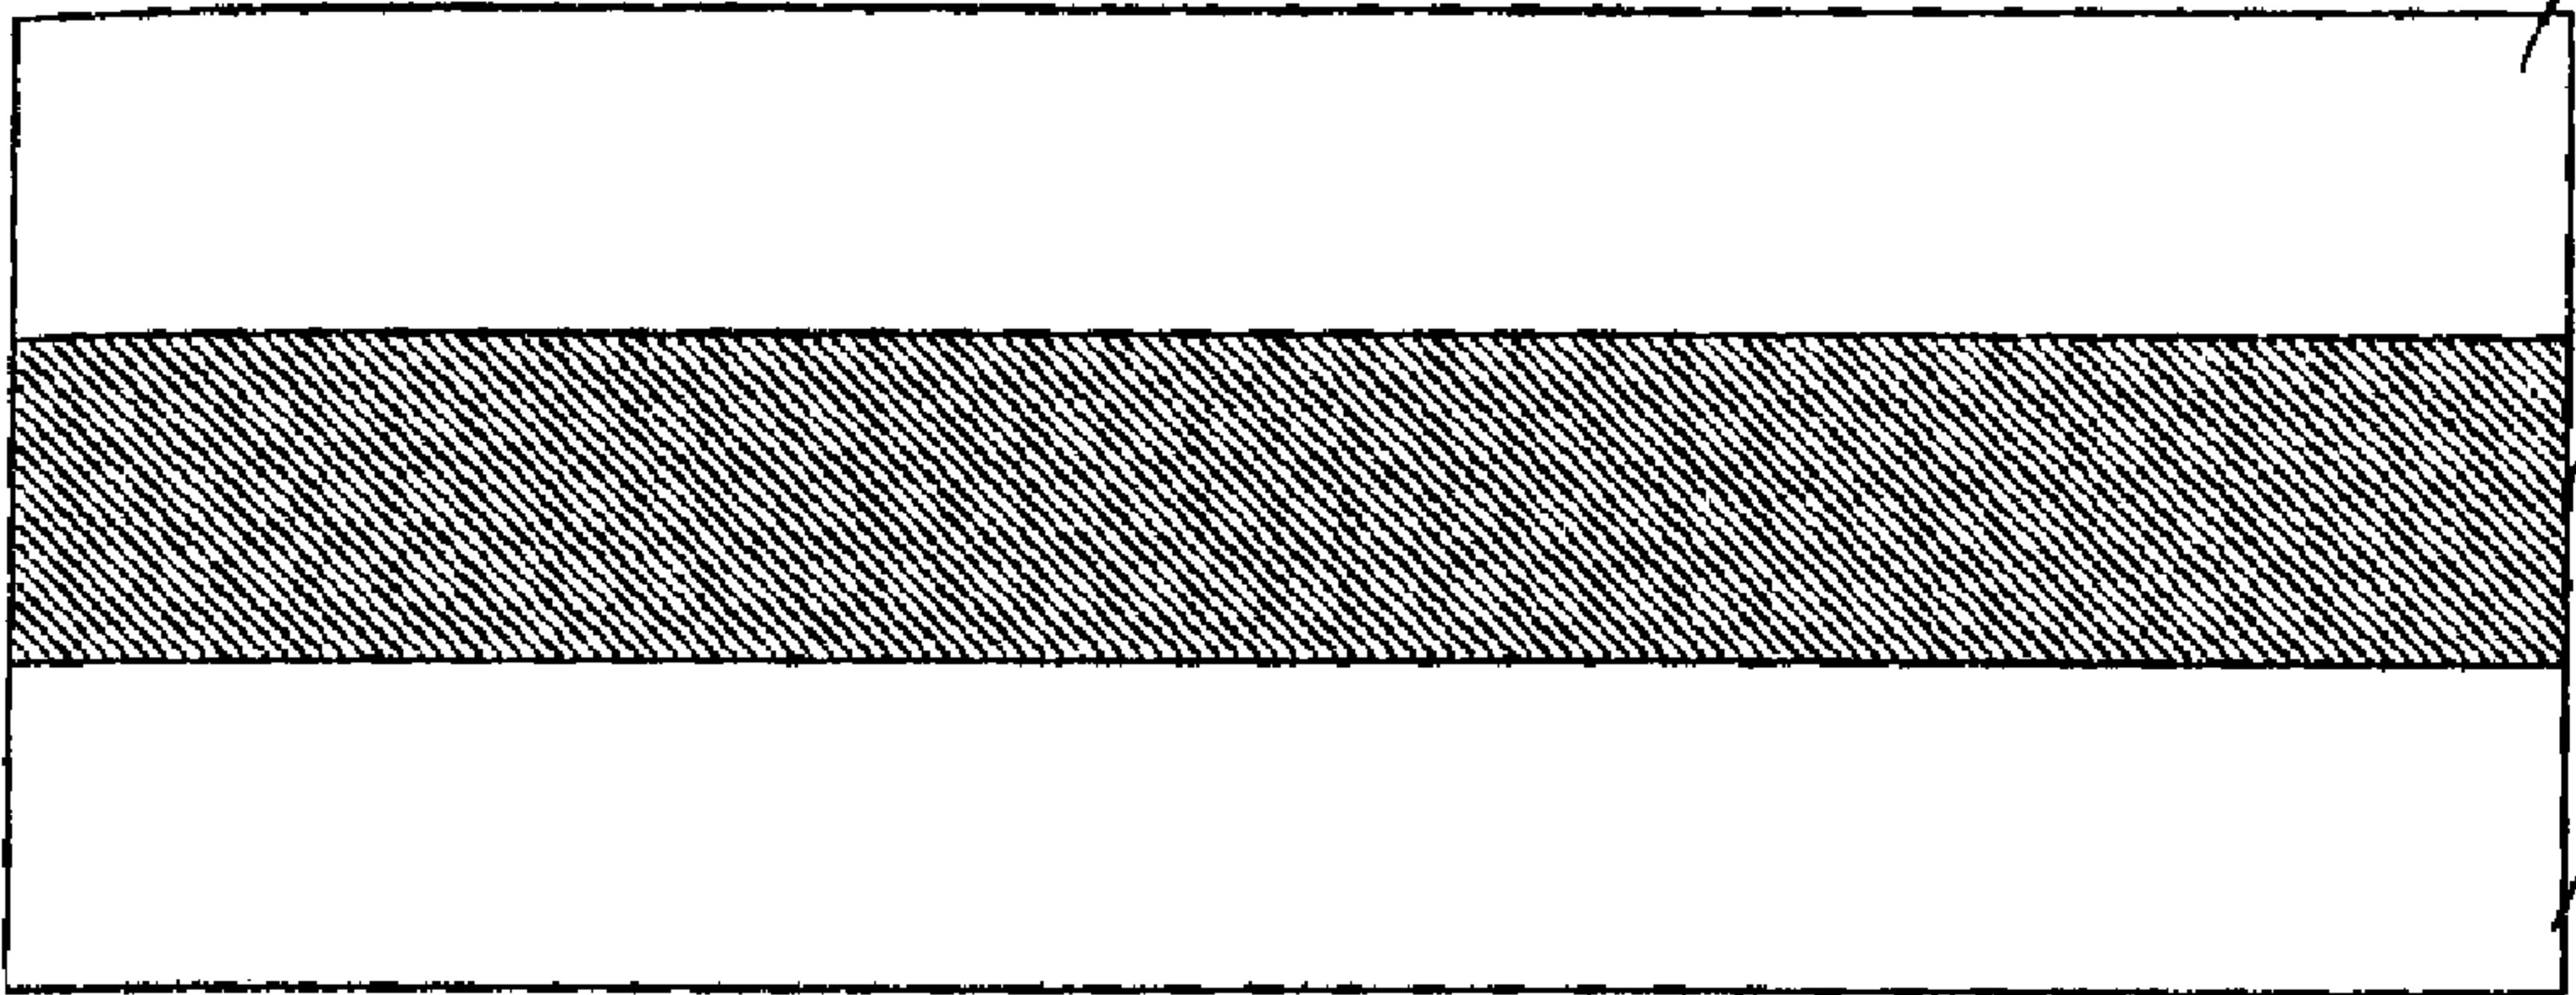

1

3

2