



(43) International Publication Date
22 September 2016 (22.09.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/148755 A1

(51) International Patent Classification:

C07C 5/22 (2006.01) C07C 7/14 (2006.01)
C07C 5/27 (2006.01) C07C 7/144 (2006.01)
C07C 7/04 (2006.01) C07C 7/148 (2006.01)
C07C 7/12 (2006.01) C07C 15/08 (2006.01)

(21) International Application Number:

PCT/US2015/065703

(22) International Filing Date:

15 December 2015 (15.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/135,255 19 March 2015 (19.03.2015) US
15166343.2 5 May 2015 (05.05.2015) EP

(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US).

(72) Inventors: **BENDER, Timothy, P.**; 15718 Starcreek Lane, Houston, TX 77044 (US). **PORTER, John, R.**; 1 Falling Leaf Court, Friendswood, TX 77546 (US). **PILLIOD, Dana, Lynn**; 2873 Alentina Court, League City, TX 77573 (US).

(74) Agents: **JENKINS, Amanda, K.** et al.; Exxonmobil Chemical Company, Law Department, P.O.Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: PROCESS AND APPARATUS FOR THE PRODUCTION OF PARA-XYLENE

(57) Abstract: A process for producing para-xylene (PX) comprises supplying a hydrocarbon feed comprising xylenes and ethylbenzene (EB) to a PX recovery unit, where a PX-rich stream and at least one PX-depleted stream are recovered from the feed. The PX-depleted stream is then separated into an EB-rich stream and an EB-depleted stream in a divided wall column. The EB-depleted stream is then isomerized under at least partial liquid phase conditions to produce a first isomerized stream having a higher PX concentration than the PX-depleted stream, and the EB-rich stream is isomerized under at least partial vapor phase conditions to produce a second isomerized stream having a higher PX concentration than the PX-depleted stream. The first and second isomerized streams are then recycled to the PX recovery unit to recover additional PX and the process is repeated to define a so-called xylene isomerization loop.



WO 2016/148755 A1

PROCESS AND APPARATUS FOR THE PRODUCTION OF PARA-XYLENE

Inventors: Timothy P. Bender, John R. Porter, Dana L. Pilliod

CROSS-REFERENCE OF RELATED APPLICATIONS

[0001] This application claims the benefit of Provisional Application No. 62/135,255, filed March 19, 2015 and EP Application No.: 15166343.2, filed May 5, 2015.

FIELD

[0002] This application relates to the treatment of ethylbenzene in the production of para-xylene.

BACKGROUND

[0003] Ethylbenzene (EB), para-xylene (PX), ortho-xylene (OX) and meta-xylene (MX) are often present together in C₈ aromatic product streams from chemical plants and oil refineries. Of these C₈ compounds, although high purity EB is an important raw material for the production of styrene, for a variety of reasons all high purity EB feedstocks used in styrene production are produced by alkylation of benzene with ethylene, rather than by recovery from a C₈ aromatics stream. Of the three xylene isomers, PX has the largest commercial market and is used primarily for manufacturing terephthalic acid and terephthalate esters for use in the production of various polymers such as poly(ethylene terephthalate), poly(propylene terephthalate), and poly(butene terephthalate). While OX and MX are useful as solvents and raw materials for making products such as phthalic anhydride and isophthalic acid, market demand for OX and MX and their downstream derivatives is much smaller than that for PX.

[0004] Given the higher demand for PX as compared with its other isomers, there is significant commercial interest in maximizing PX production from any given source of C₈ aromatic materials. However, there are a number of major technical challenges to be overcome in achieving this goal of maximizing PX yield. For example, the four C₈ aromatic compounds, particularly the three xylene isomers, are usually present in concentrations dictated by the thermodynamics of production of the C₈ aromatic stream in a particular plant or refinery. As a result, the PX production is limited, at most, to the amount originally present in the C₈ aromatic stream unless additional processing steps are used to increase the amount of PX and/or to improve the PX recovery efficiency. A variety of methods are known to increase the concentration of PX in a C₈ aromatics stream. These methods normally involve cycling the stream between a separation step, in which at least part of the

PX is recovered to produce a PX-depleted stream, and a xylene isomerization step, in which the PX content of the PX-depleted stream is returned back towards equilibrium concentration.

[0005] In a typical aromatics plant, such as that shown in **Figure 1**, liquid feed, typically a C₈₊ aromatic feedstream which has previously been processed by known methods to remove C₇ species (particularly benzene and toluene), is fed by conduit **1** to xylenes re-run **3**, an apparatus per se well known in the art. The xylenes re-run (or more simply a fractionation column) vaporizes the feed and separates the C₈ aromatics into an overhead mixture **5** of xylenes (OX, MX, and PX) and ethylbenzene (EB), and a bottom product **61** comprising C₉₊ aromatics. The overhead mixture typically has a composition of about 40-50% metaxylene (MX), 15-25% PX, 15-25% OX, and 10-20% EB. Unless otherwise noted herein, percentages are % weight. The overhead is then condensed in condenser **7**, an apparatus also per se well-known in the art, and becomes the feed for the PX recovery unit **15**, via conduit **9** and **13**, a portion of the condensed overhead may be returned to re-run **3** as reflux via conduits **9** and **11**.

[0006] The PX recovery unit **15** may employ crystallization technology, adsorption technology, or membrane separation technology, each per se well known in the art. These technologies separate PX from its isomers and are capable of producing high purity PX up to 99.9%, which is taken from unit **15** via conduit **17**. Shown in **Figure 1** is the case where unit **15** is an adsorptive separation unit, such as a ParexTM or EluxylTM unit, in which case typically the extract **17**, which comprises a desorbent, such as paradiethylbenzene (PDEB), needs to be separated, such as by distillation, from the desired extract PX in distillation column **19**, which generates an overhead **23** that is condensed in condenser **25** to yield a liquid stream **27**, which is a high purity PX stream. This stream **27** may be taken off via conduit **31** and optionally a portion may be returned to column **19** as reflux via conduit **29**. The desorbent is returned to the PX recovery system **15** via conduit **21**. Raffinate from the recovery system **15**, comprising MX, OX, EB, and some PX, is removed via conduit **65** and sent to unit **37**, discussed below. Note: a portion of raffinate in **65** may be recovered and marketed as low-value solvent xylene.

[0007] The raffinate **65**, which comprises mainly MX, OX, EB, and desorbent is sent to fractionation column **37**, generating overhead **33** and bottoms **63**. Overhead **33** contains MX, OX and EB, which is condensed in condenser **32** and sent via conduit **35** and then **41** to isomerization unit **43**, discussed in more detail below. A portion may be returned to fractionator **37** via conduit **35** and then **39** as reflux. The desorbent in the bottoms product is returned to **15**. Note that as used herein the term "raffinate" is used to mean the portion

recovered from the PX recovery unit **15**, whether the technology used is adsorptive separation, crystallization, or membrane, and then is sent to the isomerization unit **43**, conventionally a vapor phase isomerization unit, which uses technology also per se well-known.

[0008] A stream consisting essentially of MX, OX and EB is sent to isomerization unit **43**, an apparatus per se known in the art, to isomerize the MX and OX and optionally EB to PX. Isomerization unit **43** may be a vapor phase or liquid phase isomerization unit. Conventionally there are one or more heat exchangers or furnaces associated with the system shown in **Figure 1** between the PX recovery unit **15** and the isomerization unit that are not shown for convenience of view. Likewise, hydrogen separators and hydrogen compressors are also not shown for convenience of view. These and other features, such as valves and the like, would be apparent to one of ordinary skill in the art in possession of the present invention.

[0009] The product of the isomerization unit **43** is sent via conduit **51** to the C₇-distillation tower **53**, which separates the product of isomerization into a bottom stream **59** comprising equilibrium xylenes and the overhead **47**, comprising C₇-aromatics, e.g., benzene and toluene. The overhead product is condensed in condenser **45** and then the distribution of liquid product via conduit **49** may be apportioned as desired between conduit **57** and conduit **55**, the former of which may be disposed of in numerous ways which would be well-known per se in the art, and the latter conduit returning C₇-aromatics as reflux to tower **53**. The bottoms product **59** of distillation tower **53** is then sent to xylenes re-run **3**, either merging with feed **1** as shown in the figure, or it may be introduced by a separate inlet (not shown).

[0010] The xylene isomerization unit **43** may be conducted in either a vapor phase or liquid phase and is intended to accomplish two major things: isomerize the lower valued MX and OX to higher value PX, and convert EB into benzene/toluene and light gases (so-called "EB destruction") or optionally, isomerize EB to xylenes. Various options exist for using one or more of the xylenes isomerization technologies, but generally, conducting the xylene isomerization under at least partially liquid phase conditions minimizes xylene loss and is more energy efficient than vapor phase isomerization. However, under these conditions, little or none of the EB may be converted in the xylene isomerization step and as a result the amount of EB in the xylenes loop can build up to very high levels. Thus, to maximize the use of liquid phase isomerization, it is desirable to control the amount of EB in the PX-depleted stream subjected to liquid phase isomerization.

SUMMARY

[0011] The present invention is directed to a process for producing PX in which a hydrocarbon feed comprising xylenes and EB is provided to a PX recovery unit, which recovers a PX-rich stream and at least one PX-depleted stream. The at least one PX-depleted stream is sent to a divided wall column where it is separated into an EB-rich stream and an EB-depleted stream. At least a portion of the EB-depleted stream is isomerized at least partially in the liquid phase to produce a first isomerized stream having a higher PX concentration than the PX-depleted stream, and at least a portion of the EB-rich stream is isomerized at least partially in the vapor phase to produce a second isomerized stream having a higher PX concentration than the PX-depleted stream. The first and second isomerized streams are then recycled to the PX recovery unit. In one embodiment, the PX recovery unit produces a single PX-depleted stream, while in another embodiment, the PX recovery unit produces two PX-depleted streams – one rich in EB and one low in EB.

[0012] The invention further provides an apparatus for the production of PX comprising a PX recovery unit, which produces a PX-rich stream and at least one PX-depleted stream from a hydrocarbon feed, fluidly connected to a divided wall column in which the at least one PX-depleted stream is separated into an EB-rich stream and an EB-depleted stream; a liquid phase isomerization unit fluidly connected to the divided wall column to isomerize the EB-depleted stream and produce a first isomerized stream having a higher PX concentration than the PX-depleted stream; and a vapor phase isomerization unit fluidly connected to the divided wall column to isomerize the EB-rich stream and produce a second isomerized stream having a higher PX concentration than the PX-depleted stream. The apparatus may also include a xylenes fractionation column fluidly connected to the liquid phase isomerization unit, the vapor phase isomerization unit and the PX recovery unit, downstream of the liquid phase isomerization unit and the vapor phase isomerization unit and upstream of the PX recovery unit, and a fractionation column fluidly connected to the vapor phase isomerization unit and the xylenes fractionation column, downstream of the vapor phase isomerization unit and upstream of the xylenes fractionation column.

[0013] The present invention provides a process for controlling the amount of EB in the PX-depleted stream and maximizing the use of liquid phase isomerization, which minimizes xylene loss and results in energy savings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1 is a flow diagram of a conventional para-xylene (PX) production and extraction process which employs liquid phase xylene isomerization and vapor phase xylene isomerization.

[0015] FIG. 2 is a flow diagram of one embodiment of the inventive process.

[0016] FIG. 3 is a flow diagram of a second embodiment of the inventive process.

DETAILED DESCRIPTION OF THE DRAWINGS

[0017] As used herein the term " C_n " hydrocarbon, wherein n is a positive integer, means a hydrocarbon having n number of carbon atom(s) per molecule. For example, a C_8 aromatic hydrocarbon means an aromatic hydrocarbon or mixture of aromatic hydrocarbons having 8 number of carbon atom(s) per molecule. The term " C_{n+} " hydrocarbon, wherein n is a positive integer, means a hydrocarbon having at least n number of carbon atom(s) per molecule, whereas the term " C_{n-} " hydrocarbon wherein n is a positive integer, means a hydrocarbon having no more than n number of carbon atom(s) per molecule.

[0018] The present invention is an improved process for producing PX. With reference to **Figure 2**, a hydrocarbon feed **102** comprising xylenes and EB is provided to a PX recovery unit **120**, where a PX-rich stream **122** and at least one PX-depleted stream **124** are recovered from the feed. The PX-depleted stream **124** is then separated into an EB-rich stream **132** and an EB-depleted stream **134** in a divided wall column **130**. At least part of the EB-depleted stream **134** is then fed to a xylene isomerization unit **150** where the EB-depleted stream **134** is isomerized under at least partial liquid phase conditions to produce a first isomerized stream **152** having a higher PX concentration than the PX-depleted stream **124**. At least part of the EB-rich stream **132** is then fed to a xylene isomerization unit **140** where the EB-rich stream **132** is isomerized under at least partial vapor phase conditions to produce a second isomerized stream **142** having a higher PX concentration than the PX-depleted stream **124**. At least part of the first and second isomerized streams **152**, **142** are then recycled to the PX recovery unit **120** to recover additional PX and the process is repeated to define a so-called xylene isomerization loop.

Hydrocarbon Feed

[0019] The hydrocarbon feed **102** employed in the present process may be any hydrocarbon stream containing C_8 aromatic hydrocarbons, such as a reformat stream (product stream of a reformat splitting tower), a hydrocracking product stream, a xylene or EB reaction product stream, an aromatic alkylation product stream, an aromatic

disproportionation stream, an aromatic transalkylation stream, a methanol to aromatic product stream, and/or a Cyclar™ process stream.

[0020] In one embodiment, the feed is the product of the alkylation of benzene and/or toluene with methanol and/or dimethyl ether in a methylation reactor. One such methylation reactor is described in U.S. Patent Nos. 6,423,879 and 6,504,072, the entire contents of which are incorporated herein by reference, and employs a catalyst comprising a porous crystalline material having a Diffusion Parameter for 2,2 dimethylbutane of about 0.1-15 sec⁻¹ when measured at a temperature of 120°C and a 2,2 dimethylbutane pressure of 60 torr (8 kPa). The porous crystalline material may be a medium-pore zeolite, such as ZSM-5, which has been severely steamed at a temperature of at least 950°C in the presence of at least one oxide modifier, for example including phosphorus, to control reduction of the micropore volume of the material during the steaming step. Such a methylation reactor is hereinafter termed a "PX-selective methylation reactor".

[0021] The feedstock may further comprise recycle stream(s) from the isomerization step(s) and/or various separating steps. The hydrocarbon feed comprises PX, together with meta-xylene (MX), ortho-xylene (OX), and ethylbenzene (EB). In addition to xylenes and EB, the hydrocarbon feedstock may also contain certain amounts of other aromatic or even non-aromatic compounds. Examples of such aromatic compounds are C₇- hydrocarbons, such as benzene and toluene, and C₉+ aromatics, such as mesitylene, pseudo-cumene and others. These types of feedstream(s) are described in "Handbook of Petroleum Refining Processes", Eds. Robert A. Meyers, McGraw-Hill Book Company, Second Edition.

Para-Xylene Recovery

[0022] The hydrocarbon feed **102** is initially supplied to a PX recovery unit **120** to recover a PX-rich product stream **122** from the feed and leave a PX-depleted stream **124**. In one embodiment, the PX-rich product stream **122** comprises at least 50 wt% PX, preferably at least 60 wt% PX, more preferably at least 70 wt% PX, even more preferably at least 80 wt% PX, most preferably at least 90 wt% PX, and ideally at least 95 wt% PX, based on the total weight of the PX rich product stream. The PX recovery unit **120** can include one or more of any of the PX recovery units known in the art, including, for example, a crystallization unit, an adsorption unit such as a PAREX™ unit or an ELUXYL™ unit, a reactive separation unit, a membrane separation unit, an extraction unit, a distillation unit, an extractive distillation unit, a fractionation unit, or any combination thereof. These types of separation unit(s) and their designs are described in "Perry's Chemical Engineers' Handbook", Eds. R.H. Perry, D.W. Green and J.O. Maloney, McGraw-Hill Book Company, Sixth Edition, 1984, and the

previously-mentioned "Handbook of Petroleum Refining Processes". In a preferred embodiment, the PX recovery unit **120** is a simulated moving bed adsorption unit such as a PAREX™ unit or an ELUXYL™ unit.

[0023] Depending on the composition of the hydrocarbon feed **102**, one or more initial separation steps that serve to remove C₇- and C₉+ hydrocarbons from the feed may occur prior to recovery of the PX-rich product stream **122**. Generally the initial separation steps may include fractional distillation, crystallization, adsorption, a reactive separation, a membrane separation, extraction, or any combination thereof. In one embodiment, the feed **102** is passed through a xylenes fractionation tower **110** prior to passing to the PX recovery unit **120**. The xylenes fractionation tower **110** produces an overhead stream **112** comprising C₈ hydrocarbons and a bottoms stream **114** containing C₉+ hydrocarbons.

[0024] In the embodiment shown in **Figure 2**, the PX recovery unit **120** produces the conventional raffinate, or PX-depleted stream **124**, comprising MX, OX and EB. In another embodiment, shown in **Figure 3**, the PX recovery unit **120** may be modified to produce two different PX-depleted streams – a PX-depleted stream **126** rich in EB and a PX-depleted stream **128** low in EB. Examples of PX recovery units that produce multiple raffinate streams are described in U.S. Patent Application Serial No. 14/624,861 and U.S. Patent Nos. 7,582,206 and 8,030,533.

Divided Wall Column

[0025] Returning to **Figure 2**, the PX-depleted stream **124** then passes to a divided wall column **130**, which separates the PX-depleted stream **124** into two streams – an EB-rich stream **132** and an EB-depleted stream **134**. The divided wall column **130** may be used in addition to, or, in a preferred embodiment, in place of, the raffinate tower (fractionator **37** in **Figure 1**). As its name implies, the term "divided wall distillation column" refers to a particular known form of distillation column which comprises a dividing wall. The dividing wall vertically bisects a portion of the interior of the distillation column but does not extend either to the top or bottom sections of the column, thus, enabling the column to be refluxed and reboiled similar to a conventional column. The dividing wall provides a fluid impermeable baffle separating the interior of the column. The divided wall column may be configured for a number of processes, with an inlet to the column is located on one side of the dividing wall and one or more side draws are located on the opposing side, or an inlet on both sides of the divided wall column and multiple draws from the top or bottom of the column, or any combination thereof.

[0026] In a particular embodiment, the dividing wall extends from the top of the column down to a tray on which the EB concentration is low enough to provide an optimum ratio of low EB and high EB products, which is ascertainable by one skilled in the art using simulation tools. The PX-depleted stream **124** is provided to the column on one side of the dividing wall and the two streams are withdrawn from the top of the column. Each overhead stream is processed through a separate overhead product system **136, 138**, each consisting of a condenser, which may be drumless, reflux pump, and an optional reflux drum. A portion of the EB-rich stream **132** may be returned to the divided wall column **130** as reflux, while the remainder of the EB-rich stream **132** is sent to isomerization unit **140**. A portion of the EB-depleted stream **134** may be returned to the divided wall column **130** as reflux, while the remainder of the EB-depleted stream **134** is sent to isomerization unit **150**. In other embodiments in which the amount of EB in the EB-rich stream is minimal, the EB-rich stream may be purged to fuel blending.

[0027] In the embodiment depicted in **Figure 3**, the PX-depleted stream **126** rich in EB enters the divided wall column **130** on one side of the dividing wall and the PX-depleted stream **128** low in EB enters the divided wall column **130** on the opposite side of the dividing wall. The divided wall column **130** further enhances the EB separation, and an EB-rich stream **132** and an EB-depleted stream **134** are recovered as overhead streams as in the previous embodiment. Using a divided wall column in conjunction with a simulated moving bed adsorption unit modified to separate the raffinate into high and low EB streams not only eliminates the need for the conventional raffinate tower, but the divided wall column provides additional EB separation beyond what the simulated moving bed adsorption unit achieves.

Xylene Isomerization

[0028] Because liquid phase isomerization converts little or none of the EB in the PX-depleted stream, in a preferred embodiment, the EB-depleted stream **134** is sent to isomerization unit **150**, which is operated in the liquid phase, and the EB-rich stream **132** is sent to isomerization unit **140**, which is operated in the vapor phase. Minimizing the amount of PX-depleted stream subjected to vapor phase isomerization saves energy and capital, as liquid phase isomerization requires less energy and capital than the vapor phase isomerization process due to the requirement of vaporizing the PX-depleted stream and the use of hydrogen, which requires an energy- and capital-intensive hydrogen recycle loop.

Liquid Phase Isomerization

[0029] The EB-depleted stream **134** is fed to a xylene isomerization unit **150** where the EB-depleted stream **134** is contacted with a xylene isomerization catalyst under at least

partially liquid phase conditions effective to isomerize the PX-depleted, EB-depleted stream **134** back towards an equilibrium concentration of the xylene isomers. Suitable conditions for the liquid phase isomerization include a temperature of from about 200°C to about 540°C, preferably from about 230°C to about 310°C, and more preferably from about 270°C to about 300°C, a pressure of from about 0 to 6895 kPa(g), preferably from about 1300 kPa(g) to about 3500 kPa(g), a weight hourly space velocity (WHSV) of from 0.5 to 100 hr⁻¹, preferably from 1 to 20 hr⁻¹, and more preferably from 1 to 10 hr⁻¹. Generally, the conditions are selected so that at least 50 wt% of the C₈ aromatics would be expected to be in the liquid phase.

[0030] Any catalyst capable of isomerizing xylenes in the liquid phase can be used in the xylene isomerization unit, but in one embodiment the catalyst comprises an intermediate pore size zeolite having a Constraint Index between 1 and 12. Constraint Index and its method of determination are described in U.S. Patent No. 4,016,218, which is incorporated herein by reference. Particular examples of suitable intermediate pore size zeolites include ZSM-5, ZSM-11, ZSM-12, ZSM-22, ZSM-23, ZSM-35, ZSM-48, and MCM-22, with ZSM-5 and ZSM-11 being particularly preferred, specifically ZSM-5. It is preferred that the acidity of the zeolite, expressed as its alpha value, be greater than 300, such as greater than 500, or greater than 1000. The alpha test is described in U.S. Pat. No. 3,354,078; in the Journal of Catalysis, Vol. 4, p. 527 (1965); Vol. 6, p. 278 (1966); and Vol. 61, p. 395 (1980), each incorporated herein by reference as to that description. The experimental conditions of the test used to determine the alpha values cited herein include a constant temperature of 538°C and a variable flow rate as described in detail in the Journal of Catalysis, Vol. 61, p. 395. A preferred catalyst is described in U.S. Patent No. 8,569,559, which is incorporated herein by reference.

[0031] The product of the liquid phase xylene isomerization process **150** is a first isomerized stream **152** having a higher PX concentration than the PX-depleted, EB-depleted stream **134**. The first isomerized stream **152** is then recycled to the PX recovery unit **120** to recover additional PX and the process is repeated to generate a so-called xylene isomerization loop. To manage the level of EB in the liquid phase isomerization loop and prevent a buildup of EB, a purge stream **154** may be removed from the first isomerized stream **152** at regular intervals (which may be determined by one skilled in the art) and passed to the xylene isomerization unit **140** where the EB may be converted.

Vapor Phase Isomerization

[0032] The EB-rich stream **132** is fed to a xylene isomerization unit **140** where the EB-rich stream **132** is contacted with a xylene isomerization catalyst under at least partially vapor phase conditions effective to isomerize the PX-depleted, EB- rich stream **132** back towards an equilibrium concentration of the xylene isomers. There are generally two types of vapor phase isomerization catalysts – one that isomerizes the four different C8 aromatic compounds, including EB, to their equilibrium concentrations and one that dealkylates EB to produce benzene and ethylene and isomerizes the xylene isomers. Either catalyst may be used for the vapor phase isomerization unit **140**.

EB Isomerization

[0033] In one embodiment, the EB- rich stream **132** is subjected to EB isomerization to produce a stream containing the C8 aromatic compounds in equilibrium concentrations. The EB isomerization catalyst system comprises at least a first bed containing a xylene isomerization catalyst and a second bed downstream of the first bed and containing an ethylbenzene isomerization catalyst. The beds can be in the same or different reactors.

[0034] Typically, the xylene isomerization catalyst comprises an intermediate pore size molecular sieve having a Constraint Index within the approximate range of 1 to 12, such as ZSM-5 (U.S. Pat. No. 3,702,886 and Re. 29,948); ZSM-11 (U.S. Pat. No. 3,709,979); ZSM-12 (U.S. Pat. No. 3,832,449); ZSM-22 (U.S. Pat. No. 4,556,477); ZSM-23 (U.S. Pat. No. 4,076,842); ZSM-35 (U.S. Pat. No. 4,016,245); ZSM-48 (U.S. Pat. No. 4,397,827); ZSM-57 (U.S. Pat. No. 4,046,685); and ZSM-58 (U.S. Pat. No. 4,417,780). Alternatively, the xylene isomerization catalyst may comprise a molecular sieve selected from MCM-22 (described in U.S. Pat. No. 4,954,325); PSH-3 (described in U.S. Pat. No. 4,439,409); SSZ-25 (described in U.S. Pat. No. 4,826,667); MCM-36 (described in U.S. Pat. No. 5,250,277); MCM-49 (described in U.S. Pat. No. 5,236,575); and MCM-56 (described in U.S. Pat. No. 5,362,697), with MCM-49 being particularly preferred. The molecular sieve may also comprise a EUO structural type molecular sieve, with EU-1 being preferred, or mordenite. The entire contents of the above references are incorporated by reference herein.

[0035] The xylene isomerization catalyst may also include a hydrogenation/dehydrogenation component, which may be the same material present in the second, ethylbenzene isomerization catalyst, described below. If the same hydrogenation/dehydrogenation component is used in both catalysts, typically this component is present in a lower amount in the xylene isomerization catalyst than in the ethylbenzene isomerization catalyst. More preferably, however, to reduce its ethylbenzene conversion

activity, the first catalyst composition does not contain a hydrogenation-dehydrogenation component.

[0036] In addition, it may be desirable to combine the molecular sieve of the xylene isomerization catalyst with another material resistant to the temperature and other conditions of the process. Such matrix materials include synthetic or naturally occurring substances as well as inorganic materials such as clay, silica, and/or metal oxides. The metal oxides may be naturally occurring or in the form of gelatinous precipitates or gels including mixtures of silica and metal oxides. Naturally occurring clays which can be composited with the molecular sieve include those of the montmorillonite and kaolin families, which families include the subbentonites and the kaolins commonly known as Dixie, McNamee, Georgia and Florida clays or others in which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification.

[0037] In addition to the foregoing materials, the molecular sieve may be composited with a porous matrix material, such as alumina, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-berylia, silica-titania, as well as ternary compounds such as silica-alumina-thoria, silica-alumina-zirconia, silica-alumina-magnesia, and silica-magnesia-zirconia. A mixture of these components could also be used. The matrix may be in the form of a cogel. The relative proportions of molecular sieve component and inorganic oxide gel matrix on an anhydrous basis may vary widely with the molecular sieve content ranging from between about 1 to about 99 percent by weight and more usually in the range of about 10 to about 80 percent by weight of the dry composite.

[0038] Typically the xylene isomerization catalyst typically has an alpha value of about 4 to about 1000, such as from about 5 to about 80, with the preferred value being inversely dependent on reactor temperature.

[0039] The EB isomerization catalyst composition is primarily intended to isomerize the ethylbenzene in the feed selectively to para-xylene, while minimizing isomerization of the xylenes in the feed. The catalyst composition typically comprises a molecular sieve having unidimensional 10-membered ring pores. The phrase "unidimensional 10-membered ring pores" means that the pores of the molecular sieve are defined by 10-membered rings of tetrahedrally coordinated atoms which extend essentially in one dimension so that the pores are substantially free from any intersecting pores. Examples of suitable molecular sieves having unidimensional 10-membered ring pores include ZSM-5, ZSM-12, SAPO-11, ZSM-

23, ZSM-22, NU-87, ZSM-11, ZSM-50, ZSM-57, SAPO-41, ZSM-48, EU-1, and mordenite. Preferred molecular sieves are ZSM-5, ZSM-12 or EU-1.

[0040] The molecular sieve of the catalyst composition typically has an alpha value of about 0.1 to about 20, for example from about 1 to about 5.

[0041] The molecular sieve used in the second catalyst composition is associated with a hydrogenation/dehydrogenation component. Examples of such components include the oxide, hydroxide, sulfide, or free metal (i.e., zerovalent) forms of Group VIII metals (i.e., Pt, Pd, Ir, Rh, Os, Ru, Ni, Co and Fe), Group VIB metals (i.e., Cr, Mo, W), Group IVA metals (i.e., Sn and Pb), Group VA metals (i.e., Sb and Bi), and Group VIIB metals (i.e., Mn, Tc and Re). Combinations of catalytic forms of such noble or non-noble metals, such as combinations of Pt with Sn, may be used. The metal is preferably in a reduced valence state. The reduced valence state of the metal may be attained, in situ, during the course of the reaction, when a reducing agent, such as hydrogen, is included in the feed to the reaction. Treatments such as coking or sulfiding may also be employed, especially at the start of a run with fresh catalyst, to modify the catalytic performance of the metal.

[0042] In one practical embodiment, the hydrogenation-dehydrogenation component is a noble metal (i.e., Pt, Pd, Ir, Rh, Os and Ru) and particularly is platinum. The amount of the hydrogenation-dehydrogenation component is suitably from about 0.001 to about 10 percent by weight, e.g., from about 0.03 to about 3 percent by weight, such as from about 0.2 to about 1 percent by weight of the total catalyst although this will, of course, vary with the nature of the component, with less of the highly active noble metals, particularly platinum, being required than of the less active base metals.

[0043] The EB isomerization catalyst composition may also include a binder and/or matrix material which may be the same as, or different from, any binder and/or matrix material contained by the first catalyst composition. In particular, the binder in the second catalyst composition may be a zeolitic material such that the second catalyst composition comprises a so-called "zeolite-bound zeolite" as described in, for example, U.S. Pat. No. 6,517,807, the entire contents of which are incorporated herein by reference. Thus, the second catalyst composition may comprise a core zeolite having unidimensional 10-membered ring pores, such as ZSM-48, bound with a high silica binder which is at least partly converted to a high silica zeolite (such as ZSM-5 or ZSM-48) which at least partly covers the surface of the core zeolite. By ensuring that the zeolitic binder has a higher silica to alumina molar ratio than the core zeolite, the binder can lower the surface activity of the

core zeolite and hence reduce any unwanted xylene isomerization which would otherwise occur at the surface of the core zeolite.

[0044] In general, the EB isomerization catalyst composition is different from the xylenes isomerization catalyst composition, for example by containing a different molecular sieve, having a lower alpha value and/or by containing more or a more active hydrogenation/dehydrogenation component.

[0045] The conditions employed in the xylene isomerization stage of the process of the second embodiment are not narrowly defined but generally include a temperature of from 250 to about 600°C, a pressure of from about 0 to about 500 psig (100 to 3550 kPa), a weight hourly space velocity (WHSV) of between about 0.05 and about 50 hr⁻¹, and a hydrogen, H₂, to hydrocarbon, HC, molar ratio of between about 0.05 and about 20.

[0046] The conditions used in the ethylbenzene isomerization stage are also not narrowly defined, but generally include a temperature of from about 250 to about 600°C, a pressure of from about 0 to about 500 psig (100 to 3550 kPa), a weight hourly space velocity (WHSV) of between about 0.01 and about 20 hr⁻¹, and a hydrogen, H₂, to hydrocarbon, HC, molar ratio of between about 0.05 and about 20. Typically, the conditions include a temperature of from about 400 to about 500°C, a pressure of from about 50 to about 400 psig (445 to 2870 kPa), a WHSV of between about 1 and about 10 hr⁻¹, and a H₂ to HC molar ratio of between about 1 and about 10.

[0047] In general, the xylene isomerization step and the ethylbenzene isomerization step of the present process are carried out in fixed bed reaction zones containing the catalyst compositions described above. The reaction zones may be in sequential beds in a single reactor, with the ethylbenzene isomerization catalyst being located downstream of the xylene isomerization catalyst and with the feed being cascaded from the first to the second bed without intervening separation of light gases. As an alternative, the ethylbenzene isomerization catalyst and the xylene isomerization catalyst can be disposed in separate reactors which, if desired, can be operated at different process conditions, in particular with the temperature of the ethylbenzene isomerization reactor being higher than that of the xylene isomerization reactor.

[0048] The product of the vapor phase xylene isomerization process **140** is a second isomerized stream **142** having a higher PX concentration than the PX-depleted, EB-rich stream **132**. The second isomerized stream **142** is then recycled to the PX recovery unit **120** to recover additional PX and the process is repeated to generate a so-called xylene isomerization loop. In embodiments, the second isomerized stream **142** is passed through a

detoluenizing fractionation column **160** to produce a C₇- isomerized stream **164** and a C₈₊ isomerized stream **162**, which is passed through the xylenes re-run tower **110**, before being recycled to the PX recovery unit **120** to recover additional PX.

EB Dealkylation

[0049] In another embodiment, the EB- rich stream **132** is subjected to xylenes isomerization in which the EB in the stream can be dealkylated to produce benzene. In this embodiment, where the ethylbenzene is removed by cracking/disproportionation, the para-xylene-depleted C₈ stream is conveniently fed to a multi-bed reactor comprising at least a first bed containing an ethylbenzene conversion catalyst and a second bed downstream of the first bed and containing a xylene isomerization catalyst. The beds can be in the same or different reactors.

[0050] The ethylbenzene conversion catalyst typically comprises an intermediate pore size zeolite having a Constraint Index ranging from 1 to 12, a silica to alumina molar ratio of at least about 5, such as at least about 12, for example at least 20 and an alpha value of at least 5, such as 75 to 5000. Constraint Index and its method of determination are disclosed in U.S. Pat. No. 4,016, 218, which is herein incorporated by reference, whereas the alpha test is described in U.S. Pat. No. 3,354,078 and in the Journal of Catalysis, Vol. 4, p. 527 (1965); Vol. 6, p. 278 (1966); and Vol. 61, p. 395 (1980), each incorporated herein by reference as to that description. The experimental conditions of the test used herein include a constant temperature of 538°C and a variable flow rate as described in detail in the Journal of Catalysis, Vol. 61, p. 395. Higher alpha values correspond with a more active cracking catalyst.

[0051] Examples of suitable intermediate pore size zeolites include ZSM-5 (U.S. Pat. Nos. 3,702,886 and Re. 29,948); ZSM-11 (U.S. Pat. No. 3,709,979); ZSM-12 (U.S. Pat. No. 3,832,449); ZSM-22 (U.S. Pat. No. 4,556,477); ZSM-23 (U.S. Pat. No. 4,076,842); ZSM-35 (U.S. Pat. No. 4,016,245); ZSM-48 (U.S. Pat. No. 4,397,827); ZSM-57 (U.S. Pat. No. 4,046,685); ZSM-58 (U.S. Pat. No. 4,417,780); EU-1; and mordenite. The entire contents of the above references are incorporated by reference herein. Preferred zeolites are ZSM-5, ZSM-12 or EU-1.

[0052] The zeolite employed in ethylbenzene conversion catalyst typically has a crystal size of at least 0.2 microns and exhibits an equilibrium sorption capacity for xylene, which can be either para, meta, ortho or a mixture thereof, of at least 1 gram per 100 grams of zeolite measured at 120°C and a xylene pressure of 4.5±0.8 mm of mercury and an ortho-xylene sorption time for 30 percent of its equilibrium ortho-xylene sorption capacity of

greater than 1200 minutes (at the same conditions of temperature and pressure). The sorption measurements may be carried out gravimetrically in a thermal balance. The sorption test is described in U.S. Pat. Nos. 4,117,026; 4,159,282; 5,173,461; and Re. 31,782, each of which is incorporated by reference herein.

[0053] The zeolite used in the ethylbenzene conversion catalyst may be self-bound (no binder) or may be composited with an inorganic oxide binder, with the zeolite content ranging from between about 1 to about 99 percent by weight and more usually in the range of about 10 to about 80 percent by weight of the dry composite, e.g., about 65% zeolite with about 35% binder. Where a binder is used, it is preferably non-acidic, such as silica. Procedures for preparing silica bound ZSM-5 are described in U.S. Pat. Nos. 4,582,815; 5,053,374; and 5,182,242, incorporated by reference herein.

[0054] In addition, the ethylbenzene conversion catalyst typically comprises from about 0.001 to about 10 percent by weight, e.g., from about 0.05 to about 5 percent by weight, e.g., from about 0.1 to about 2 percent by weight of a hydrogenation/dehydrogenation component. Examples of such components include the oxide, hydroxide, sulfide, or free metal (i.e., zero valent) forms of Group VIIIA metals (i.e., Pt, Pd, Ir, Rh, Os, Ru, Ni, Co, and Fe), Group VIIA metals (i.e., Mn, Tc, and Re), Group VIA metals (i.e., Cr, Mo, and W), Group VB metals (i.e., Sb and Bi), Group IVB metals (i.e., Sn and Pb), Group IIIB metals (i.e., Ga and In), and Group IB metals (i.e., Cu, Ag and Au). Noble metals (i.e., Pt, Pd, Ir, Rh, Os and Ru) are preferred hydrogenation/dehydrogenation components. Combinations of catalytic forms of such noble or non-noble metal, such as combinations of Pt with Sn, may be used. The metal may be in a reduced valence state, e.g., when this component is in the form of an oxide or hydroxide. The reduced valence state of this metal may be attained, in situ, during the course of a reaction, when a reducing agent, such as hydrogen, is included in the feed to the reaction.

[0055] The xylene isomerization catalyst employed in this embodiment typically comprises an intermediate pore size zeolite, e.g., one having a Constraint Index between 1 and 12, specifically ZSM-5. The acidity of the ZSM-5 of this catalyst, expressed as the alpha value, is generally less than about 150, such as less than about 100, for example from about 5 to about 25. Such reduced alpha values can be obtained by steaming. The zeolite typically has a crystal size less than 0.2 micron and an ortho-xylene sorption time such that it requires less than 50 minutes to sorb ortho-xylene in an amount equal to 30% of its equilibrium sorption capacity for ortho-xylene at 120°C and a xylene pressure of 4.5+0.8 mm of mercury. The xylene isomerization catalyst may be self-bound form (no binder) or may be composited

with an inorganic oxide binder, such as alumina. In addition, the xylene isomerization catalyst may contain the same hydrogenation/dehydrogenation component as the ethylbenzene conversion catalyst.

[0056] Using the catalyst system described above, ethylbenzene cracking/disproportionation and xylene isomerization are typically effected at conditions including a temperature of from about 400°F to about 1,000°F (204 to 538°C), a pressure of from about 0 to about 1,000 psig (100 to 7000 kPa), a weight hourly space velocity (WHSV) of between about 0.1 and about 200 hr⁻¹, and a hydrogen, H₂ to hydrocarbon, HC, molar ratio of between about 0.1 and about 10. Alternatively, the conversion conditions may include a temperature of from about 650°F and about 900°F (343 to 482°C), a pressure from about 50 and about 400 psig (446 to 2859 kPa), a WHSV of between about 3 and about 50 hr⁻¹ and a H₂ to HC molar ratio of between about 0.5 and about 5. The WHSV is based on the weight of catalyst composition, i.e., the total weight of active catalyst plus, if used, binder therefor.

[0057] The product of the vapor phase xylene isomerization process **140** is a second isomerized stream **142** having a higher PX concentration than the PX-depleted, EB-rich stream **132** and containing benzene. The second isomerized stream **142** is preferably processed through a detoluenizing fractionation **160** to produce a C₇- isomerized stream **164** and a C₈₊ isomerized stream **162**, which is then recycled to the PX recovery unit **120** to recover additional PX.

[0058] Conducting xylenes isomerization under liquid phase conditions produces less C₉₊ aromatics than xylenes isomerization under vapor phase conditions. Therefore, the first isomerized stream **152** may be provided to the xylenes fractionation tower **110** at a higher tray location than the second isomerized stream **142** or the C₈₊ isomerized stream **162**, yielding greater energy savings. . Furthermore, a significant portion of the first isomerized stream **152** may bypass the xylenes fractionation tower **110** and directly enter the PX recovery unit **120**, thereby saving energy by avoiding the re-fractionation altogether.

[0059] While the present invention has been described and illustrated by reference to particular embodiments, those of ordinary skill in the art will appreciate that the invention lends itself to variations and modification is not necessarily illustrated herein without departing from the spirit and scope of the invention.

[0060] Trade names used herein are indicated by a TM symbol or ® symbol, indicating that the names may be protected by certain trademark rights, e.g., they may be registered trademarks in various jurisdictions. All patents and patent applications, test procedures (such

as ASTM methods, UL methods, and the like), and other documents cited herein are fully incorporated by reference to the extent such disclosure is not inconsistent with this invention and for all jurisdictions in which such incorporation is permitted. When numerical lower limits and numerical upper limits are listed herein, ranges from any lower limit to any upper limit are contemplated.

CLAIMS

1. A process for producing para-xylene, the process comprising:
 - (a) providing a hydrocarbon feed comprising xylenes and ethylbenzene to a para-xylene recovery unit;
 - (b) recovering a para-xylene-rich stream and at least one para-xylene-depleted stream from the hydrocarbon feed in the para-xylene recovery unit;
 - (c) separating the at least one para-xylene-depleted stream into an ethylbenzene-rich stream and an ethylbenzene-depleted stream in a divided wall column;
 - (d) isomerizing at least a portion of the ethylbenzene-depleted stream at least partially in the liquid phase to produce a first isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream;
 - (e) isomerizing at least a portion of the ethylbenzene-rich stream at least partially in the vapor phase to produce a second isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream; and
 - (f) recycling at least a portion of the first and second isomerized streams to the para-xylene recovery unit.
2. The process of claim 1, wherein the para-xylene recovery unit comprises a simulated moving bed adsorption unit.
3. The process of claim 1 or claim 2, wherein step (e) is conducted under ethylbenzene dealkylation conditions.
4. The process of claim 1 or claim 2, wherein step (e) is conducted under ethylbenzene isomerization conditions.
5. The process of any one of claims 1-4, wherein two para-xylene-depleted streams are recovered from the para-xylene recovery unit in step (b), a para-xylene-depleted stream rich in ethylbenzene and a para-xylene-depleted stream low in ethylbenzene.
6. The process of any one of claims 1-5, wherein the hydrocarbon feed is selected from the group consisting of a reformat stream, a hydrocracking product stream, a xylene or EB reaction product stream, an aromatic alkylation product stream, an aromatic disproportionation stream, an aromatic transalkylation stream, a methanol to aromatic product stream, and/or a Cyclar™ process stream.

7. The process of any one of claims 1-5, wherein the hydrocarbon feed comprises a benzene and/or toluene methylation product stream.
8. The process of any one of claims 1-7, further comprising separating a C₇- isomerized stream from the second isomerized stream in a fractionation column prior to step (f).
9. The process of any one of claims 1-8, further comprising separating the first and second isomerized streams into an overhead stream comprising C₈ hydrocarbons and a bottoms stream containing C₉₊ hydrocarbons in a xylenes fractionation column prior to step (f).
10. The process of claim 9, wherein the first isomerized stream is provided to the xylenes fractionation column at a higher location than the second isomerized stream.
11. A process for producing para-xylene, the process comprising:
 - (a) providing a hydrocarbon feed comprising xylenes and ethylbenzene to a para-xylene recovery unit;
 - (b) recovering a para-xylene-rich stream, a para-xylene-depleted stream rich in ethylbenzene and a para-xylene-depleted stream low in ethylbenzene from the feed in the para-xylene recovery unit;
 - (c) separating the para-xylene-depleted stream rich in ethylbenzene and para-xylene-depleted stream low in ethylbenzene into an ethylbenzene-rich stream and an ethylbenzene-depleted stream in a divided wall column;
 - (d) isomerizing at least a portion of the ethylbenzene-depleted stream at least partially in the liquid phase to produce a first isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream;
 - (e) isomerizing at least a portion of the ethylbenzene-rich stream at least partially in the vapor phase to produce a second isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream; and
 - (f) recycling at least a portion of the first and second isomerized streams to the para-xylene recovery unit.
12. The process of claim 11, wherein the para-xylene recovery unit comprises a simulated moving bed adsorption unit.

13. The process of claim 11 or claim 12, wherein step (e) is conducted under ethylbenzene dealkylation conditions.
14. The process of claim 11 or claim 12, wherein step (e) is conducted under ethylbenzene isomerization conditions.
15. The process of any one of claims 11-14, wherein the hydrocarbon feed is selected from the group consisting of a reformat stream, a hydrocracking product stream, a xylene or EB reaction product stream, an aromatic alkylation product stream, an aromatic disproportionation stream, an aromatic transalkylation stream, a methanol to aromatic product stream, and/or a Cyclar™ process stream.
16. The process of any one of claims 11-14, wherein the hydrocarbon feed comprises a benzene and/or toluene methylation product stream.
17. The process of any one of claims 11-16, further comprising separating a C₇ isomerized stream from the second isomerized stream in a detoluenizing fractionation column prior to step (f).
18. The process of any one of claims 11-17, further comprising separating the first and second isomerized streams into an overhead stream comprising C₈ hydrocarbons and a bottoms stream containing C₉₊ hydrocarbons in a xylenes fractionation column prior to step (f).
19. The process of claim 18, wherein the first isomerized stream is provided to the xylenes fractionation column at a higher location than the second isomerized stream.
20. An apparatus for the production of para-xylene comprising:
a para-xylene recovery unit, which produces a para-xylene-rich stream and at least one para-xylene-depleted stream from a hydrocarbon feed, fluidly connected to a divided wall column in which the at least one para-xylene-depleted stream is separated into an ethylbenzene-rich stream and an ethylbenzene-depleted stream;
a liquid phase isomerization unit fluidly connected to the divided wall column to isomerize the ethylbenzene-depleted stream and produce a first isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream;

a vapor phase isomerization unit fluidly connected to the divided wall column to isomerize the ethylbenzene-rich stream and produce a second isomerized stream having a higher para-xylene concentration than the para-xylene-depleted stream.


21. The apparatus of claim 20, further comprising a xylenes fractionation column fluidly connected to the liquid phase isomerization unit, the vapor phase isomerization unit and the para-xylene recovery unit, wherein the xylenes fractionation column is downstream of the liquid phase isomerization unit and the vapor phase isomerization unit and upstream of the para-xylene recovery unit.

22. The apparatus of claim 21, further comprising a detoluenizing fractionation column fluidly connected to the vapor phase isomerization unit and the xylenes fractionation column, wherein the detoluenizing fractionation column is downstream of the vapor phase isomerization unit and upstream of the xylenes fractionation column.

23. The apparatus of claim 21 or claim 22, wherein the first isomerized stream is sent to a higher location in the xylenes fractionation column than the second isomerized stream.

24. The apparatus of any one of claims 20-23, wherein the para-xylene recovery unit produces two para-xylene-depleted streams.

FIG. 1
(Prior Art)

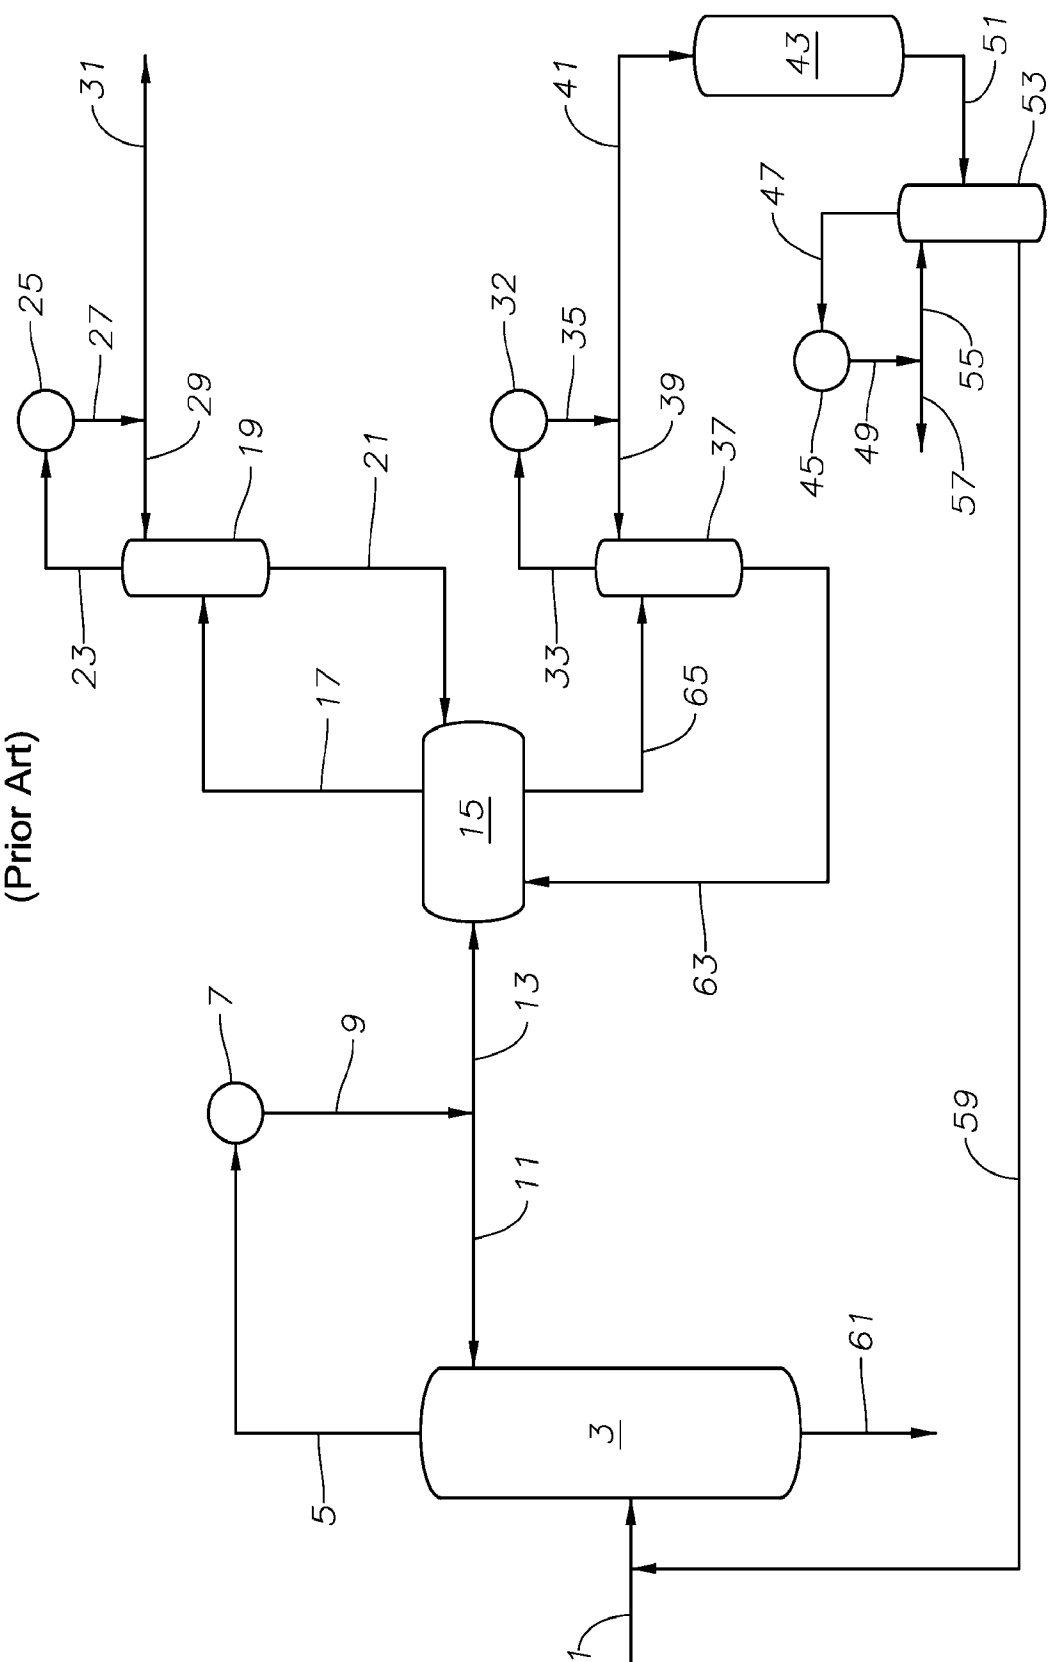

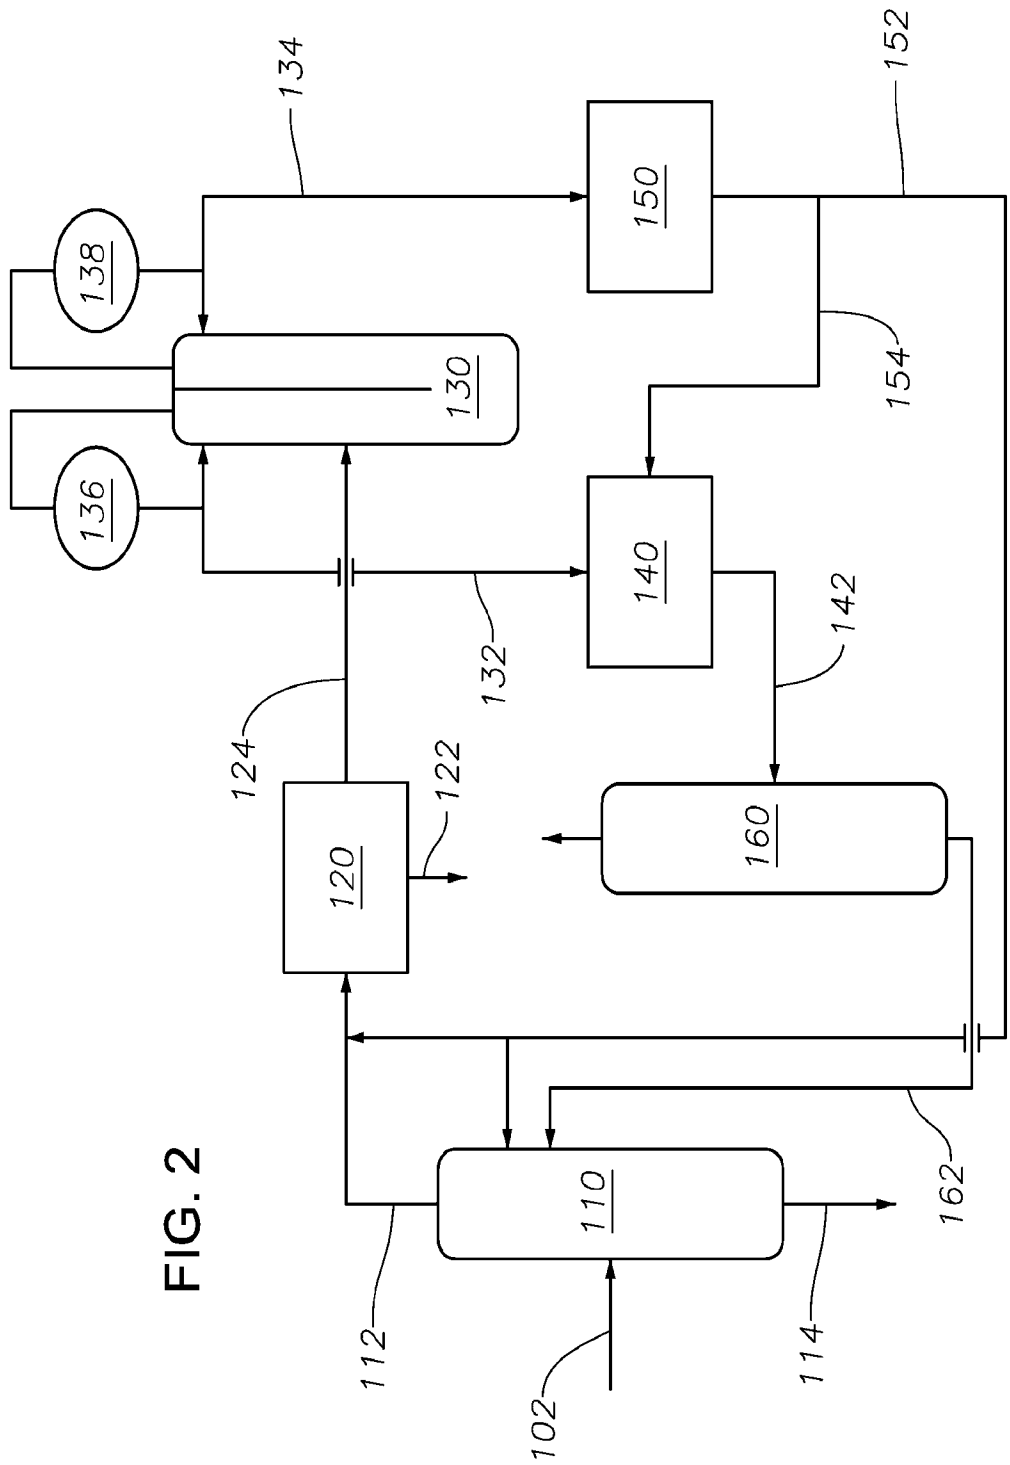


FIG. 2

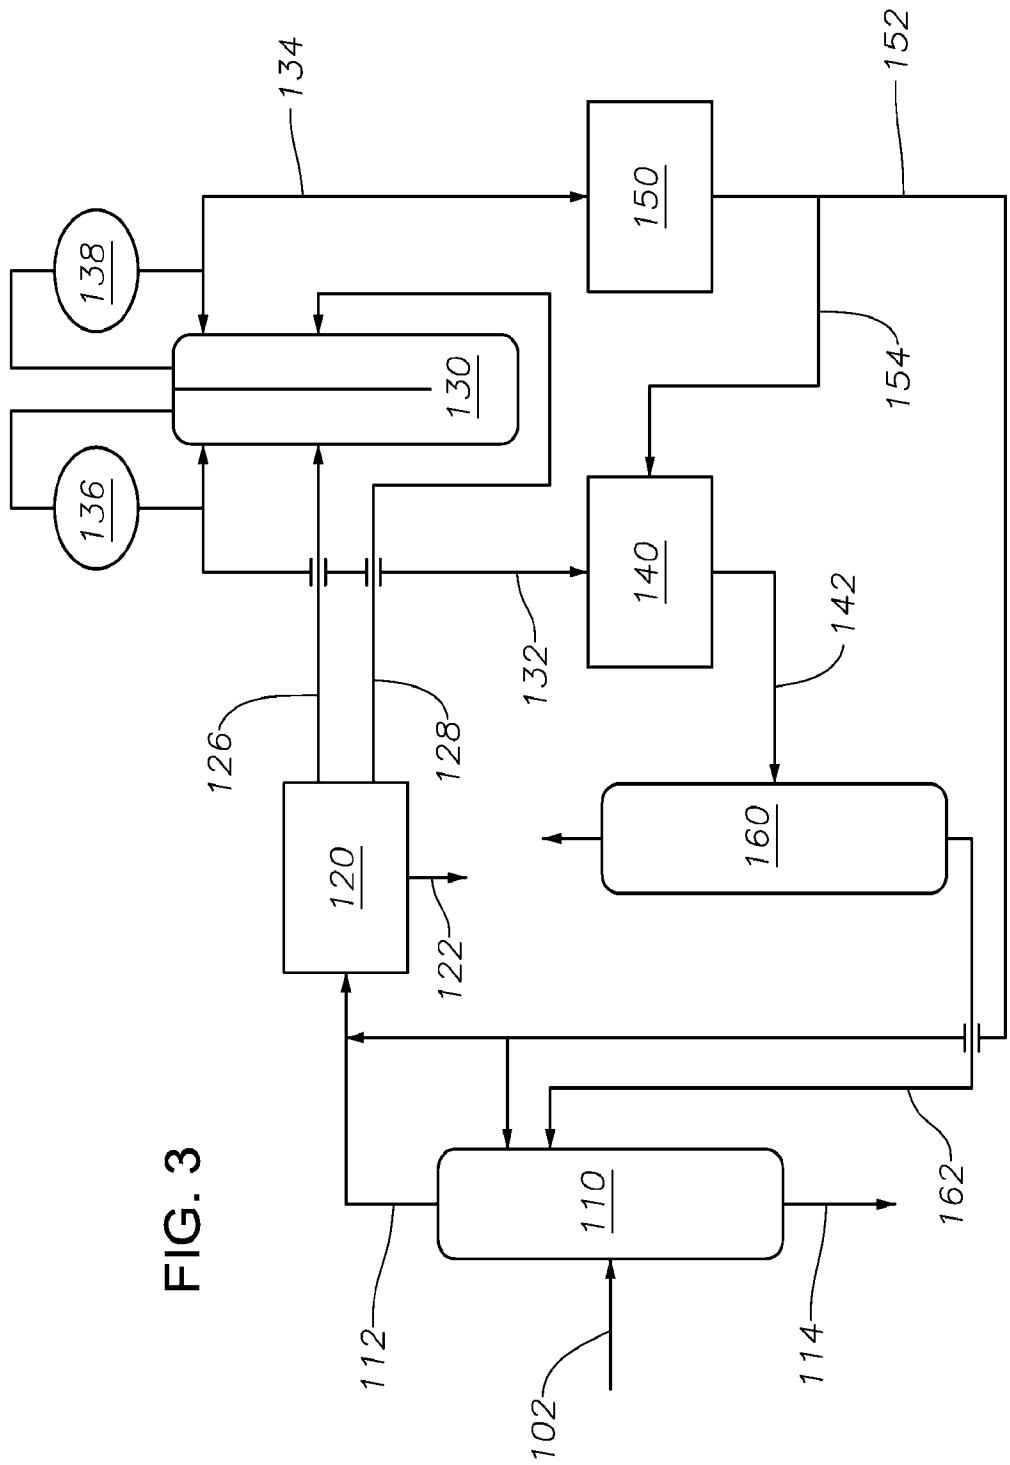


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/065703

A. CLASSIFICATION OF SUBJECT MATTER INV. C07C5/22 C07C5/27 C07C7/04 C07C7/12 C07C7/14 C07C7/144 C07C7/148 C07C15/08 ADD. According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C07C Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2012/058108 A2 (EXXONMOBIL CHEM PATENTS INC [US]; PILLIOD DANA LYNN [US]; OU JOHN DI-Y) 3 May 2012 (2012-05-03) the whole document	1-24
A	US 7 915 471 B2 (LEFLAIVE PHILIBERT [FR] ET AL) 29 March 2011 (2011-03-29) the whole document	1-24
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 1 March 2016		Date of mailing of the international search report 08/03/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Cooper, Simon

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/065703

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012058108 A2	03-05-2012	CN 103201240 A	10-07-2013
		EP 2632880 A2	04-09-2013
		JP 2014501704 A	23-01-2014
		KR 20130056357 A	29-05-2013
		SG 189261 A1	31-05-2013
		SG 10201508779U A	27-11-2015
		WO 2012058108 A2	03-05-2012

US 7915471 B2	29-03-2011	AT 422195 T	15-02-2009
		CN 1886357 A	27-12-2006
		EP 1689695 A2	16-08-2006
		ES 2321198 T3	03-06-2009
		FR 2862638 A1	27-05-2005
		JP 4966664 B2	04-07-2012
		JP 2007512293 A	17-05-2007
		KR 20060116215 A	14-11-2006
		US 2008262282 A1	23-10-2008
		WO 2005054161 A2	16-06-2005
