



US005918115A

United States Patent [19]

[11] Patent Number: **5,918,115**

Kikuchi et al.

[45] Date of Patent: **Jun. 29, 1999**

[54] **METHOD OF MANUFACTURING A SURROUNDING GATE TYPE MOSFET**

[51] Int. Cl.⁶ **H01L 21/332**

[52] U.S. Cl. **438/138; 438/206; 438/212; 438/270**

[75] Inventors: **Shin Kikuchi**, Isehara; **Mamoru Miyawaki**, Tokyo; **Genzo Monma**, Hiratsuka; **Hayao Ohzu**, Kawasaki; **Shunsuke Inoue**, Yokohama; **Yoshio Nakamura**, Atsugi; **Takeshi Ichikawa**, Zama; **Osamu Ikeda**, Tokyo; **Tetsunobu Kohchi**, Hiratsuka, all of Japan

[58] Field of Search 438/137, 138, 438/206, 207, 212, 268, 270, 220, 197

[56] References Cited

U.S. PATENT DOCUMENTS

4,670,768	6/1987	Sunami et al.	438/212
5,155,054	10/1992	Itoh	437/45
5,169,795	12/1992	Nishizawa et al.	437/41
5,177,027	1/1993	Lowrey et al.	437/38

[73] Assignee: **Canon Kabushiki Kaisha**, Tokyo, Japan

Primary Examiner—Tuan H. Nguyen
Attorney, Agent, or Firm—Fitzpatrick, Cella, Harper & Scinto

[21] Appl. No.: **08/901,936**

[22] Filed: **Jul. 29, 1997**

Related U.S. Application Data

[57] ABSTRACT

[60] Continuation of application No. 08/406,250, Mar. 17, 1995, abandoned, which is a division of application No. 07/872,295, Apr. 22, 1992, Pat. No. 5,466,961.

A semiconductor device including: an insulated gate type transistor having a columnar semiconductor region formed on the main side of a semiconductor substrate, a gate electrode formed on the side surface of the columnar semiconductor region while interposing a gate insulating film and main electrode regions respectively formed on and formed below the columnar semiconductor region; and a memory element which is formed on the upper main electrode region and which can be broken electrically.

[30] Foreign Application Priority Data

Apr. 23, 1991	[JP]	Japan	3-92304
Apr. 23, 1991	[JP]	Japan	3-92305
Apr. 26, 1991	[JP]	Japan	3-97243
Jun. 28, 1991	[JP]	Japan	3-184168
Jun. 28, 1991	[JP]	Japan	3-184169
Jun. 28, 1991	[JP]	Japan	3-184170
Jun. 28, 1991	[JP]	Japan	3-184171

6 Claims, 112 Drawing Sheets

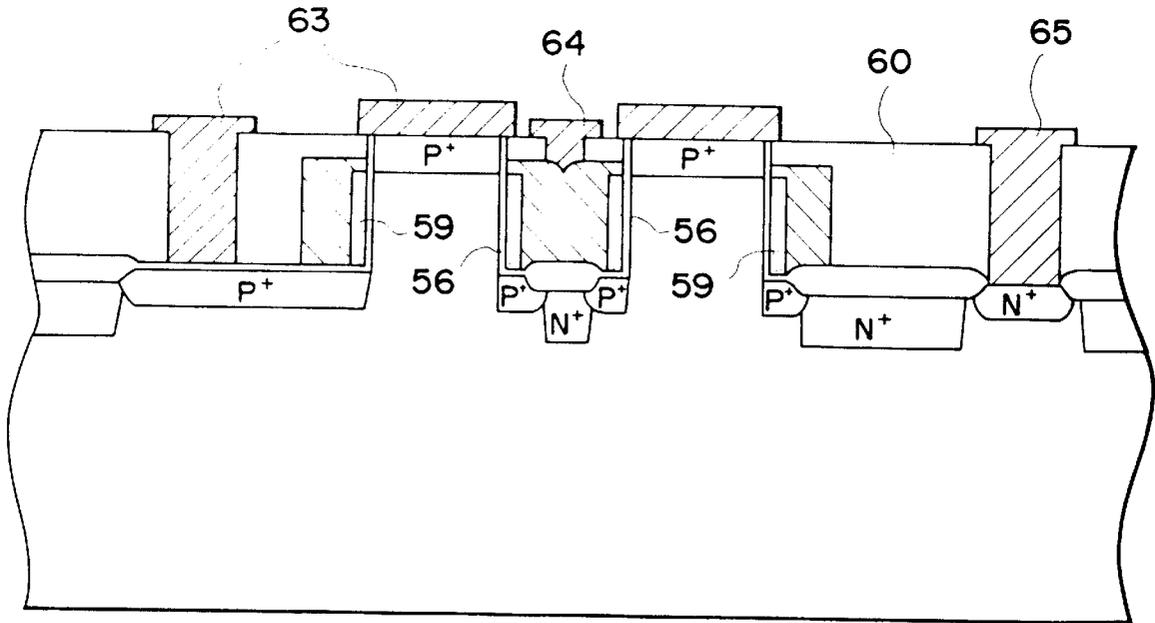


FIG. 1

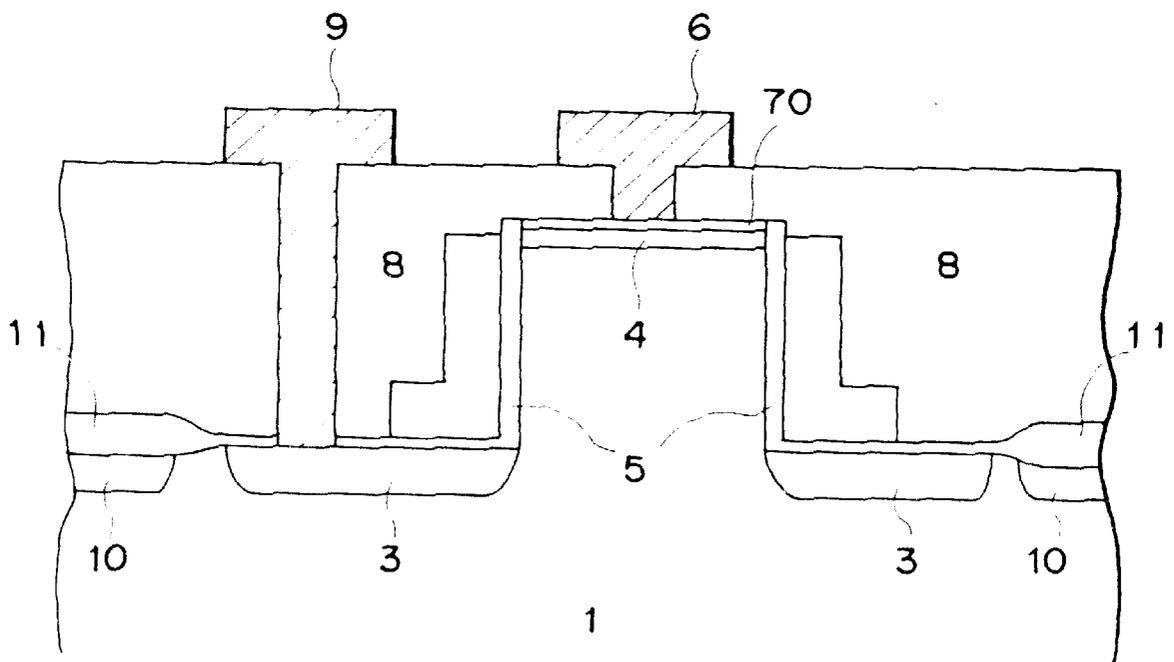


FIG. 2

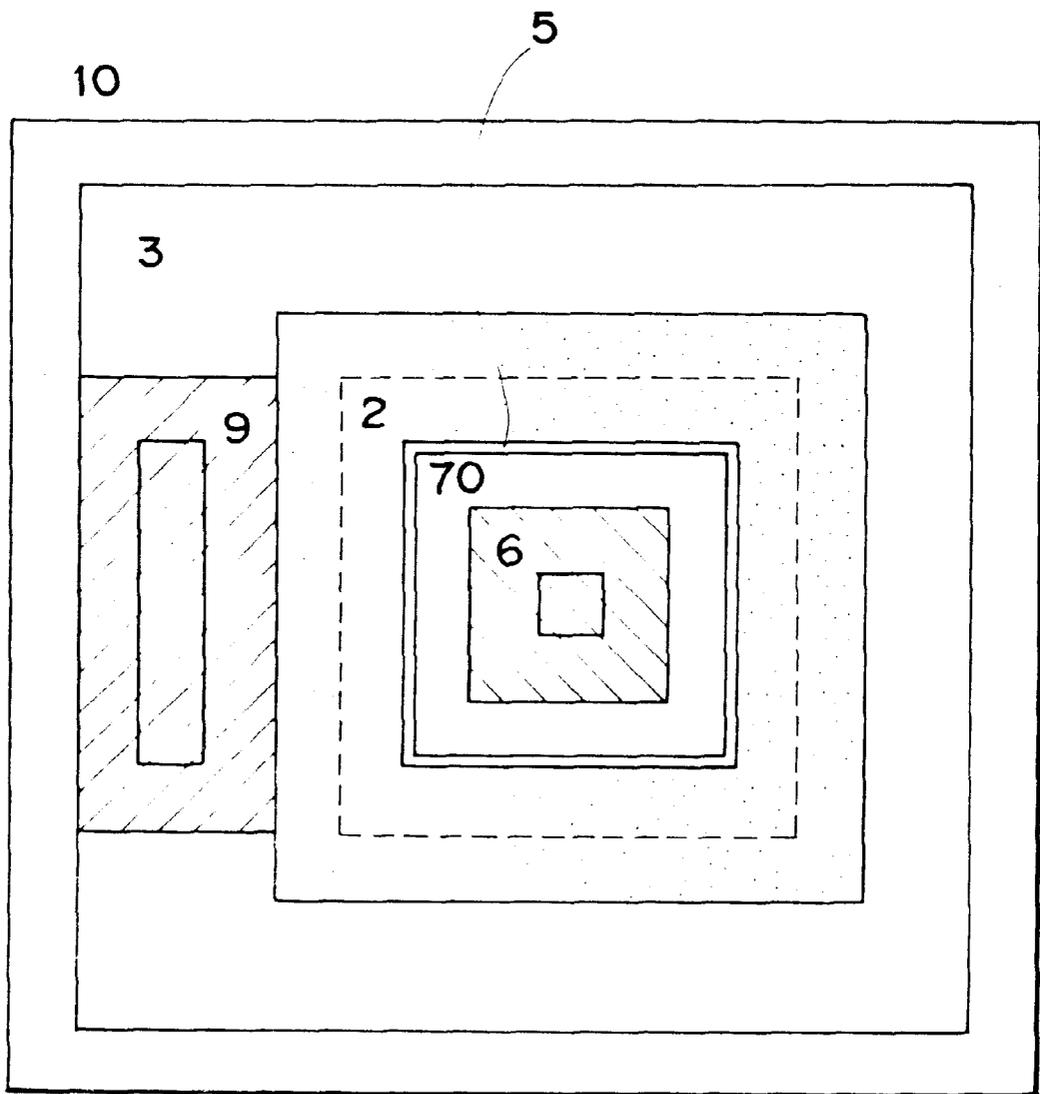


FIG. 3

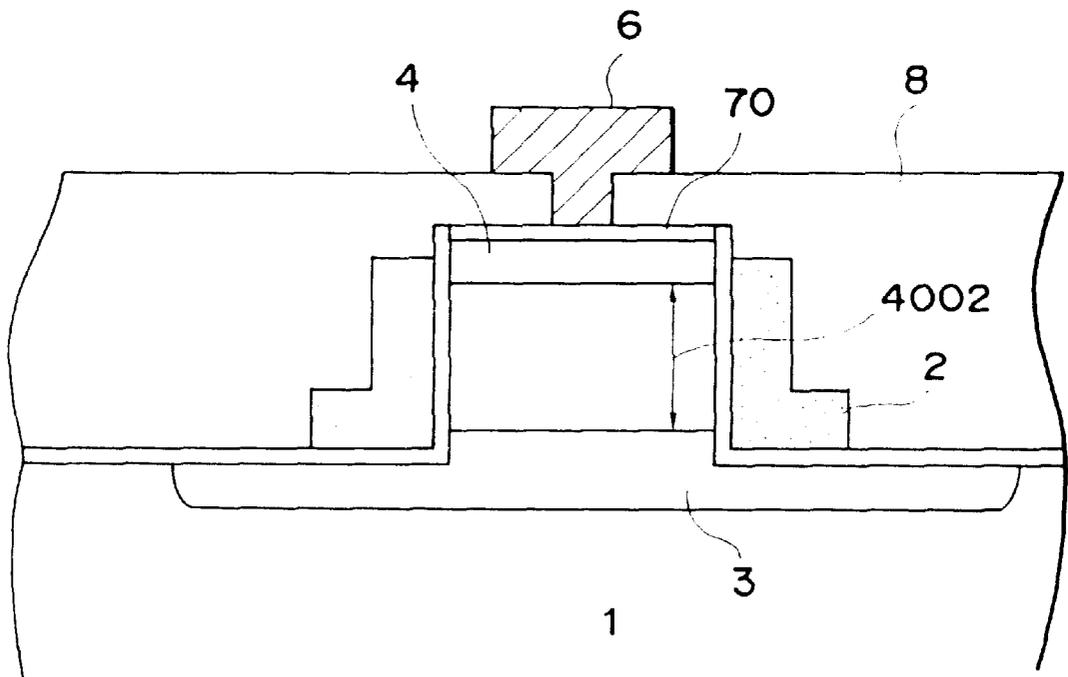


FIG. 4

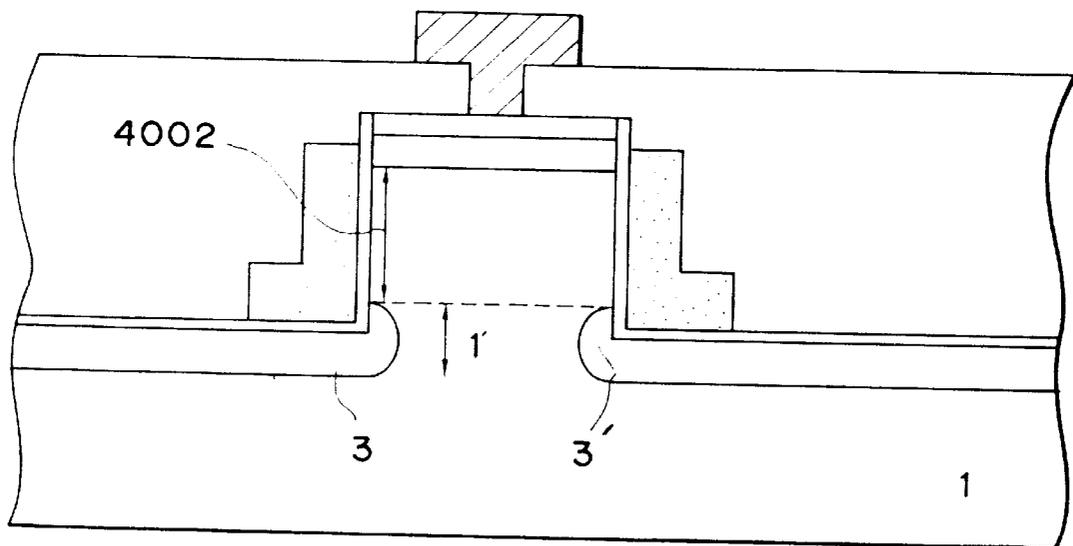


FIG. 5

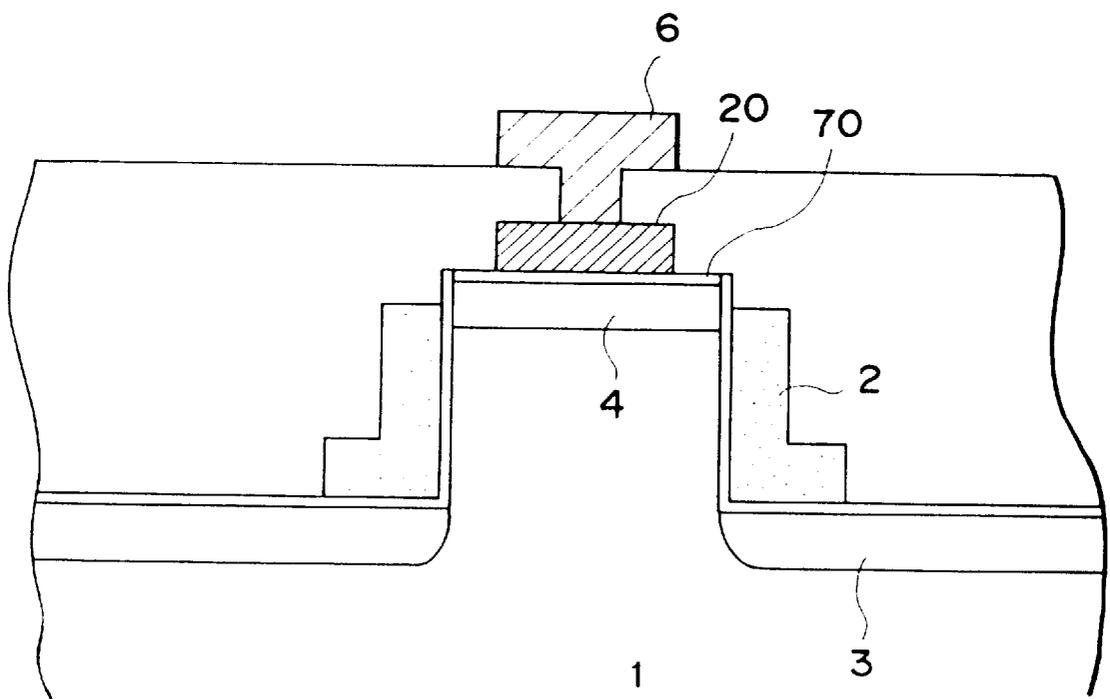


FIG. 6

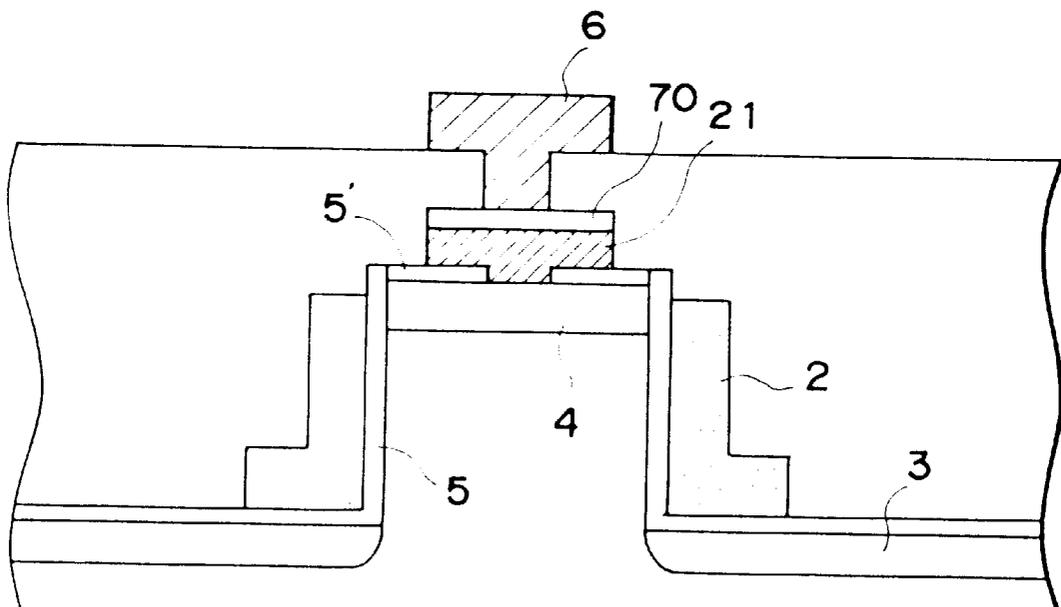


FIG. 7

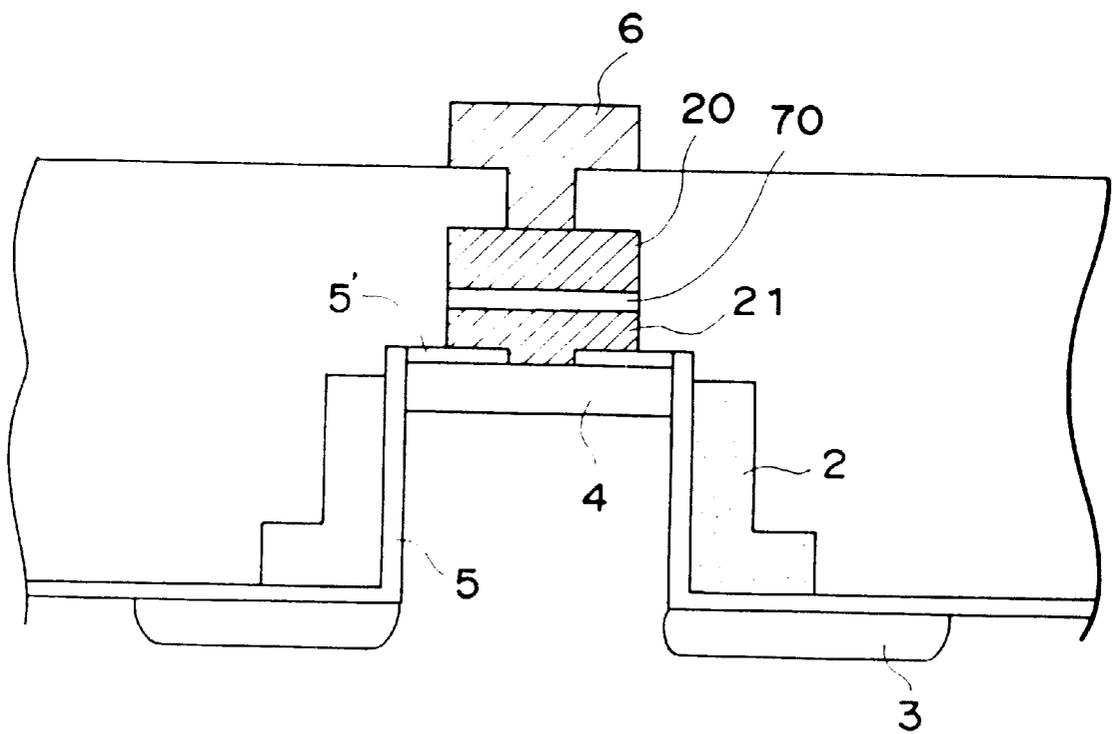


FIG. 9

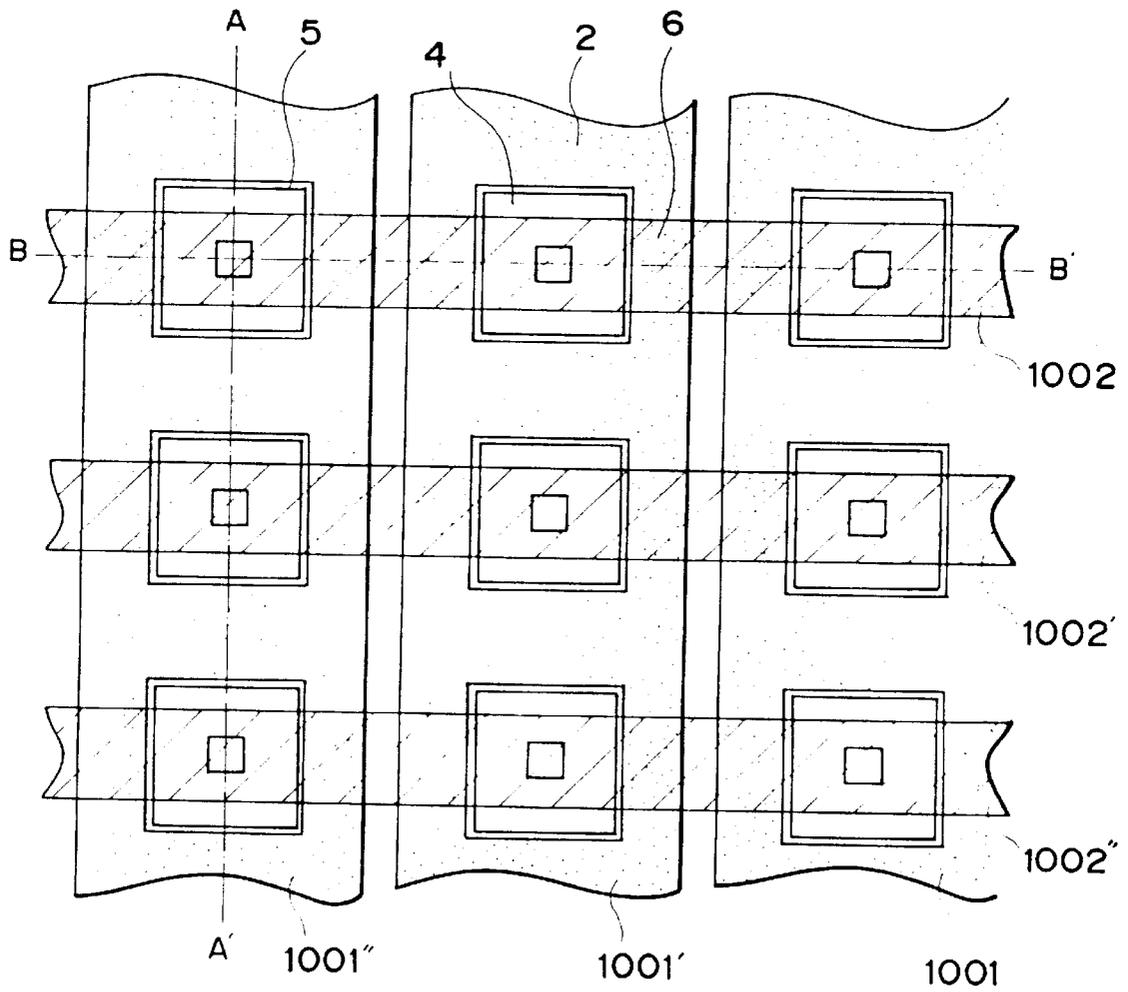


FIG. 10

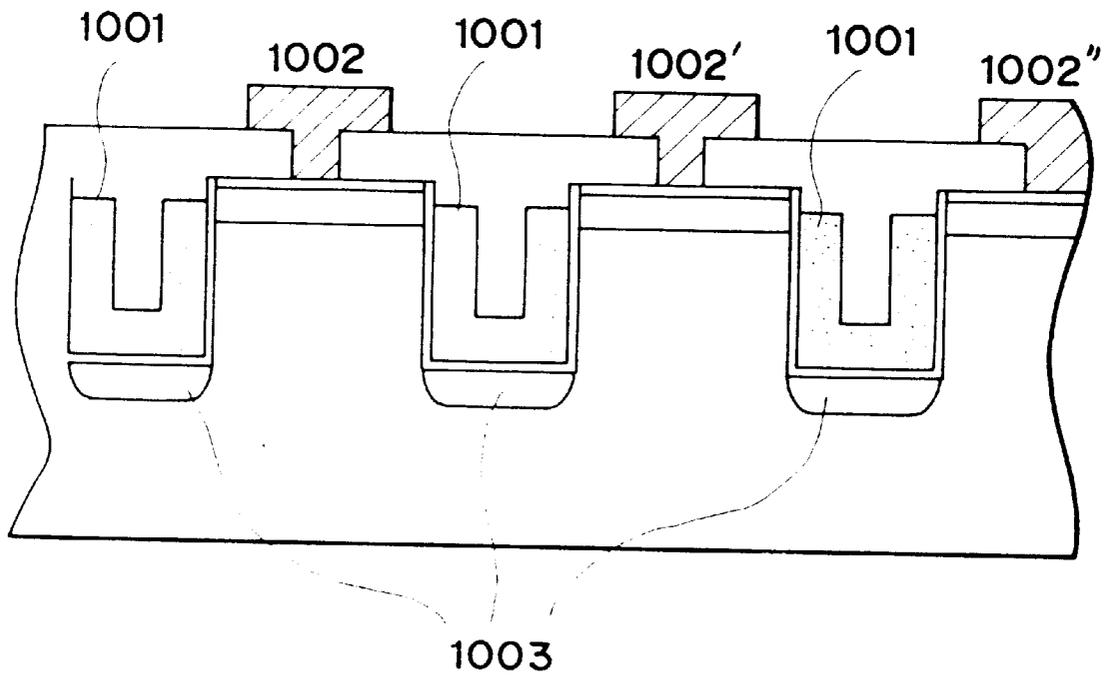


FIG. 11

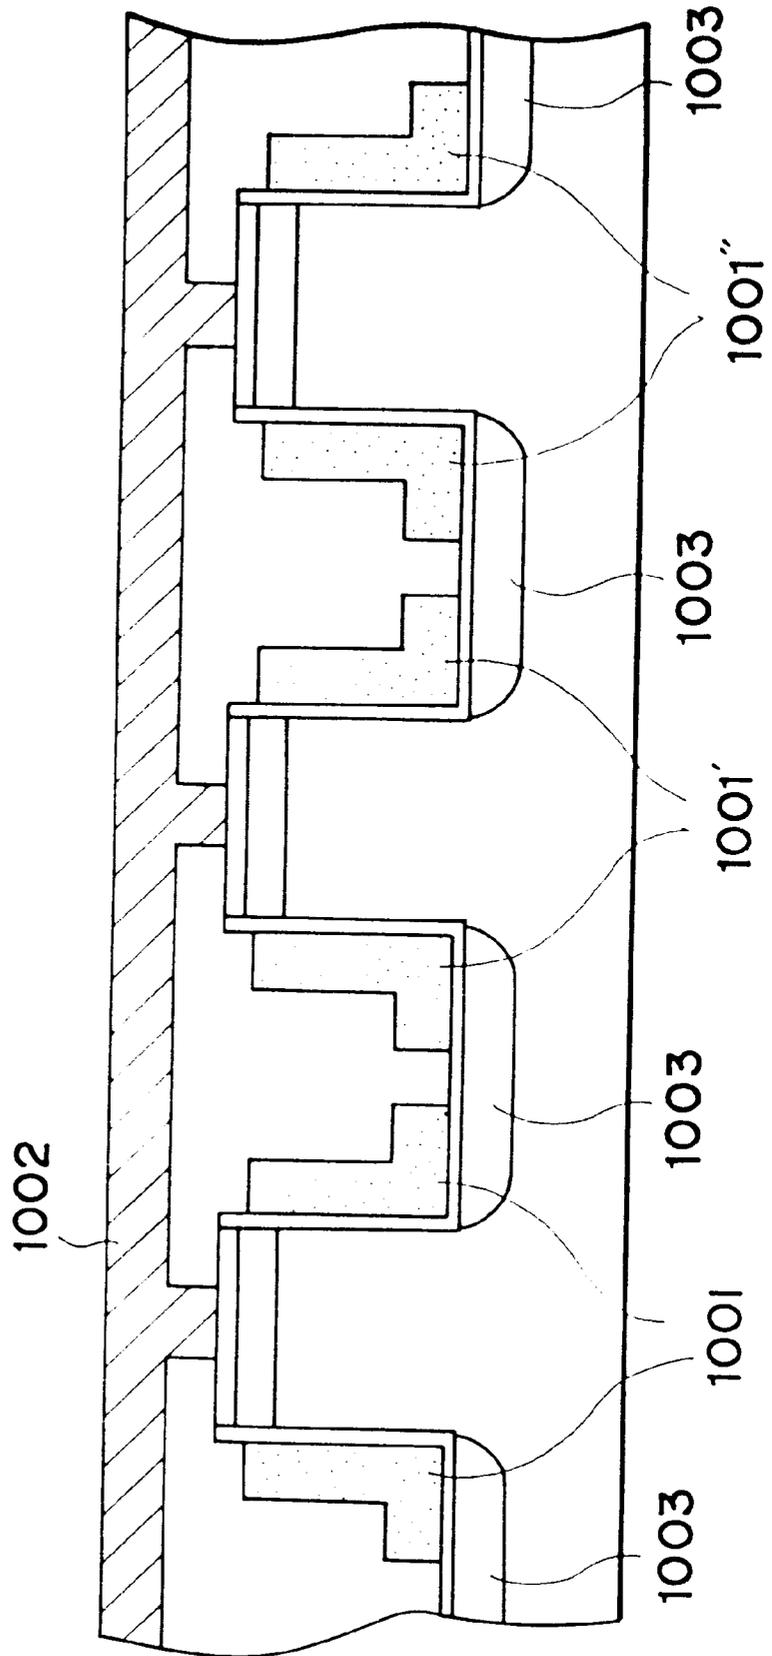


FIG. 12

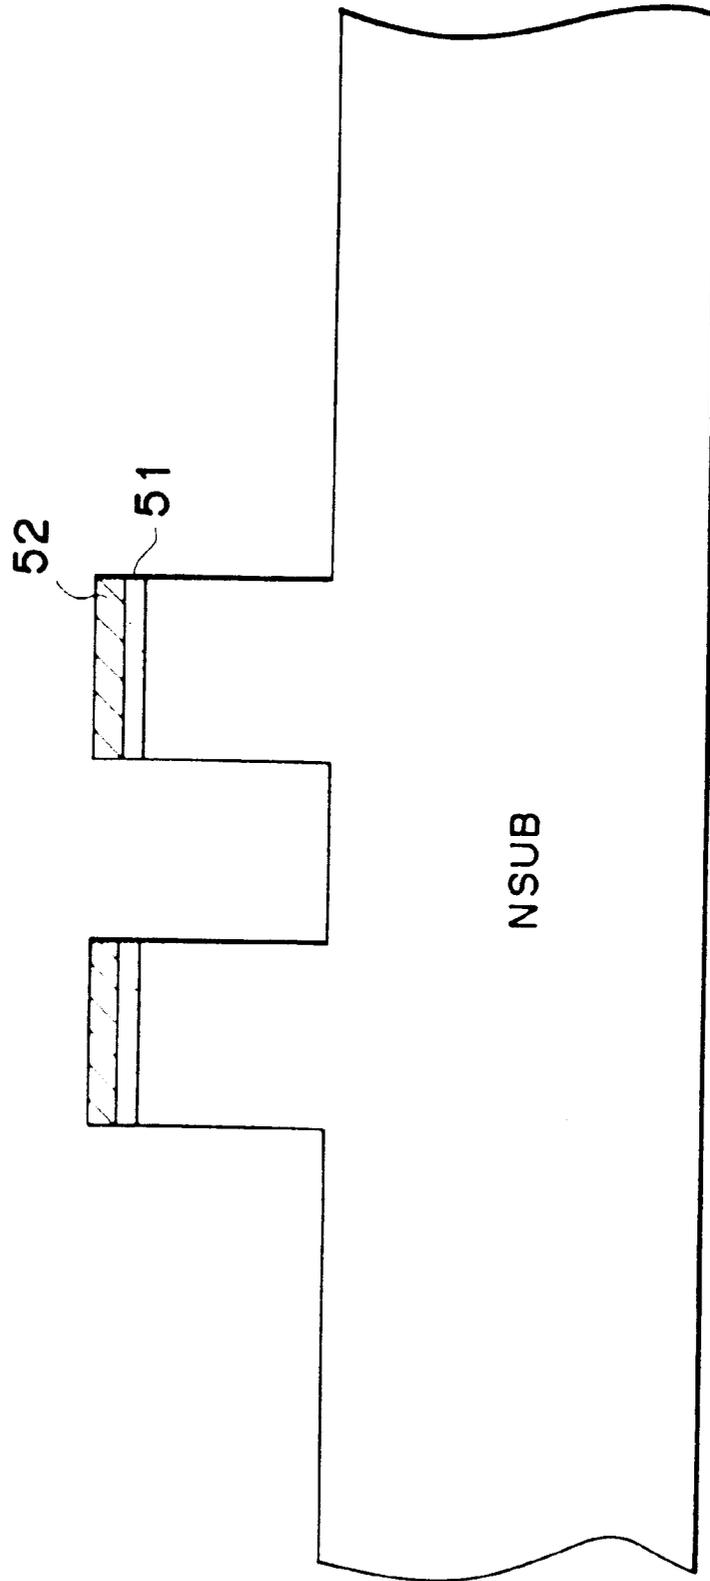


FIG. 13

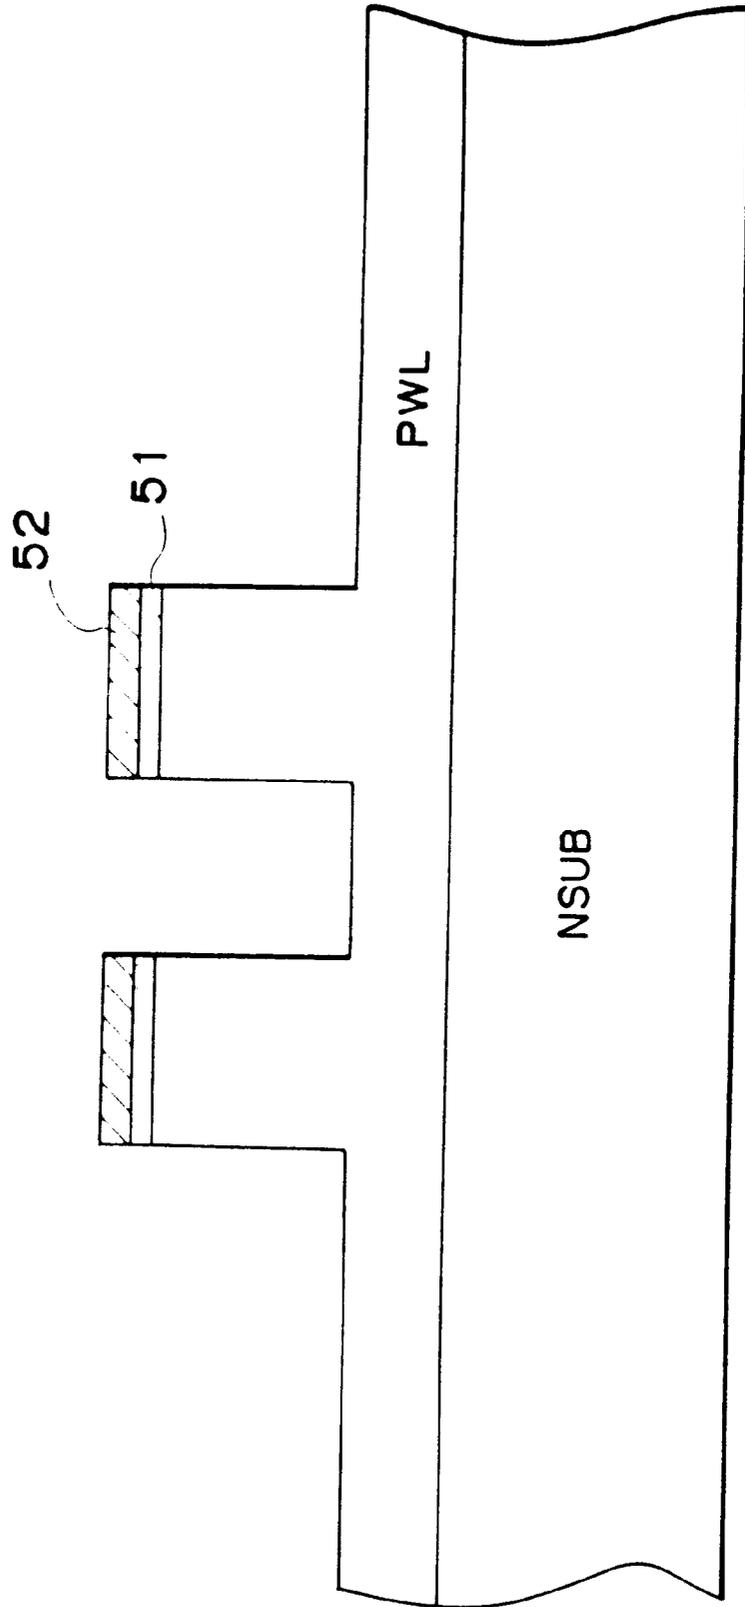


FIG. 14

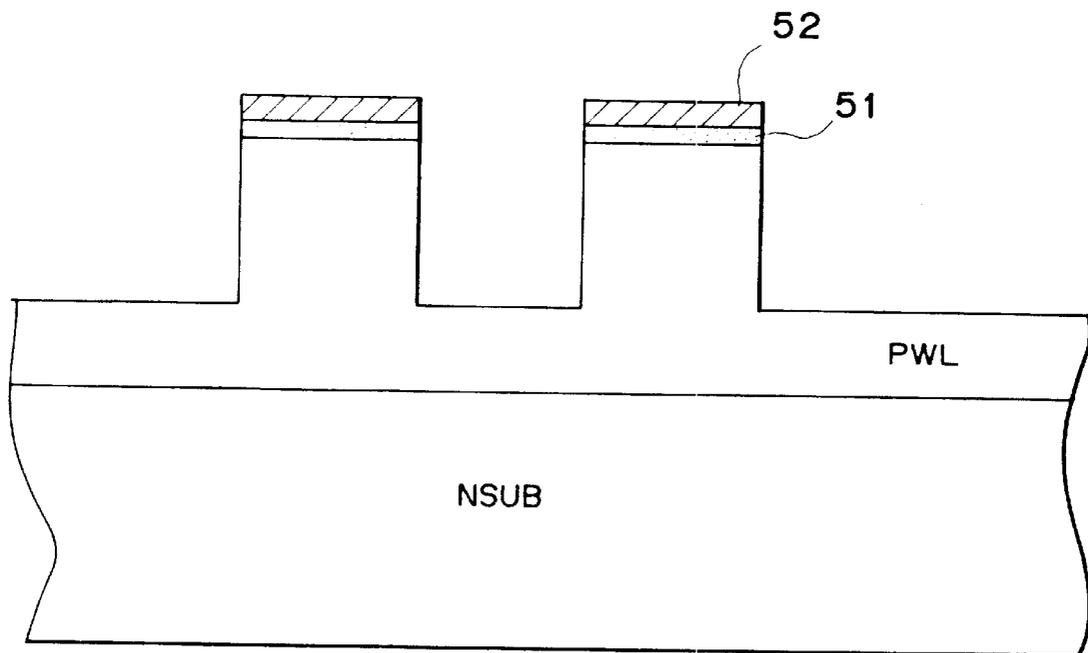


FIG. 15

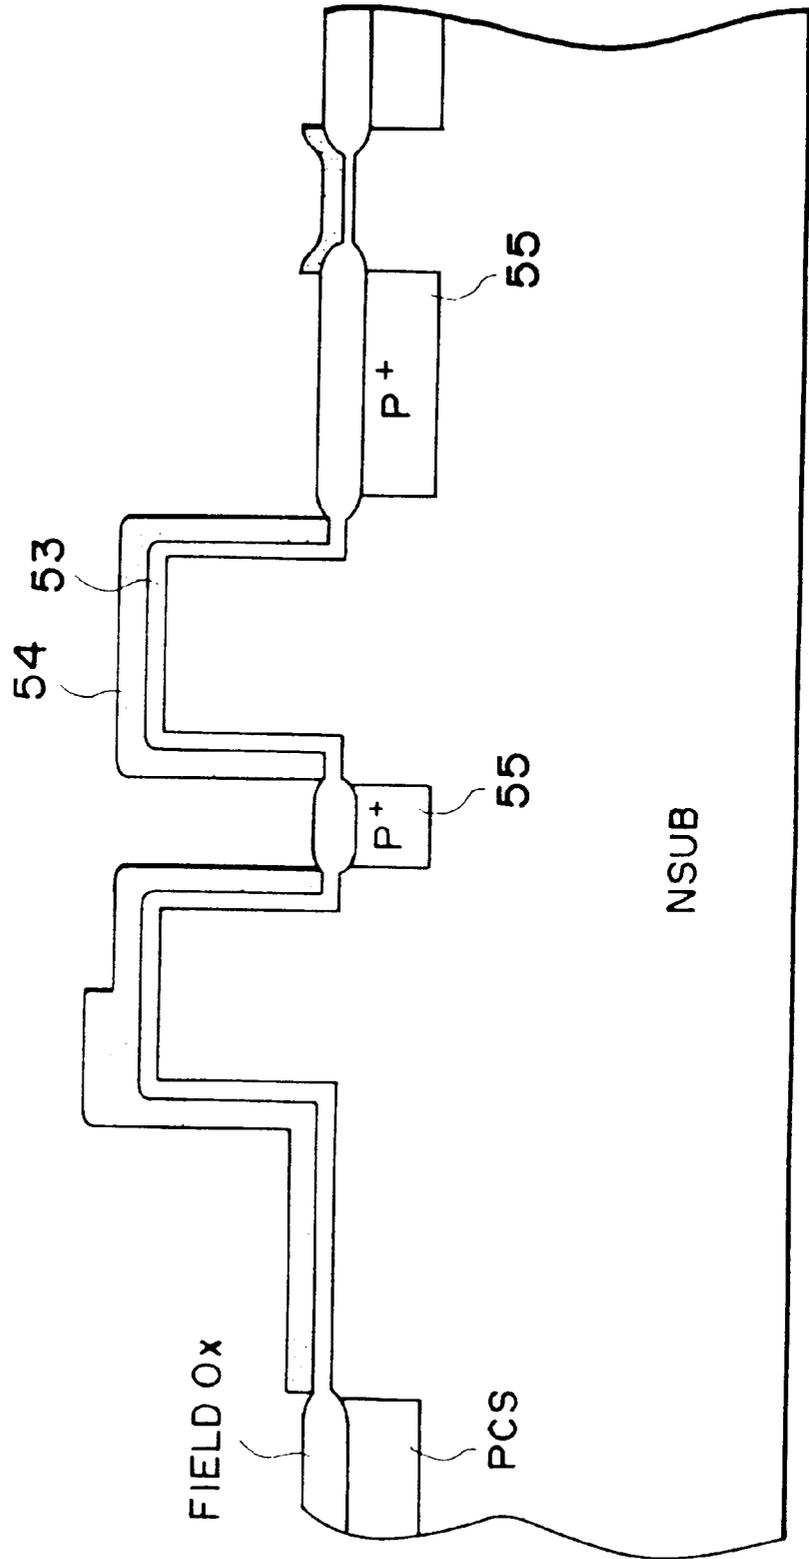


FIG. 16

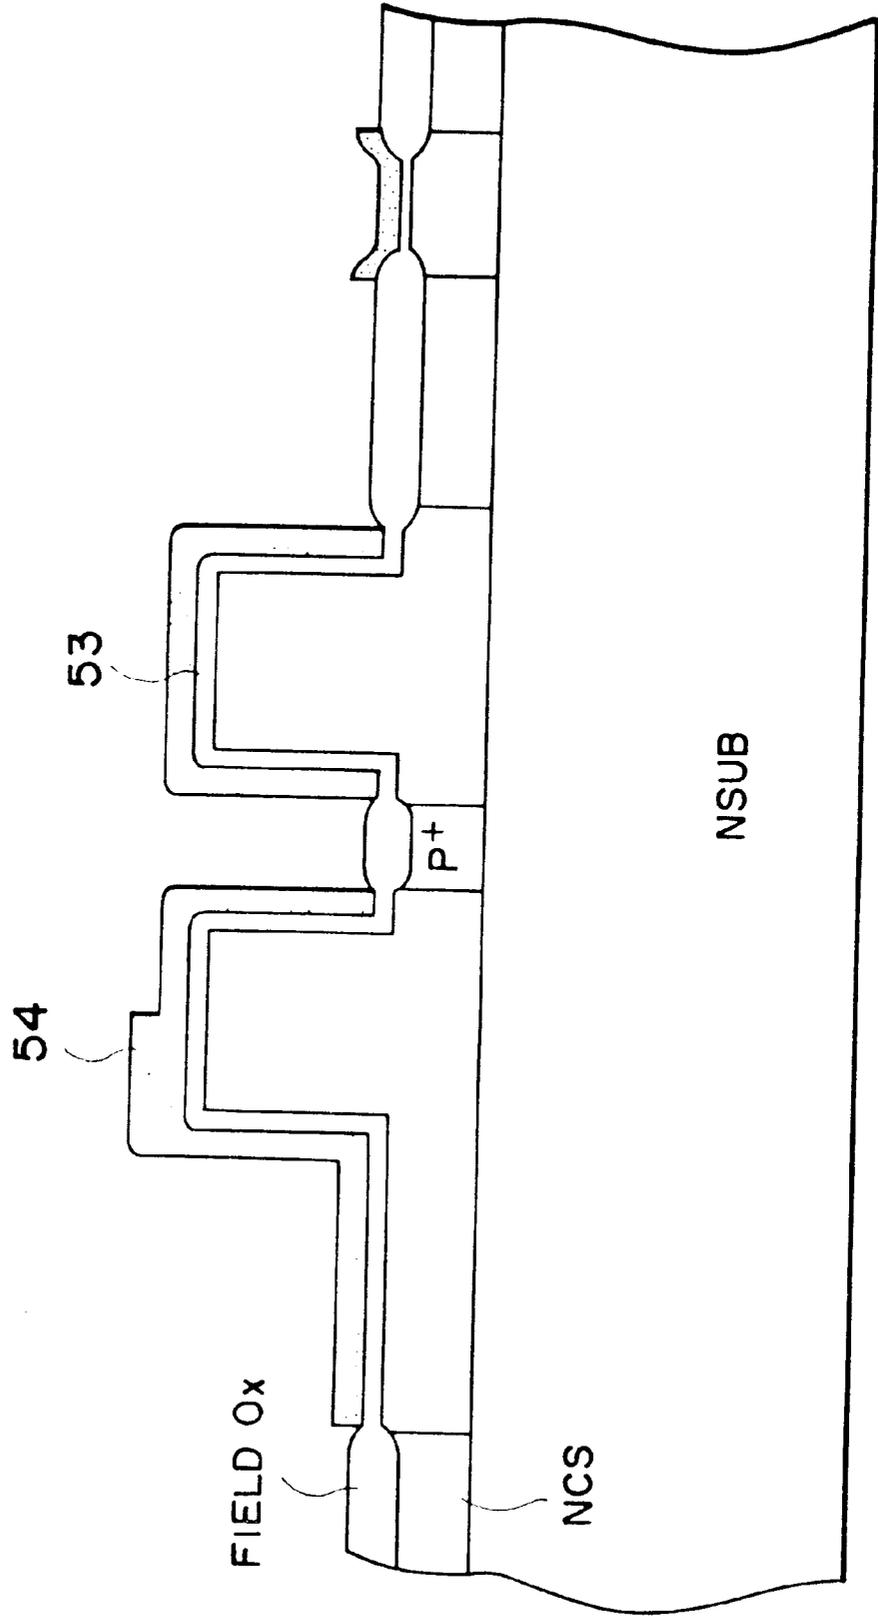


FIG. 17

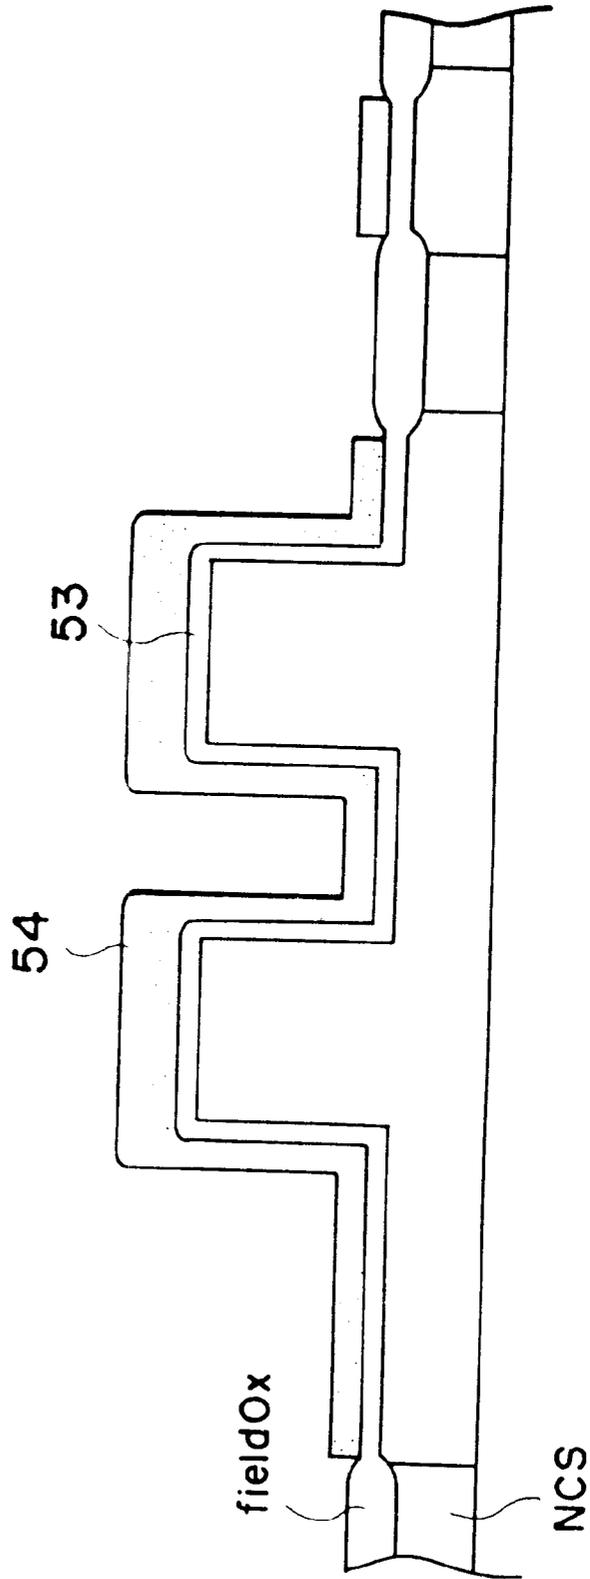


FIG. 18

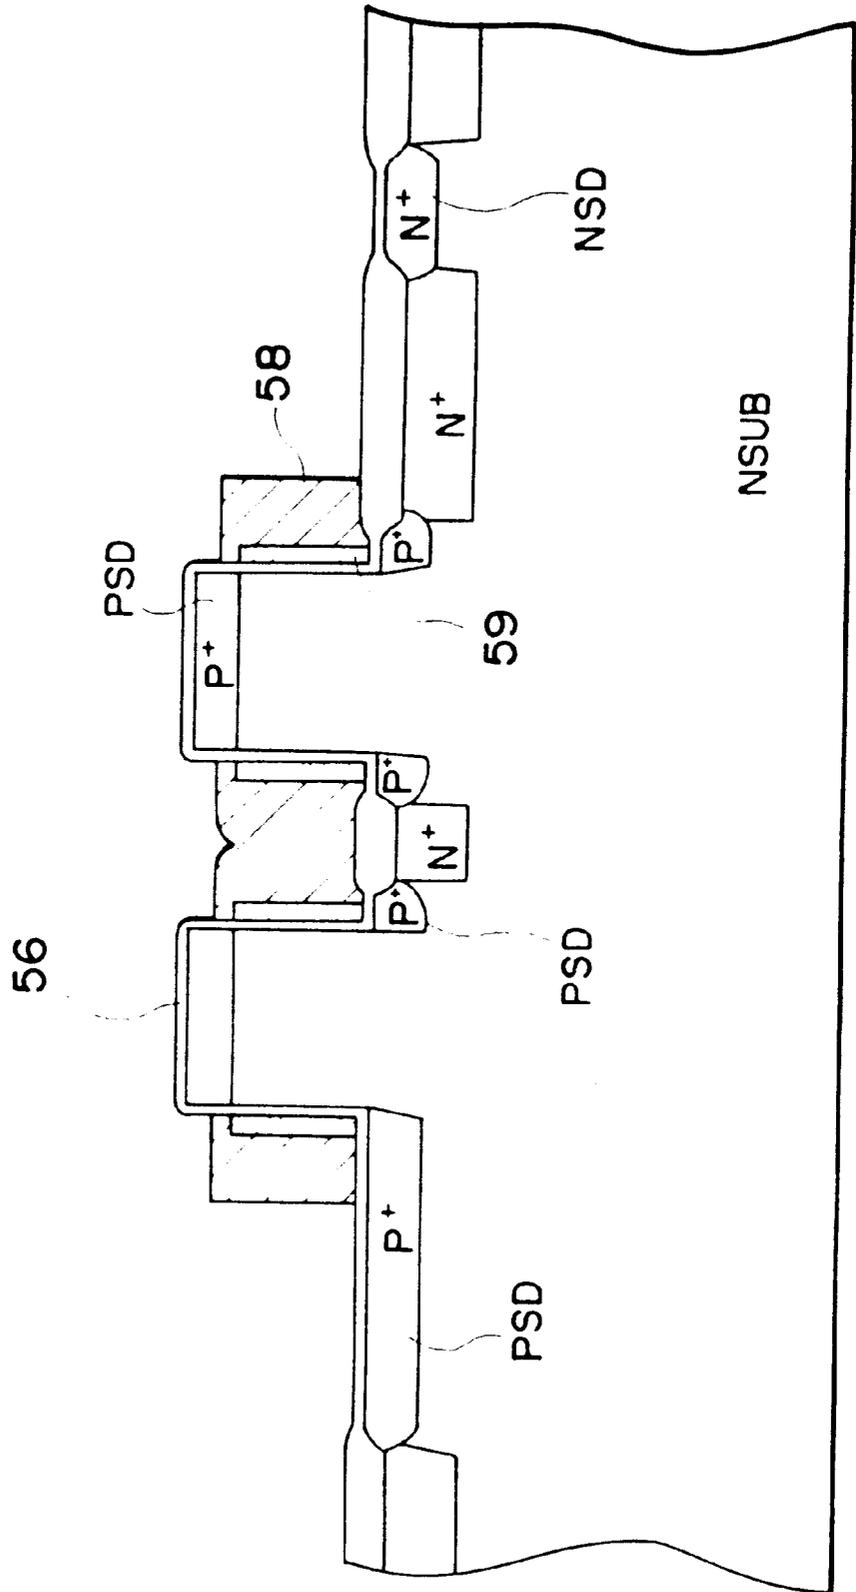


FIG. 19

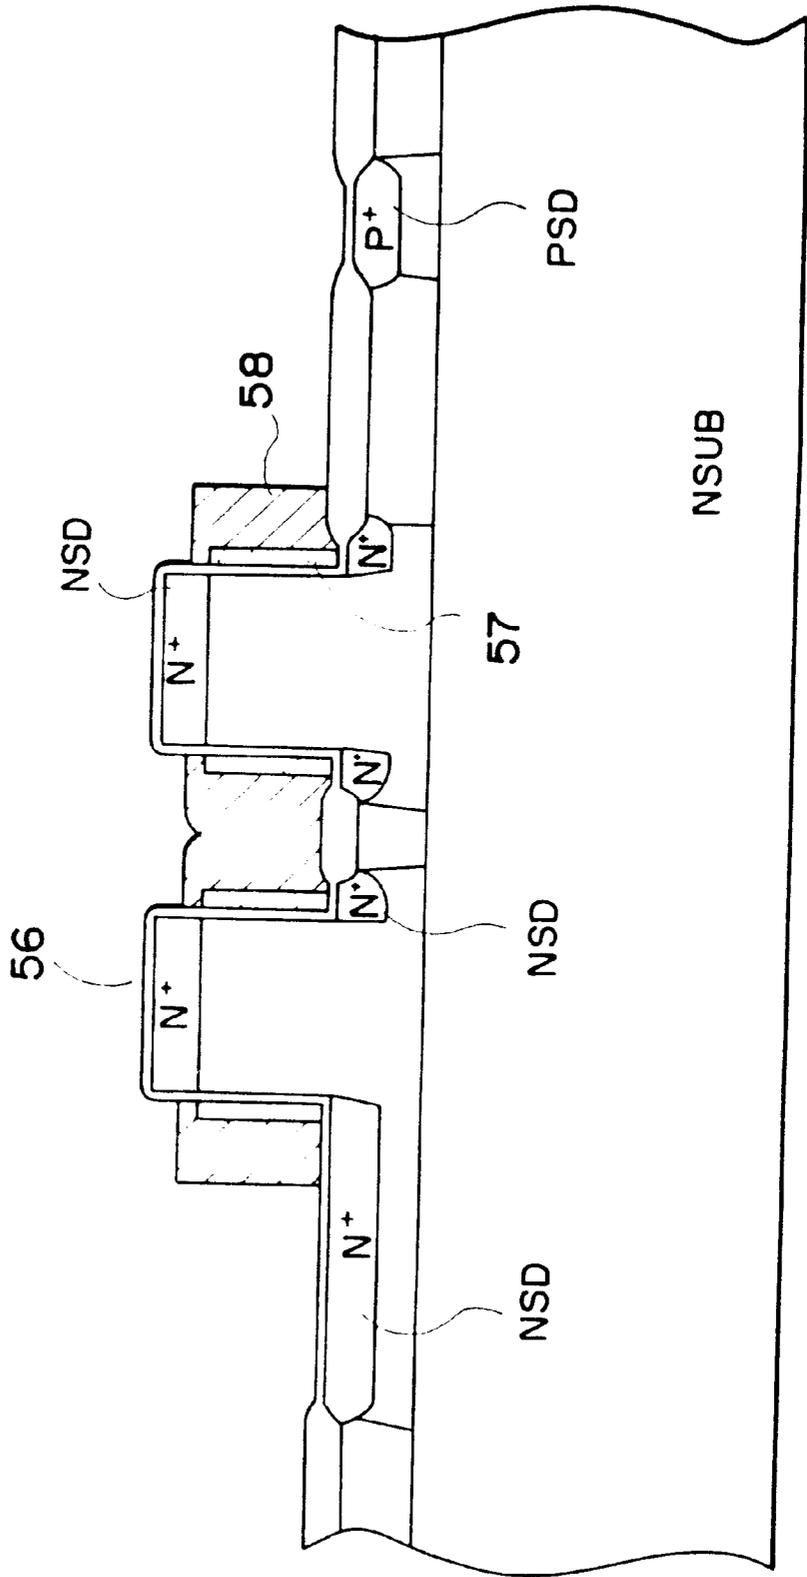


FIG. 20

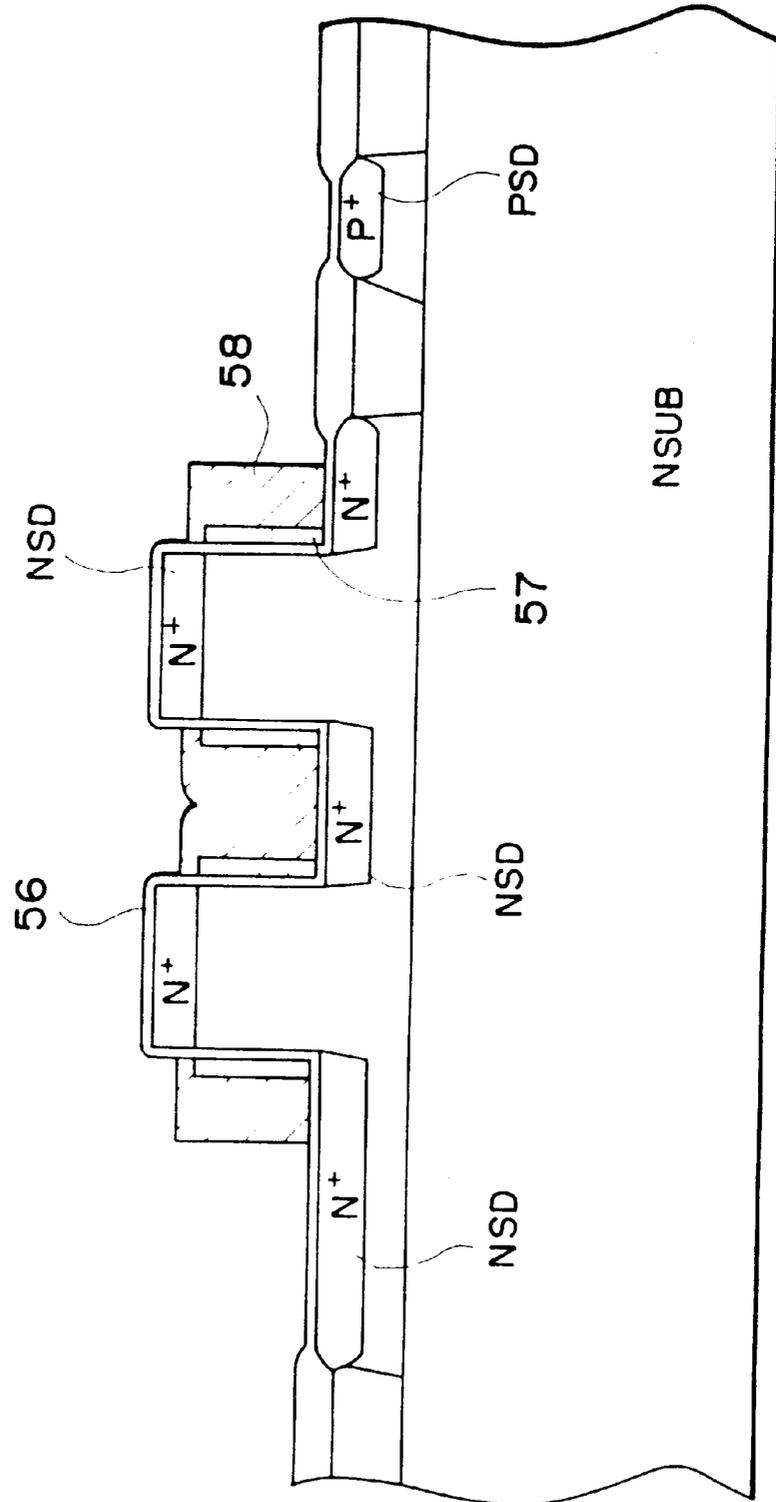


FIG. 21

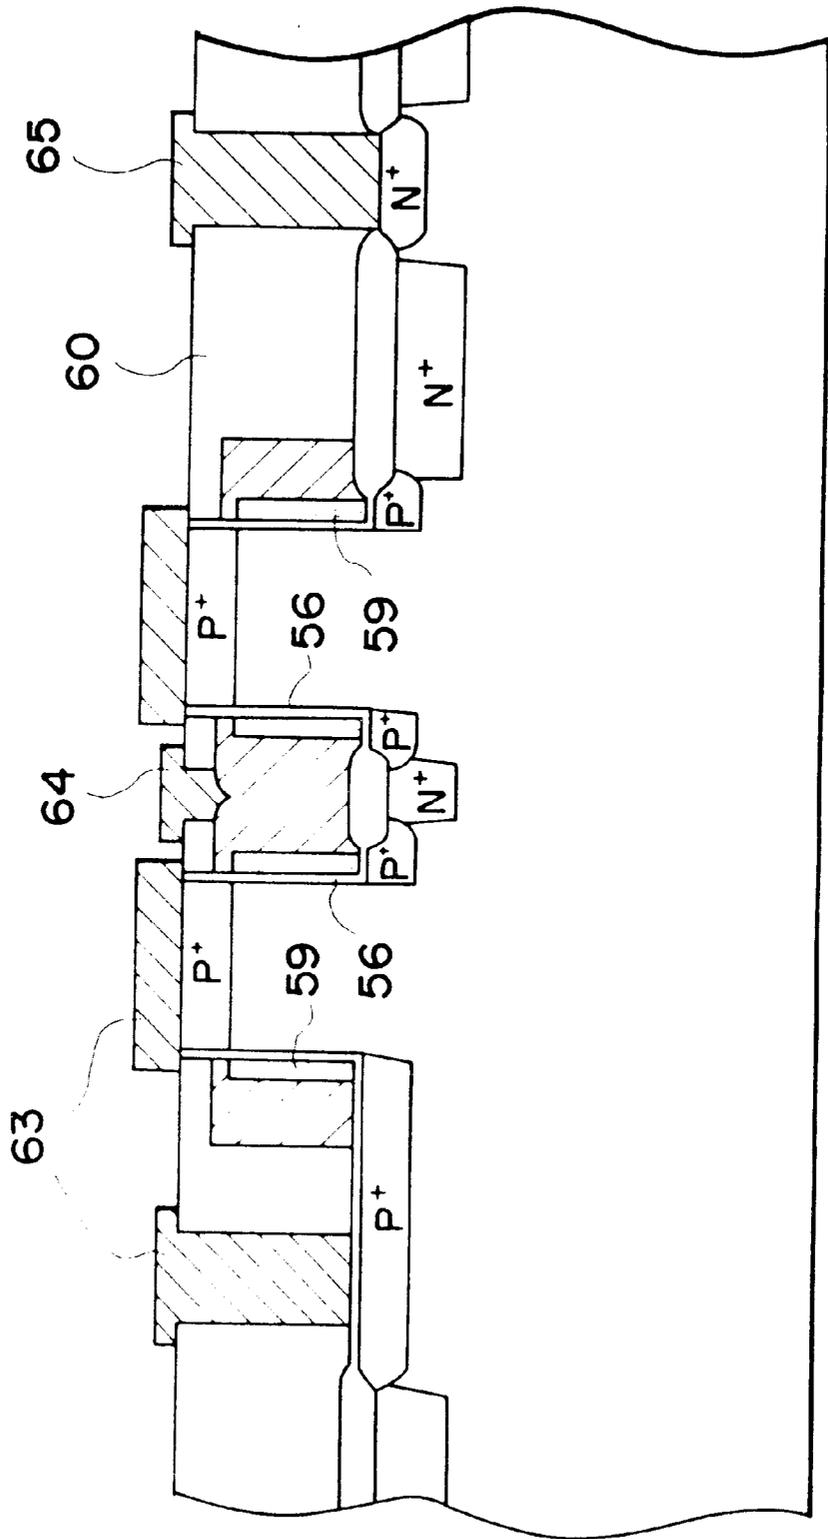


FIG. 22

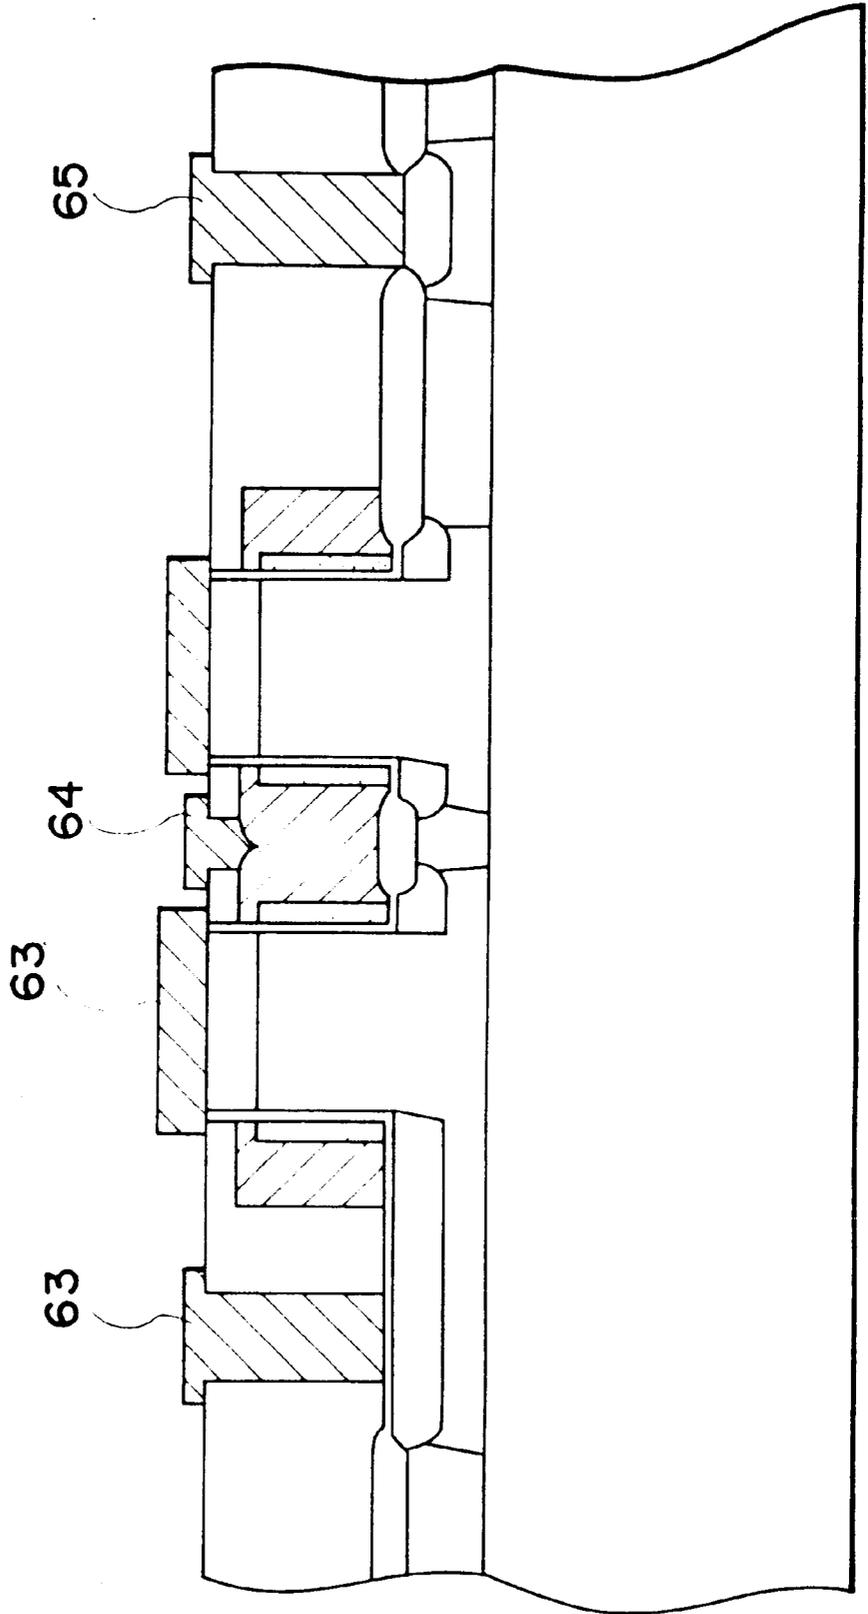


FIG. 23

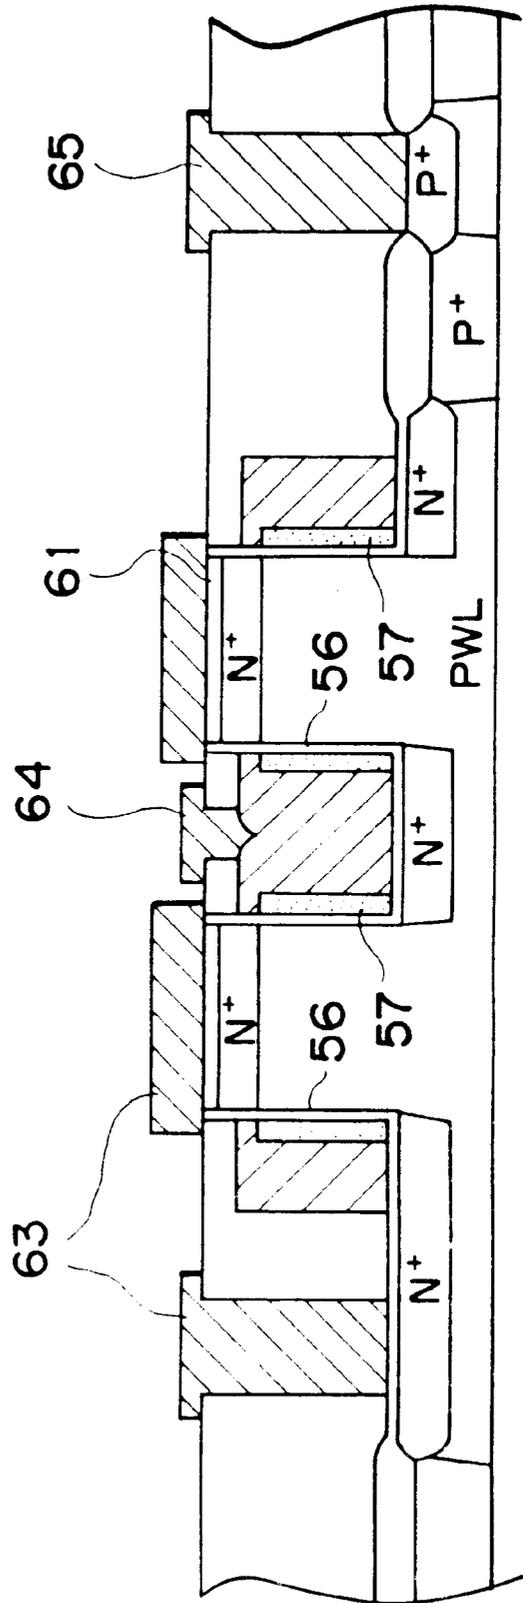


FIG. 24

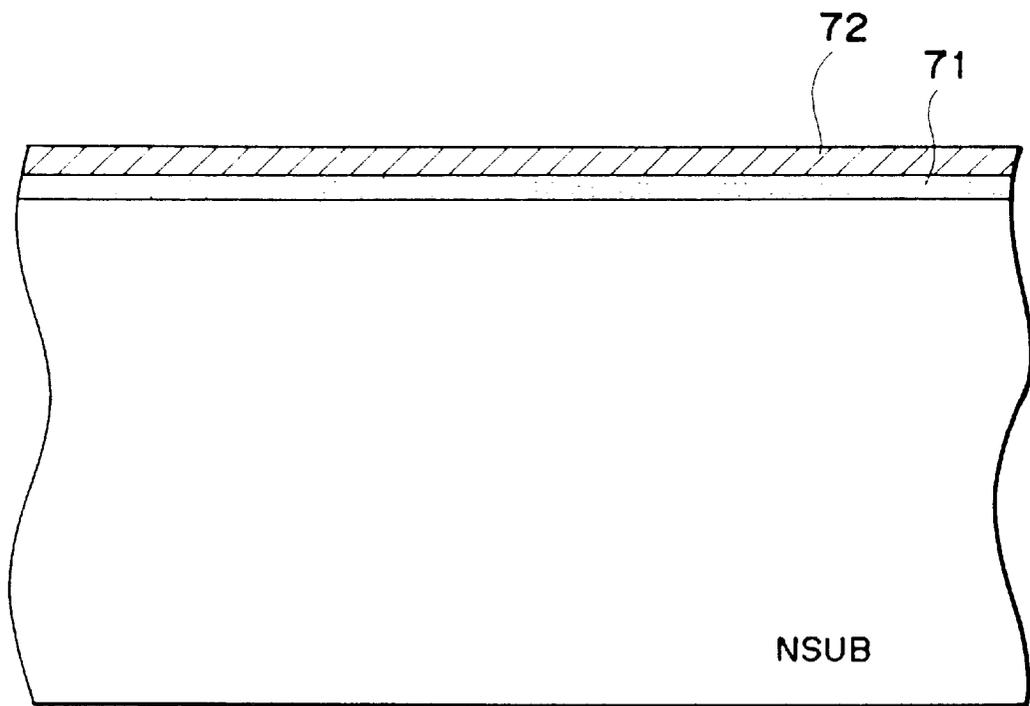


FIG. 25

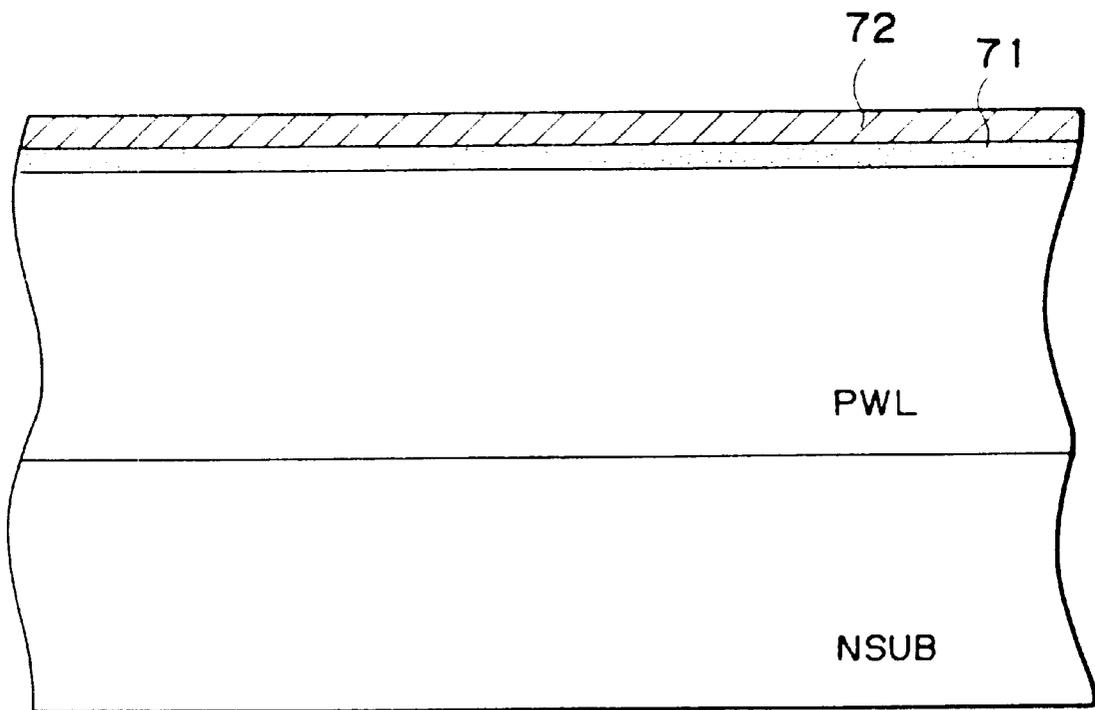


FIG. 26

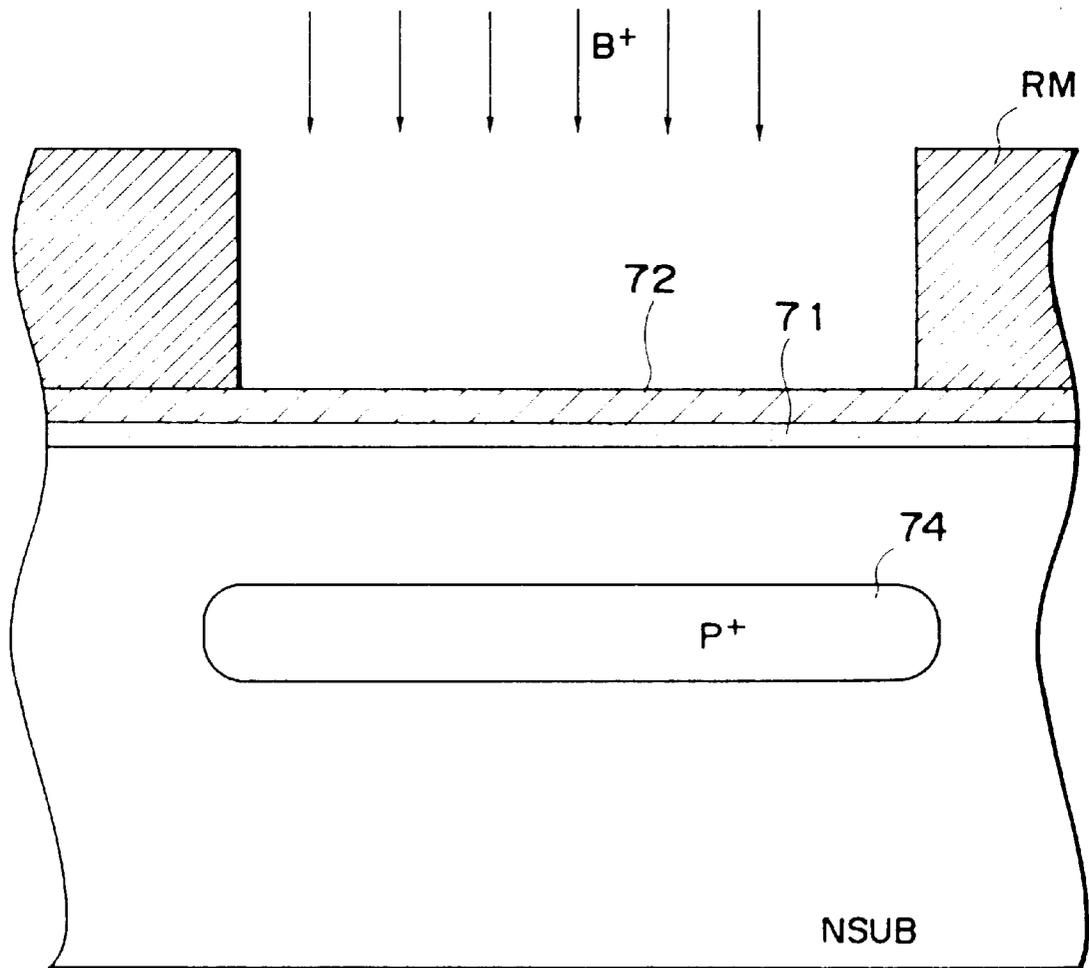


FIG. 27

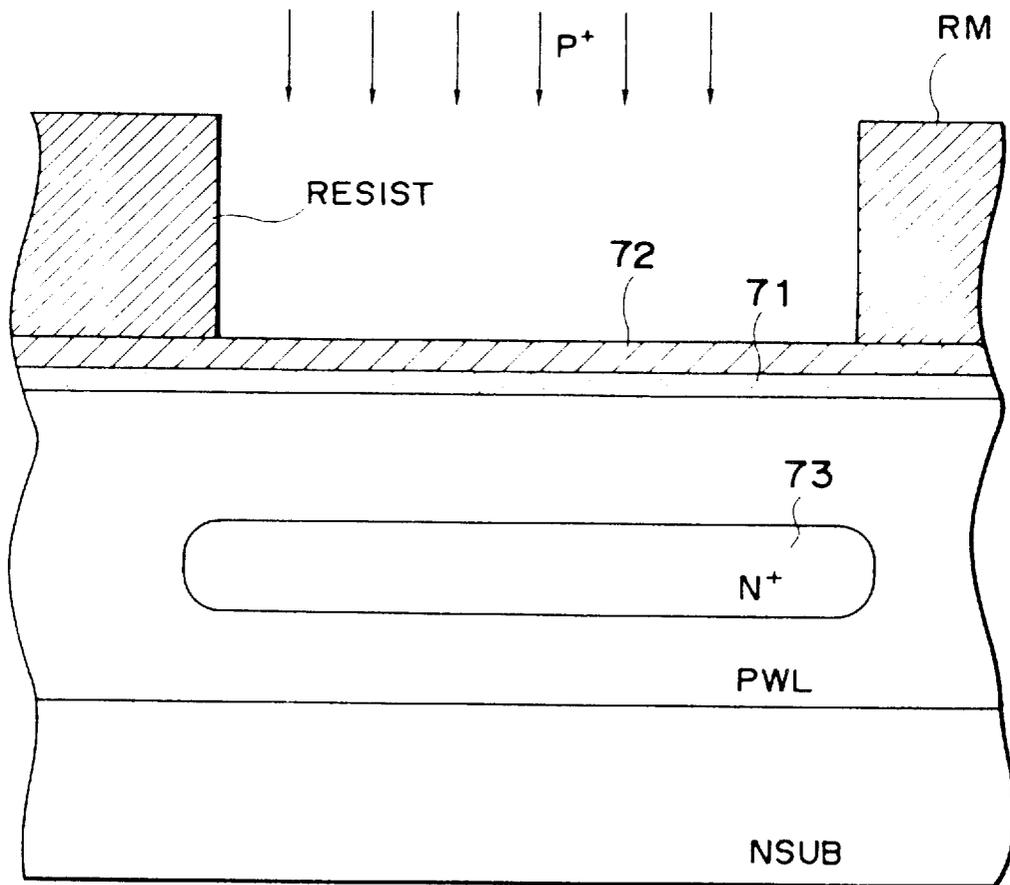


FIG. 28

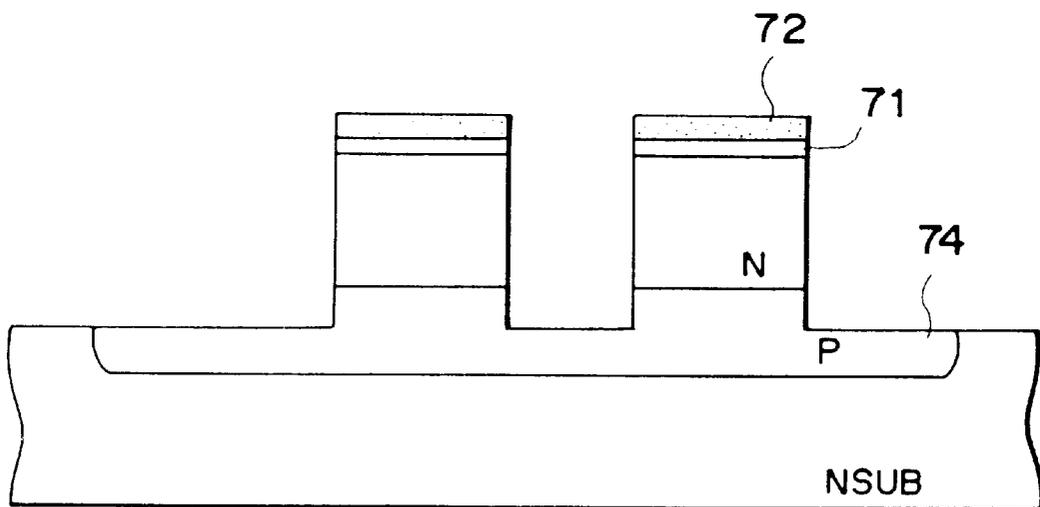


FIG. 29

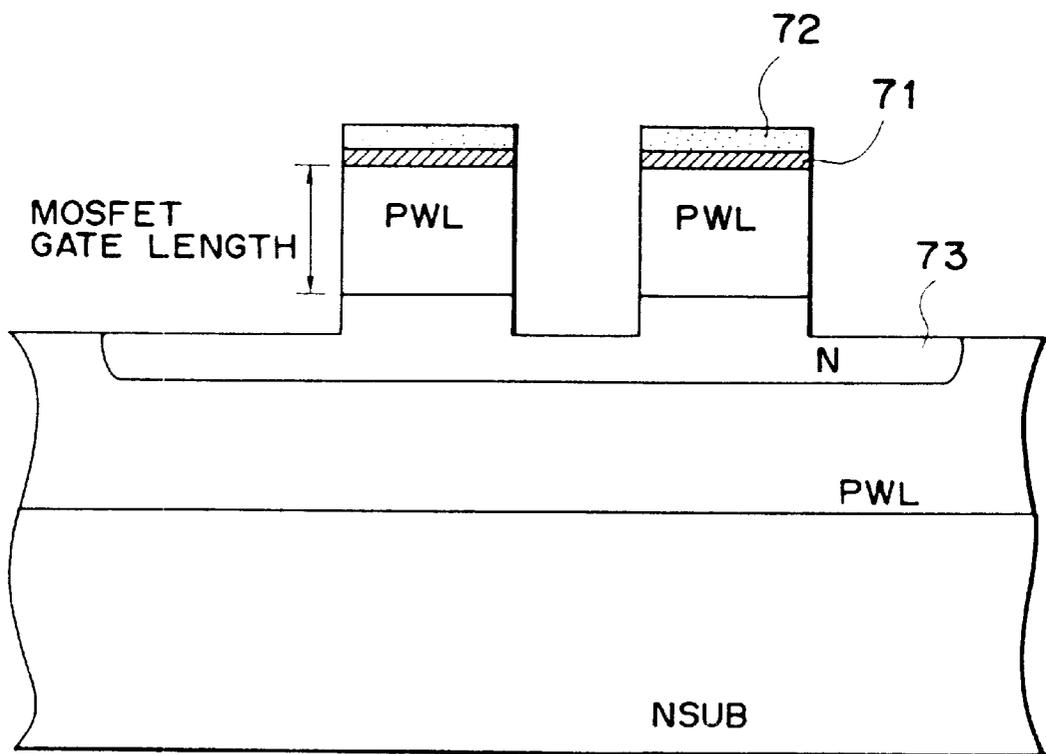


FIG. 30

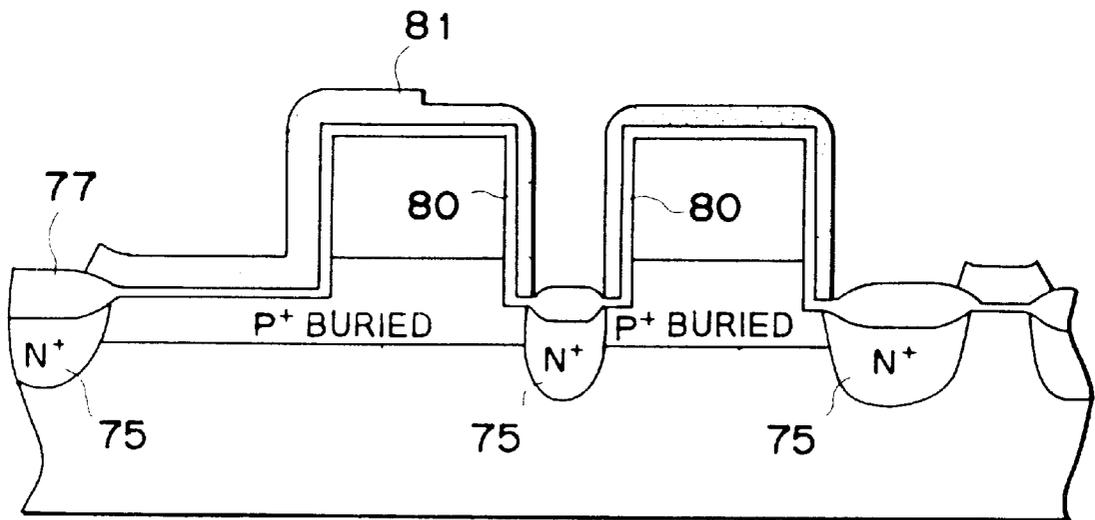


FIG. 31

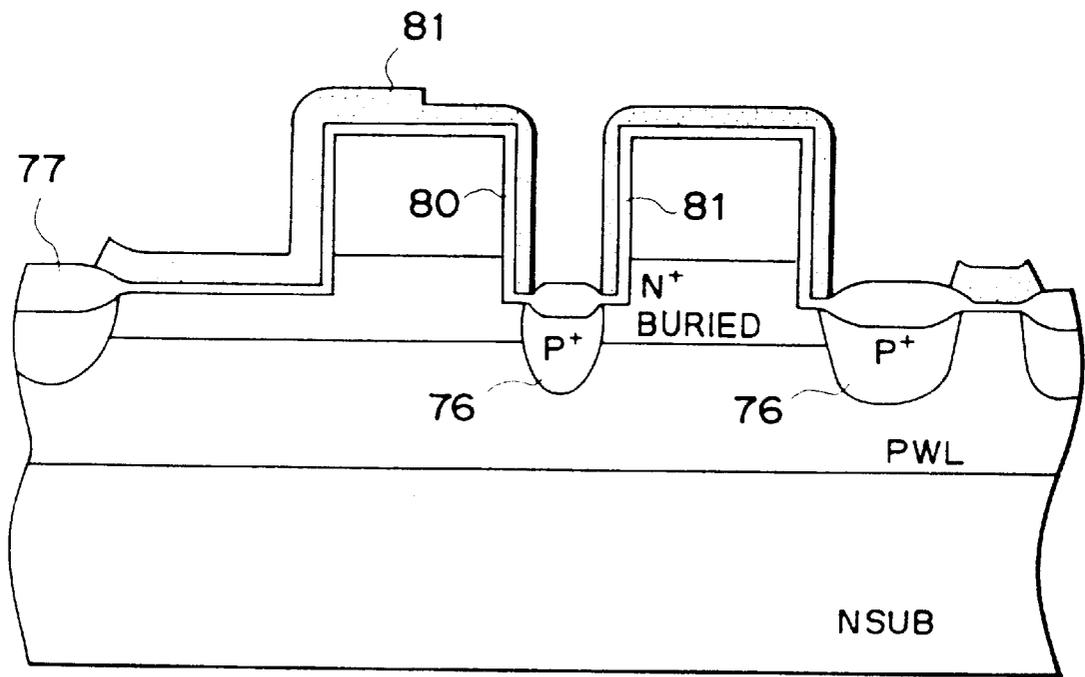


FIG. 32

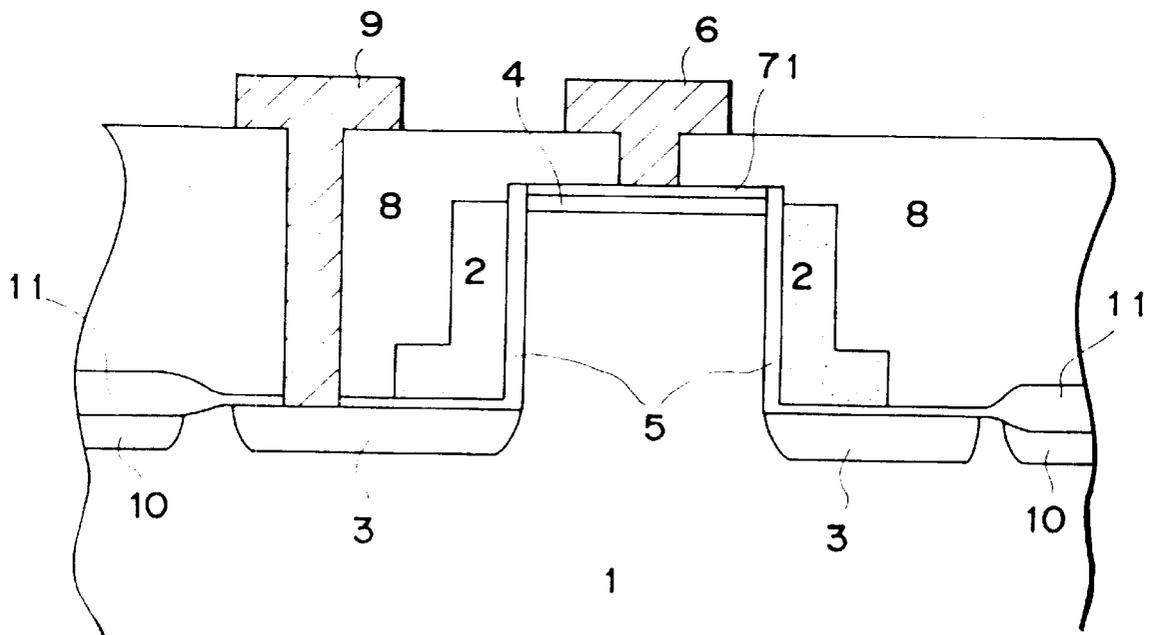


FIG. 33

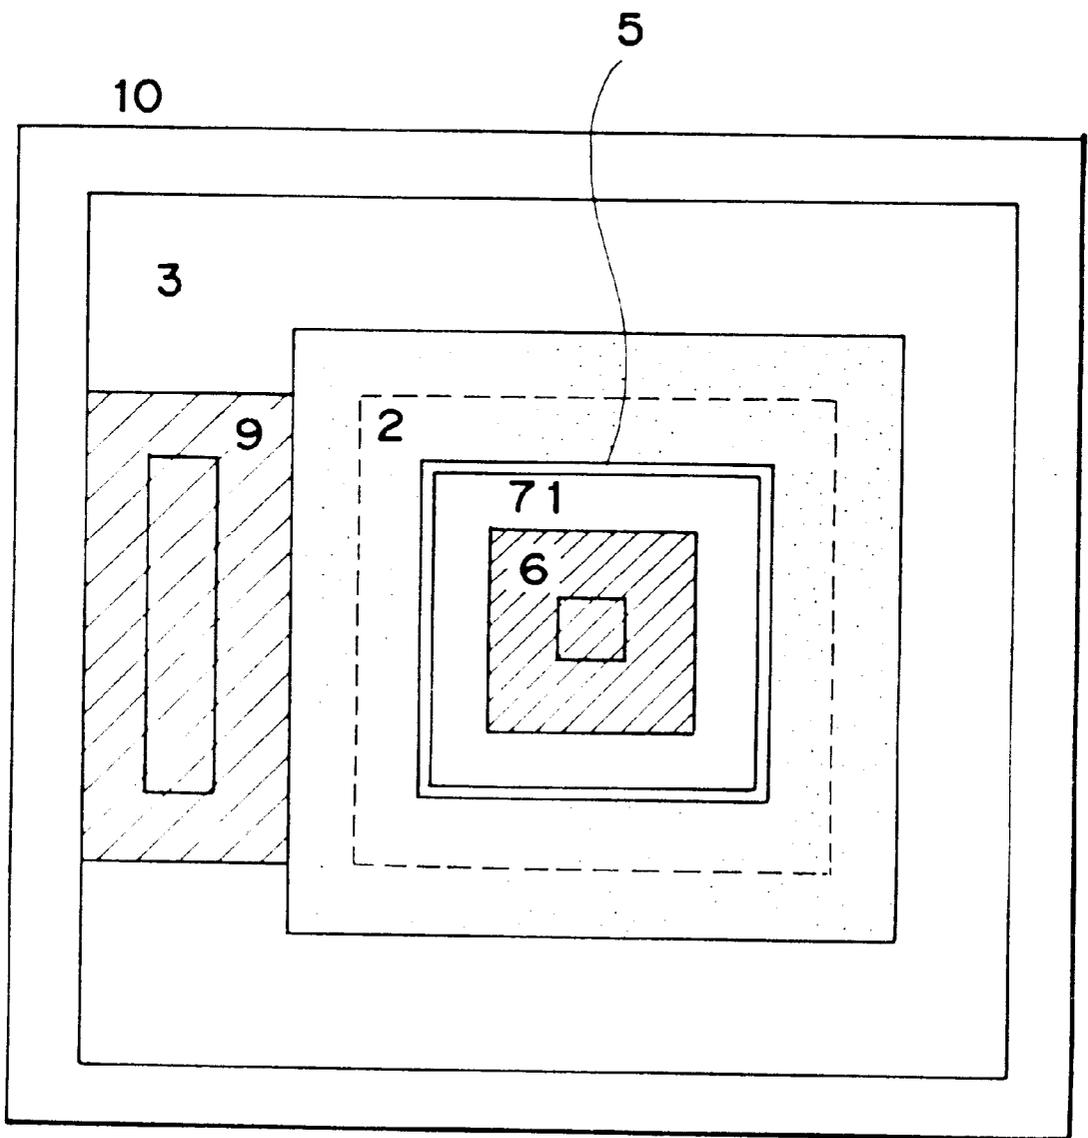


FIG. 34

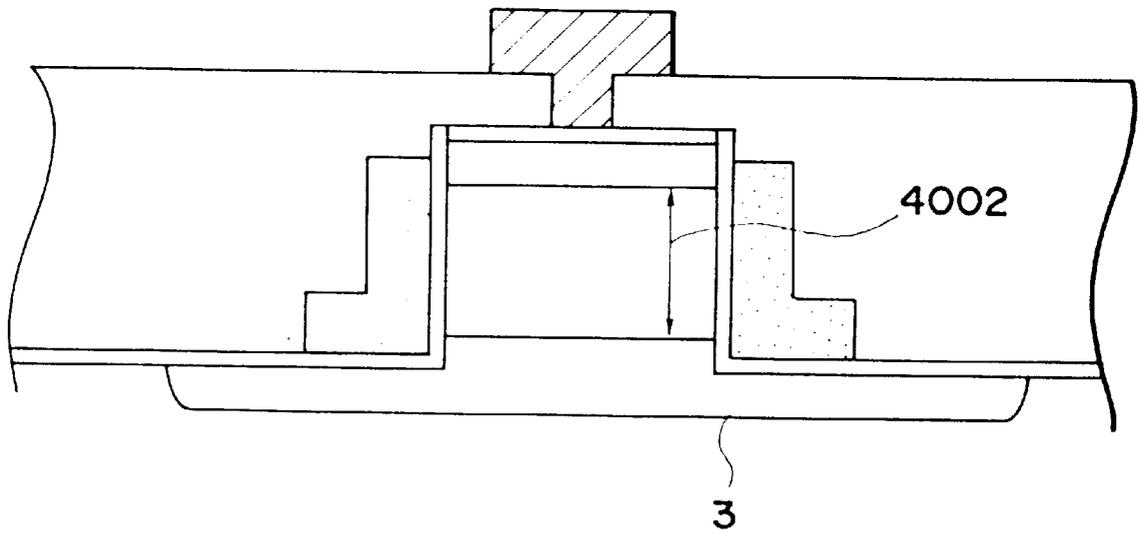


FIG. 35

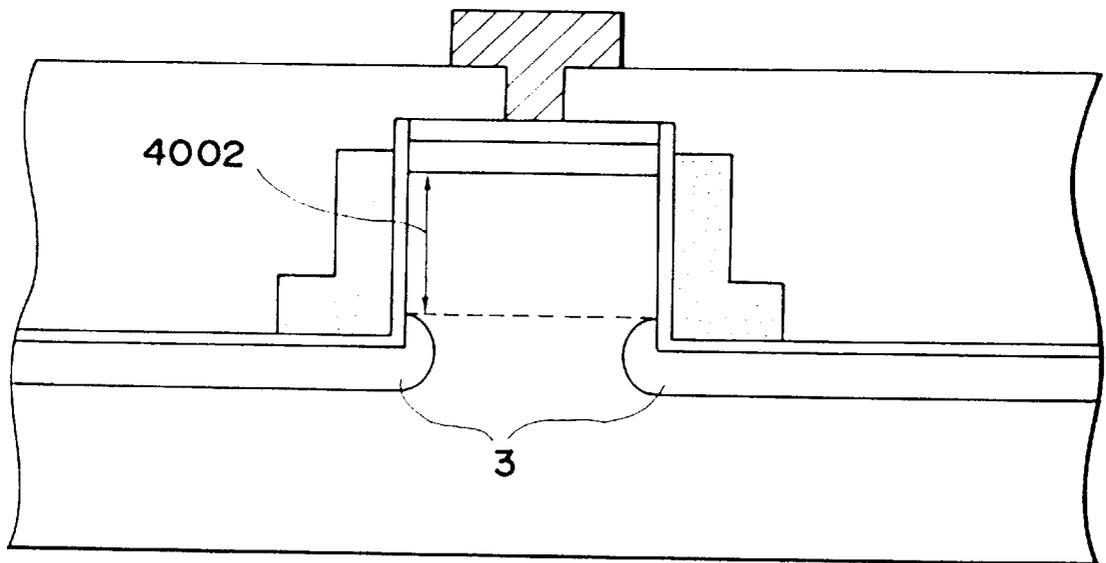


FIG. 36

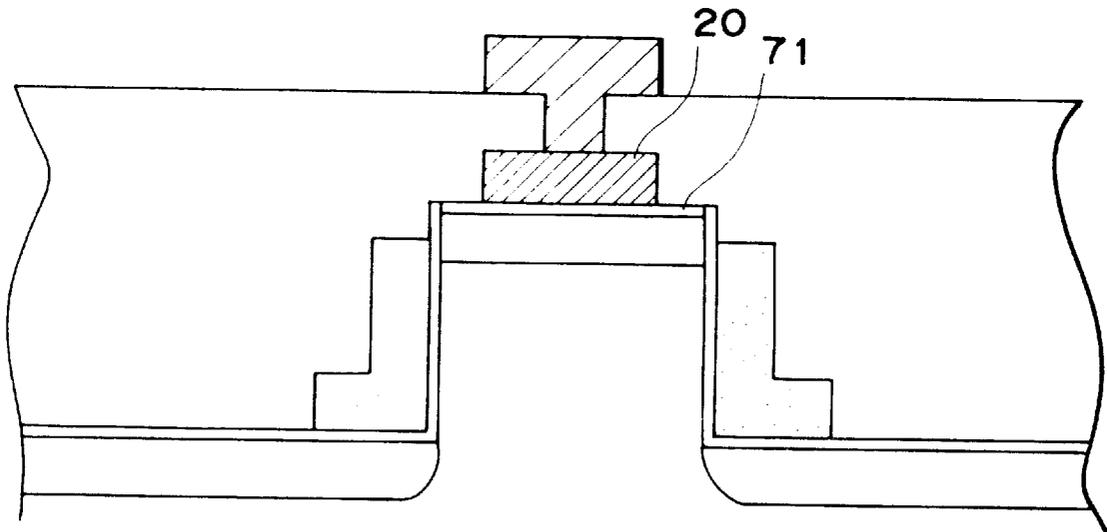


FIG. 37

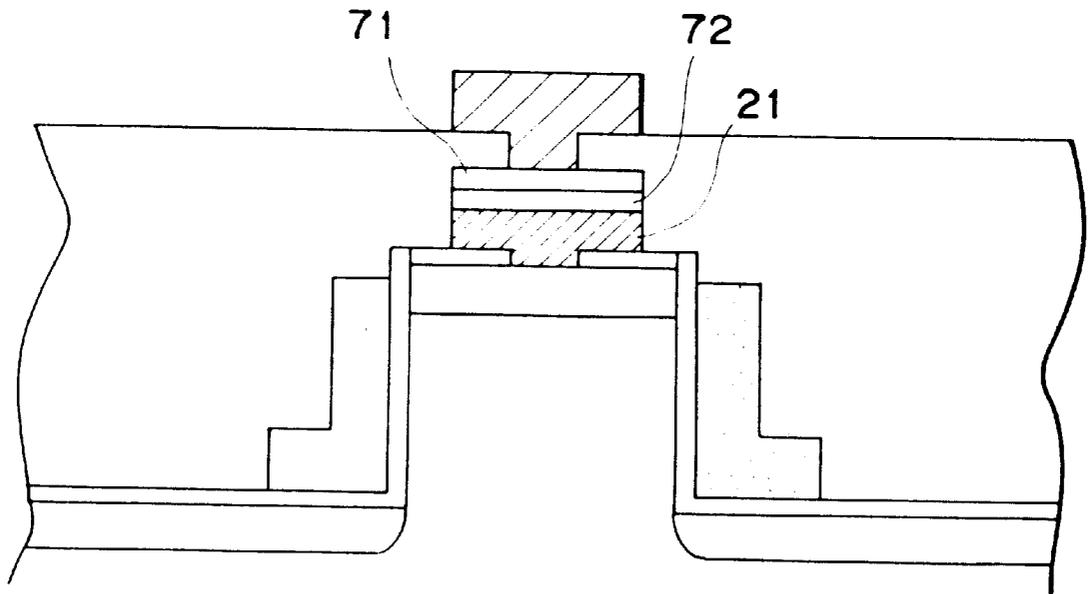


FIG. 38

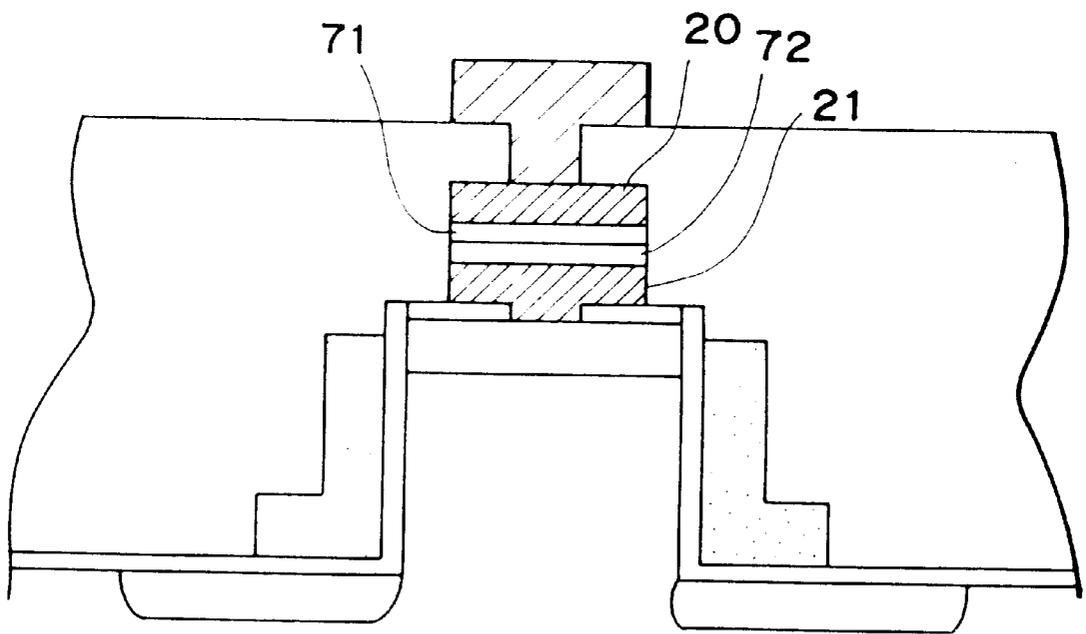


FIG. 39

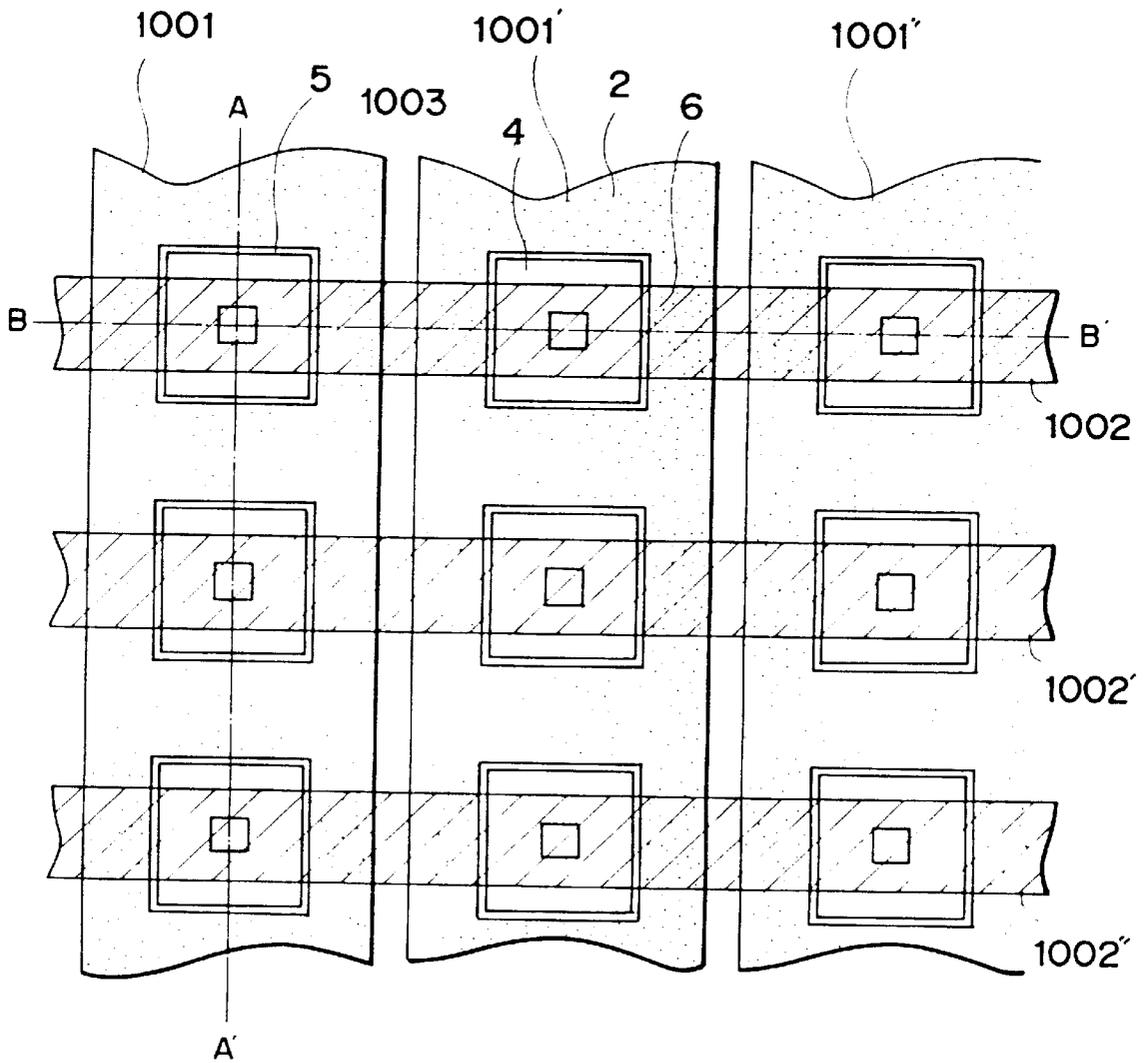


FIG. 40

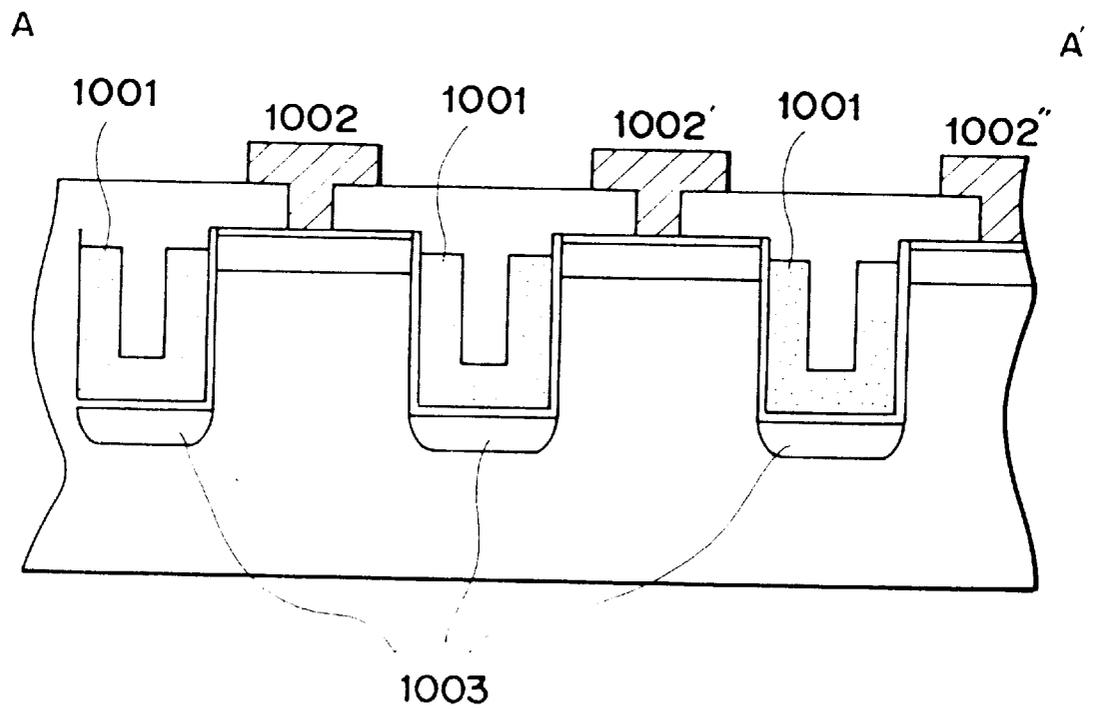


FIG. 41

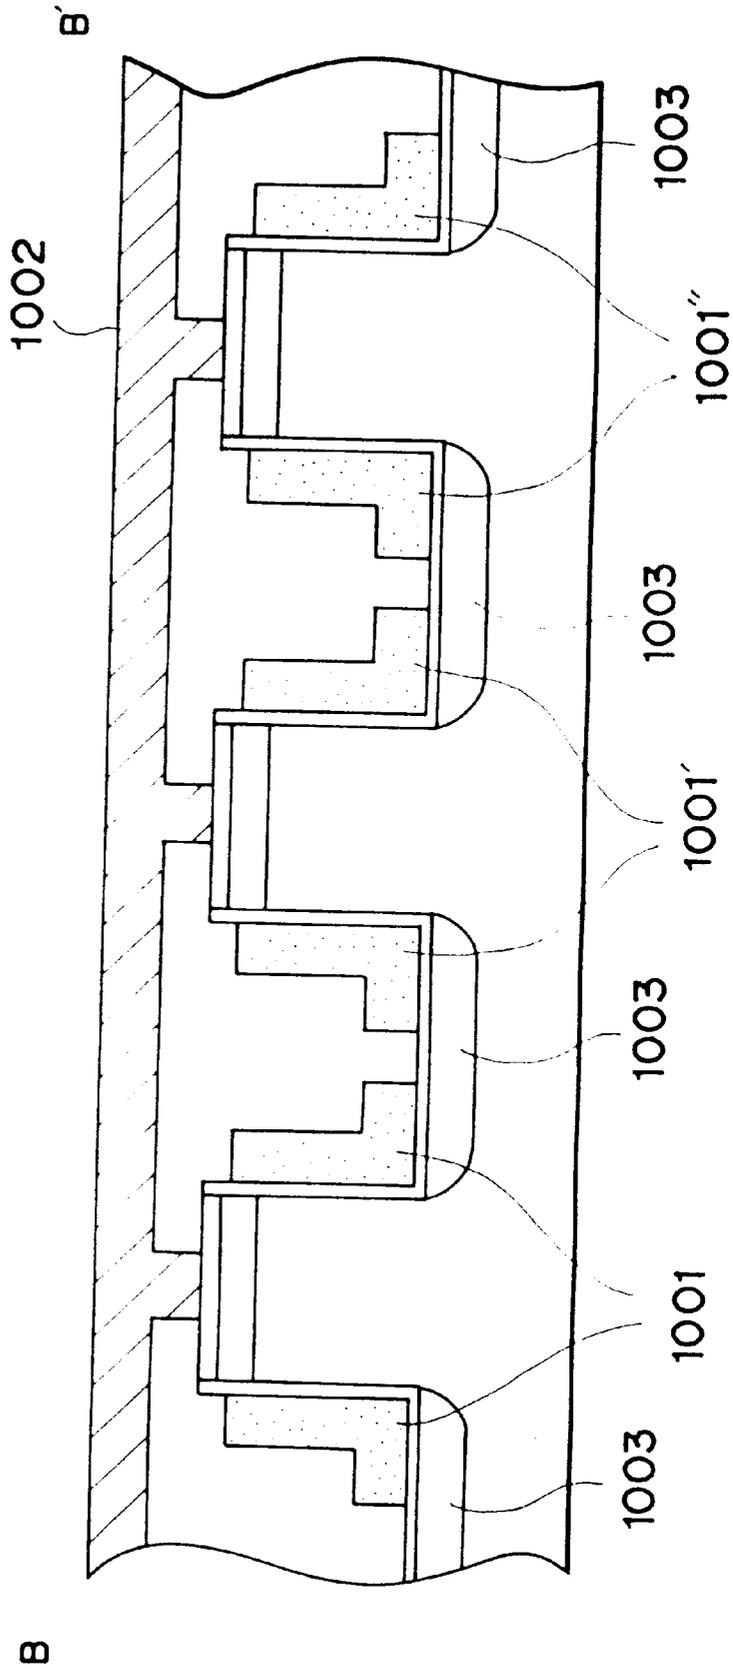


FIG. 42A

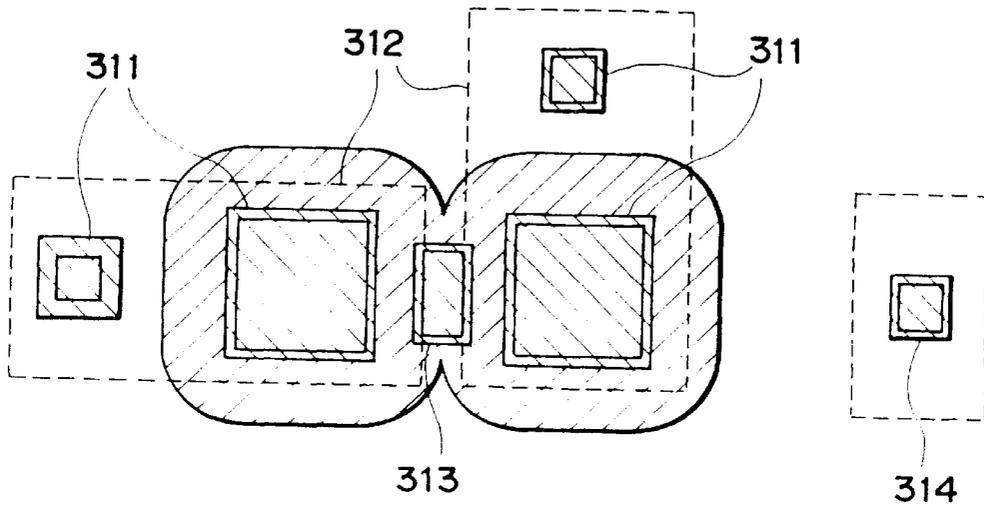


FIG. 42B

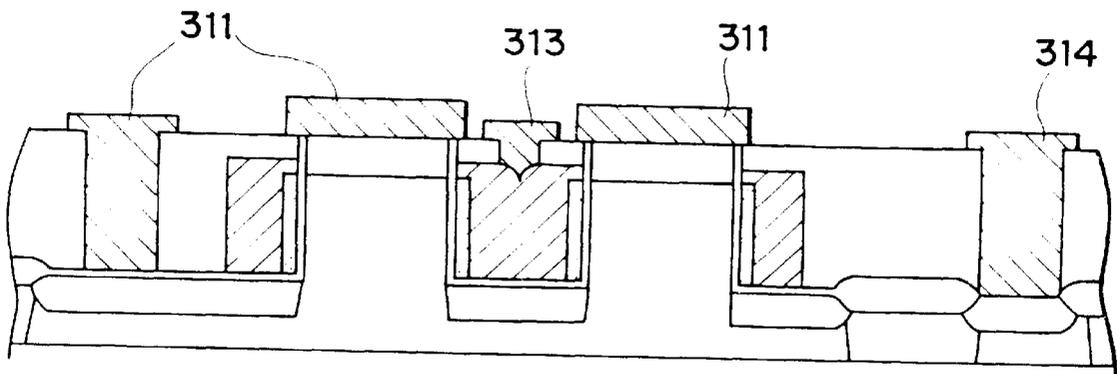


FIG. 43

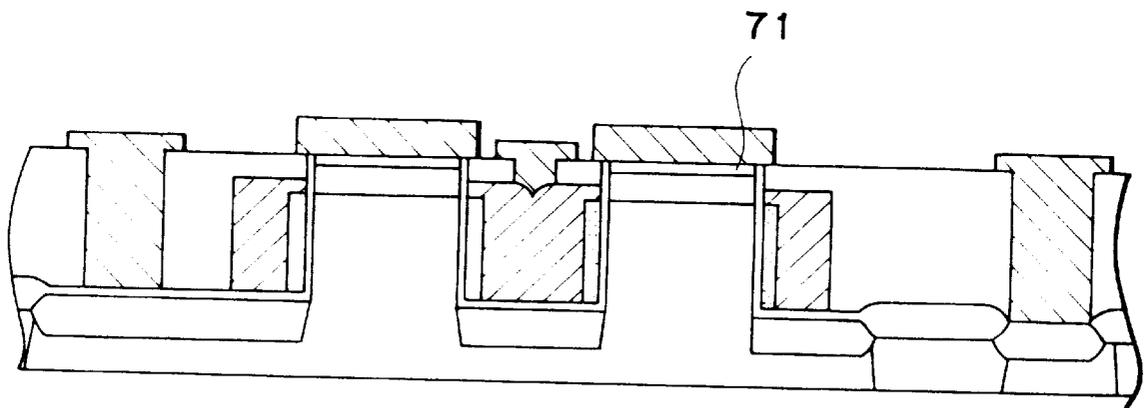


FIG. 45A
PRIOR ART

FIG. 45B
PRIOR ART


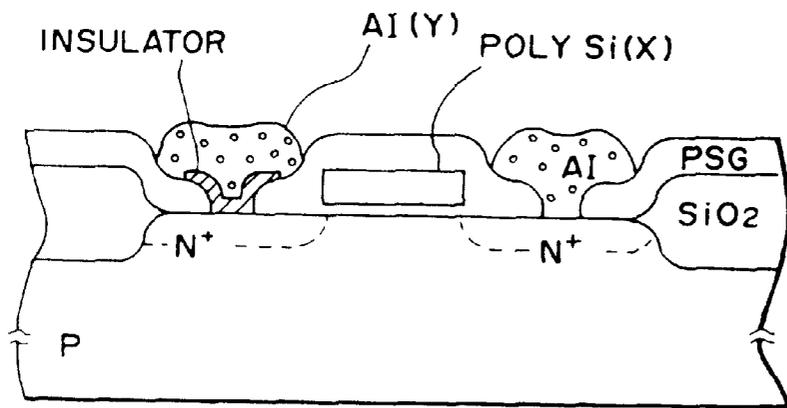


FIG. 46
PRIOR ART

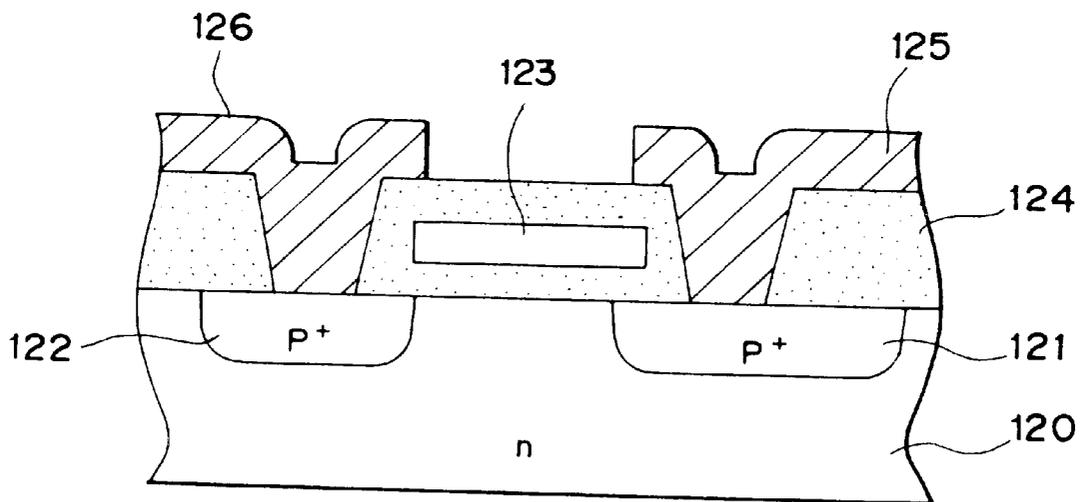


FIG. 47

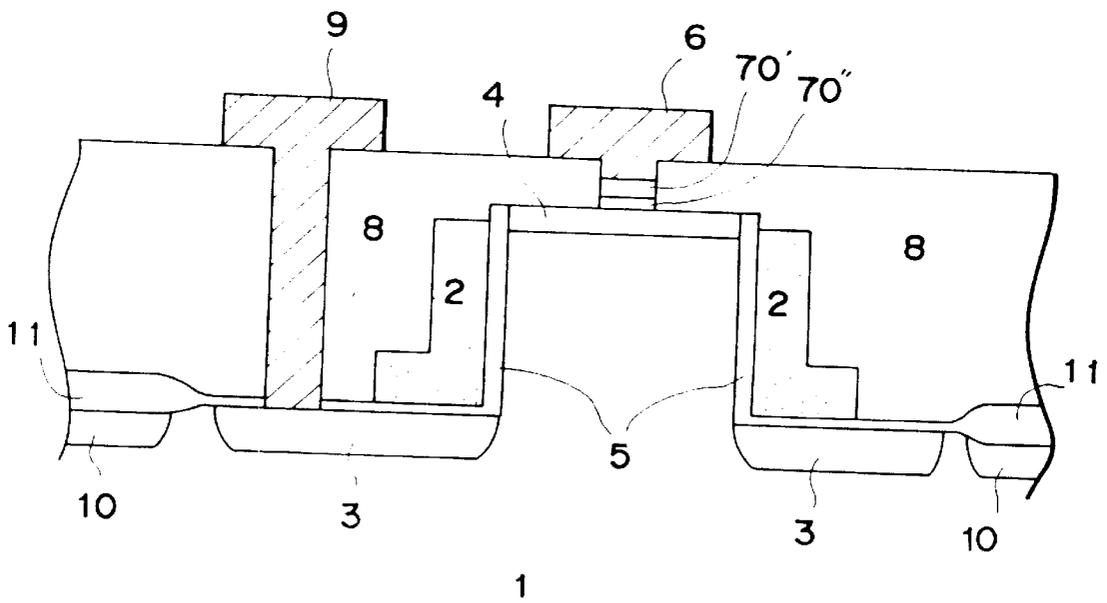


FIG. 48

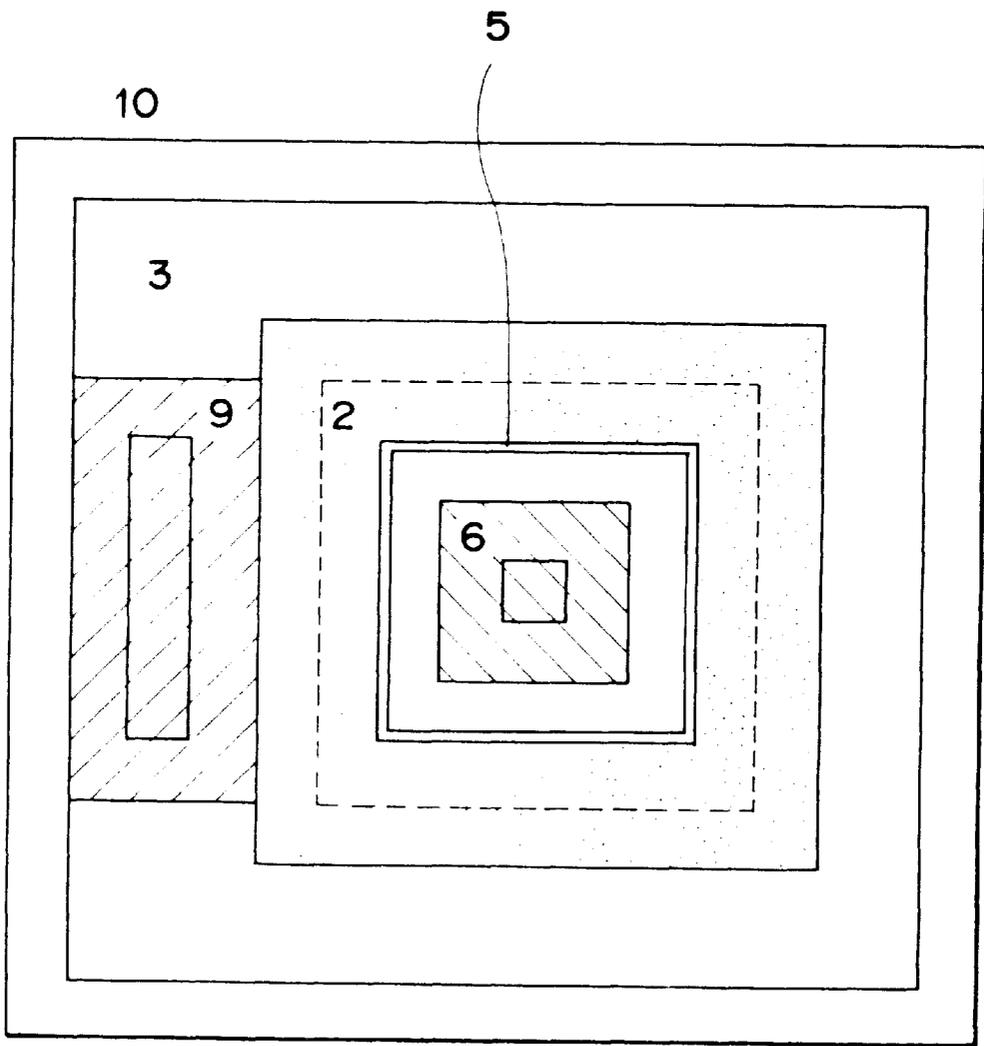


FIG. 49

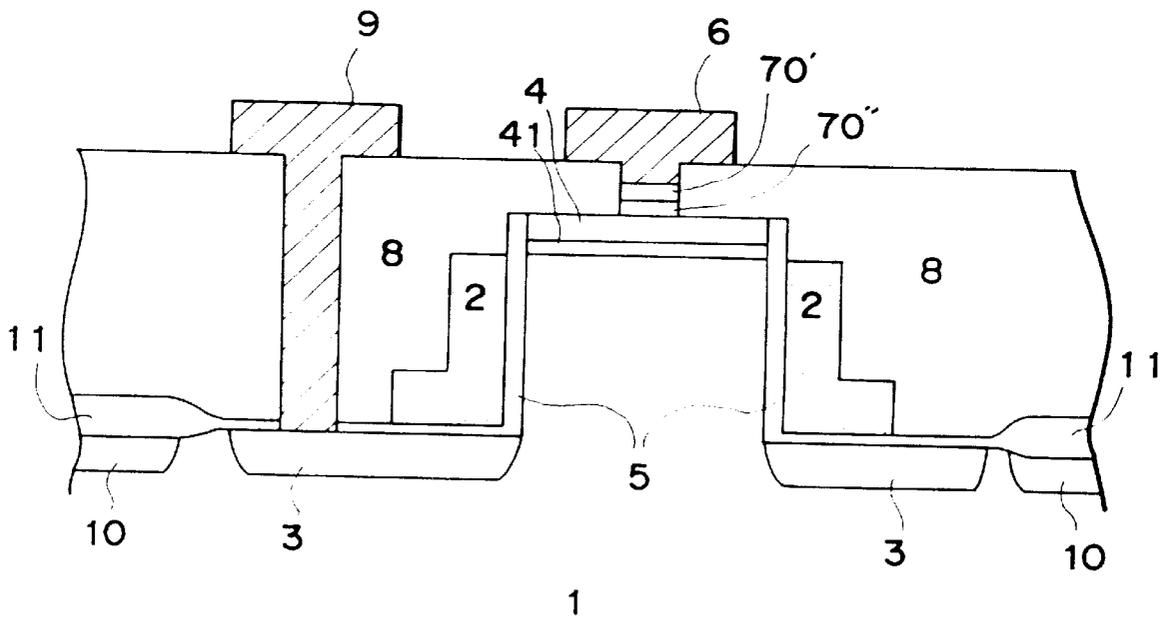


FIG. 50

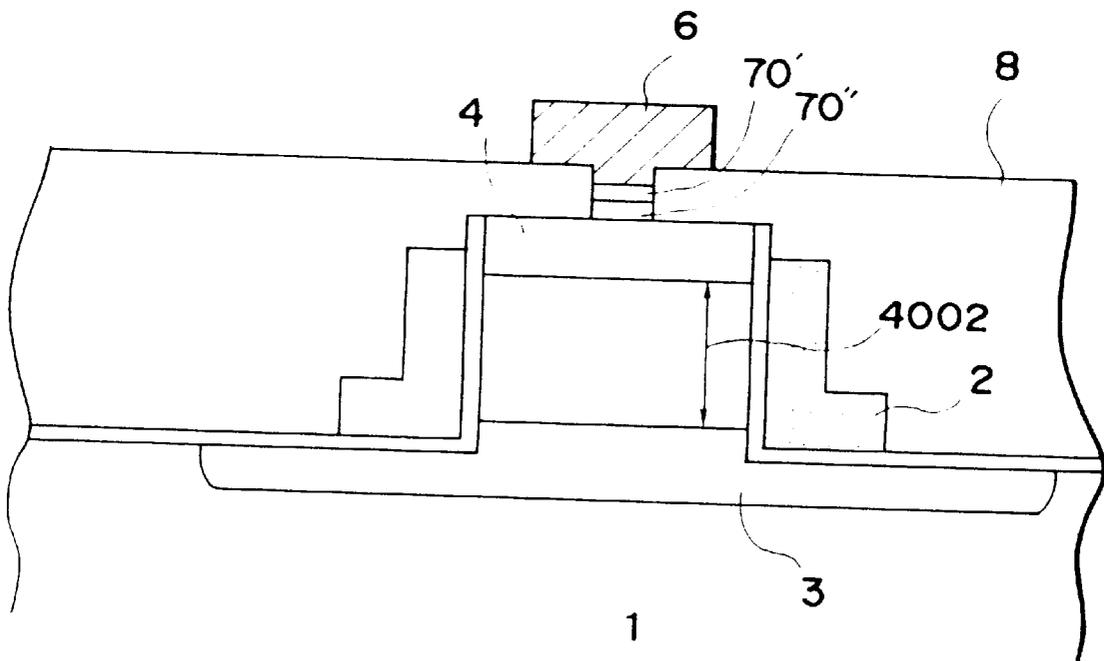


FIG. 51

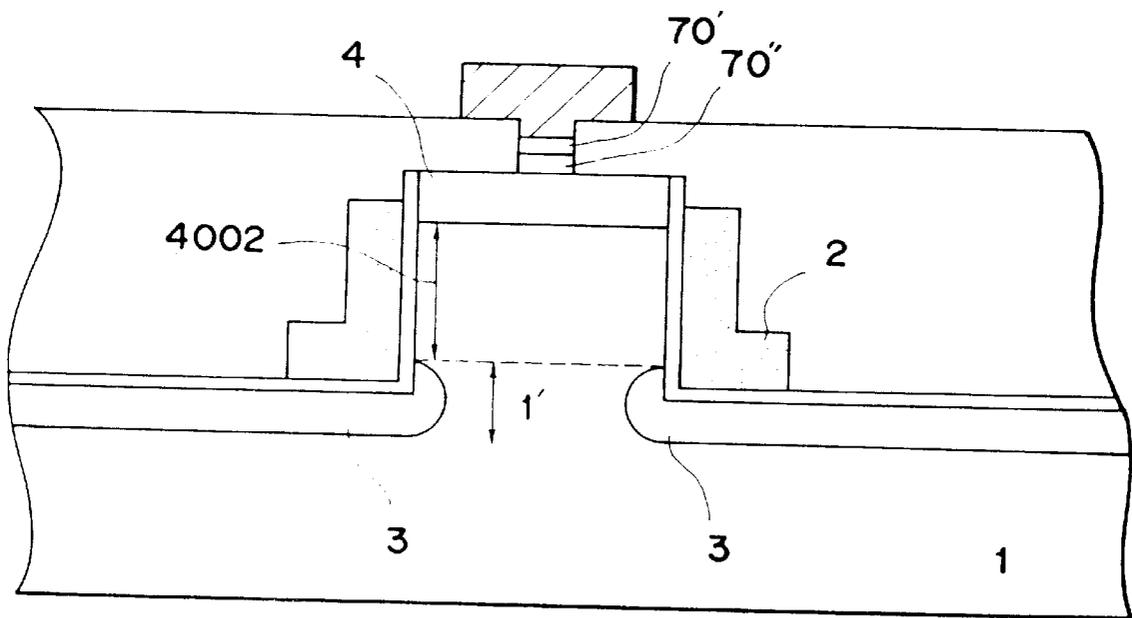


FIG. 52

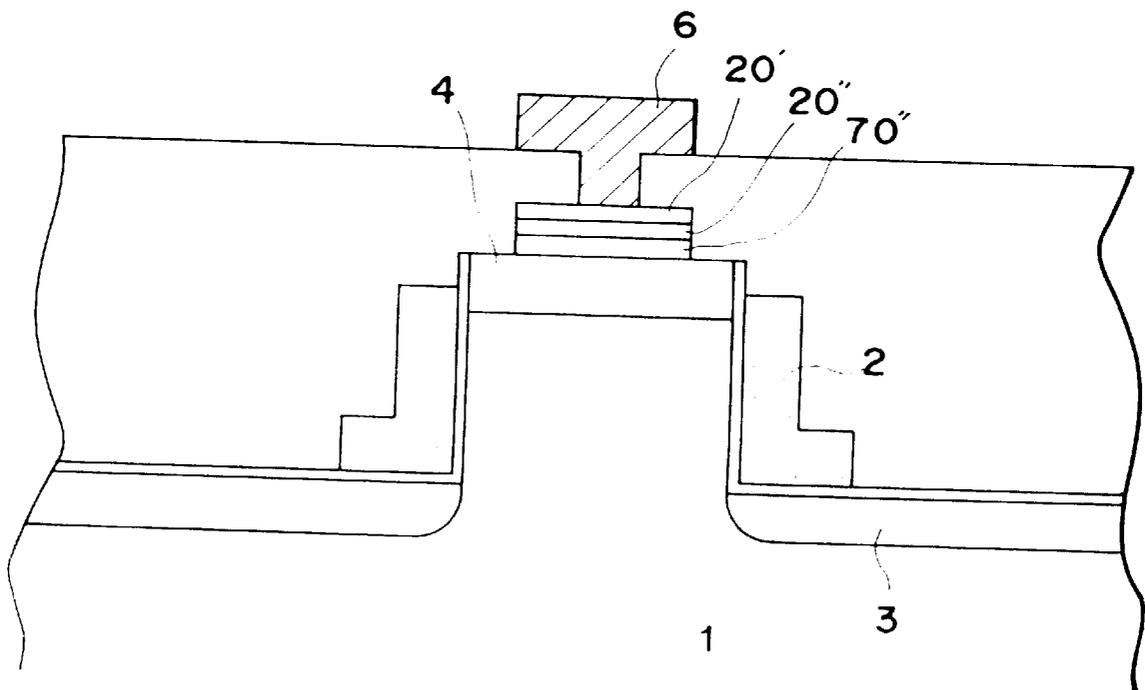


FIG. 53

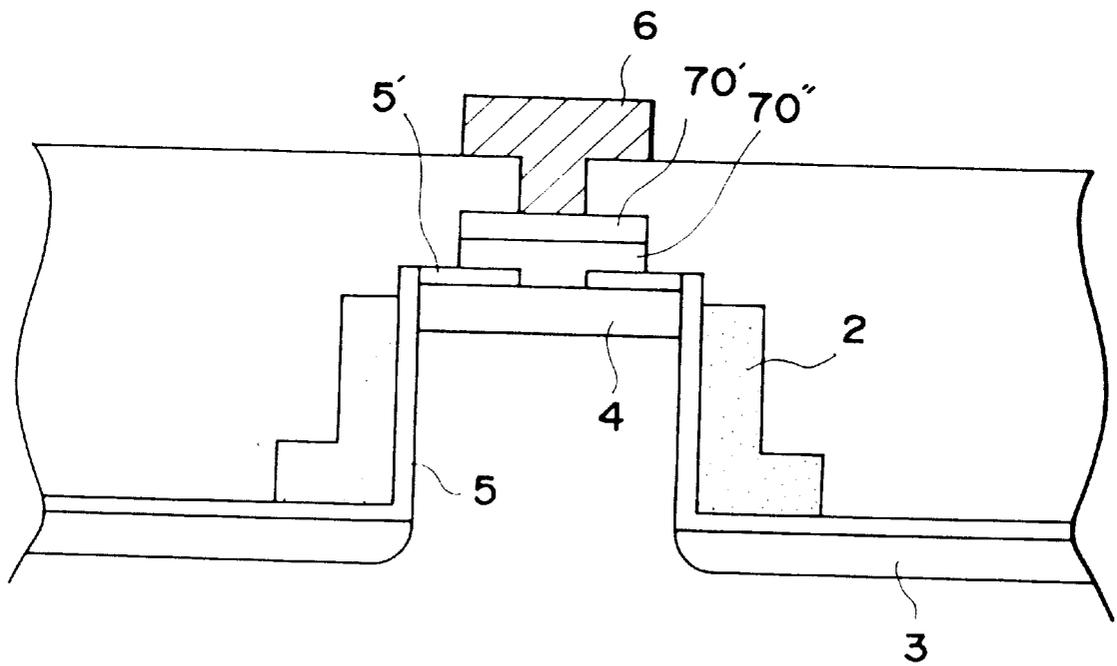


FIG. 54

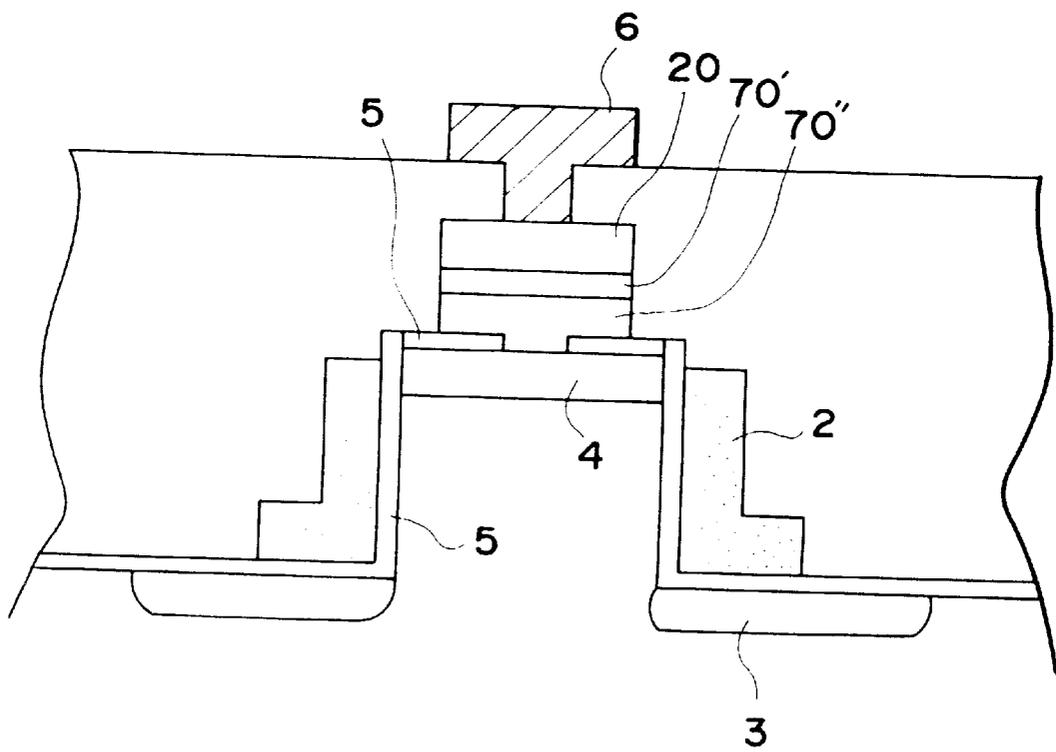


FIG. 55

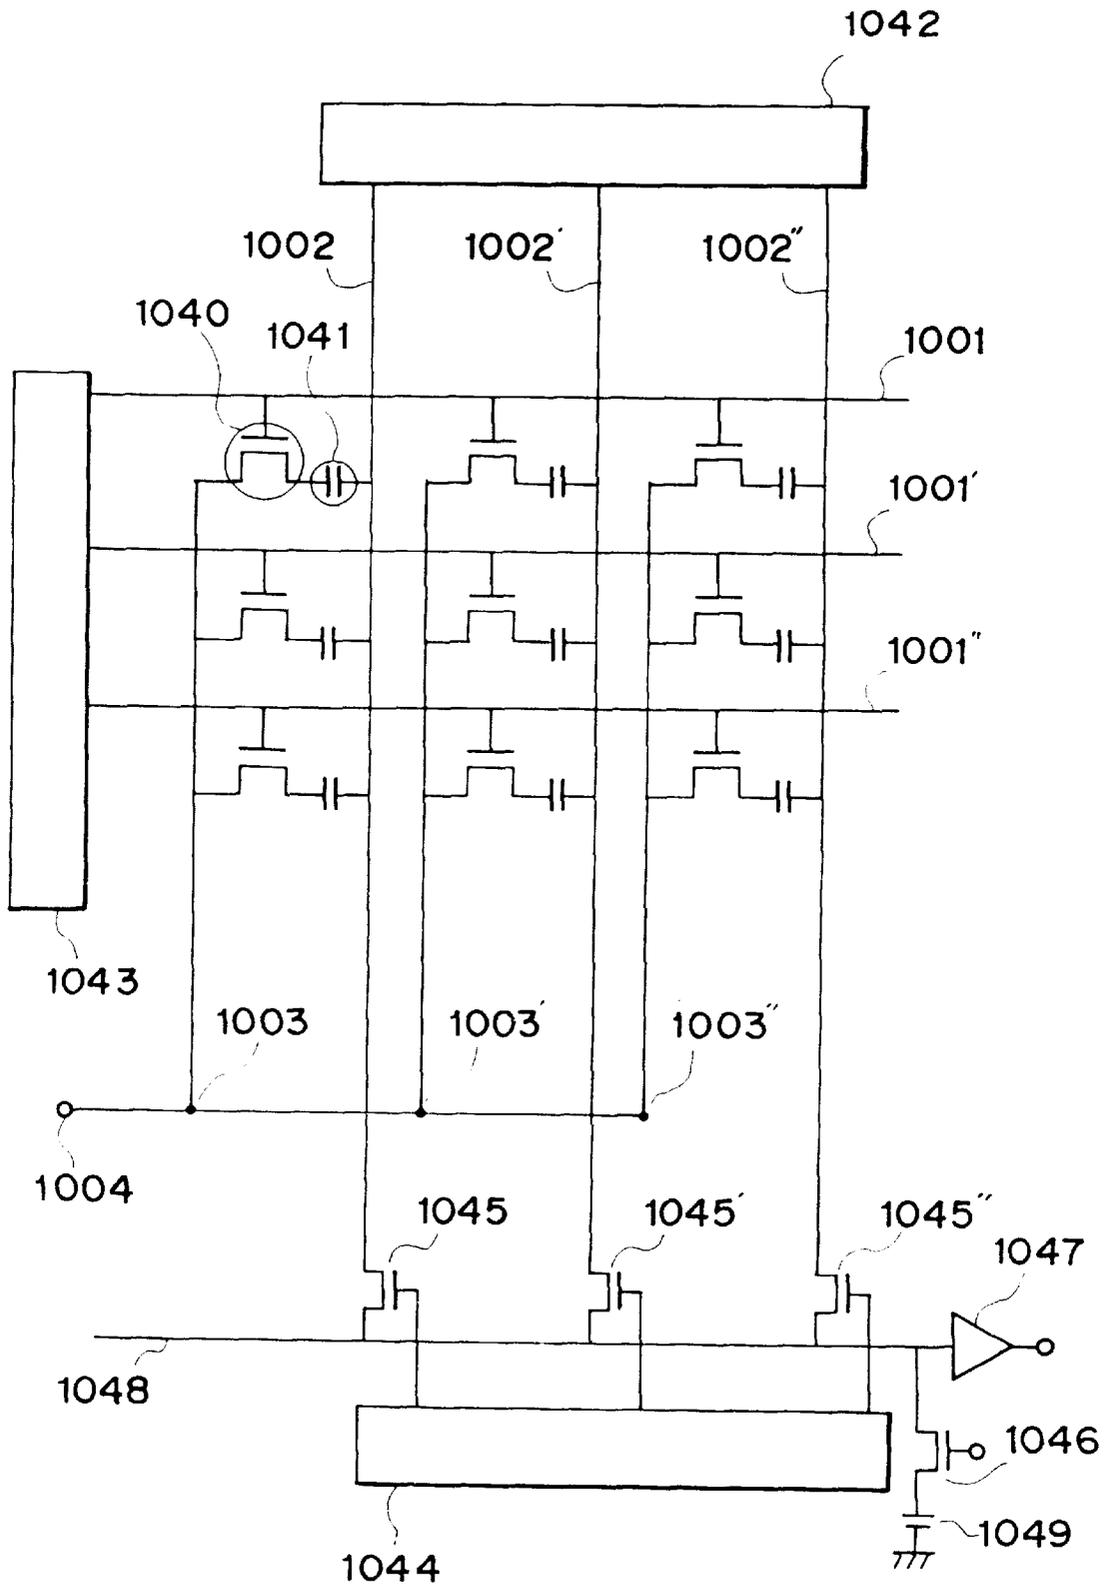


FIG. 56

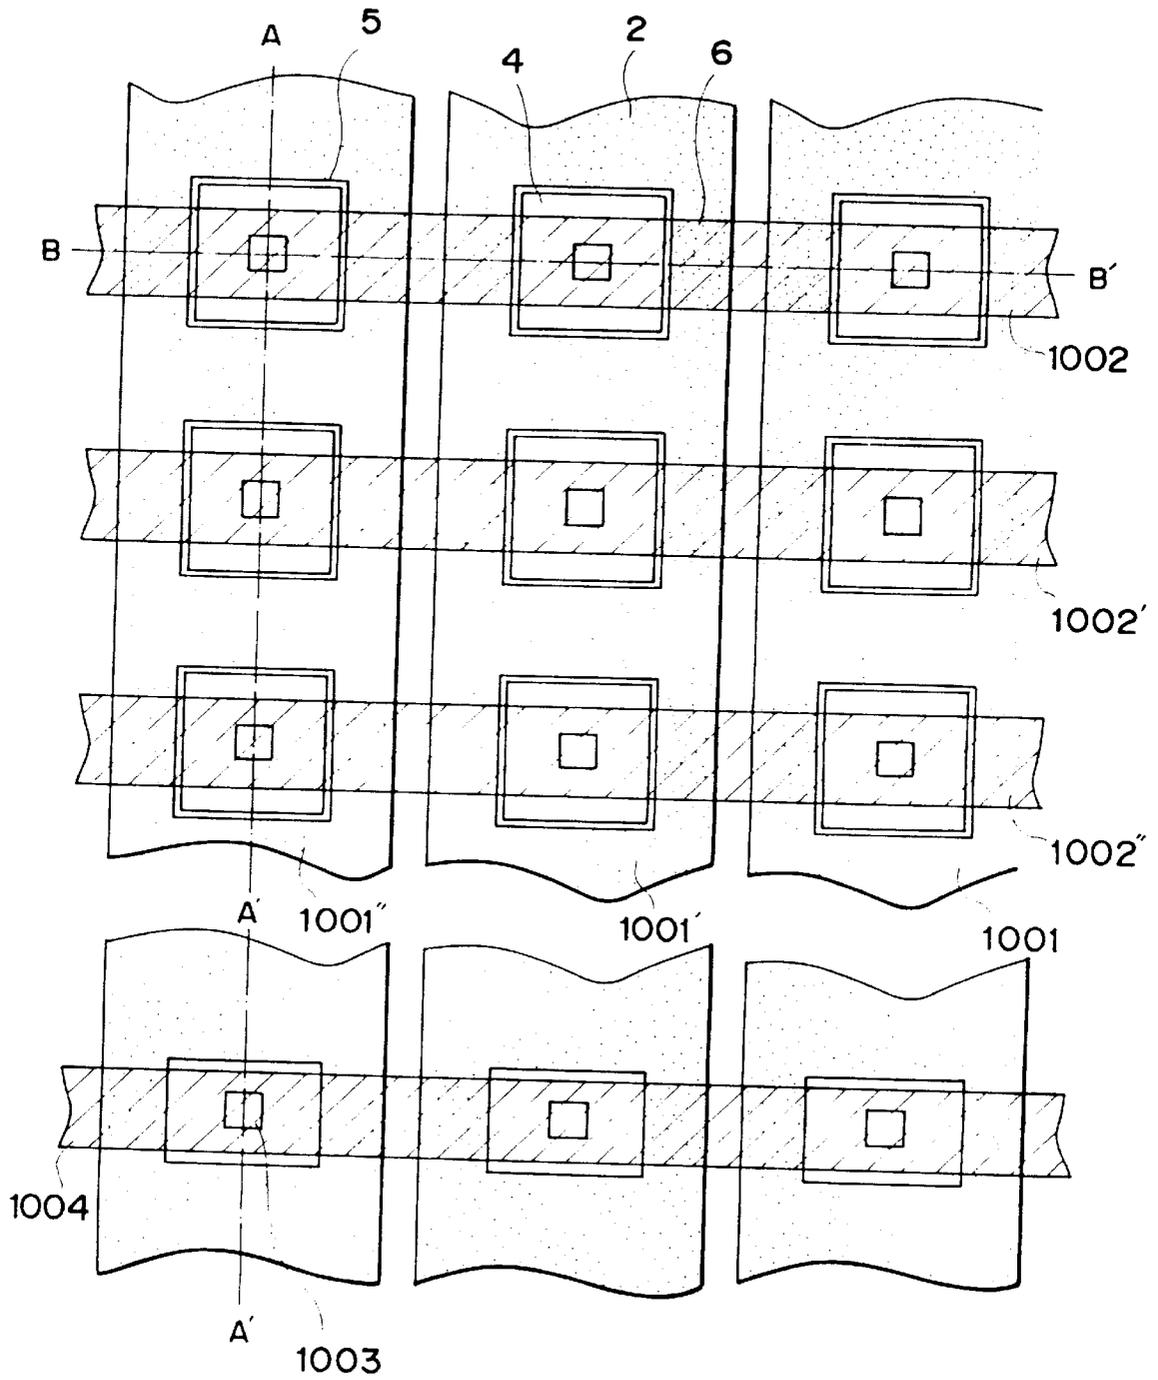


FIG. 57

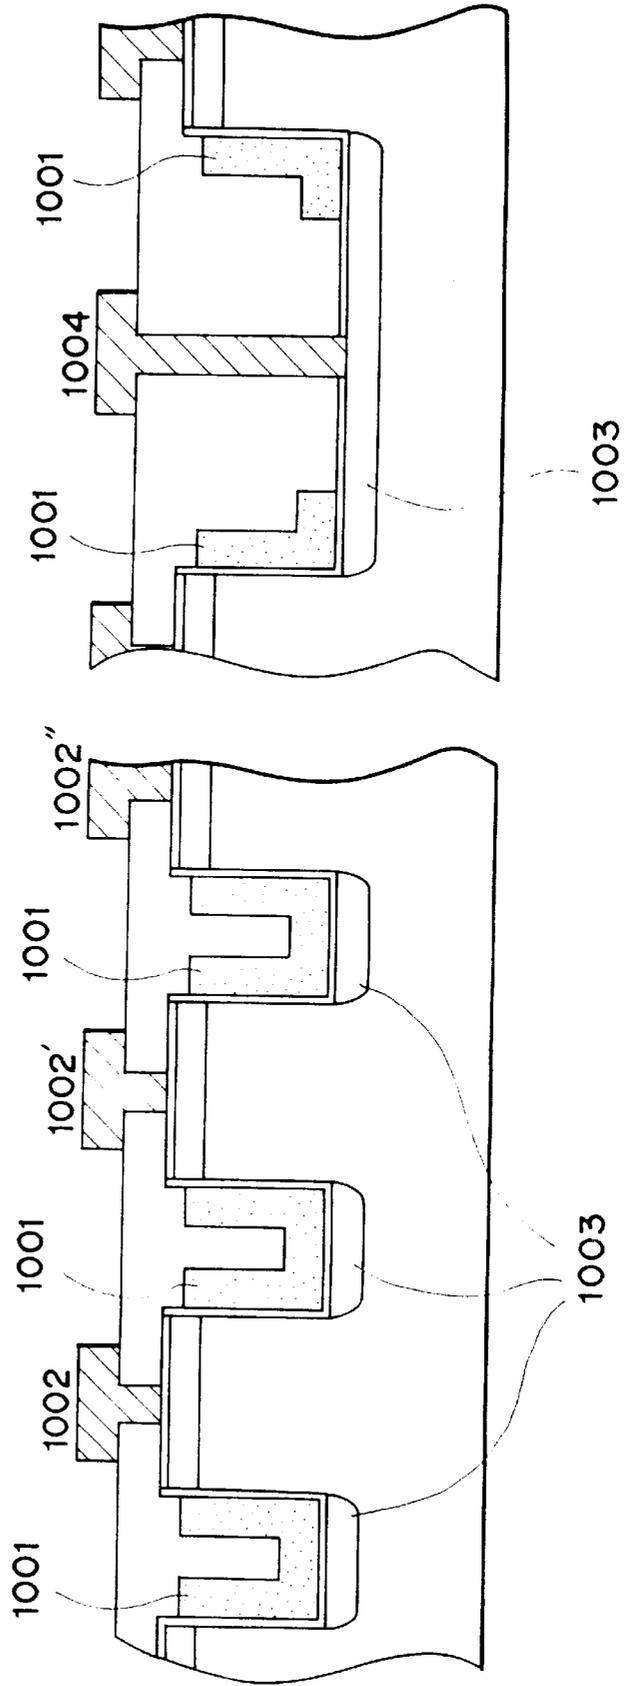


FIG. 58

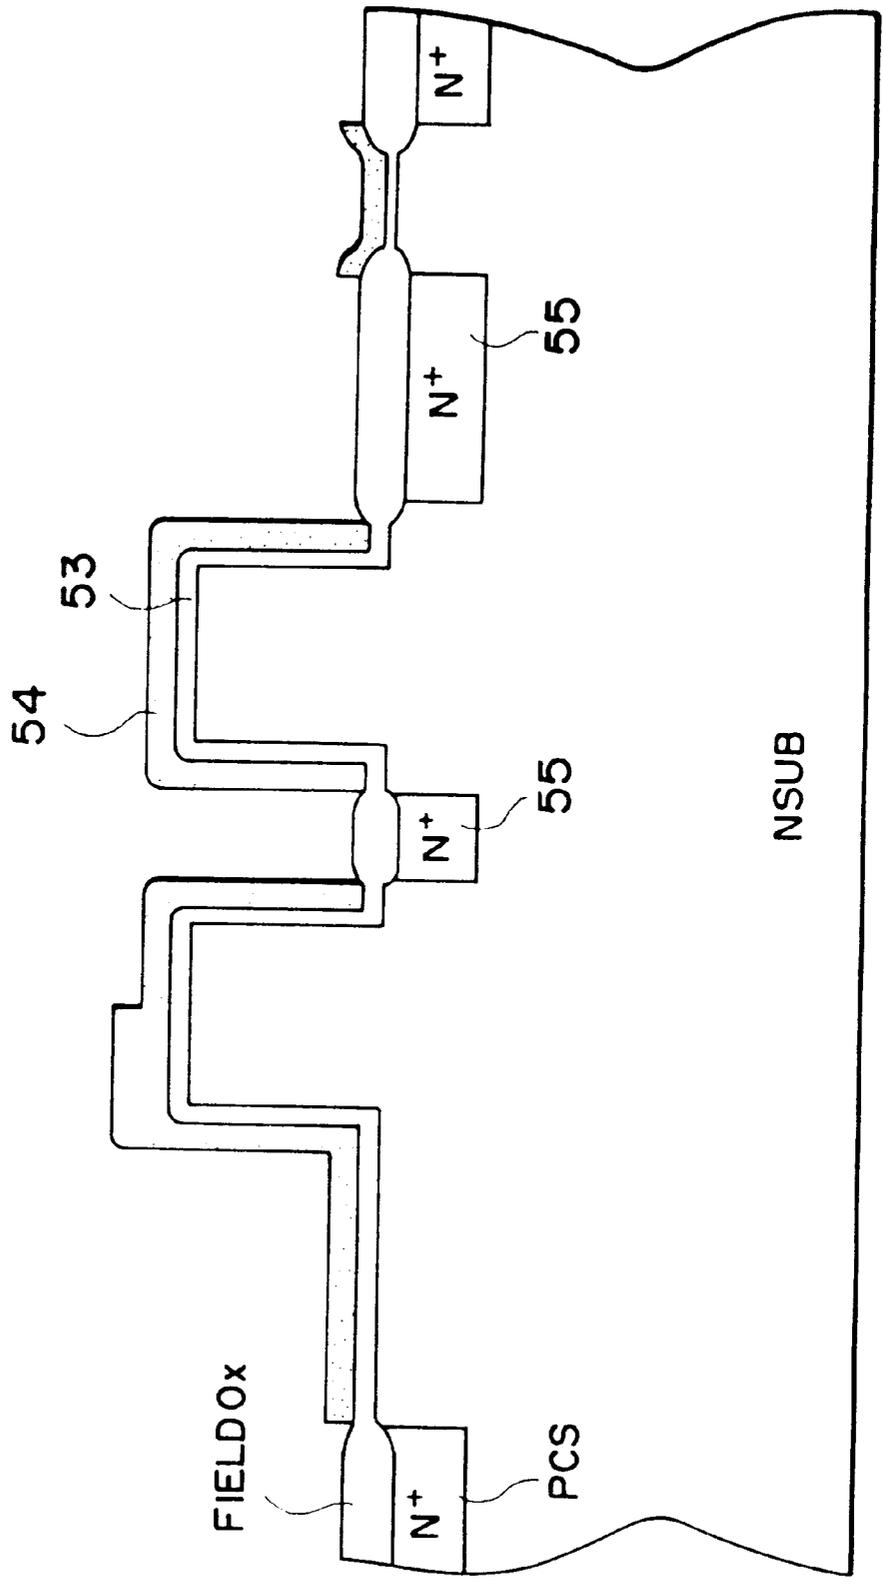


FIG. 59

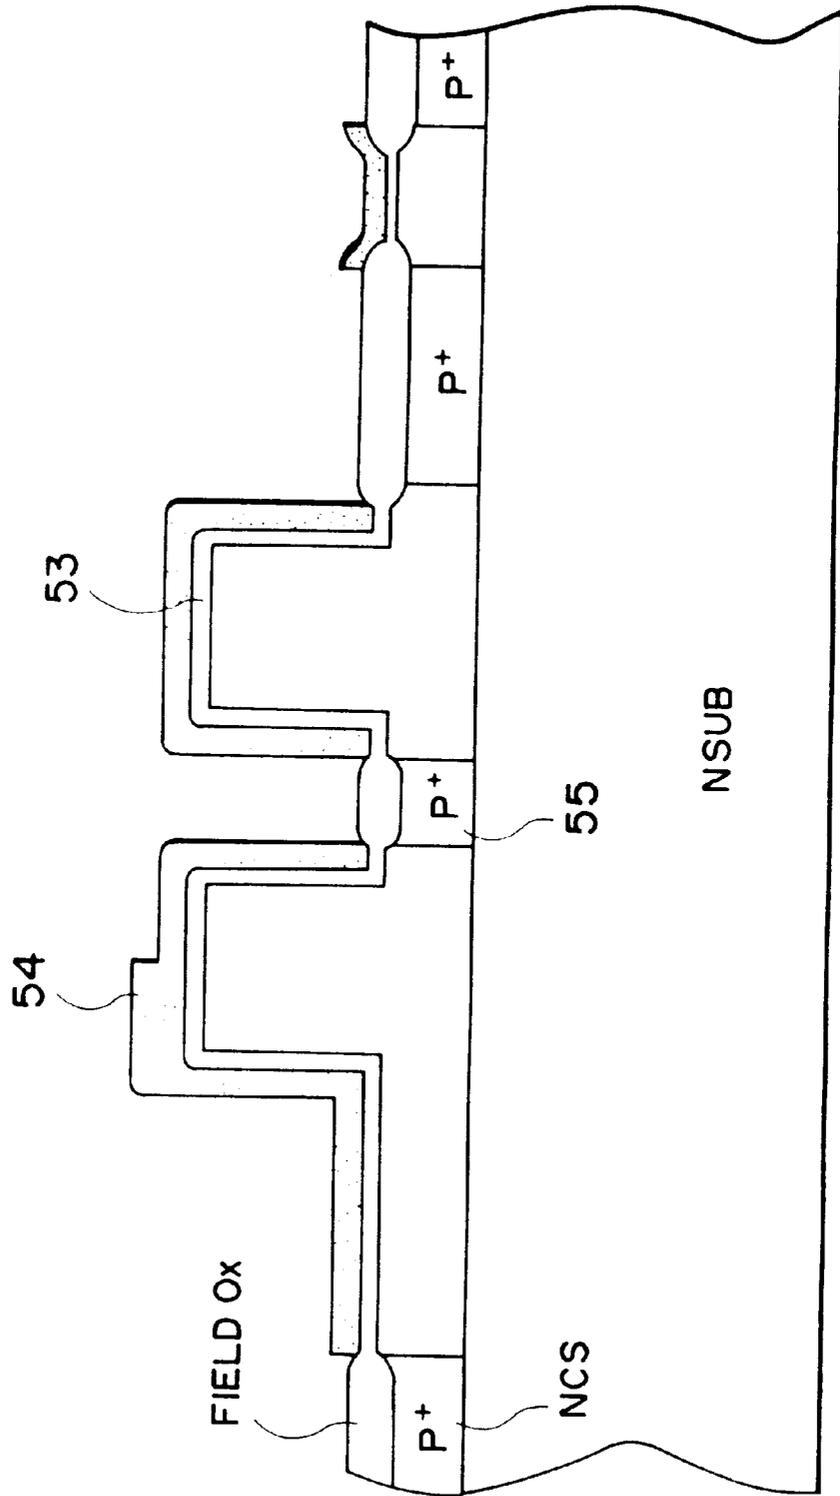


FIG. 60

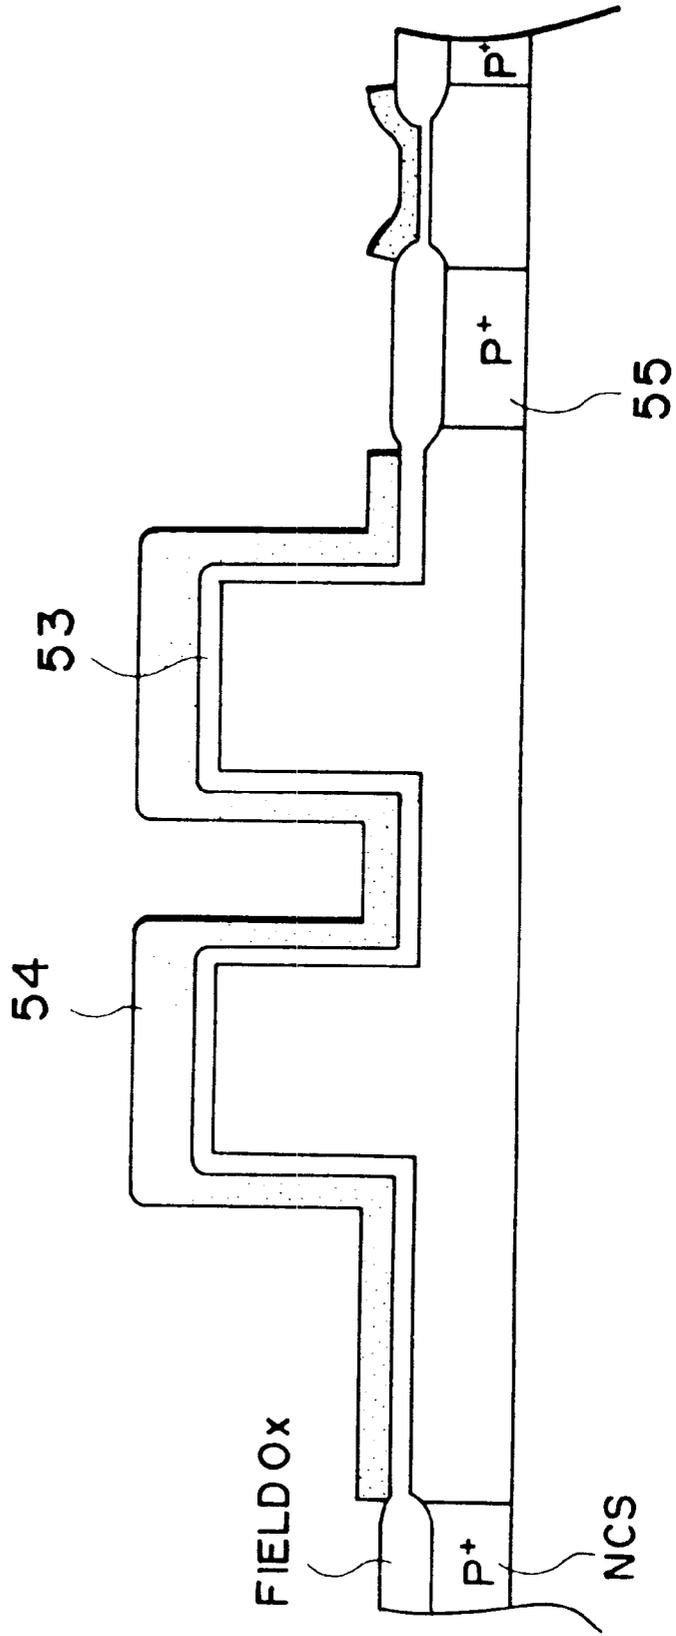


FIG. 61

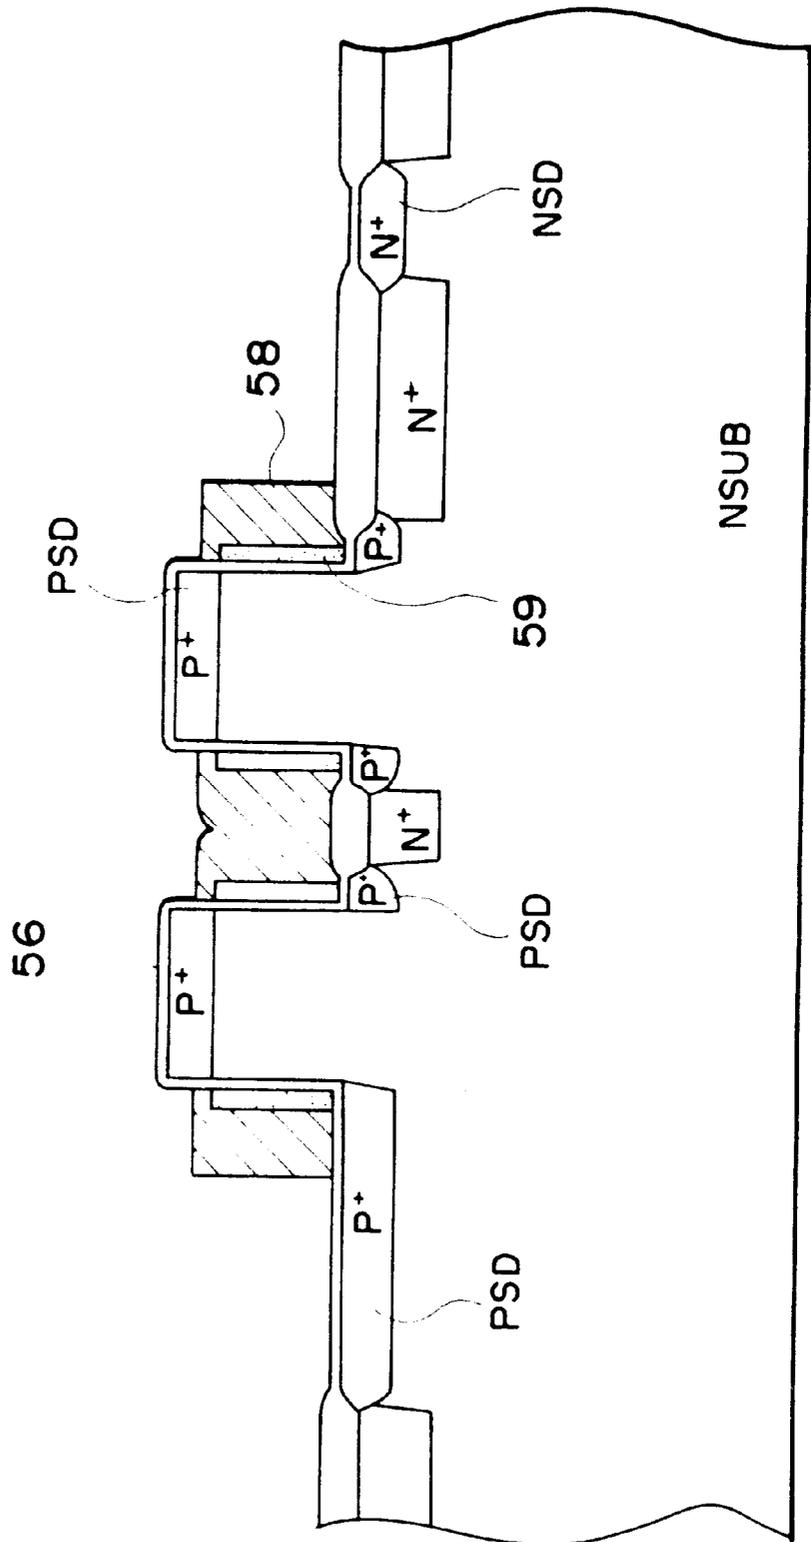


FIG. 62

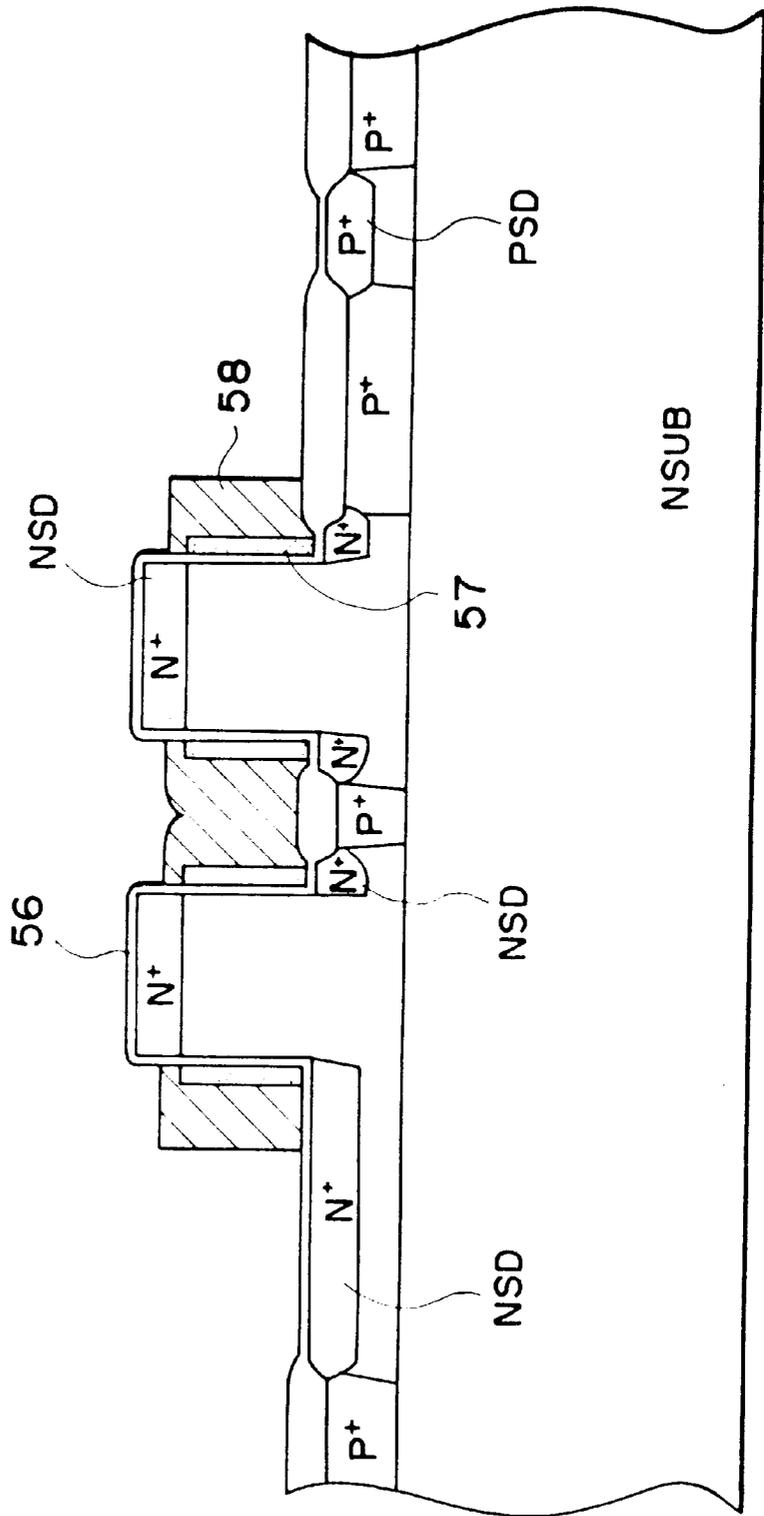


FIG. 64

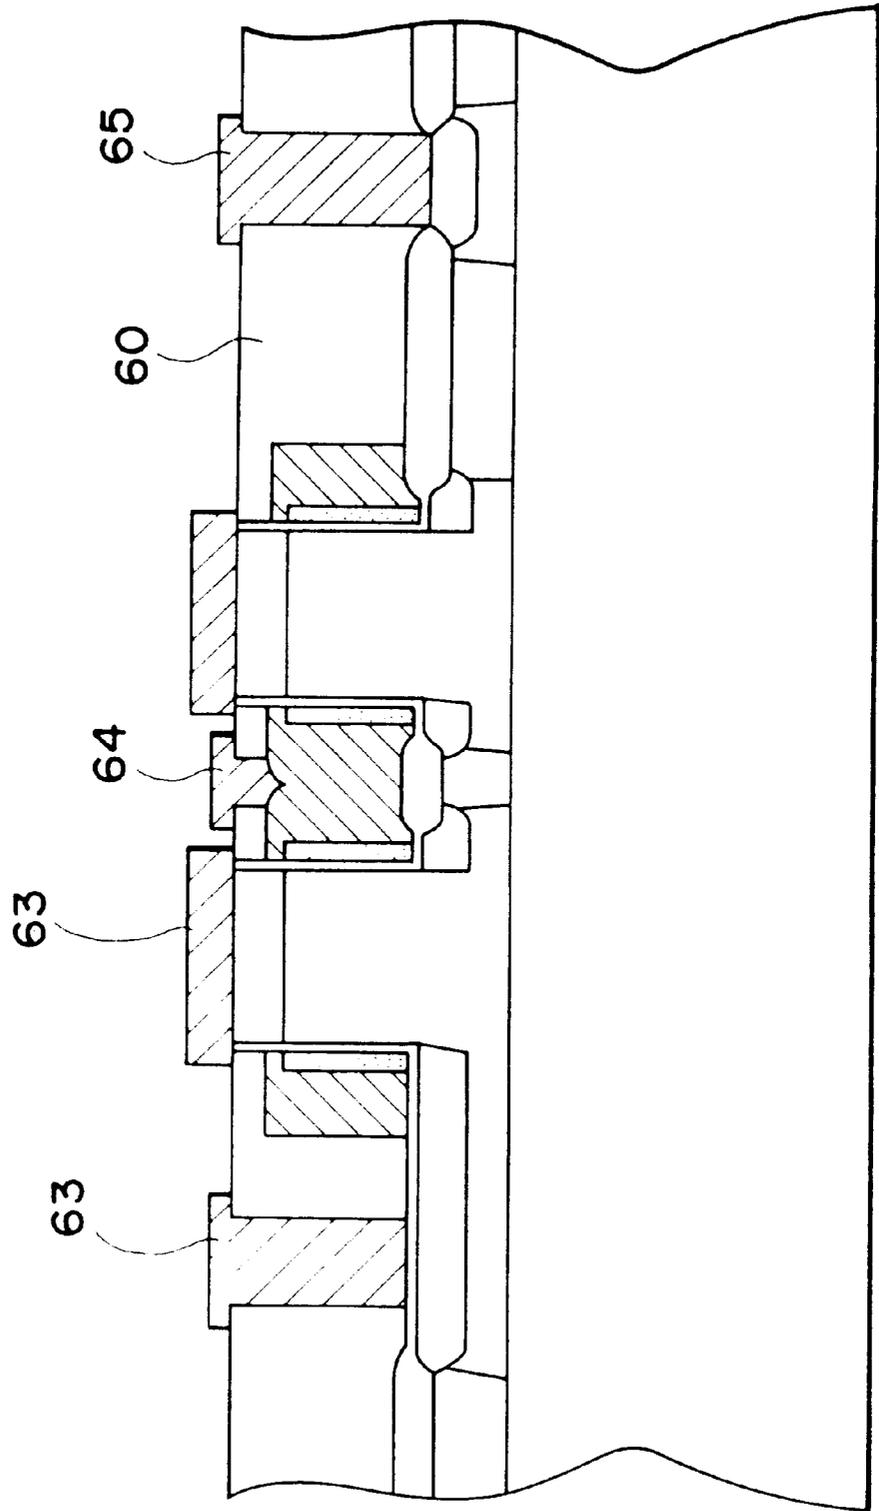


FIG. 66
PRIOR ART

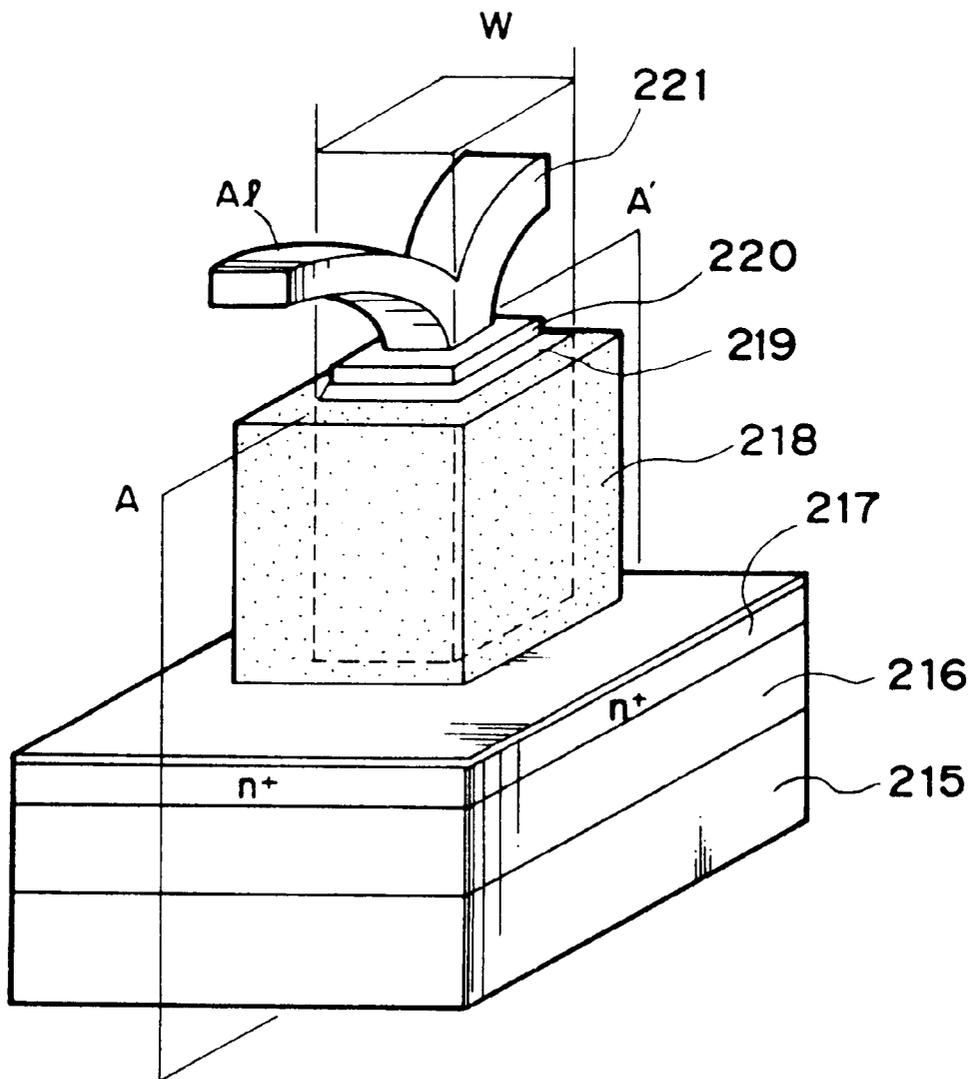


FIG. 67
PRIOR ART

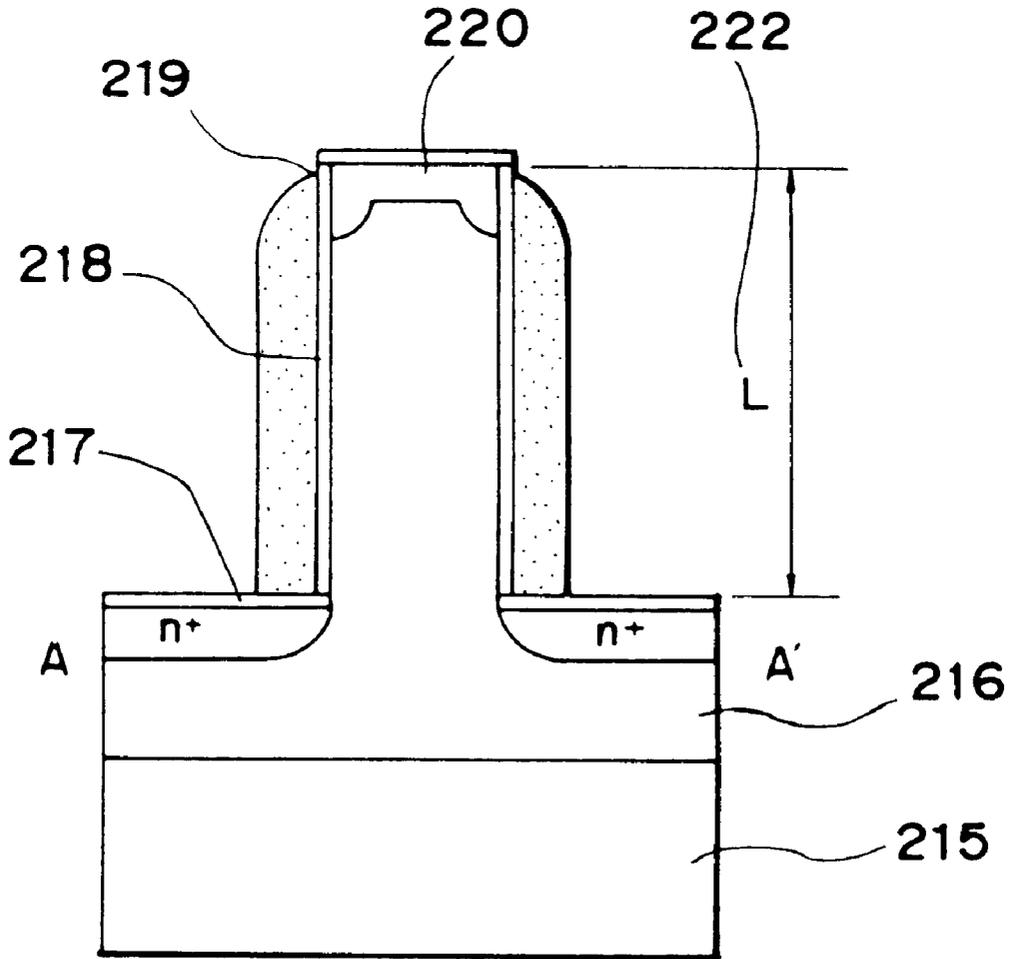


FIG. 68A

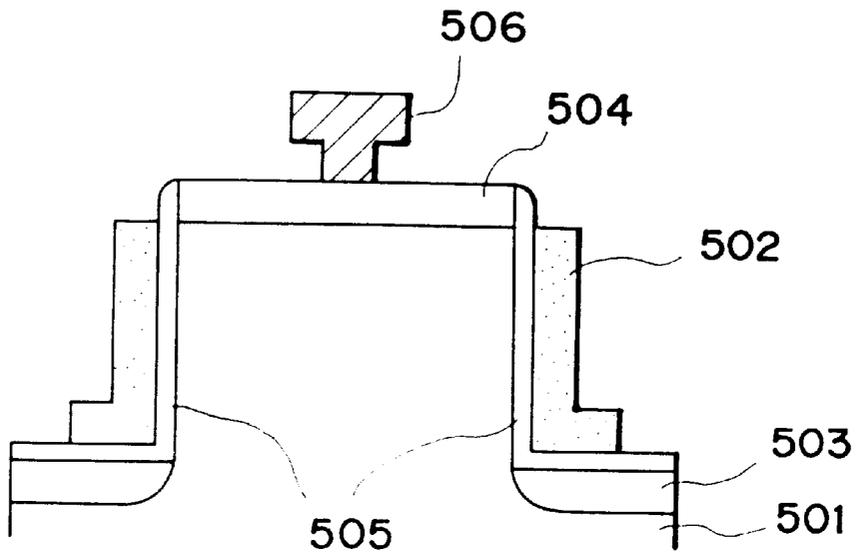


FIG. 68B

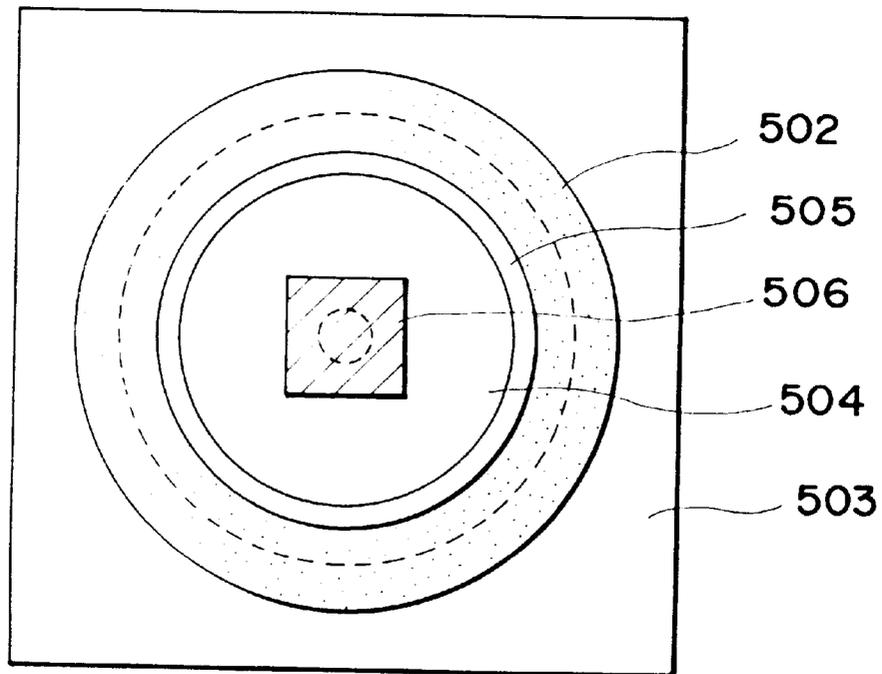


FIG. 69

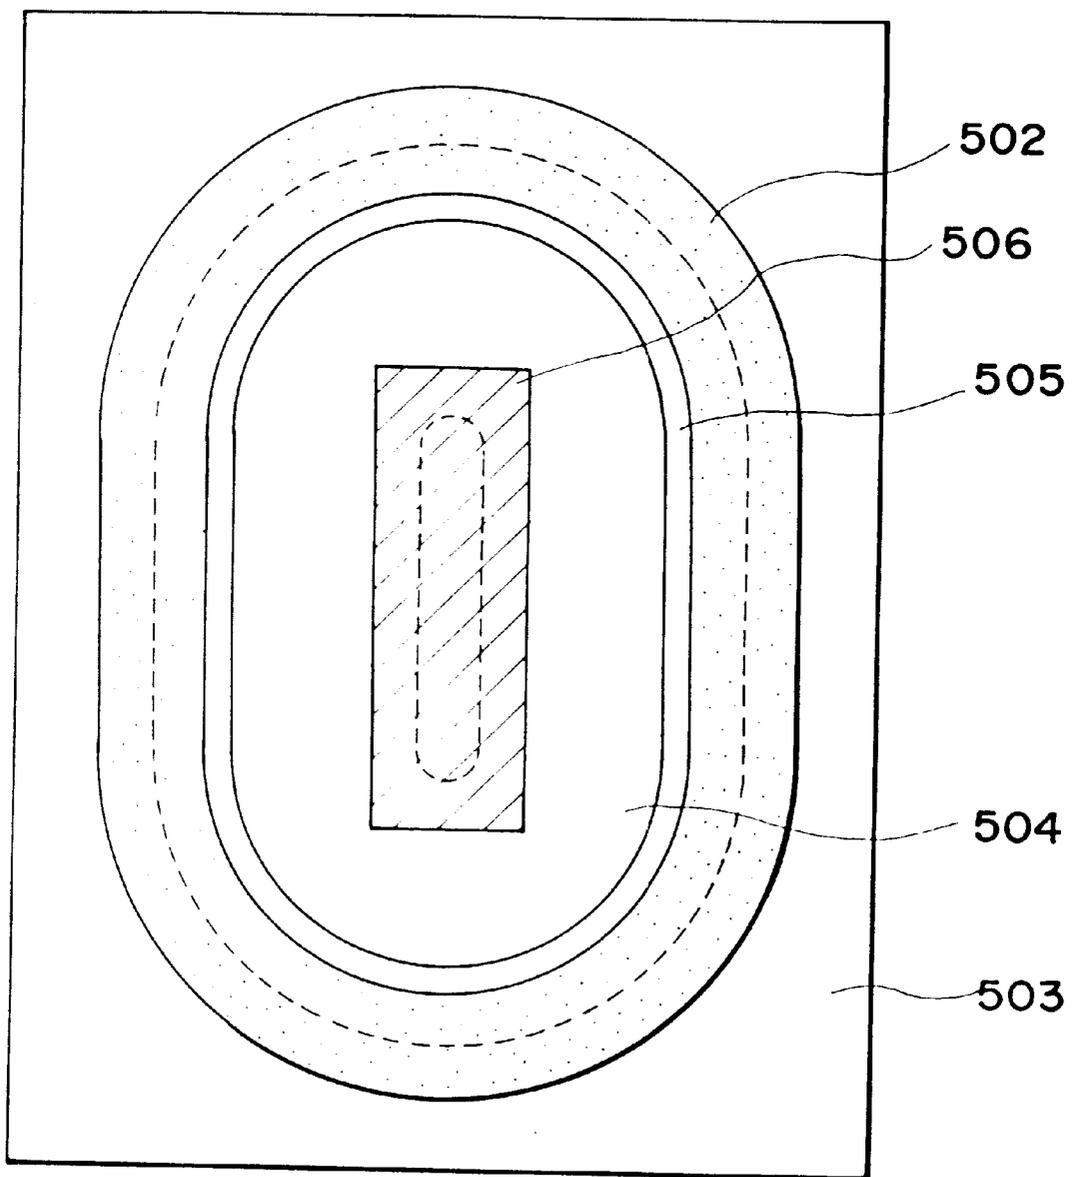


FIG. 70A

FIG. 70B

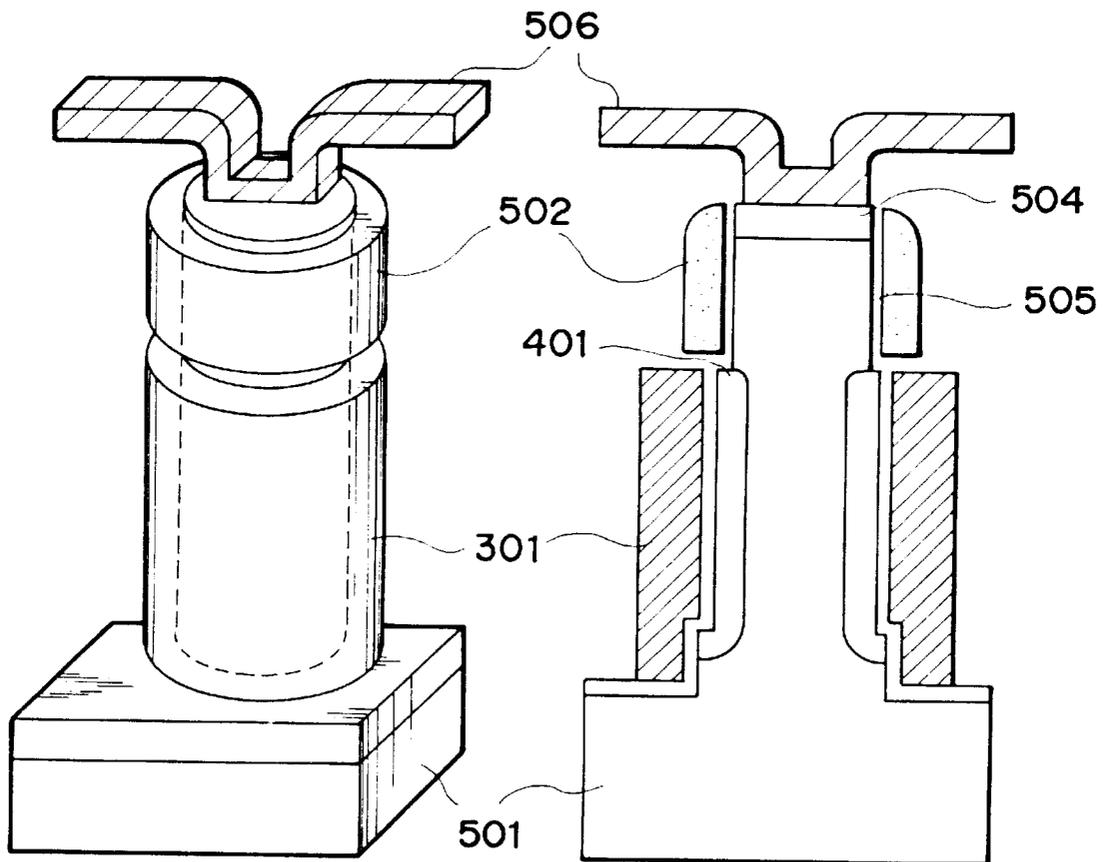


FIG. 71A

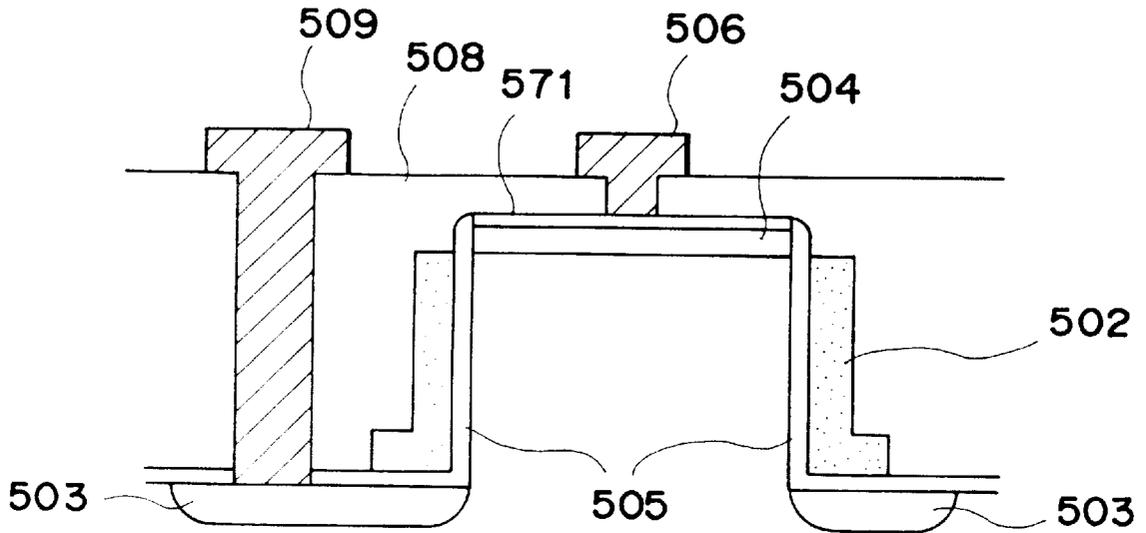


FIG. 71B

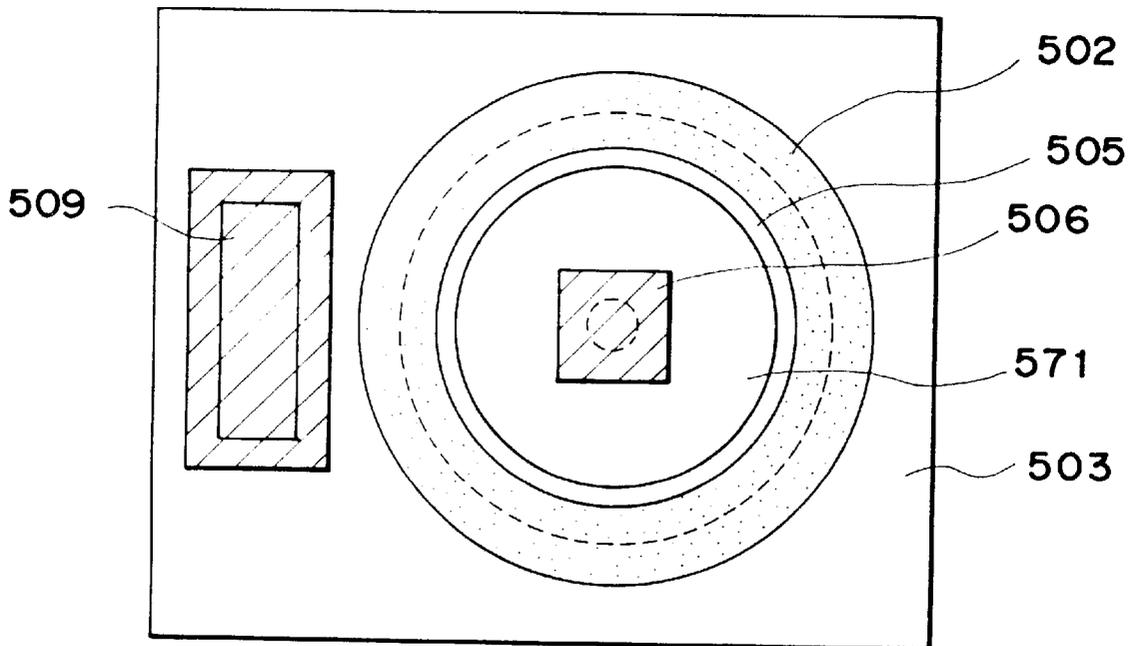


FIG. 72

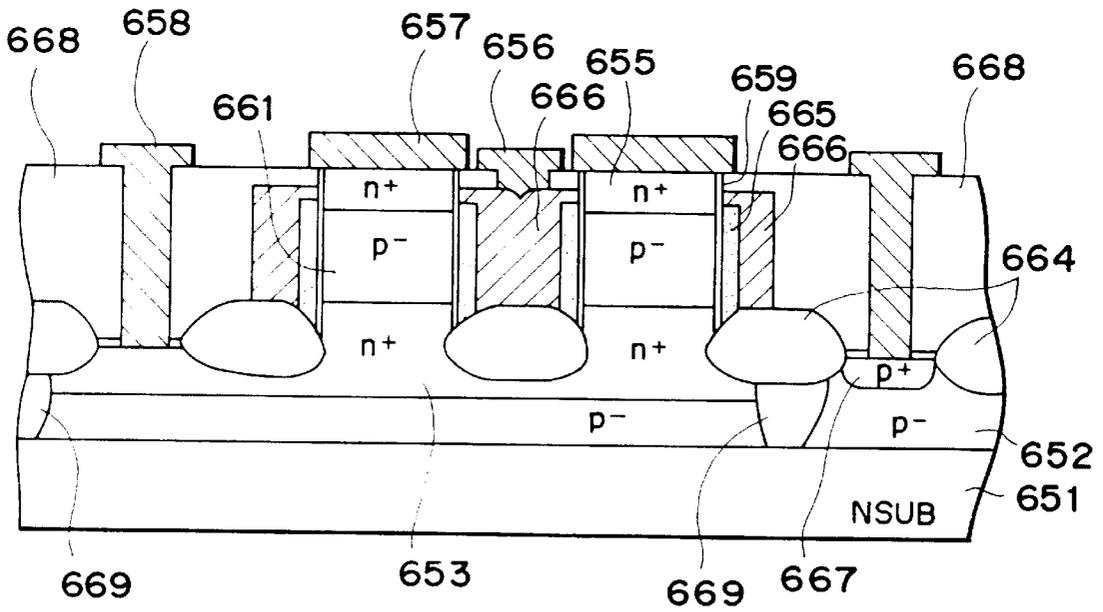


FIG. 73

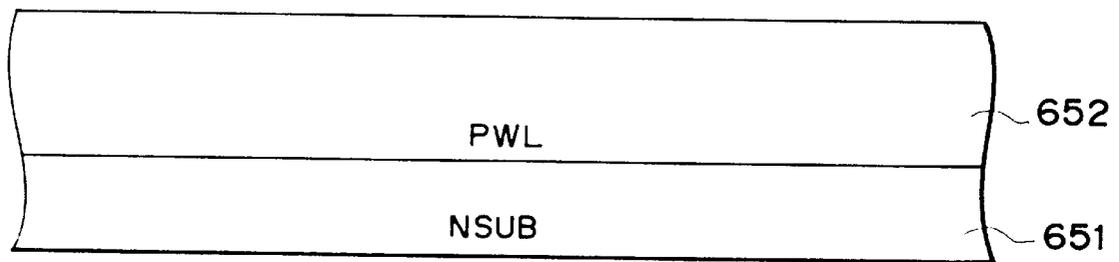


FIG. 74

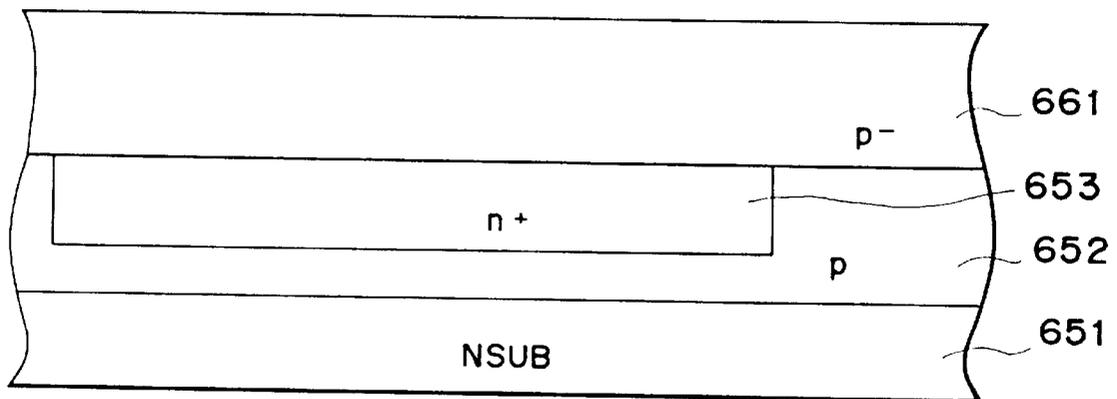


FIG. 75

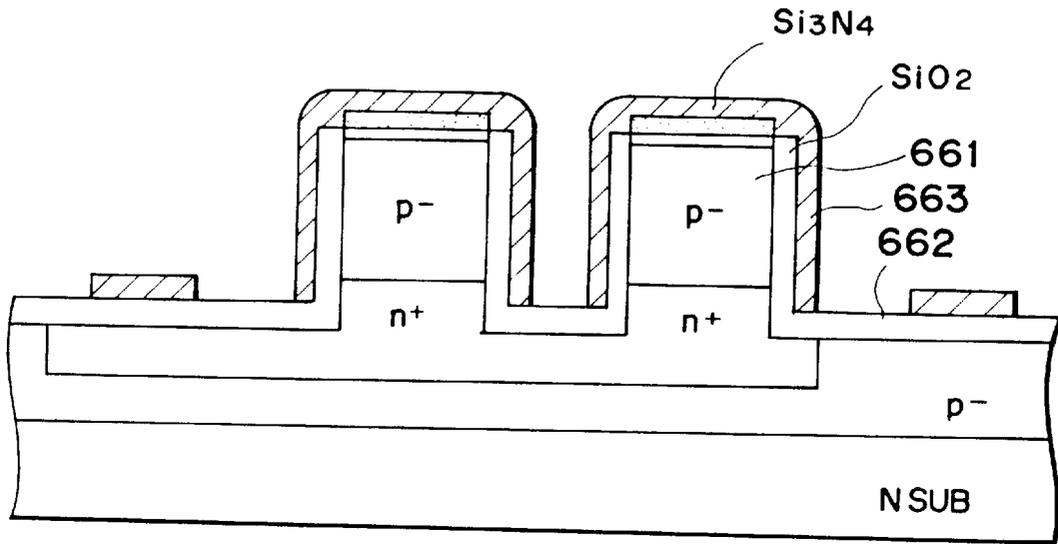


FIG. 76

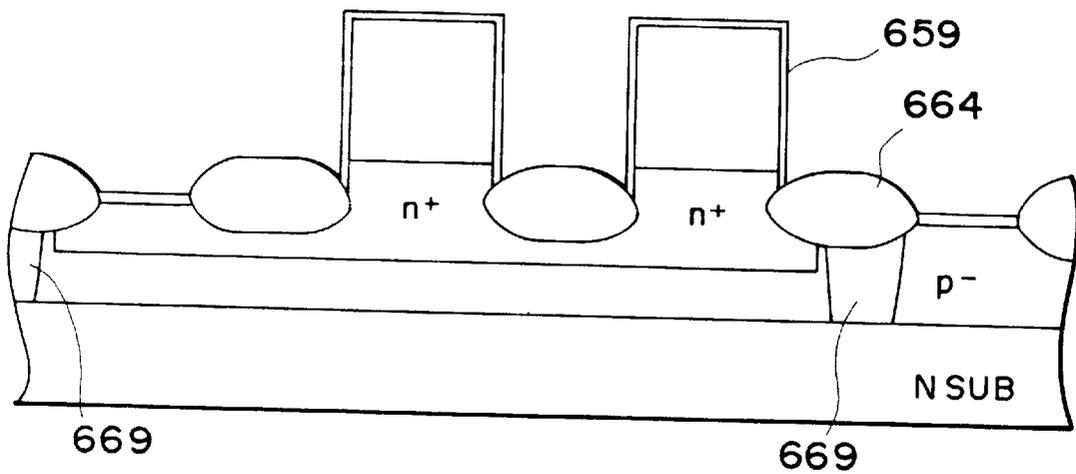


FIG. 77

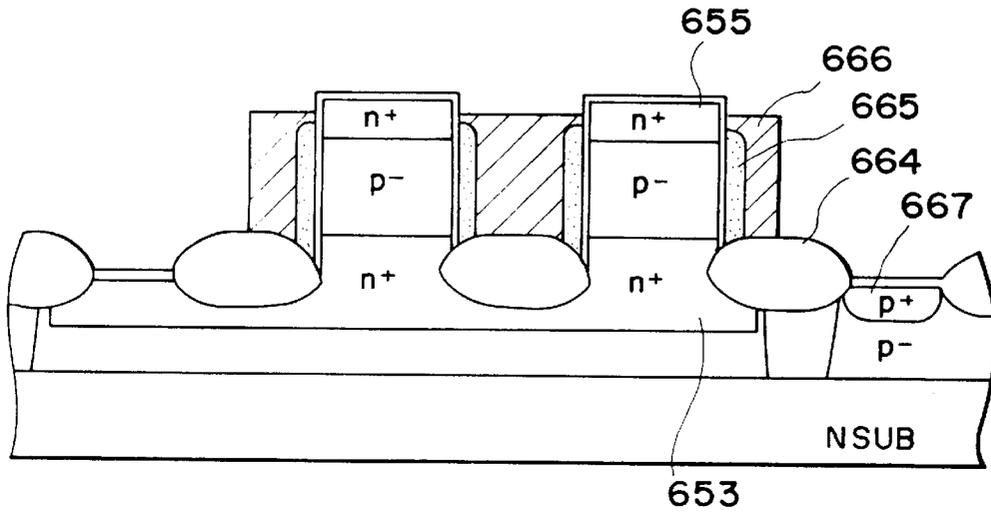


FIG. 78

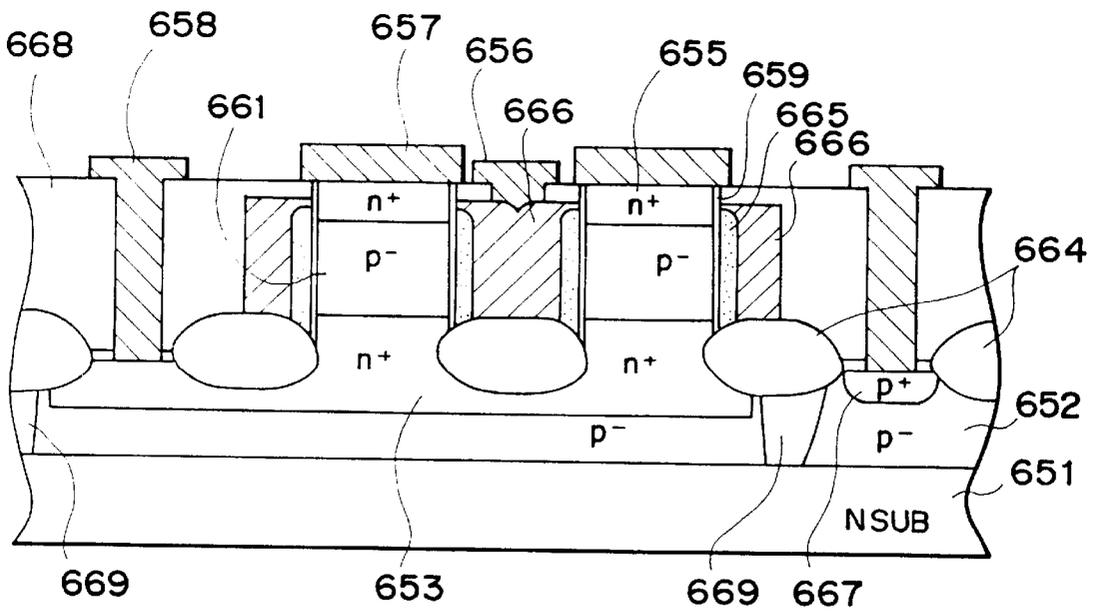


FIG. 79

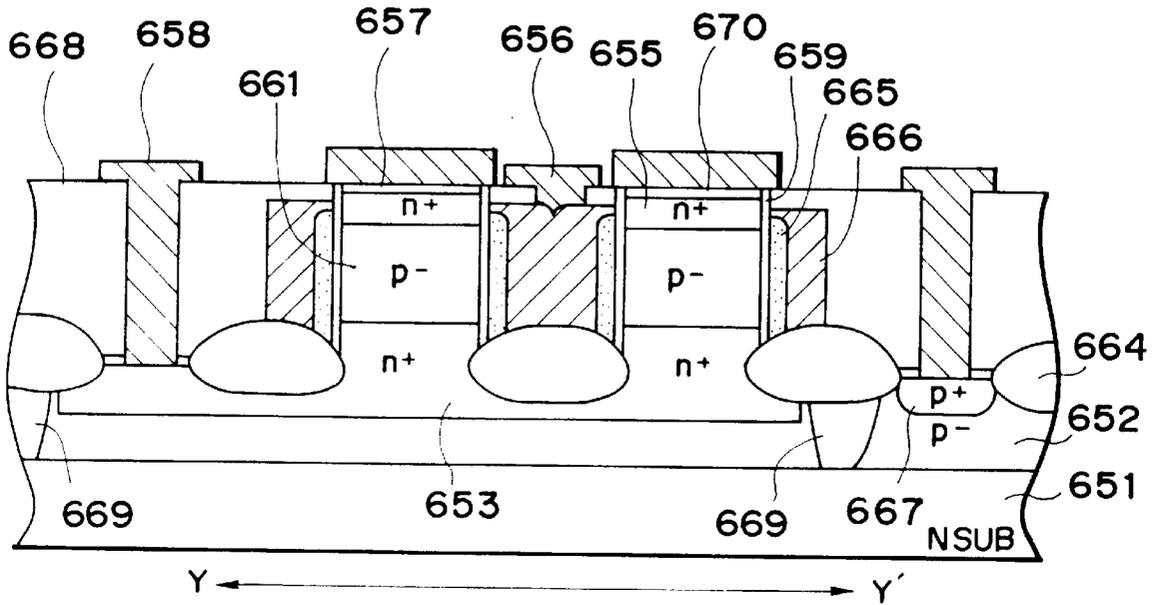


FIG. 80

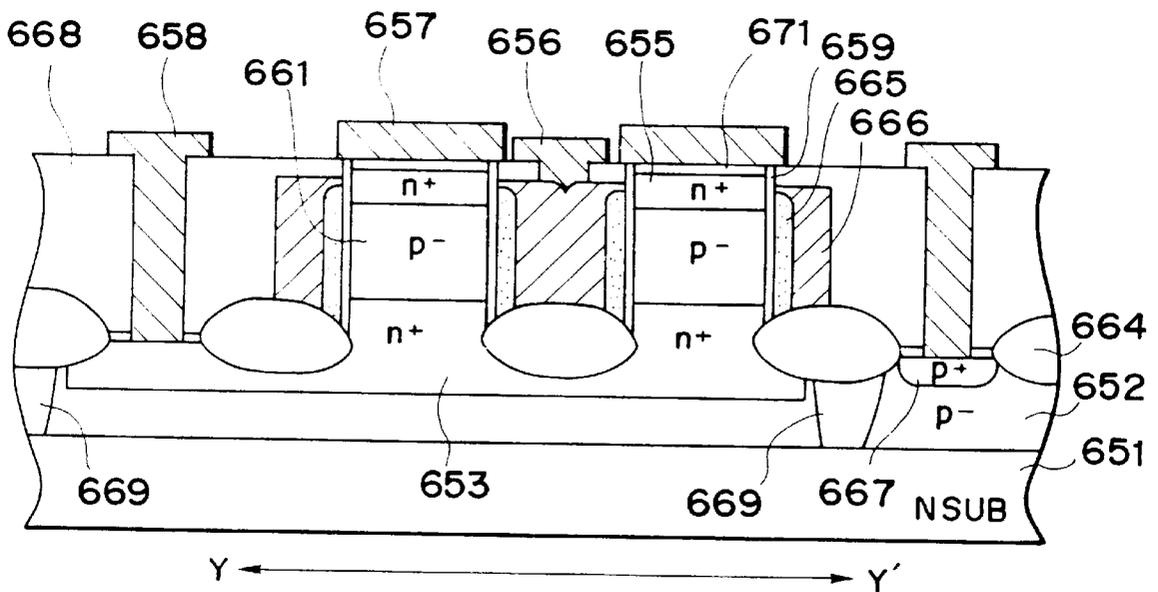


FIG. 81

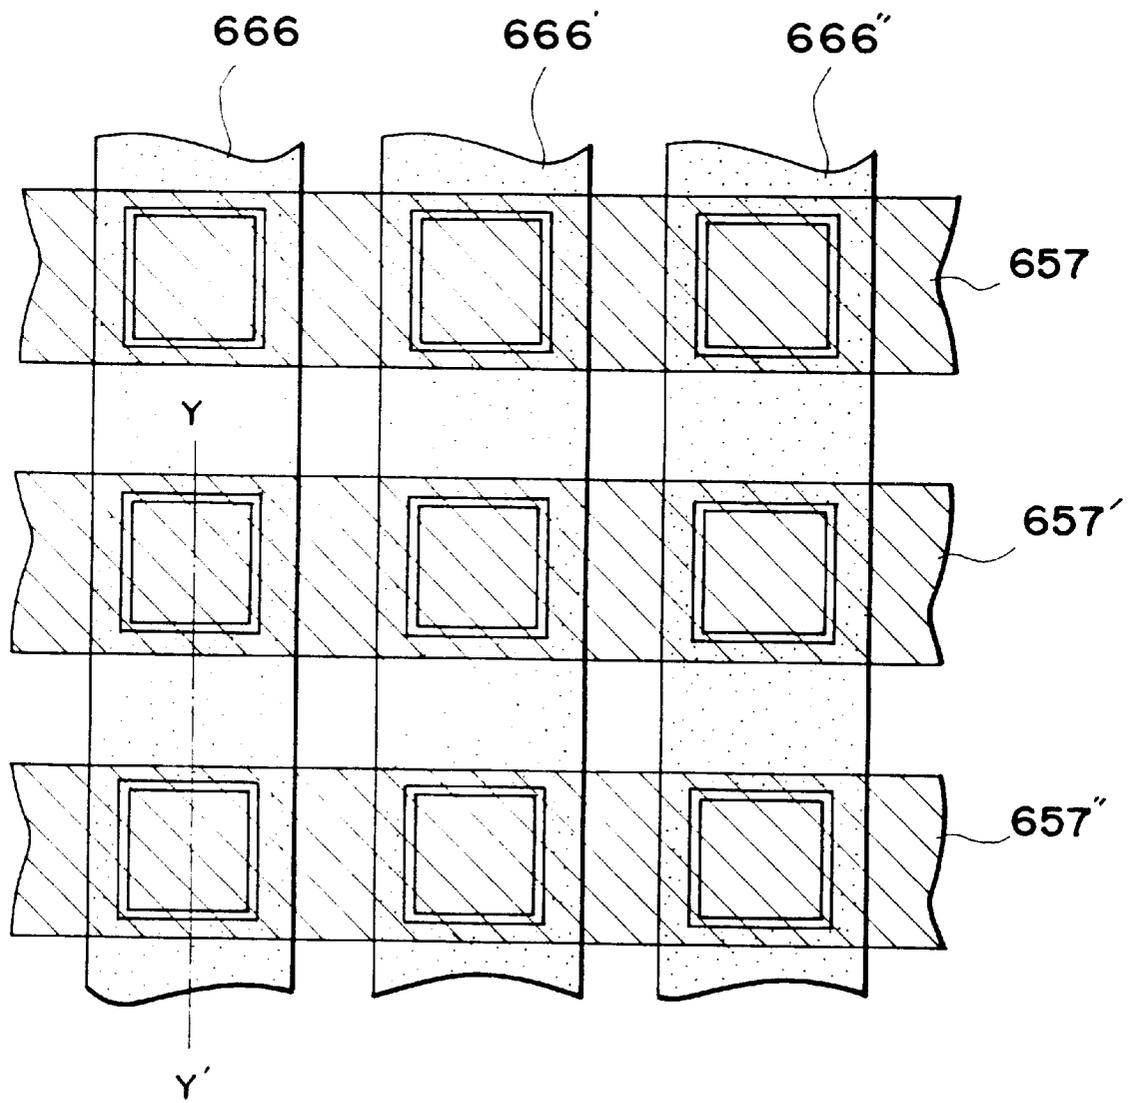


FIG. 82
PRIOR ART

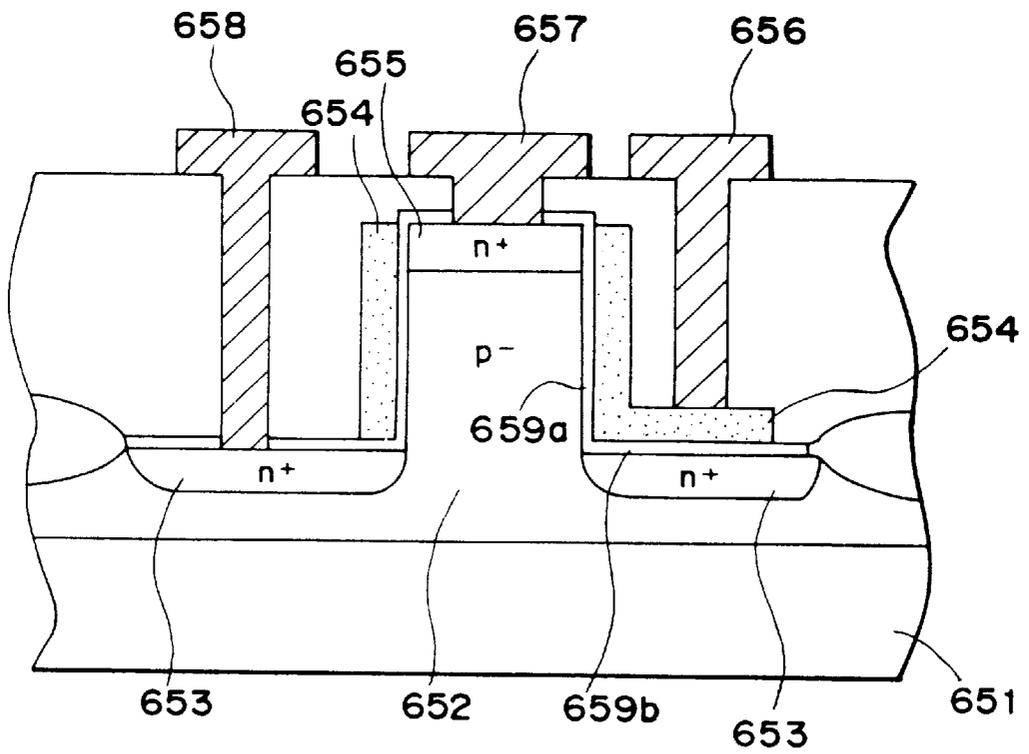


FIG. 83A

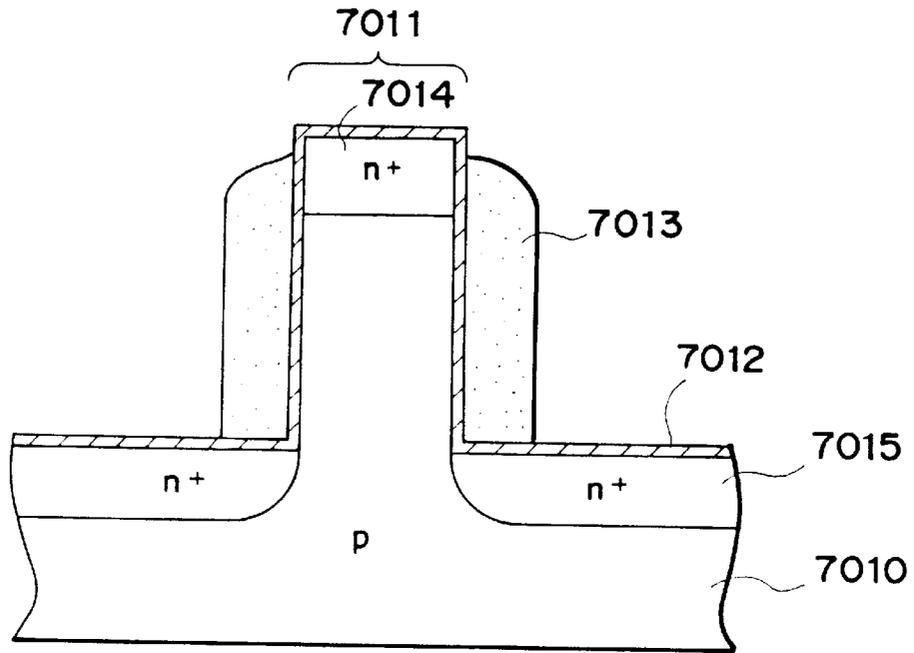


FIG. 83B

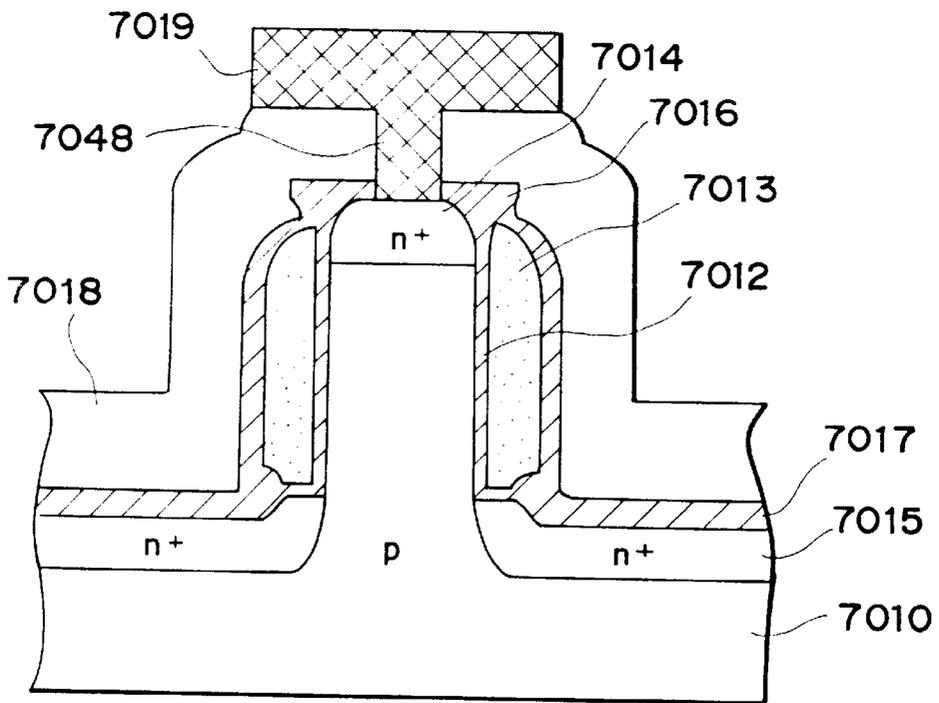


FIG. 84

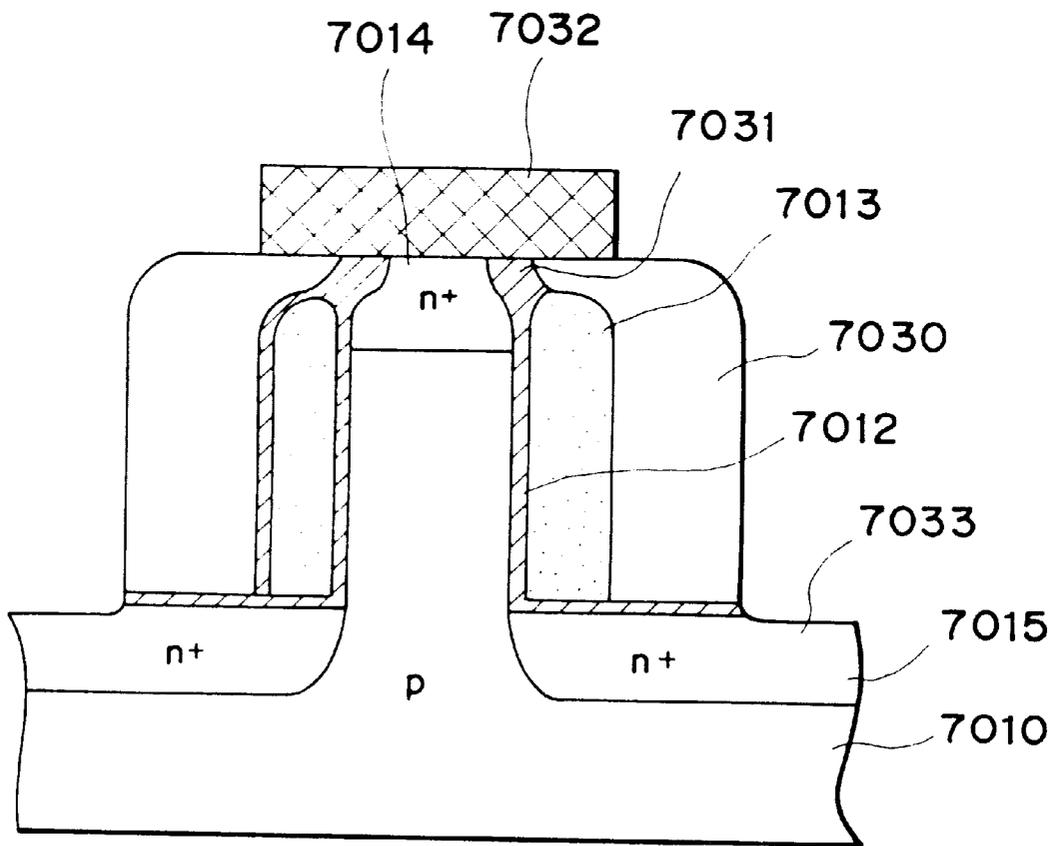


FIG. 85

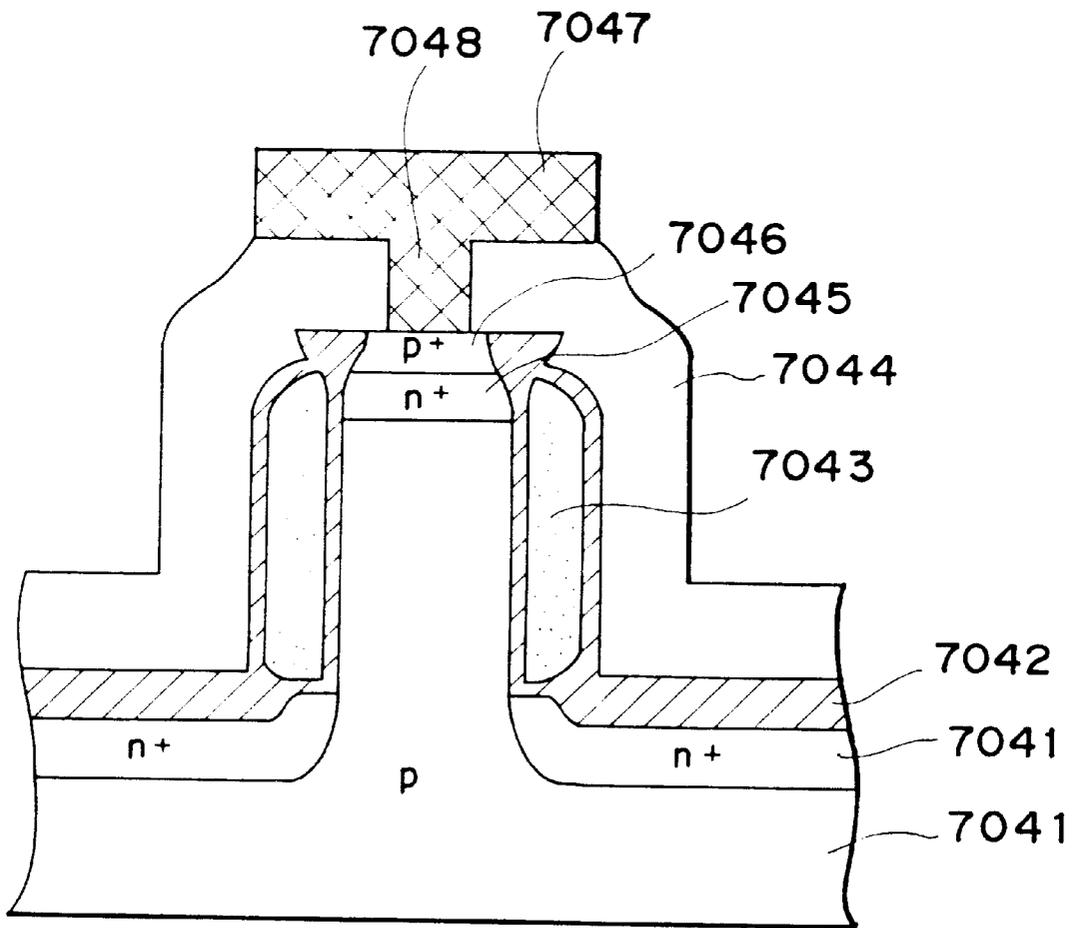


FIG. 89

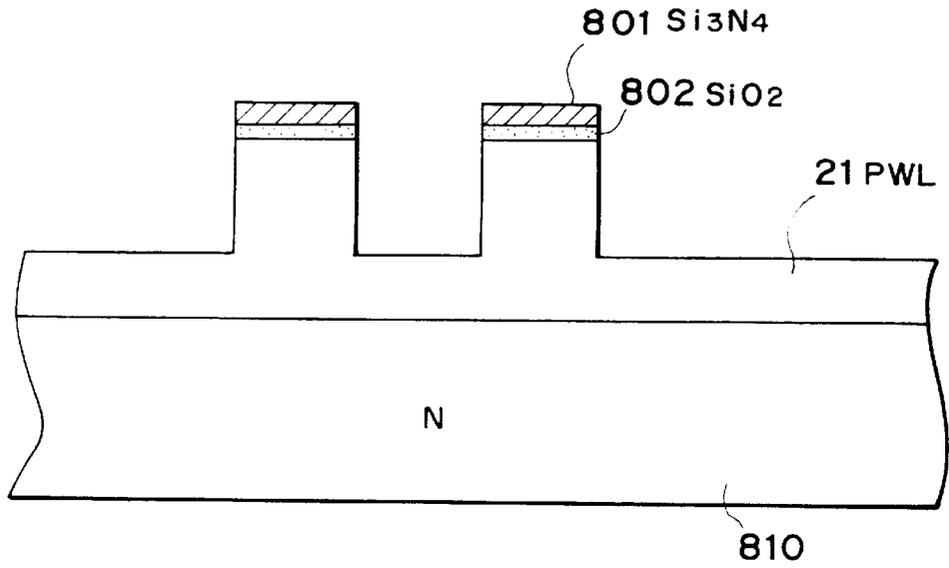


FIG. 90

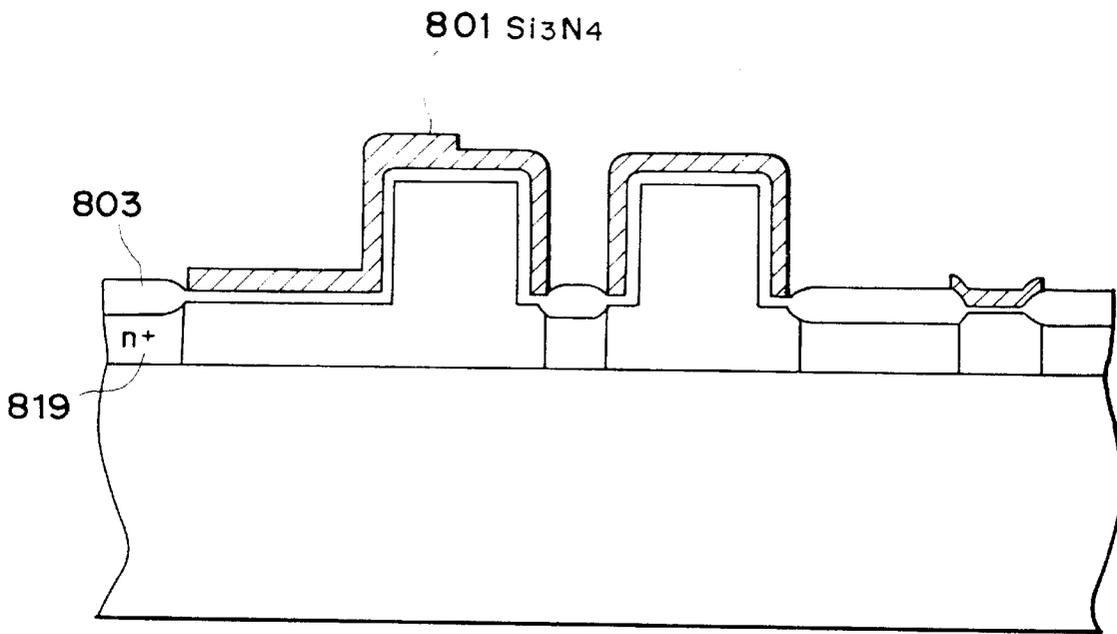


FIG. 91

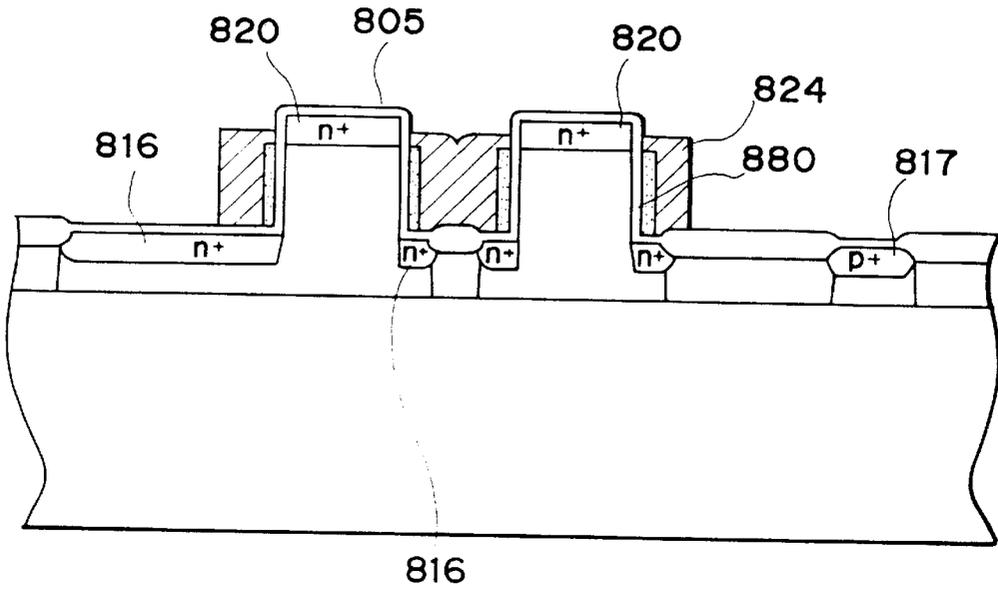


FIG. 92

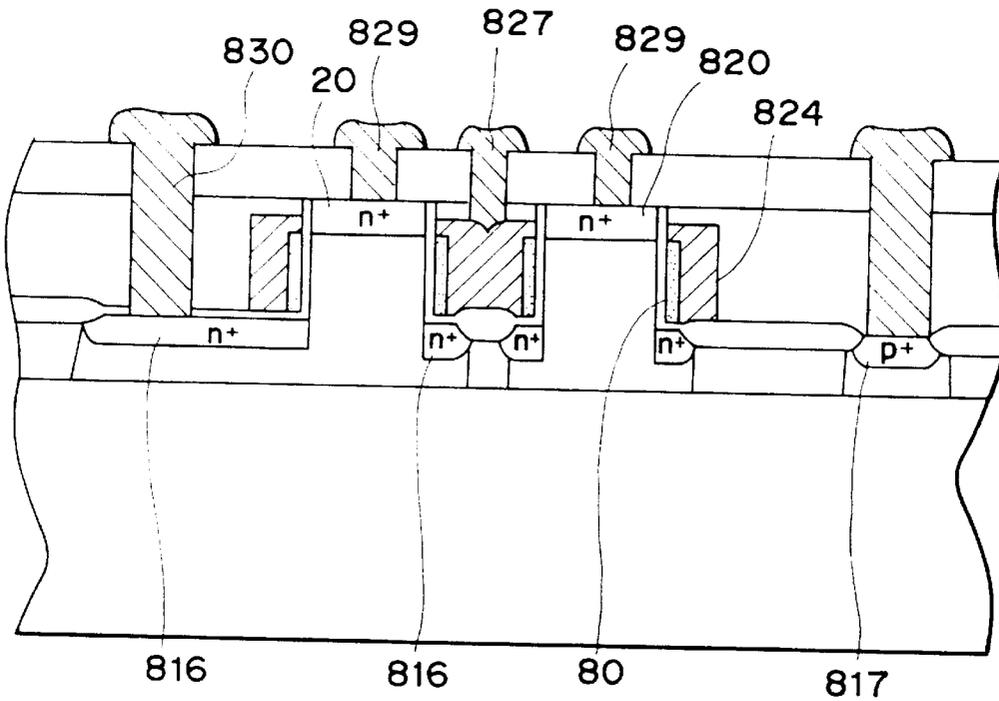


FIG. 93

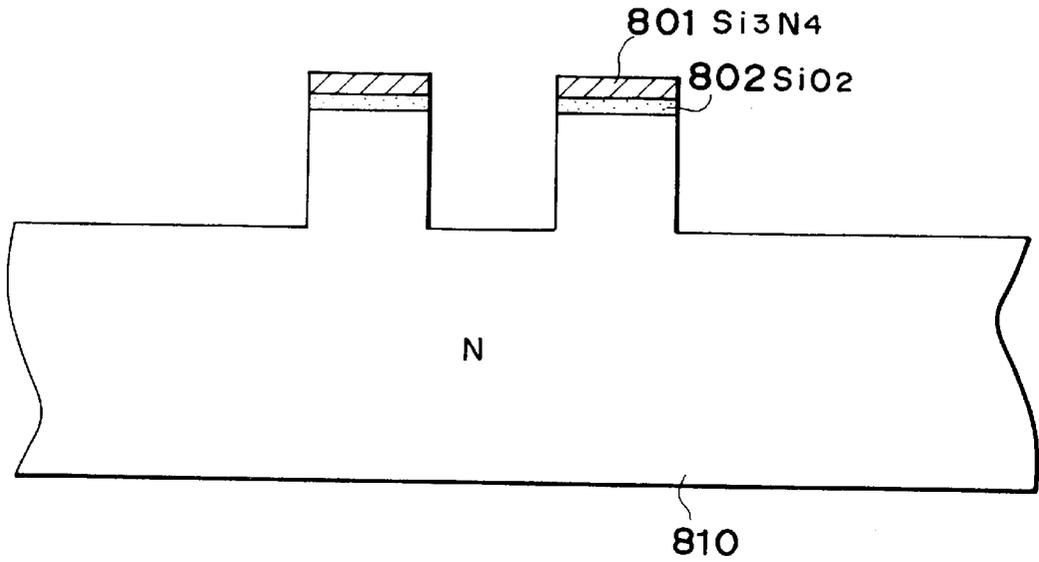


FIG. 94

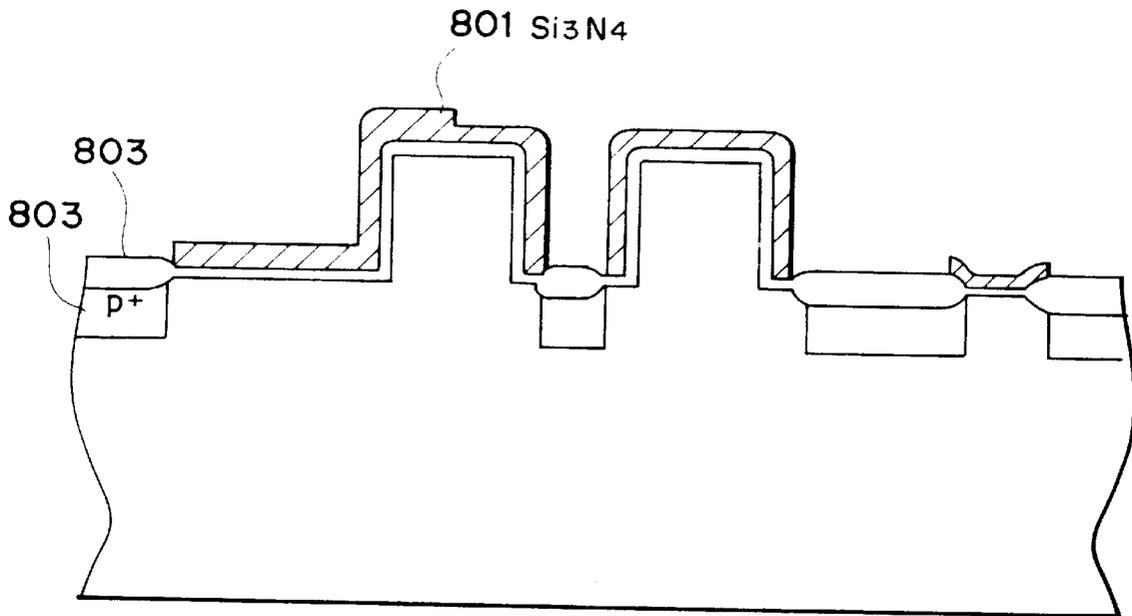


FIG. 95

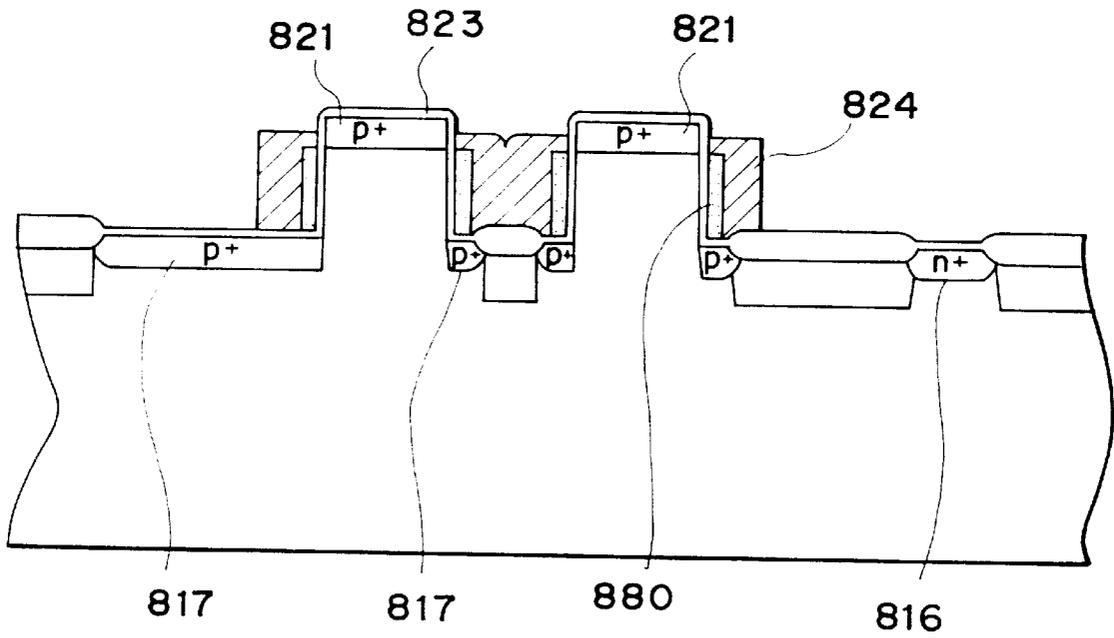


FIG. 97

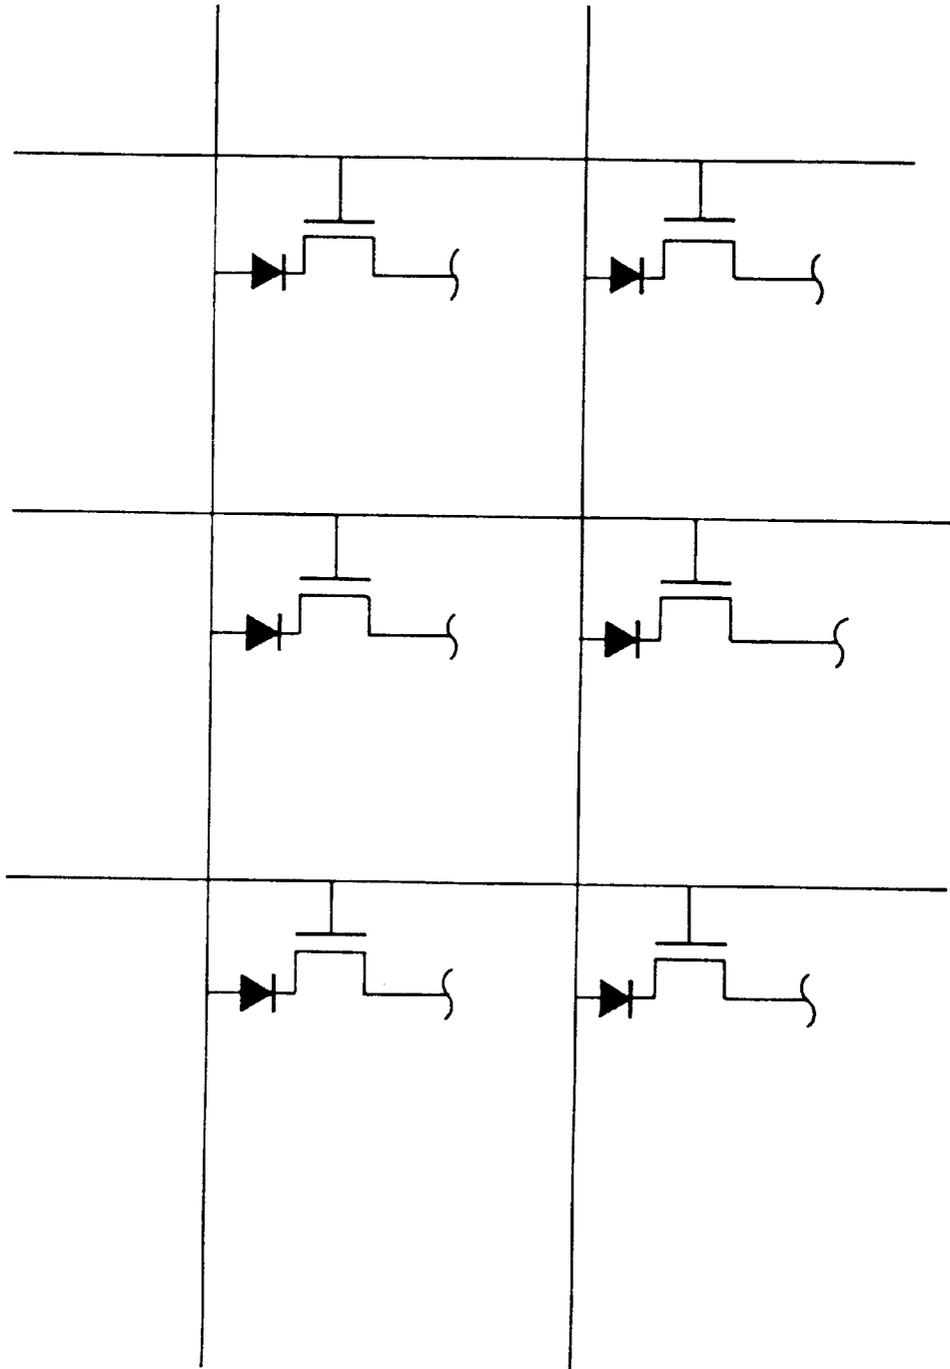


FIG. 98

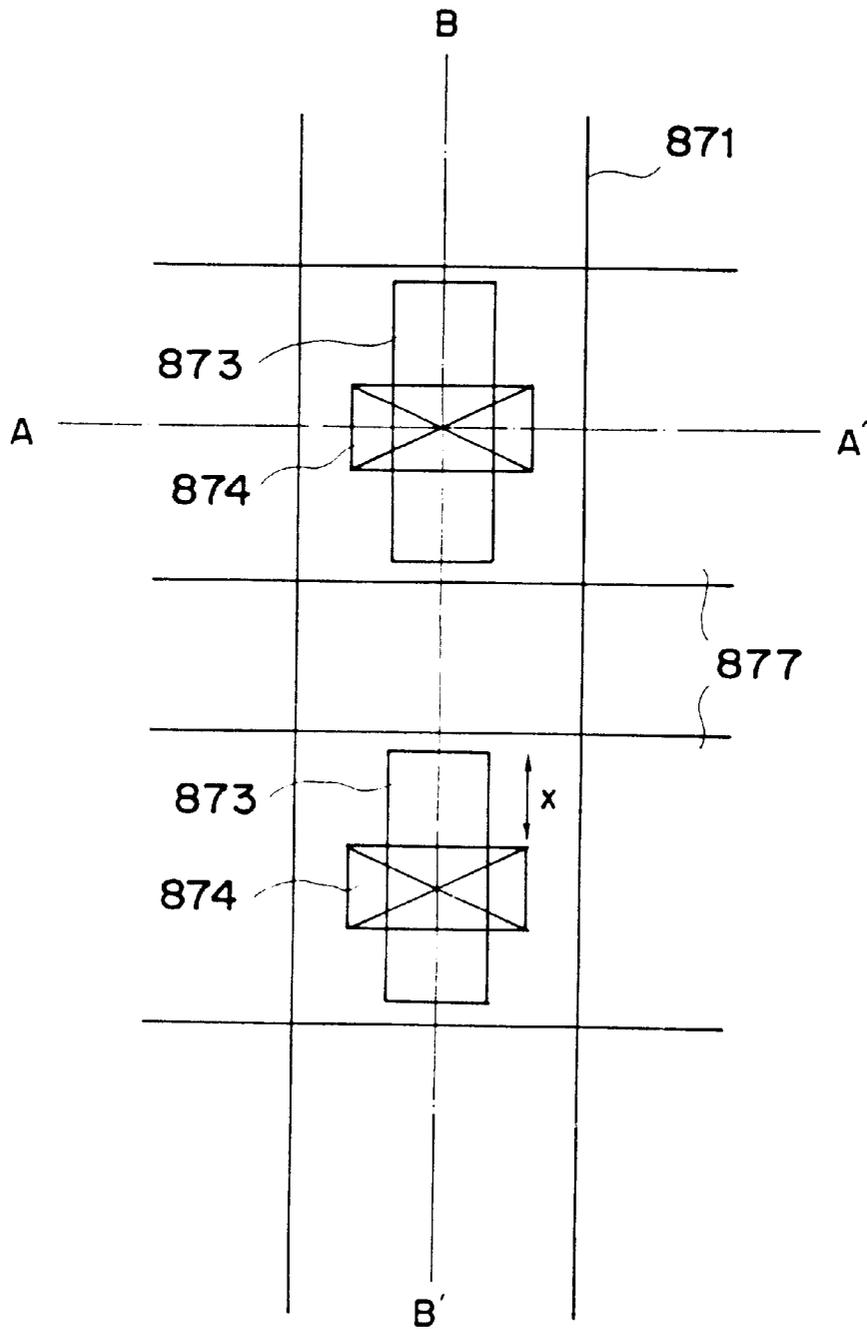


FIG. 99

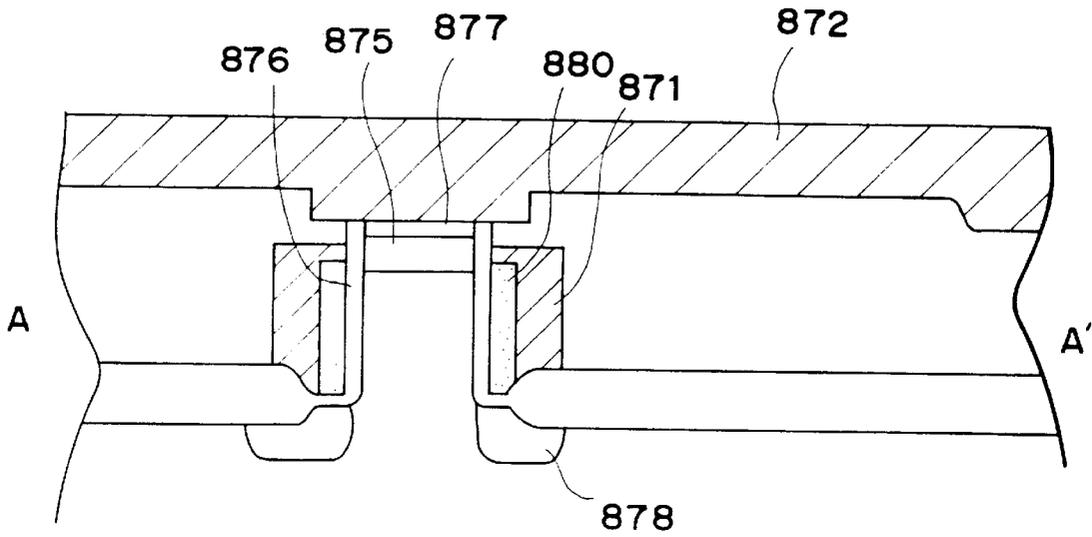


FIG. 100

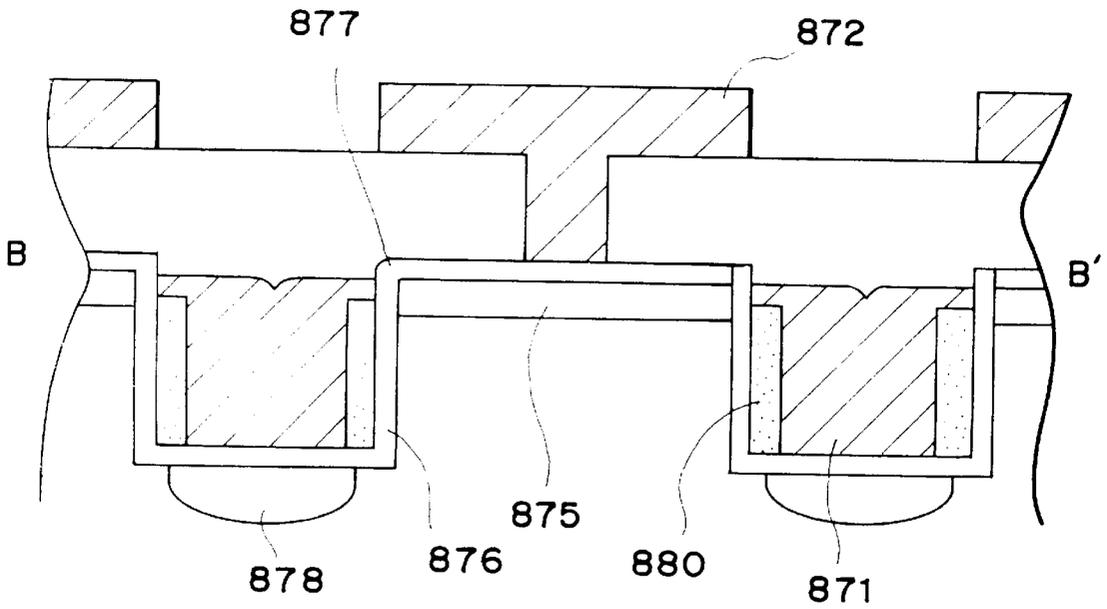


FIG. 101
PRIOR ART

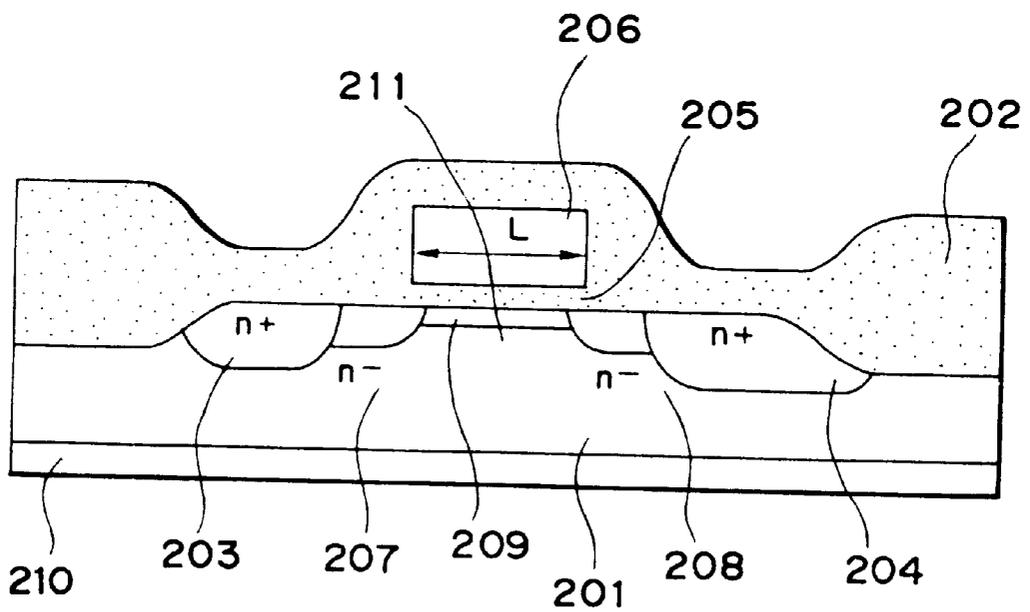


FIG. 102
PRIOR ART

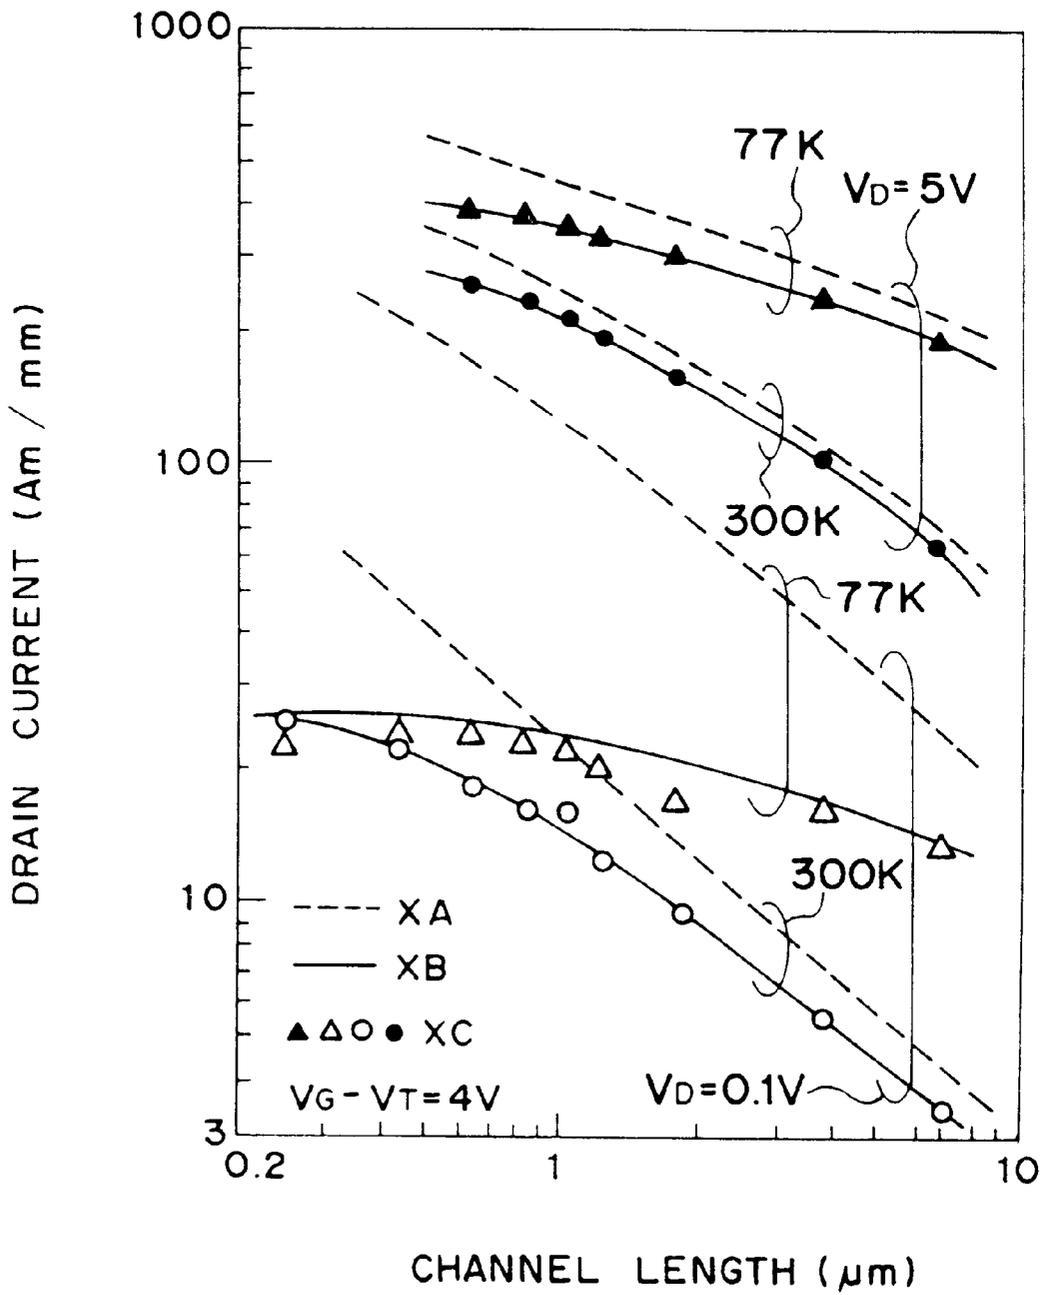


FIG. 103
PRIOR ART

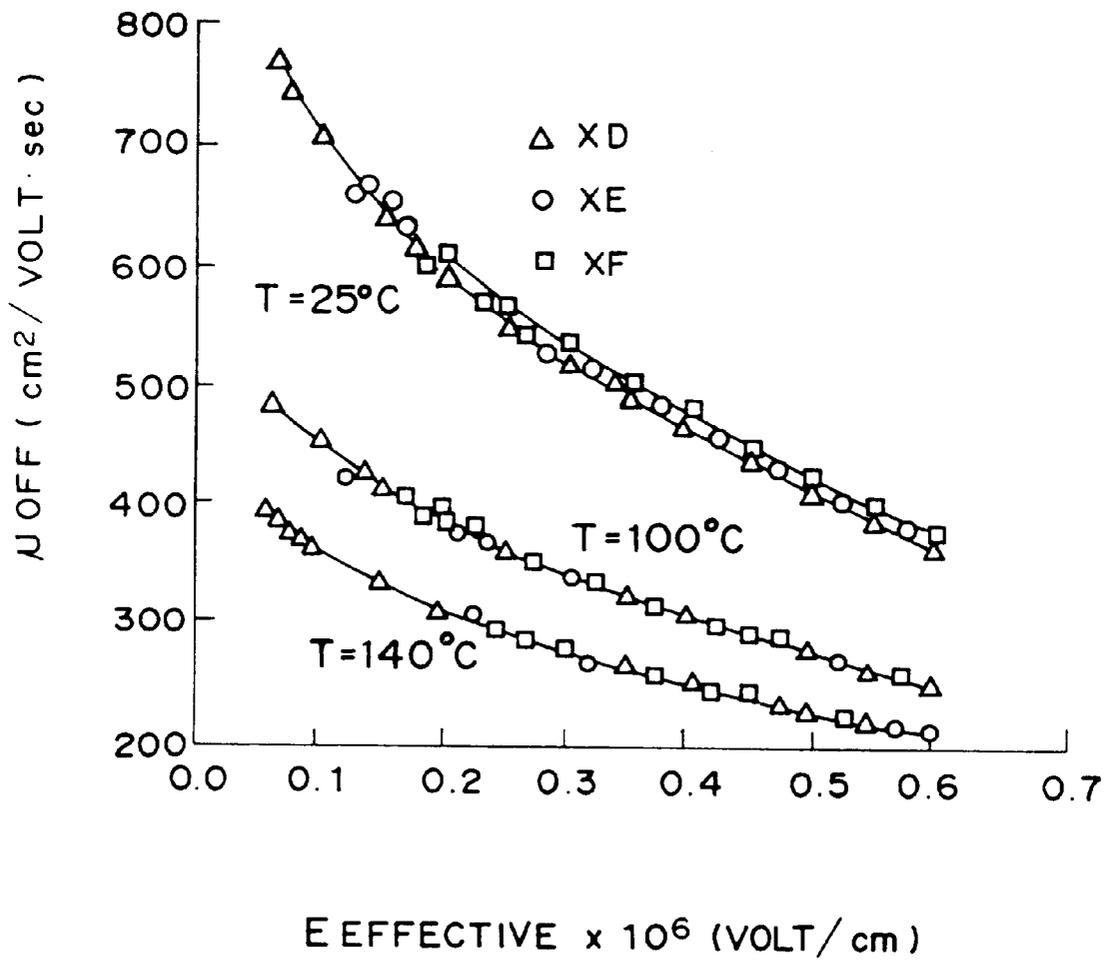


FIG. 104A
PRIOR ART

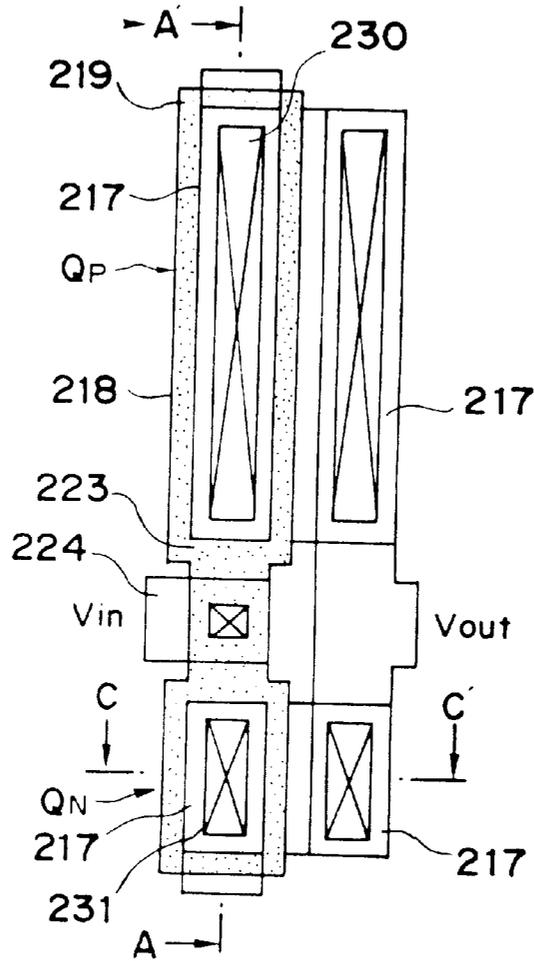


FIG. 104B PRIOR ART

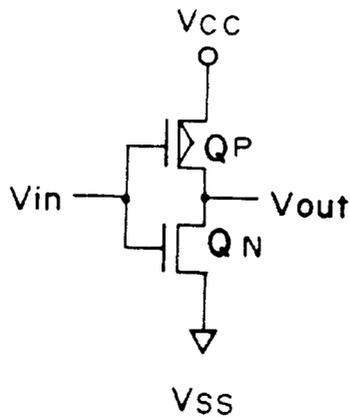


FIG. 105
PRIOR ART

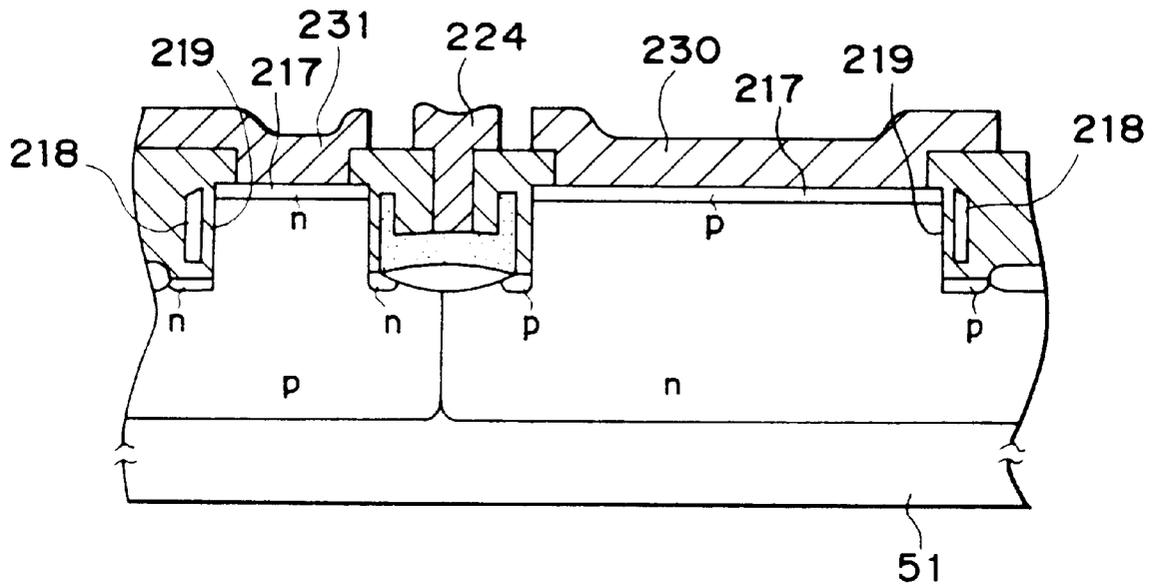


FIG. 106
PRIOR ART

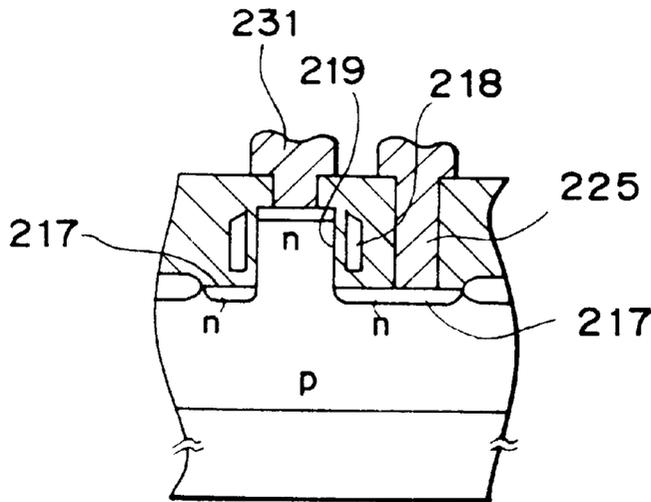


FIG. 107
PRIOR ART

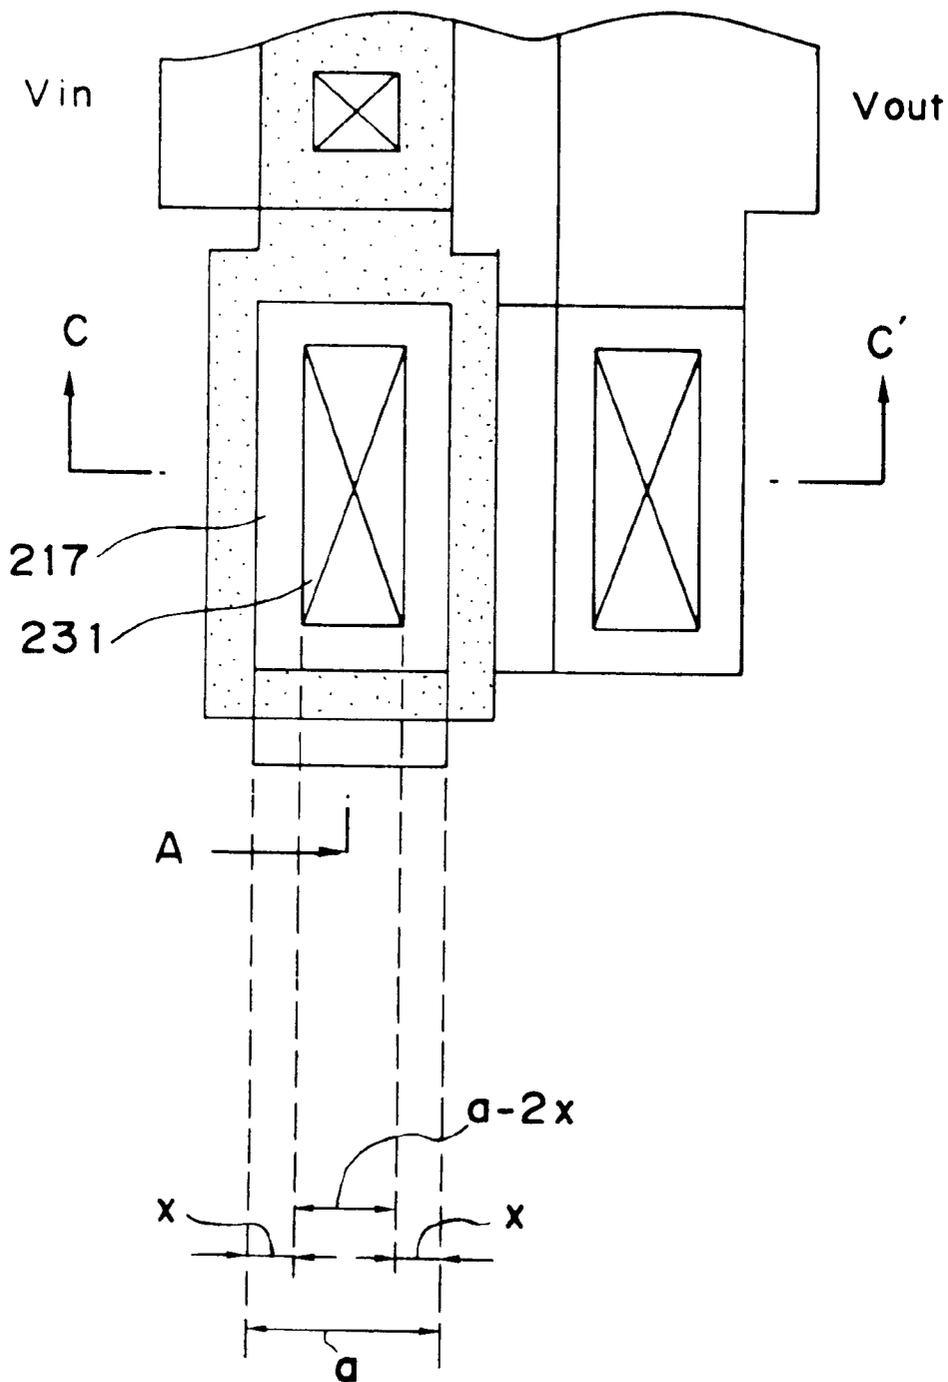


FIG. 108A

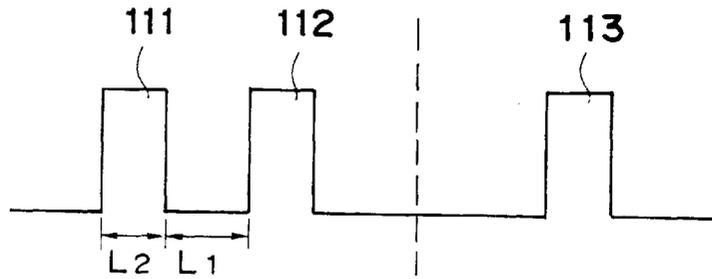


FIG. 108B

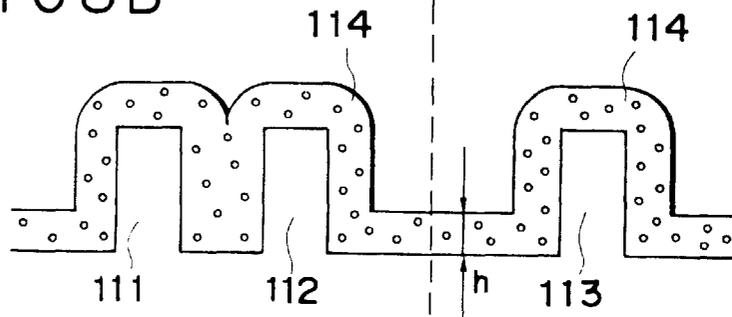


FIG. 108C

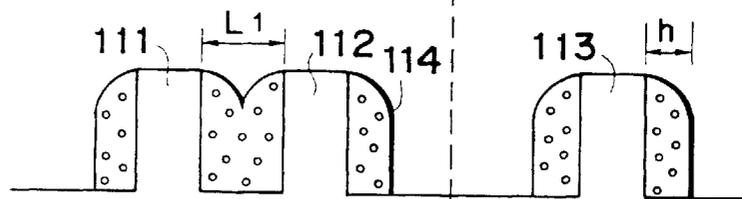


FIG. 108D

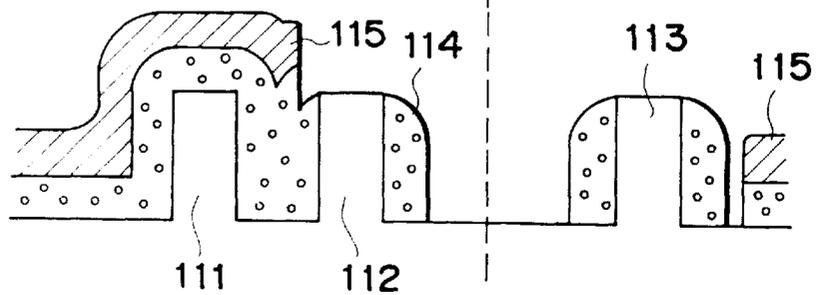


FIG. 109

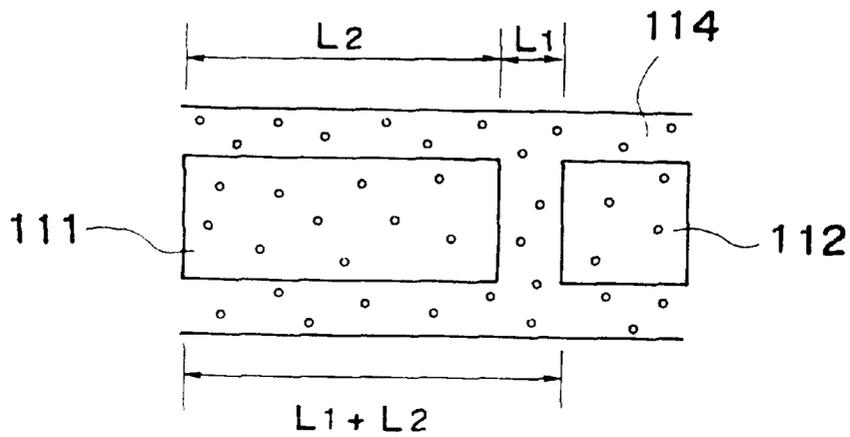


FIG. 110

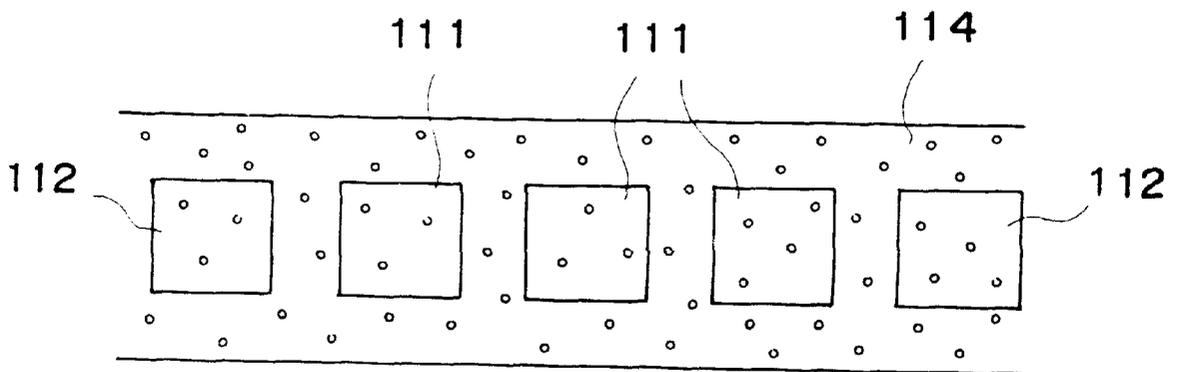


FIG. 111

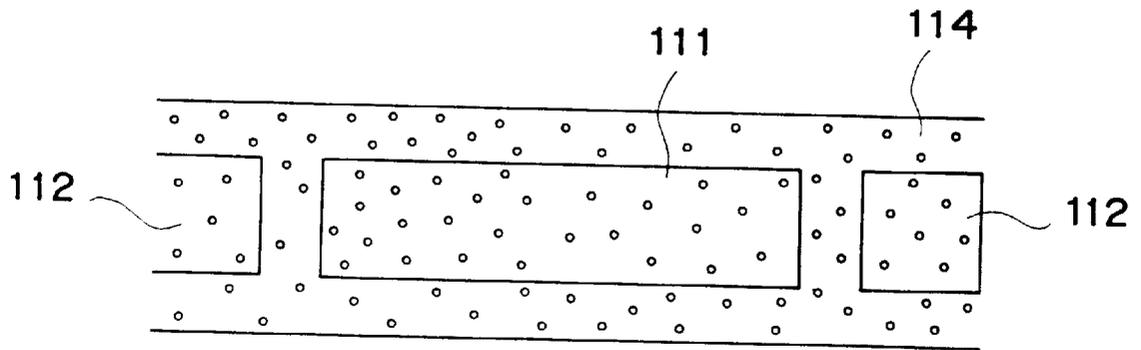


FIG. 112

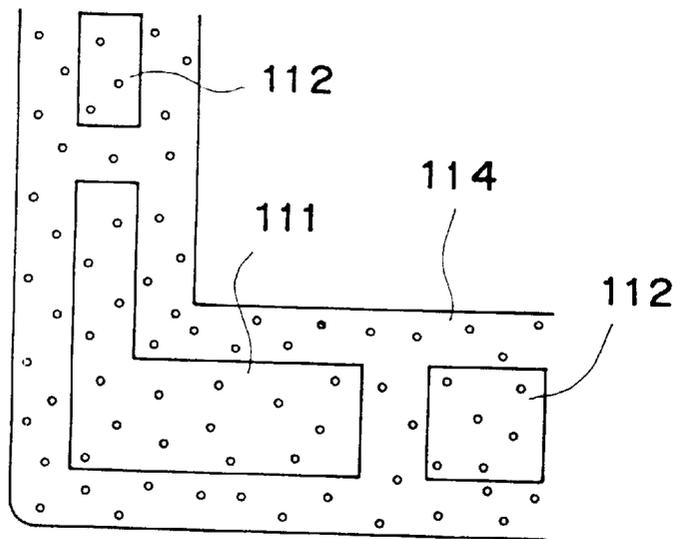


FIG. 113

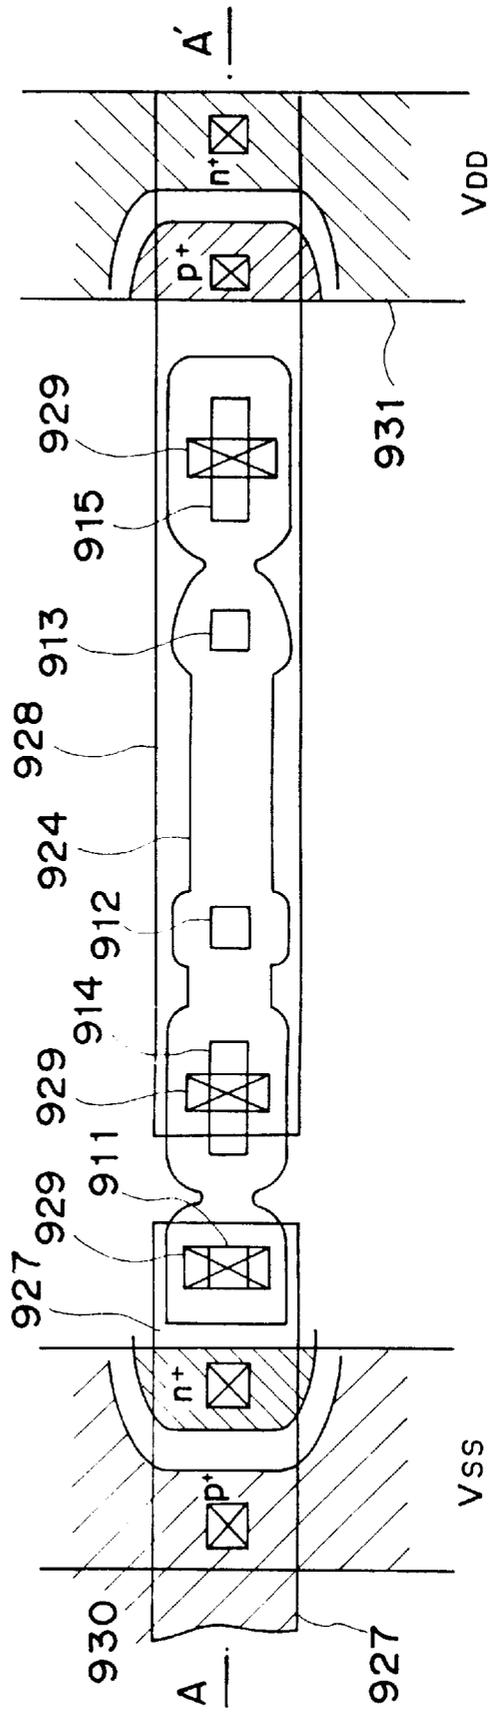


FIG. 115
PRIOR ART

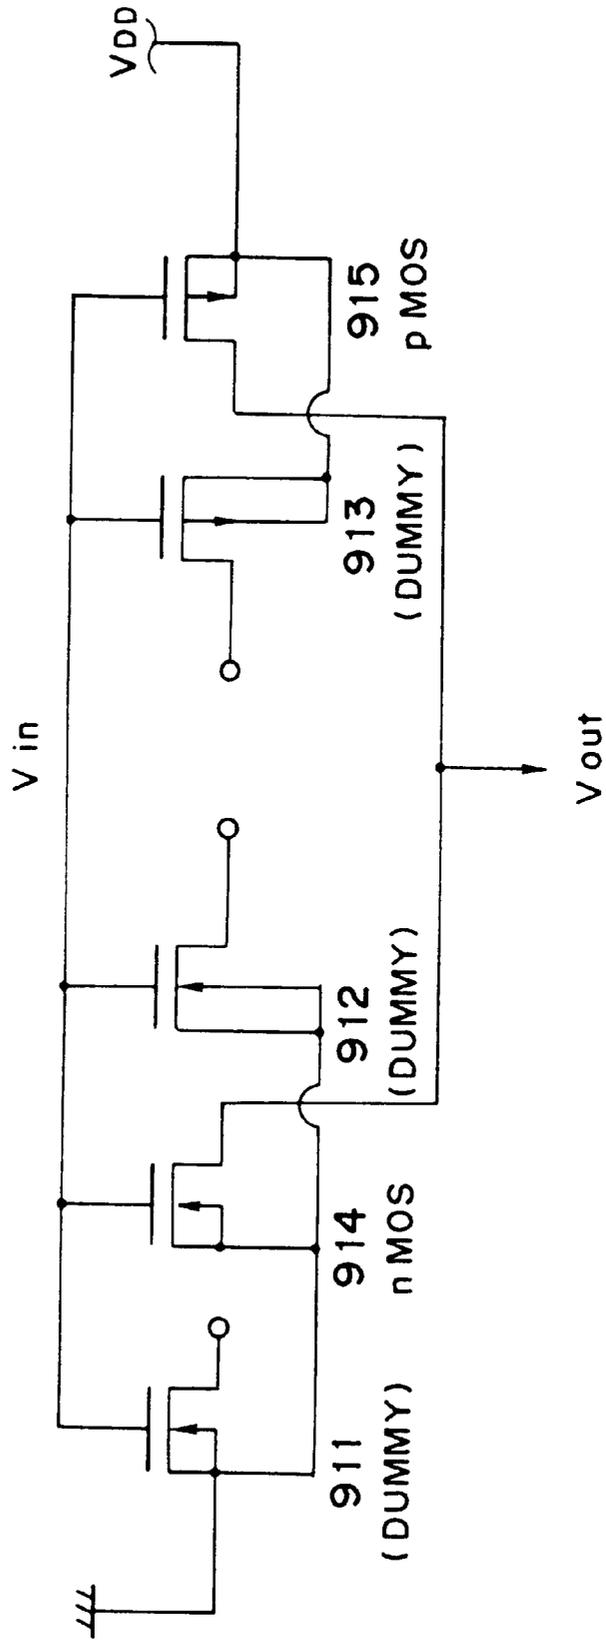


FIG. 116A

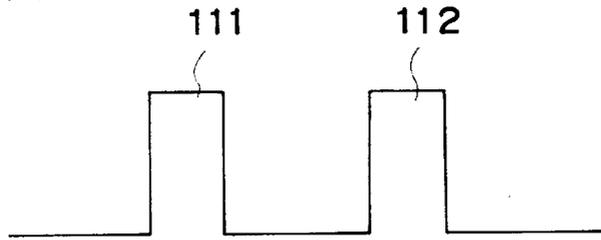


FIG. 116B

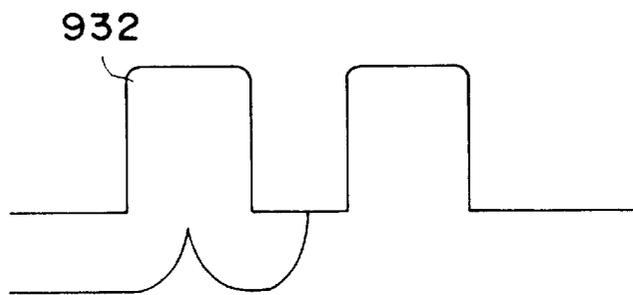


FIG. 116C

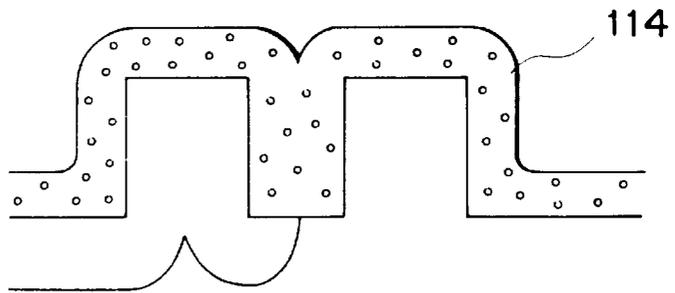


FIG. 116D

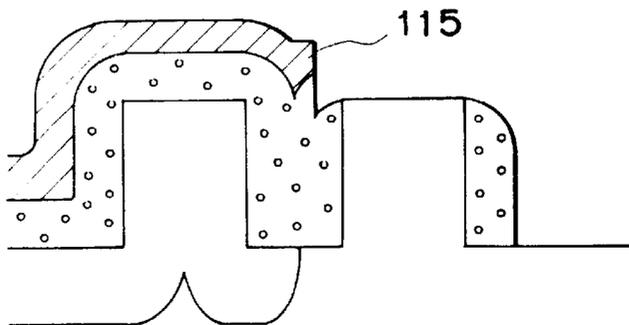


FIG. 117

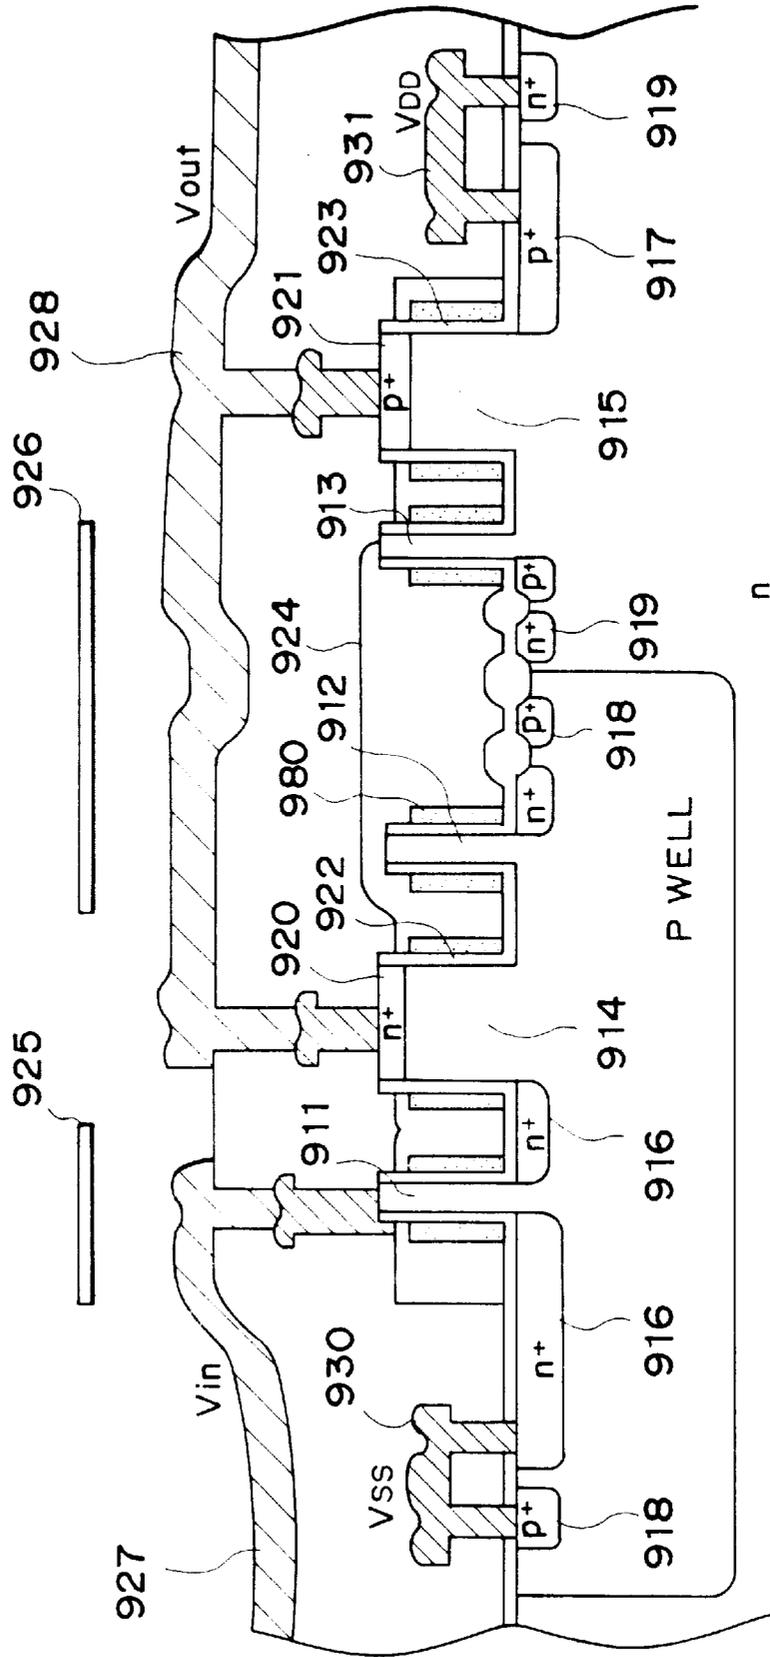


FIG. 118

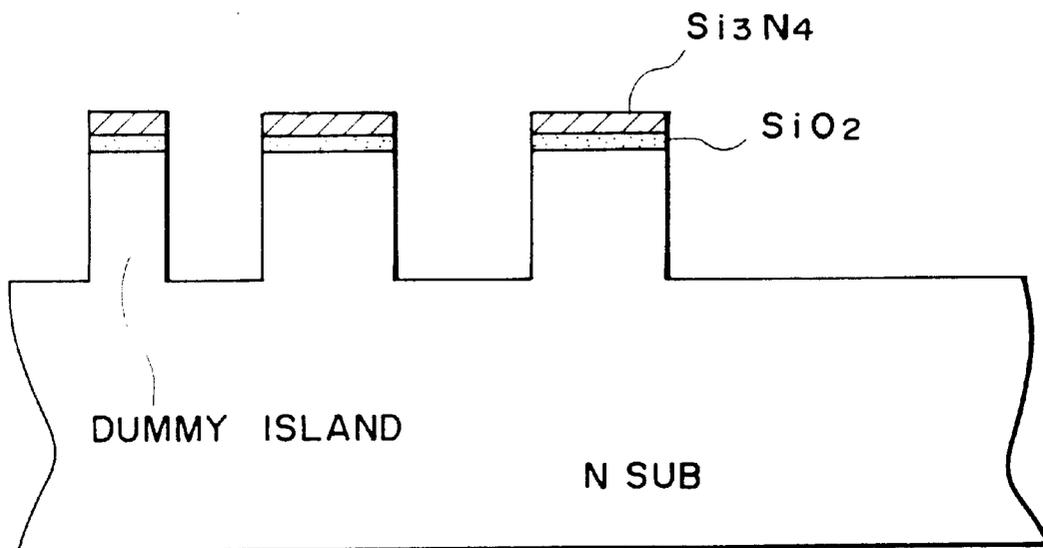


FIG. 119

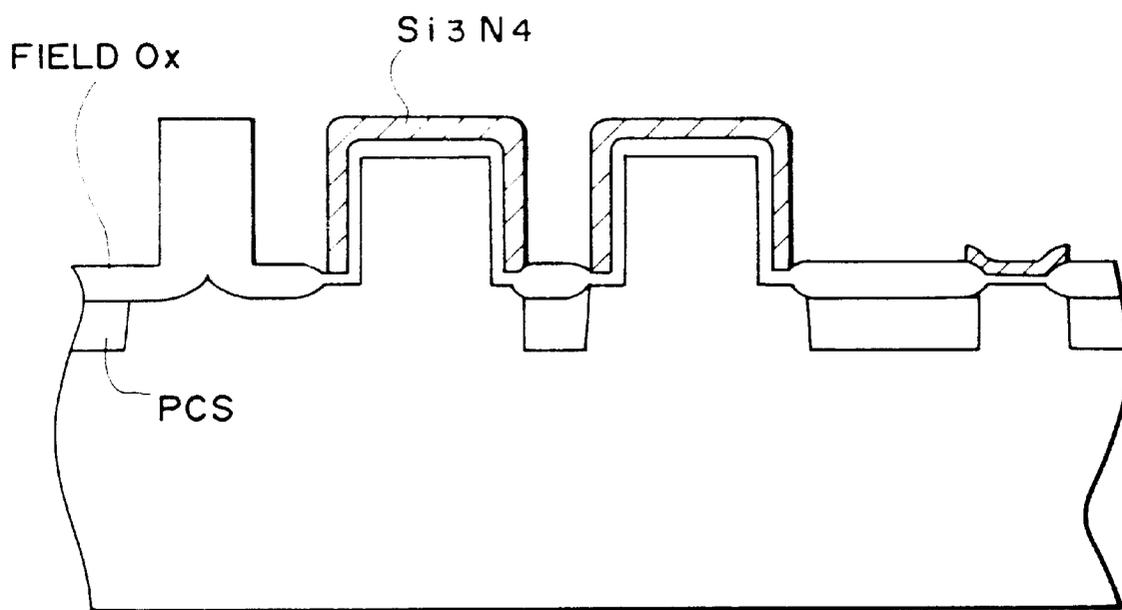


FIG. 120

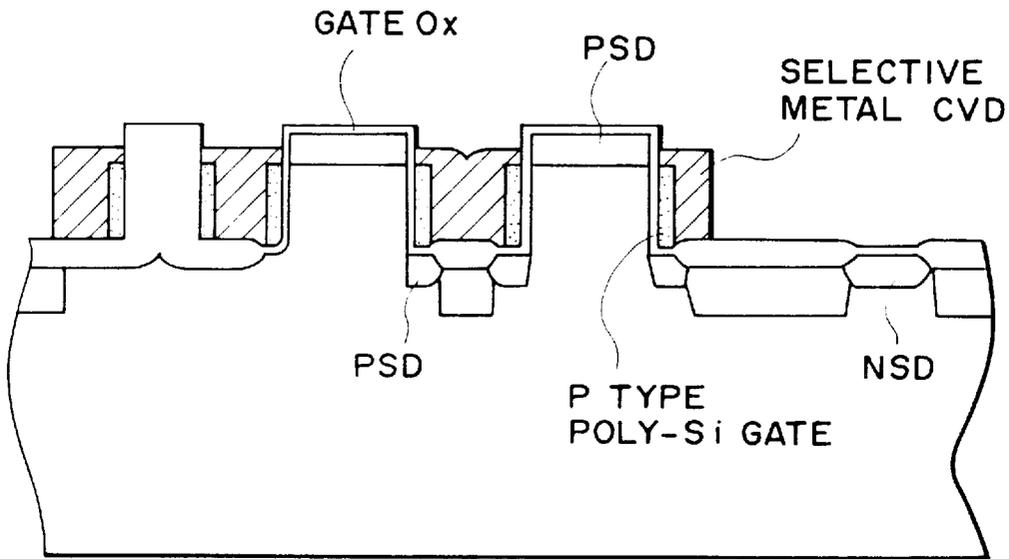


FIG. 121

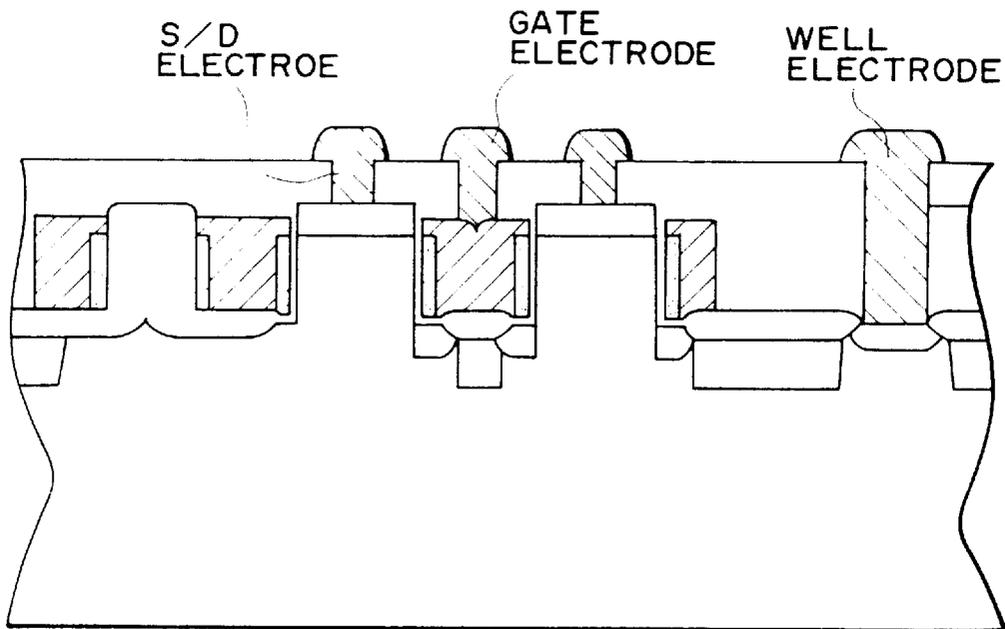


FIG. 122

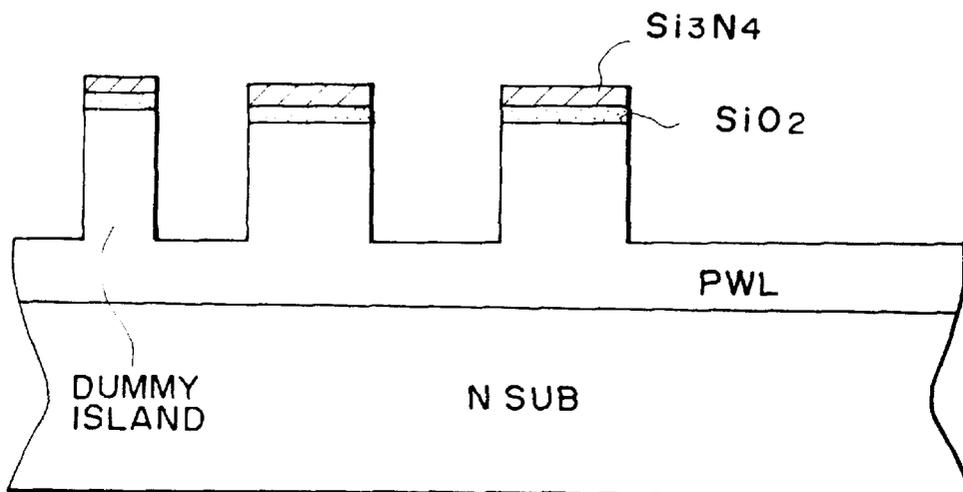


FIG. 123

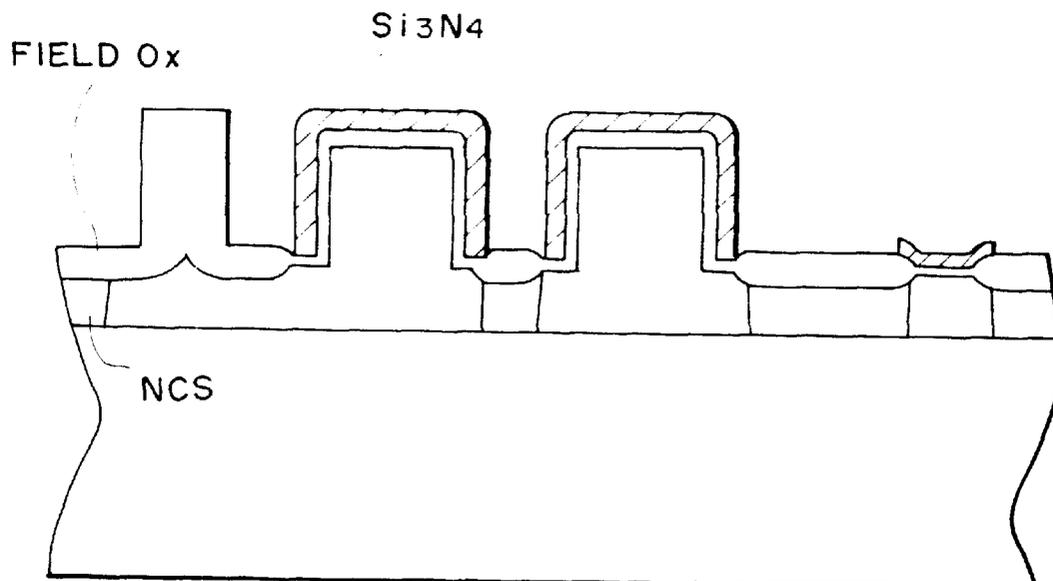


FIG. 124

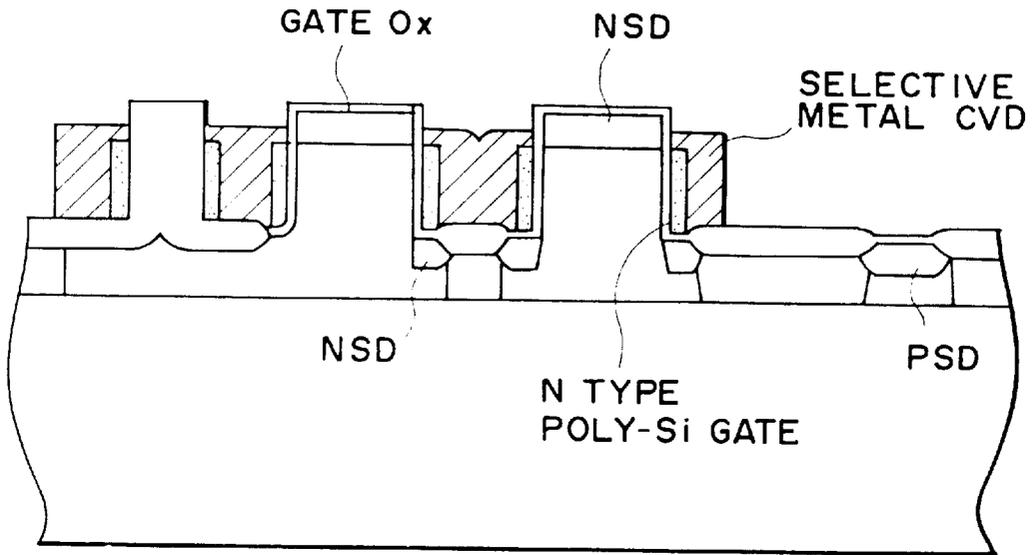


FIG. 125

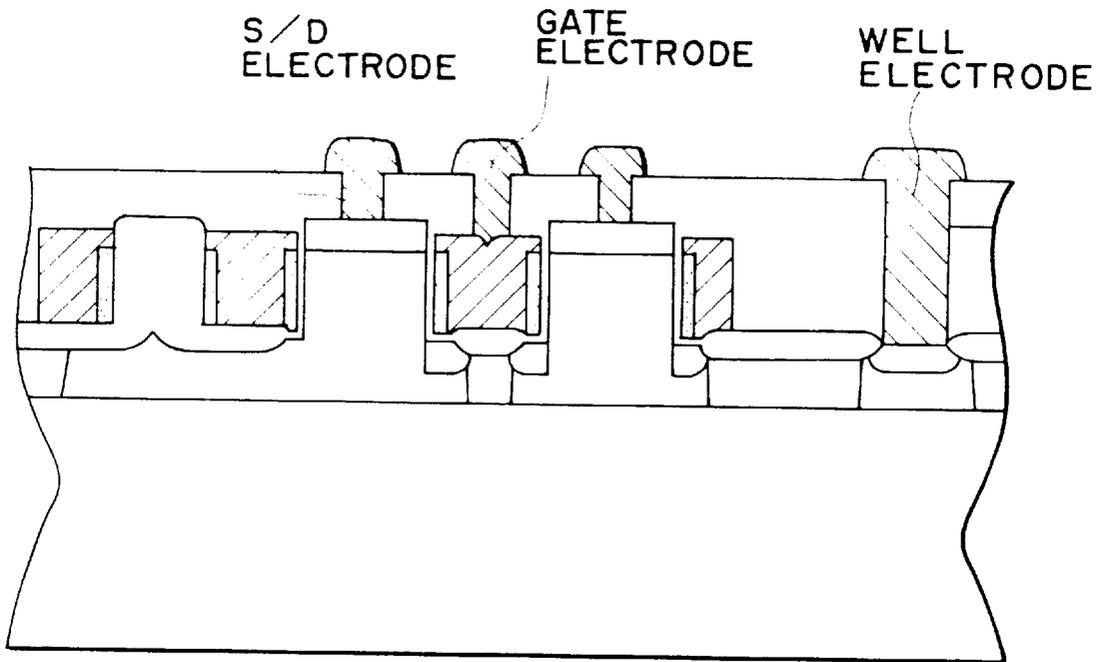


FIG. 126A FIG. 126B


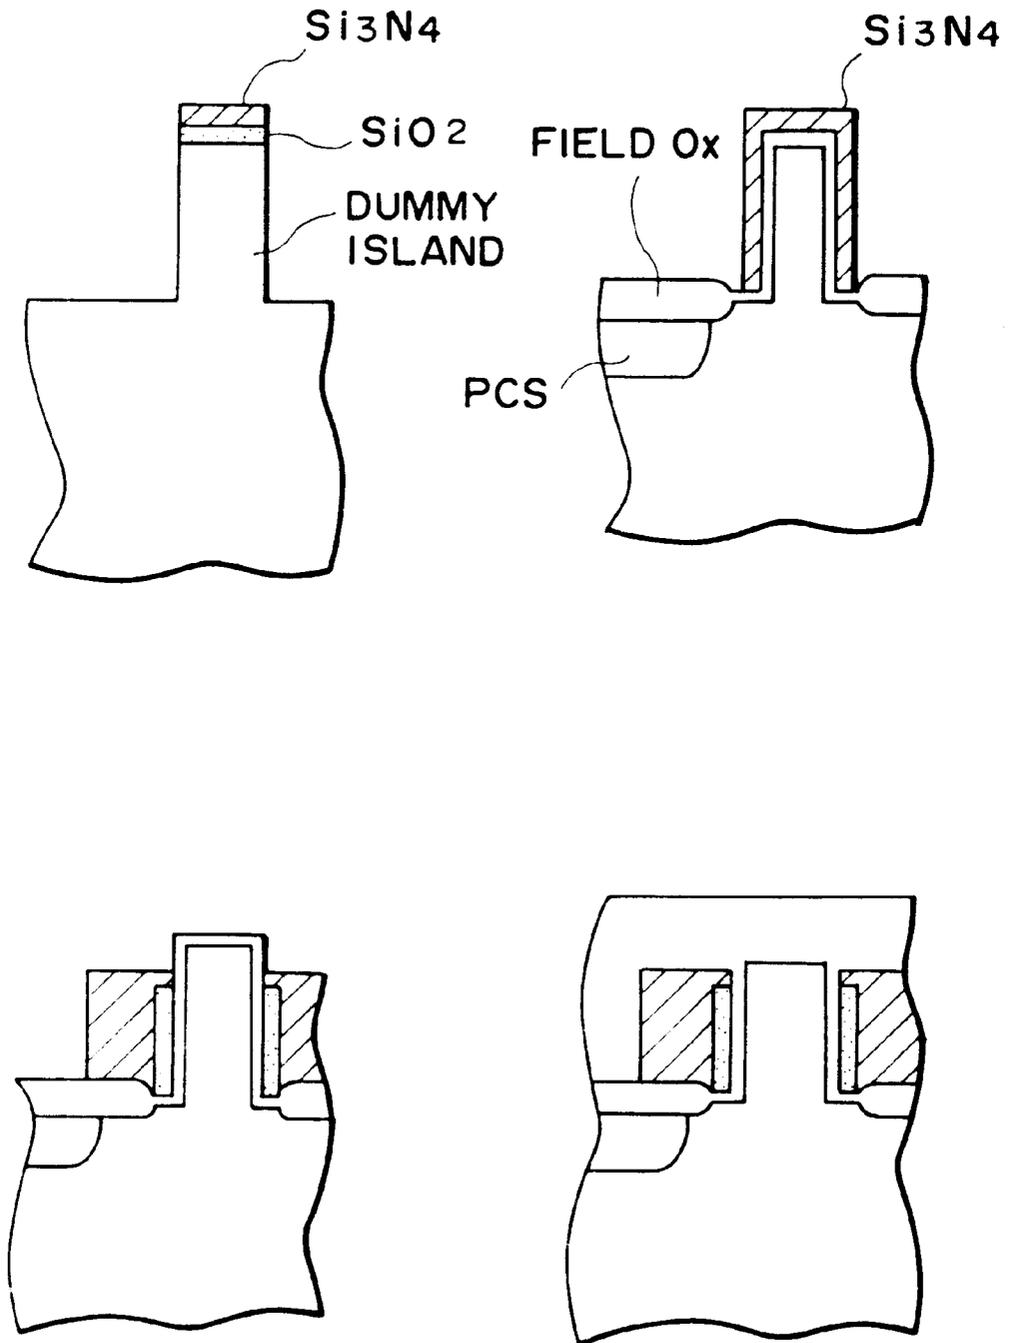


FIG. 127

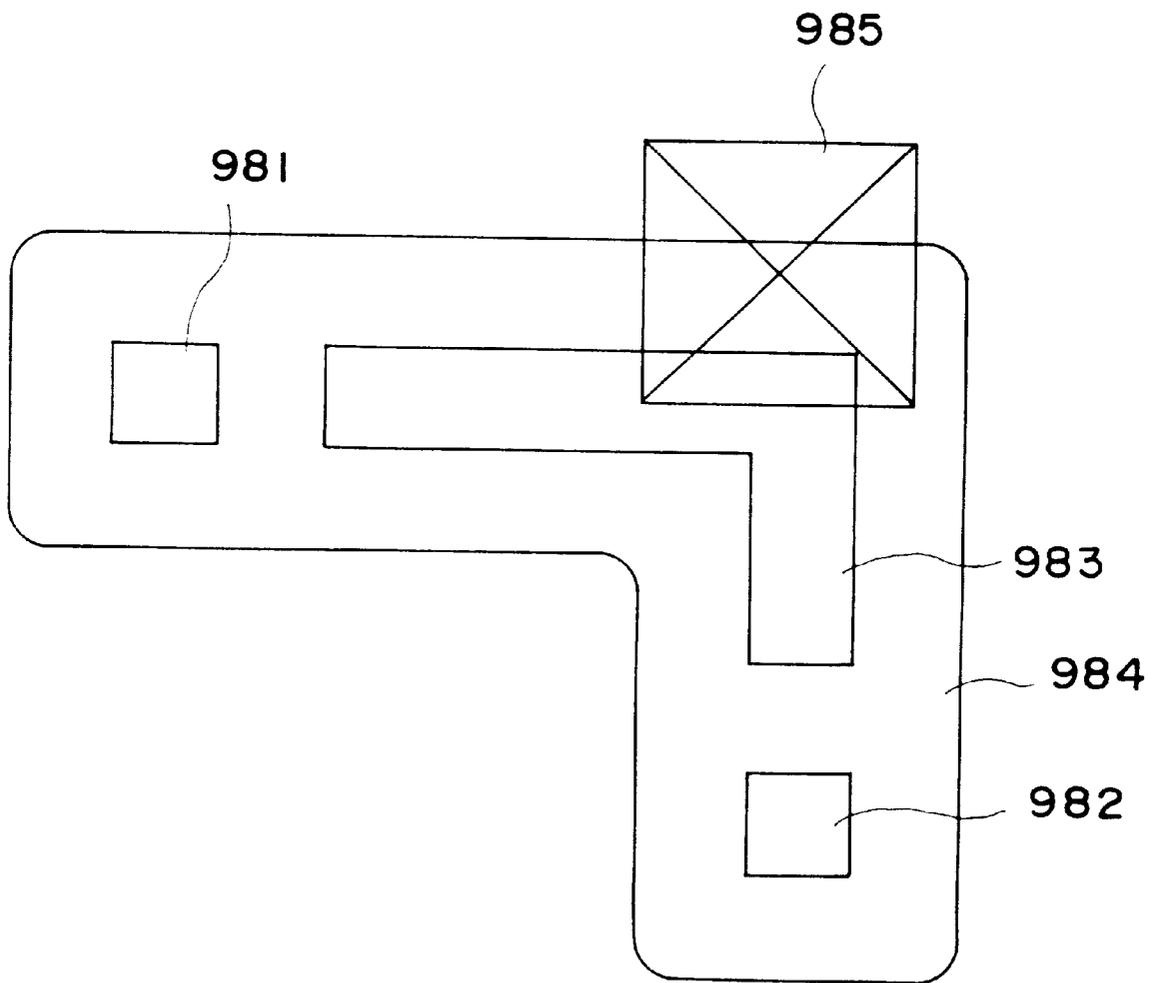

METHOD OF MANUFACTURING A SURROUNDING GATE TYPE MOSFET

This application is a continuation of application Ser. No. 08/406,250, filed Mar. 17, 1995, now abandoned, which was a divisional of application Ser. No. 07/872,295, filed Apr. 22, 1992, now U.S. Pat. No. 5,466,961.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a semiconductor device for use in an electronic circuit for a variety of technical fields such as an automobile, an electric power generating plant, an artificial satellite as well as an OA machine and an electronic product for a private use such as a copying machine, a facsimile machine, a printer and a video camera, and a method of manufacturing the semiconductor device.

In particular, the present invention relates to a semiconductor memory device for storing a required information signal.

2. Related Background Art

FIG. 45 illustrates the structure of a semiconductor memory capable of storing and programming data only one time, the semiconductor memory being constituted by an MOS type field effect transistor (hereinafter called an "MOSFET") serving as an insulated gate type field effect transistor and a memory cell having an insulating film.

A memory of the aforesaid type has been disclosed in, for example, "A New Programmable Cell Utilizing Insulator Breakdown", IDEM' 85, pp 639 to 642.

Another type semiconductor arranged as shown in FIG. 46 has been known.

FIG. 46 is a cross-sectional view which illustrates the semiconductor memory of the aforesaid type. Referring to FIG. 46, reference numeral 120 represents an n-type substrate, 121 represents a p⁺ drain, 122 represents a P⁺ source, 123 represents a floating gate, 124 represents an insulating layer, 125 represents a drain wiring and 126 represents a source wiring. The floating gate 123 is manufactured by, for example, embedding a polycrystalline silicon in a silicon oxide film.

A transistor for use in ULSIs and having a gate length of sub-micron order has been developed thanks to progress of the fine processing technology.

FIG. 101 is a schematic cross sectional view which illustrates an LDD (Lightly Doped Drain) structure as a typical MOS type field effect transistor (hereinafter called a "MOSFET").

Referring to FIG. 101, reference numeral 201 represents a P type semiconductor substrate, 202 represents a field oxide film, 203 and 204 respectively represent n⁺ layer of the source region and that of the drain region and 205 represents a gate insulating film, 206 represents a gate electrode. Reference numerals 207 and 208 respectively represent n⁻ layer provided for the purpose of relieving the field concentration taken place adjacent to the gate of the source region and that of the drain region, 290 represent a channel dope layer formed by an ion injection operation for the purpose of making the threshold to be a desired value and 210 represents a P⁺ layer.

However, the transistor structured as described above arises the following problems.

A first problem takes place in that drain current I_D and the mutual inductance (gam) are too small due to the presence

of the n⁻ layers 207 and 208. A second problem arises in that the mobility is deteriorated, and a third problem will arise in that the gate width W cannot be fined with the similar scaling to that for use to fining the gate length L.

The aforesaid problems will now be described.

FIG. 102 is a graph which illustrates an example of the relationship between the length of the channel and the drain current as disclosed in K. Yano, M. Aoki, and T. Masahara Extended Abstracts of the 18th (1986 International) Conference on Solid State Devices and Material (1986) PP85 to 88. FIG. 102 shows results of comparisons made between a drain voltage V_D of 0.1 V, 5V, temperature of 77K. and 300K.

As can be understood from FIG. 102, parasitic drain resistance generated due to the n⁻ layers 207 and 208 causes the decrease of the length of the channel and the increase in the drain current are not in proportion to each other as designated by a dashed line XA but are made as designated by a solid line XB. Referring to FIG. 102, symbol XC shows measured values. Since a large drain current is not obtained as described above, the mutual conductance characteristics (the gm characteristics) are deteriorated.

A rule of scaling a typical MOSFET is shown in Table 1.

TABLE 1

Parameter	Scaling Ratio
Length of channel	1/K
Width of channel	1/K
Thickness of gate oxide film	1/K
Depth of joint	1/K
Thickness of Depletion layer	1/K
Concentration of impurities in channel	K
Voltage	1/K

As can be understood from Table 1, the punch-through current between the source and the drain generated due to fining of the channel length L can be prevented by raising the impurity concentration Na of the region which is formed into the channel. However, the concentration of the impurities in the channel is raised, the mobility of the carrier is lowered and thereby the gm characteristics are deteriorated. It might therefore be considered feasible to employ a method in which the p⁺ layer 210 is brought near the gate insulating film 205. In this case, the field intensity in the vertical direction in relation to the direction in which the carrier is moved is raised. Therefore, also the mobility of the carrier is lowered while maintaining the correlative relationship as shown in FIG. 103 (which illustrates the relationship between the field intensity (axis of abscissa) in the vertical direction and the mobility (axis of ordinate) as disclosed in, for example, A. G. Sabnis et al. IEDM 79 PP18 to 21, where XD, XE and XF are measured values when the power supply voltage was 0.1V, -5.0V and -20.0V, respectively).

That is, the characteristics of the MOSFET having the gate length L ranged from 0.5 to 0.8 μm can be improved to a certain degree according to the scaling rule shown in Table 1. However, the gate length L is smaller than the aforesaid range, the drain current and the gm characteristics excessively deteriorated. Furthermore, the fining operation will cause the proportion of the wiring section to be enlarged. Therefore, there is a desire of a transistor having further improved gm characteristics. However, it can be met by only widening the gate width W under the present conditions. Therefore, the original object of fining the size cannot be achieved.

Also a GOLD type (Gate Overlap Lightly Doped Drain) MOSFET which is a modification to the LDD type MOSFET encounters the aforesaid problems.

In order to overcome the aforesaid problems experienced with the MOSFET structured as described above, a surrounding gate transistor (SGT) has been disclosed which is arranged in such a manner that four gate electrodes face one another as suggested in H. Tadato, K. Sunoushim, N. Okabe, A. Nitayama, K. Hieda, F. Horiguchi, and F. Masuoka IEDM (International Electron Device Meeting) (1988) PP222 to 225. The structure of it is shown in FIG. 128. FIG. 128A is a perspective view and 128B is a cross section taken along line A—A'.

Referring to FIGS. 66 and 67, reference numeral 215 represents a substrate, 216 represents a p well layer, 217 represents a source region, 218 represents a gate electrode, 219 represents a gate insulating film, 220 represents a drain region and 221 represents a drain outlet electrode. In the aforesaid structure, the gate electrode 218 is formed to surround the channel region. Therefore, the following advantages can be obtained: the concentration of the electric field can be relieved, the adverse effect of the hot carrier or the like can be eliminated and the control of the potential of the channel portion by using the gate can be easily performed.

FIG. 104A and FIG. 104B respectively are a plan view and a circuit diagram which illustrate a CMOS inverter circuit which utilizes an SGT. FIGS. 105 and 106 are cross-sectional views respectively taken along line A—A' and C—C' of FIG. 104A. The contact portions between Vin and PMOSFET and NMOSFET are represented by 230 and 231.

In the aforesaid conventional transistor, the portion between the source and the drain is not conductive in a normal state. Writing can be performed by applying negative high voltage between the source and the drain of the transistor, avalanche-breaking down the pn junction on the drain side and injecting large energy electrons generated at this time into the floating gate so as to cause the portion between the source and the drain to be a conductive state. In a case where the aforesaid device is used as a memory, facts whether or not the charge is injected into the floating gate are made correspond to information 1 and 0.

However, since the charge stored in the floating slightly leaks in the memory of the aforesaid type, problems arises in that information cannot be stored-permanently and the reading characteristics are undesirably changed with time.

Furthermore, the aforesaid MOSFET is not suitable to be fined and its characteristics (gm characteristics) encounter a problem in that the mutual conductance is too small.

In addition, if the gate length is $0.5 \mu\text{m}$ or less at the time of the fining operation, the improvement of the aforesaid MOSFET by scaling cannot be expected.

As a dynamic random access memory (DRAM), a vertical memory cell constituted by using a surrounding gate transistor (SGT) as the addressing transistor and by forming a trench capacitor in its main electrode region of the substrate has been suggested.

However, the inventors of the present invention found that a DRAM of the aforesaid type has the following problems: with the high integration exceeding 16 M bits and further fining of the cell, the capacitor size is limited and the capacity is thereby reduced. As a result, a large signal charge cannot be stored. On the contrary, the parasitic capacity of the wiring is increased due to the fining process. As a result, the signal transmitted finally becomes too small and the SN

ratio is also lowered at the time of reading the stored signal by means of the capacity division. Therefore, the memory is erroneously operated.

Furthermore, since the shape is formed into an vertical shape, the manufacturing process is too complicated and therefore the yield cannot be improved. As a result, a problem in terms the commercial viewpoint arises.

That is, the inventors of the present invention found that the original object to satisfactorily apply the fine transistor such as the SGT to the DRAM cannot be achieved.

Another semiconductor memory has been known which is arranged as shown in FIG. 46.

FIG. 46 is a cross sectional view which illustrates a semiconductor memory of the aforesaid type. Referring to FIG. 46, reference numeral 120 represents an n-type substrate, 121 represents a p⁺ drain, 122 represents a P⁺ source, 123 represents a floating gate, 124 represents an insulating layer, 125 represents a drain wiring and 126 represents a source wiring. The floating gate 123 is manufactured by, for example, embedding a polycrystalline silicon in a silicone oxide film. The portion between the source and the drain is not conductive in a normal state. Writing can be performed by applying negative high voltage between the source and the drain of the transistor, avalanche-breaking down the pn junction on the drain side and injecting large energy electrons generated at this time into the floating gate so as to cause the portion between the source and the drain to be a conductive state. In a case where the aforesaid device is used as a memory, facts whether or not the charge is injected into the floating gate are made correspond to information 1 and 0.

However, since the charge stored in the floating slightly leaks in the memory of the aforesaid type, problems arises in that information cannot be stored permanently and the reading characteristics are undesirably changed with time. Furthermore, the aforesaid MOSFET is not suitable to be fined and its characteristics (gm characteristics) encounter a problem in that the mutual conductance is too small.

In addition, if the gate length is $0.5 \mu\text{m}$ or less at the time of the fining operation, the improvement of the aforesaid MOSFET by scaling cannot be expected.

The aforesaid conventional technology encounters another problem in that the voltage resistance of the oxide film in the Si edge portion is deteriorated.

FIG. 67 illustrates the process of the change in the thickness of the oxide film in the Si edge portion. Assuming that the thickness of the oxide film in the flat region made of Si is δ_2 and that in the edge portion is δ_1 as designated by 254 shown in FIG. 67, the following relationship is held:

$$\delta_1 < \delta_2 \quad (1)$$

Furthermore, the shape of the Si in the edge portion tends to be formed into an wedge shape, causing the voltage resistance of the portion in the vicinity of the edge to be lowered.

Therefore, the reliability of the semiconductor device will be deteriorated.

The integrated circuits of the semiconductor integrated circuits using the MOS transistor have been further highly integrated. With the tendency of raising the degree of integration, the MOS transistor for use in the integrated circuit has been fined to a sub-micron order. However, if the gate size is reduced to the submicron order, the following problems arise:

1. The leak current increases due to the short channel effect.

2. The VTH and the mutual conductance are undesirably changed due to the hot carrier effect.

In order to overcome these problems, an MOS transistor having a surrounding gate is used in the existing state.

FIG. 82 is a cross sectional view which illustrates an example of the structure of the conventional surrounding gate-type MOS transistor.

Referring to FIG. 82, reference numeral 651 represents a N-type Si substrate, 652 represents a P⁻ layer for forming a columnar semiconductor layer, 653 represents a drain N⁺ layer of the NMOS, 654 represents a gate electrode, 655 represents a source N⁺ layer of the N-MOS, 656 represents an Al electrode for ejecting the drain, 659a represents a gate oxide film formed around the columnar semiconductor layer and 659b represents a gate oxide film formed under the gate electrode.

In the aforesaid conventional surrounding gate type MOS transistor (hereinafter called an "SGT-MOS Tr"), the thickness of the oxide film 659b under the gate electrode is the same as that of the oxide film (the side portion of the columnar semiconductor layer). In a case where the thickness of the oxide film 659b under the gate electrode is about 20 to 150 Å, the gate Ω source capacity in the MOS Tr increases, causing a problem to arise in that the switching characteristics of the memory excessively deteriorate.

However, if the DRAM is formed by integrating 1-gigabit memory devices, it is considered that the size of a cell becomes about 0.3 μm square. Therefore, the aforesaid vertical MOS transistor which is the most promising device in the age of the high integration devices encounters multiple problems at the time of the manufacturing process if the size is the aforementioned order.

In the method of manufacturing the conventional vertical MOS transistor, the top surface of the columnar silicon monocrytal region serving as a source region of the MOS transistor and the gate electrode are separated from each other while interposing a thin gate oxide film. Therefore, there arises the following problems:

(Problem 1) The size of the contact portion of the source electrode becomes very small in a very fine pattern in which the vertical transistor is able to exhibit its performance. Therefore, a slight positional deviation taken place in relation to the lower layer at the time of forming a contact opening will cause a short circuit to be generated between the gate electrode and the source electrode. If the columnar silicon region is enlarged in order to overcome the aforesaid problem, the degree of integration of the overall circuit will be lowered.

(Problem 2) If the introduction of impurities into the source region is performed by the ion injection, the gate oxide film adjacent to the source region can be easily damaged. Therefore, the short circuit between the source and the gate will take place or the reliability of the gate oxide film will be deteriorated.

(Problem 3) Since the parasitic capacity between the source and gate electrodes increases, the high speed operation of the circuit is hindered.

Furthermore, the aforesaid conventional structure encounters a problem that patterning at the time of ejecting the wiring from the upper portion of the columnar semiconductor layer cannot be easily performed in a state where the width of the columnar semiconductor layer has been fined with proceeding of the fining operation. Therefore, the fining speed is limited.

FIG. 107 is an enlarged view which illustrates a contact hole portion shown in FIG. 104. Referring to FIG. 107, the

contact hole 231 to be opened when the wiring is taken from the upper portion of the columnar semiconductor 217 is formed in such a manner that its longer side runs parallel to the longer side of the upper portion of the columnar semiconductor.

Therefore, assuming that the shorter side of the upper portion of the columnar semiconductor 217 is a and the alignment margin between the contact hole 231 and the columnar semiconductor 217 is x, the width of the contact hole 231 becomes a-2x or less.

As a result, it is very difficult to perform aligning with the contact hole and therefore the yield becomes too difficult. This leads to a fact, when a becomes a submicron order, the aforesaid process cannot be performed at the existing technological level.

What is even worse, when the aforesaid conventional structure is constituted, it is very difficult to perform a process in which wiring is arranged from the gate electrode, that is, a photolithography process in which both of the surrounding gate and the gate wiring portion are left. The aforesaid problem becomes critical with proceeding of the fining process and it is a critical problem for the surrounding gate type MOSFET.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide a semiconductor storage device constituted so as to be suitable to be subjected to a fining process and capable of operating at high speed while reducing power consumption.

Another object of the present invention is to provide an insulated gate type transistor and a semiconductor memory arranged in such a manner that its SGT cell, which has been formed into a square shape in a conventional structure, is formed into a cylindrical shape in order to eliminate a region in which the thickness of the oxide film is locally reduced so as to relieve the concentration of the electric field to improve the voltage resistance of the oxide film and to improve the reliability.

Another object of the present invention is to realize a surrounding gate type MOS Tr capable of preventing an increase in the gate-source capacity of the MOS Tr and excessive deterioration in the switching characteristics of a memory.

Another object of the present invention is to provide a method of manufacturing a semiconductor device capable of improving the manufacturing margin adjacent to the source of a vertical MOS transistor, improving the reliability of the gate oxide film and performing a high speed operation.

Other and further objects, features and advantages of the invention will be appear more fully from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic cross sectional view which illustrates a memory cell according to Embodiment 1 (A) of the present invention;

FIG. 2 is a schematic top view which illustrates a memory cell according to Embodiment 1 (A) of the present invention;

FIG. 3 is a schematic cross sectional view which illustrates a memory cell according to Embodiment 2 (A) of the present invention;

FIG. 4 is a schematic cross sectional view which illustrates a memory cell according to Embodiment 3 (A) of the present invention;

FIG. 49 is a schematic top view which illustrates a memory cell according to Embodiment 2 (H) of the present invention;

FIG. 50 is a schematic top view which illustrates a memory cell according to Embodiment 3 (H) of the present invention;

FIG. 51 is a schematic top view which illustrates a memory cell according to Embodiment 4 (H) of the present invention;

FIG. 52 is a schematic top view which illustrates a memory cell according to Embodiment 5 (H) of the present invention;

FIG. 53 is a schematic top view which illustrates a memory cell according to Embodiment 6 (H) of the present invention;

FIG. 54 is a schematic top view which illustrates a memory cell according to Embodiment 7 (H) of the present invention;

FIG. 55 is a circuit diagram which illustrates a semiconductor memory according to the present invention;

FIG. 56 is a schematic top view which illustrates a semiconductor memory according to Embodiment 7 (H) of the present invention;

FIG. 57 is a cross sectional view taken along line AA' of FIG. 56;

FIG. 58 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 59 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 60 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 61 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 62 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 63 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 64 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 65 is a schematic view which illustrates a process of manufacturing a semiconductor device according to the present invention;

FIG. 66 is a schematic perspective view which illustrates a conventional surrounding gate type transistor (SGT);

FIG. 67 is a schematic cross sectional view which illustrates the conventional surrounding gate type transistor (SGT);

FIGS. 68A and 68B are schematic views which illustrate Embodiment 1 (B) of the present invention;

FIG. 69 is a schematic view which illustrates Embodiment 2 (B) of the present invention;

FIGS. 70A and 70B are schematic views which illustrate Embodiment 3 (B) of the present invention;

FIGS. 71A and 71B are schematic views which illustrate Embodiment 4 (B) of the present invention;

FIG. 72 is a cross sectional view which illustrates the structure of Embodiment 1 (C) of the present invention;

FIG. 73 is a cross sectional view which illustrates a manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 74 is a cross sectional view which illustrates the manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 75 is a cross sectional view which illustrates the manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 76 is a cross sectional view which illustrates the manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 77 is a cross sectional view which illustrates the manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 78 is a cross sectional view which illustrates the manufacturing process according to Embodiment 1 (C) of the present invention;

FIG. 79 is a cross sectional view which illustrates a manufacturing process according to Embodiment 2 (C) of the present invention;

FIG. 80 is a cross sectional view which illustrates a manufacturing process according to Embodiment 3 (C) of the present invention;

FIG. 81 is a plan view which illustrates Embodiments 2 (C) and 3 (C);

FIG. 82 is a cross sectional view which illustrates a conventional example;

FIGS. 83A and 83B are cross sectional views which illustrate a process of manufacturing a vertical NMOS transistor according to Embodiment 1 (D) of the present invention;

FIG. 84 is a cross sectional view which illustrates a process of manufacturing a vertical NMOS transistor according to Embodiment 2 (D) of the present invention;

FIG. 85 is a cross sectional view which illustrates junction breakdown type storage device according to Embodiment 3 (D) of the present invention;

FIG. 86 is a cross sectional view which illustrates a vertical NMOS manufactured by a conventional manufacturing method;

FIG. 87 is a plan view which illustrates a CMOS inverter according to Embodiment 1 (E) of the present invention;

FIG. 88 is a cross sectional view which illustrates the CMOS inverter according to Embodiment 1 (E) of the present invention;

FIG. 89 is a cross sectional view which illustrates a process of manufacturing an NMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 90 is a cross sectional view which illustrates a process of manufacturing the NMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 91 is a cross sectional view which illustrates a process of manufacturing the NMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 92 is a cross sectional view which illustrates a process of manufacturing the NMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 93 is a cross sectional view which illustrates a process of manufacturing the PMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 94 is a cross sectional view which illustrates a process of manufacturing the PMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 95 is a cross sectional view which illustrates a process of manufacturing the PMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 96 is a cross sectional view which illustrates a process of manufacturing the PMOSFET according to Embodiment 1 (E) of the present invention;

FIG. 97 is a circuit diagram which illustrates a junction breakdown type storage device according to Embodiment 2 (E) of the present invention;

FIG. 98 is a plan view which illustrates a memory portion of the junction breakdown type storage device according to Embodiment 2 (E) of the present invention;

FIG. 99 is a plan view which illustrates the memory portion of the junction breakdown type storage device according to Embodiment 2 (E) of the present invention;

FIG. 100 is a plan view which illustrates the memory portion of the junction breakdown type storage device according to Embodiment 2 (E) of the present invention;

FIG. 101 is a schematic cross sectional view which illustrates an LDD (Lightly Doped Drain) structure as a typical MOSFET;

FIG. 102 is a graph which illustrates an example of the relationship between the channel length and the drain current;

FIG. 103 is a graph which illustrates the relationship between the vertical directional field intensity (axis of abscissa) and the mobility (axis of ordinate);

FIGS. 104A and 104B are plan views which illustrate a conventional CMOS which uses the SGT;

FIG. 105 is a plan view which illustrates the conventional CMOS which uses the SGT;

FIG. 106 is a plan view which illustrates the conventional CMOS which uses the SGT;

FIG. 107 is an enlarged plan view which illustrates a contact hole portion of the conventional CMOS which uses the SGT;

FIGS. 108A to 108D illustrate a process according to the method of the present invention;

FIG. 109 is a schematic plan view which illustrates an apparatus according to the present invention;

FIG. 110 is a schematic plan view which illustrates an apparatus according to the present invention;

FIG. 111 is a schematic plan view which illustrates an apparatus according to the present invention;

FIG. 112 is a schematic plan view which illustrates an apparatus according to the present invention;

FIG. 113 is a plan view which illustrates the CMOS inverter according to the present invention;

FIG. 114 is a cross sectional view taken along line A—A' of FIG. 113;

FIG. 115 is an equivalent circuit diagram of the CMOS in a case where a parasitic MOSFET is used;

FIGS. 116A to 116D illustrate a process according to the method of the present invention;

FIG. 117 is a cross sectional view which illustrates the CMOS inverter according to the present invention;

FIG. 118 illustrates a process of manufacturing a pMOS according to the present invention;

FIG. 119 illustrates a process of manufacturing a pMOS according to the present invention;

FIG. 120 illustrates a process of manufacturing a pMOS according to the present invention;

FIG. 121 illustrates a process of manufacturing a pMOS according to the present invention;

FIG. 122 illustrates a process of manufacturing an nMOS according to the present invention;

FIG. 123 illustrates a process of manufacturing an nMOS according to the present invention;

FIG. 124 illustrates a process of manufacturing an nMOS according to the present invention;

FIG. 125 illustrates a process of manufacturing an nMOS according to the present invention;

FIGS. 126A and 126B illustrate a process of forming a dummy land by the method according to the present invention; and

FIG. 127 is schematic plan view which illustrates the apparatus according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The object of the present invention is achieved by a semiconductor device comprising: an insulated gate type transistor having a columnar semiconductor region formed on the main side of a semiconductor substrate, a gate electrode formed on the side surface of the columnar semiconductor region while interposing a gate insulating film and main electrode regions respectively formed on and formed below the columnar semiconductor region; and a memory element which is formed on the upper main electrode region and which can be broken electrically.

According to one aspect of the invention, there is provided a semiconductor memory in which a gate electrode is formed to surround the side surface of a columnar semiconductor layer formed on the main surface of a semiconductor substrate while interposing a gate insulating film, and an electrode is formed on an FET having source and drain regions in the upper and the lower portions of the columnar semiconductor layer, the electrode being formed while interposing an insulating film or a semiconductor layer which can be electrically broken.

According to this aspect, an MIS type structure is employed which is arranged in such a manner that the vertical type FET is employed as the addressing transistor of the memory cell, the insulating film or the semiconductor layer, which forms a semiconductor junction which can be broken and which serves as a memory element, is stacked and electrodes are disposed on the vertical type FET. As a result, a semiconductor memory which can be further high integrated and capable of performing at high speed can be provided.

An object of the present invention can be achieved by a semiconductor memory in which a gate electrode is formed to surround the side surface of a columnar semiconductor layer formed on the main surface of a semiconductor substrate while interposing a gate insulating film, and an electrode is formed on an FET having source and drain regions in the upper and the lower portions of the columnar semiconductor layer, the electrode being formed while interposing a memory element which can be electrically broken.

According to this aspect, an MIS type structure is employed which is arranged in such a manner that the vertical type FET is employed as the addressing transistor of the memory cell, the insulating film, which can be broken and which serves as a memory element, is stacked and electrodes are disposed on the vertical type FET. As a result, a semiconductor memory which can be further high integrated and capable of performing at high speed can be provided.

In order to overcome the aforesaid problems, according to the present invention, there is provided a semiconductor device of a surrounding gate type having a gate insulating film and a gate electrode around a columnar semiconductor layer formed on a substrate, the semiconductor device comprising an oxide film formed just below the gate electrode, the oxide film being thicker than the gate insulating film around the columnar semiconductor layer.

According to the present invention, the surrounding gate type MOS transistor is formed into the MOS transistor having a structure in which the oxide film formed below the gate electrode is thickened. As a result, the gate and source capacity can be reduced.

The aforesaid object of the invention can be achieved by a method of manufacturing a semiconductor device including the steps of: forming a monocrystal silicon region into a columnar shape on a substrate; forming an insulating film which surrounds the side surface of the columnar monocrystal silicon region; forming a gate electrode which surrounds the insulating film; and forming a high concentration impurity diffusion layer adjacent to the top surface of the monocrystal silicon region, the method of manufacturing a semiconductor device comprising the step of: oxidizing the top surface of the columnar monocrystal silicon region and the insulating film positioned in contact with the top surface of the monocrystal silicon region by performing heat treatment in an atmosphere containing an oxidizing gas after the gate electrode has been formed so as to form an oxide film around the high concentration impurity diffusion layer, the oxide film being thicker than the insulating film which surrounds the side surface of the columnar monocrystal silicon region.

According to the present invention, the drain electrode and the gate electrode can be assuredly separated from each other by the oxide film which is sufficiently thicker than the gate oxide film. As a result, the breakdown voltage resistance between the drain and the gate can be improved.

Furthermore, by thickening the oxide film formed between the source and the gate, the leak current generated through the oxide film can be reduced.

Furthermore, the alignment margin at the time of the manufacturing process can be enlarged.

In addition, the parasitic capacity between the source and the gate can be reduced and thereby high speed switching operation can be realized.

The present invention has the following means in order to overcome the aforesaid problems:

A semiconductor device having a member which is the subject of contact and which is formed into a rectangular or a rectangular-like shape, the semiconductor device comprising: a contact hole formed in such a manner that its longer side crosses at substantially right angles made from the direction of the longer side of the contact member which is the subject of contact.

A semiconductor device wherein the member which is the subject of contact is semiconductor material having a columnar structure formed on the substrate.

A semiconductor device wherein the member which is the subject of contact is columnar semiconductor material which constitutes a surrounding gate MOSFET.

A method of manufacturing a semiconductor device comprising the steps of: forming an insulating film on a member which is the subject of contact and which has a top surface formed into a rectangular or a rectangular shape; etching the insulating film so as to form a contact hole in such a manner

that its longer side crosses at substantially right angles made from the direction of the longer side of the contact member which is the subject of contact; and depositing conductive material on the member which is the subject of contact and which has been caused to appear outside.

According to the present invention, the contact hole formed into a rectangular or a rectangular-like shape is formed in such a manner that its longer side crosses at substantially right angles made from the member which is the subject of the contact and which is formed into a rectangular or a rectangular-like shape. Therefore, if the short side of the member which is the subject of the contact is short, contact can be established easily and assuredly.

According to the present invention, the aforesaid object can be achieved by a semiconductor device comprising: one or more columnar semiconductor layers which constitute a circuit; and one or more columnar layers which are disposed at positions different from the positions of the columnar semiconductor layers and which do not constitute any circuit.

An aspect of the invention lies in a semiconductor device in which the columnar layer has a film made of insulating material on the surface thereof. An aspect of the invention lies in a semiconductor device in which the columnar layer is made of insulating material. An aspect of the invention lies in a semiconductor device in which the insulating material is silicon oxide. An aspect of the invention lies in a semiconductor device in which the columnar semiconductor layer is made of silicon.

An aspect of the invention lies in a semiconductor device in which one or more layers are formed around at least one of the columnar semiconductor layers and around at least one of the columnar layers. An aspect of the invention lies in a semiconductor device in which the interval between the columnar layer and the columnar semiconductor layer disposed adjacently or the columnar layer is two times or less the thickness of at least one layer. An aspect of the invention lies in a semiconductor device in which the at least one layer is a gate electrode of an MOSFET and a gate wiring.

In order to achieve the aforesaid problem, according to the present invention, there is provided a method of manufacturing a semiconductor device in which, when the one or more layer is formed, material of the layer is deposited and etching is performed by an etching back method.

An aspect of the invention lies in a method of manufacturing a semiconductor device in which no mask is used at the etching. An aspect of the invention lies in a method in which the film made of silicon oxide is formed by heat-oxidizing silicon. An aspect of the invention lies in a method of manufacturing a semiconductor device in which, when the one or more layers are deposited, the thickness of a deposited film is the half or more of the interval between the columnar layer and the columnar semiconductor layer disposed adjacently or the columnar layer.

First, a transistor serving as the basic portion of the present invention will now be described.

In a channel region of the transistor according to the present invention, the width (d_3) of the channel region interposed by a gate electrode in the direction in which the gate electrode faces each other and the concentration of impurities in a semiconductor in the channel region are determined as follows: they are determined in such a manner that depletion layers extending from the two facing portions are connected to each other and thereby a desired depletion portion is formed. Specifically, assuming that the width of the channel region between the facing portions of the gate

electrode is d_3 and the width of the depletion layer extending from the two portions in the direction of the extension is W , a relationship $d_3 \leq W$ is held. The reason for this lies in that, the depletion state realized in the channel region between the facing portions of the electrode acts to relieve the electric field acting on inside portion of the aforesaid channel region if the gate voltage is raised to a level at which an inversion layer is formed.

It is preferable that a dope region adjacent to the channel region be formed. The dope region must be a conduction type which is different from that of the source and the drain regions and as well as it must be a semiconductor region sowing a high impurity concentration. The type of the impurity and that of the conduction are not limited. Specifically, the concentration of the impurity in the dope region is made to be a concentration at which the dope region is not inverted by driving voltage which acts on the gate at the time of operating the transistor. As for the required function, it must receive the carrier supplied from the channel region held between the facing portions of the gate electrode.

The gate electrode according to the present invention may be made of metal, polycrystal silicon, silicide or polycide. Specifically, Al, W, Mo, Ni, Co, Rh, Pt, Pd, their silicide or their polycide may be used. A suitable material is selected after the structure of the MOSFET, the driving conditions and its work function have been considered.

The shape of the gate electrode and that of the dope region may be constituted in such a manner that the portion of the channel region which faces the dope region has no gate electrode, that the aforesaid portion is formed into the dope region or that also the portion facing the dope region has a portion of the gate electrode. It is preferable that the cross sectional shape of the channel region when it is cut in a direction perpendicular to the direction in which the carriers move is a square such as a rectangular shape so that the three sides of the channel region are surrounded by the gate electrode and the residual portion is positioned in contact with the dope region. Its side may be a side having a curvature in place of a correct straight line. Furthermore, each edge portion may be a shape formed by chamfering after the coating feasibility of the gate insulating film has been considered.

EMBODIMENT 1 (A)

FIG. 1 is a schematic cross sectional view which illustrates a semiconductor memory according to Embodiment 1 (A) by a portion corresponding to one cell.

A semiconductor substrate **1** has a columnar semiconductor layer in the upper portion thereof. A gate electrode **2** is formed around the columnar portion while holding a gate insulating film **5**. A drain region **3** is formed in the side portion of the lower portion of the columnar portion, the columnar portion having a source region **4** formed thereon. Reference numeral **9** represents a drain electrode. A source electrode **6** is connected to the source region **4** while interposing an insulating film **70**, so that an MIS capacitor is formed. The vertical size of the columnar semiconductor layer is longer than the necessitated gate length and the length of one side of the top surface and that of the lower surface is made to be of the order of sub-micron (0.1 μm). The area of the insulating film **70** is made to be substantially the same as the area of the source region **4** formed under the insulating film **70** or to be slightly smaller than the same so as to improve the feasibility of the insulating film to cover the stepped portion.

Reference numerals **10** and **11** respectively represent a channel stopper for insulating the elements and a field insulating film.

FIG. 2 is a schematic top view which illustrates the cell shown in FIG. 1. As shown in FIG. 2, the one cell is structured by stacking capacitor on a vertical type MOSFET.

In a case where a P-type semiconductor is employed to form the substrate **1**, the N-type semiconductor may be employed to form the source region and the drain region. A contrary structure may also be employed.

The electrodes **2**, **6** and **9** may be constituted by a single layer or a multilayer of polysilicon, Al, Mo or W

The insulating film **70** must be a dielectric member from which a desired capacity can be obtained. Specifically, single or multilayered silicon nitride, aluminum oxide or tantalum oxide is employed. In order to be broken by a voltage level of 3 to 5V but to withstand a voltage level of 1 to 3V, its thickness, structure and material are selected.

EMBODIMENT 2 (A)

FIG. 3 illustrates a memory cell according to Embodiment 2 (A).

The difference from the structure shown in FIG. 1 lies in that the drain region **3** is formed to cover the overall lower surface of the column and thereby the channel region is narrowed. According to this structure, the controllability of the effective channel length **4002** of the SGT can be improved and the deterioration of the voltage resistance can be prevented. Furthermore, the generation-rebonded current in the lower portion of the column can be completely prevented.

EMBODIMENT 3 (A)

FIG. 4 illustrates a memory cell according to Embodiment 3 (A).

The difference from the structures shown in FIGS. 1 and 3 lies in that a portion **3'** of the drain region is positioned in a portion of the column.

According to this structure, a cell exhibiting further improved OFF-characteristics can be obtained.

The reason for this lies in that the channel and the substrate **1** can be maintained at the same potential while interposing a region **1'**.

EMBODIMENT 4 (A)

FIG. 5 illustrates a memory cell according to Embodiment 4 (A).

The difference from the structure shown in FIG. 1 lies in that a layer **20** is formed between the insulating film **70** and the electrode **6**, the layer **20** being made of different material. The layer **20** is provided for the purpose of preventing the Al spike or the concentration of the electric fields due to generation of a transition region of W-Si, W-o and the like.

It is preferable that the layer **20** be made of material which is capable of excellent interfacial characteristics between the insulating film **70** and the electrode **6** and which has an etching rate different from that of SiO_2 . Specifically, it is exemplified by polysilicon and the like.

EMBODIMENT 5 (A)

FIG. 6 illustrates a memory cell according to Embodiment 5 (A).

The difference from the structure shown in FIG. 5 lies in that the source region **4** is formed into an N-type semicon-

ductor region of an order of 10^{19} or less, preferably of an order of 10^{16} to 10^{17} . Furthermore, a layer **21** of the same conduction type as that of the source is formed on it while being communicated via an opening. In addition, the insulating film **70** is formed on the layer **21**.

Since the film **70** is made of silicon oxide or silicon nitride prepared by the CVD method or the sputtering method and therefore the necessity of employing the thermal oxidation method can be eliminated, a problem of deterioration of the voltage resistance and that of the insulating characteristics due to dopant can be overcome.

EMBODIMENT 6 (A)

A memory cell according to Embodiment 6 (A) shown in FIG. 7 is constituted by forming the polysilicon layer **20** on the insulating film **70** according to the embodiment shown in FIG. 6.

According to aforesaid Embodiments 1 (A) to 6 (A), various problems can be overcome and high-performance and fine semiconductor memory can be realized.

By using the MOSFET to constitute the switching device in place of the bipolar transistor, the driving current required per memory cell can be significantly reduced and mounting density can be raised and the power consumption can be reduced.

By using the SGT to constitute the switching device, a further fined device can be formed and therefore a semiconductor memory having a larger size and high performance can be realized.

According to Embodiments 2 (A) and 3 (A), the high concentration source or drain region extends to the lower portion of the columnar semiconductor layer in the lower source and drain region of the SGT. Therefore, a problem of deterioration of reliability due to the generation-rebonded current and the concentration of the electric field can be effectively overcome.

That is, since the lower drain region **3** can be determined due to the diffusion from the surface of the substrate prior to performing etching of the substrate, the accuracy of the channel length L can be significantly improved as compared with the conventional method in which the effective channel length (L) is determined by the bulk etching method. Furthermore, a finer MOSFET can be manufactured.

Dark currents are generated in the depletion layer formed between the drain and the gate mainly due to a defect in the lower portion of the channel and that at an end point of the drain region. However, since the aforesaid point is covered with the drain region according to the present invention, the concentration of the electric fields, deterioration of the voltage resistance and generation of the dark current can be prevented.

Furthermore, when the gate electrode is formed in a maskless manner by using a metal CVD exhibiting excellent coating feasibility, the electrode ejecting region can be formed by a selfalignment manner.

By using the memory cell having a transistor which can be easily fined and which exhibits excellent current driving performance and by making the gate of this transistor to be the word line and by forming a semiconductor memory connected to the bit line on the source region of this transistor while interposing the insulating film between layers. As a result, a single-permanent-write enabled semiconductor memory exhibiting reduced error rate and having high density and high speed read/write characteristics can be realized.

EMBODIMENT 7

FIG. 8 is a circuit diagram which illustrates a semiconductor memory having 3×3 cells. Aforesaid Embodiments 1 to 6 can be applied to these cells.

One cell has an addressing transistor **1040** and a memory element **1041**. The memory element **1041** is a capacitor before the insulating film is broken and is not a capacitor after it has been broken because of a short circuit.

The transistor **1040** and the memory element **1041** can be constituted by the structures according to aforesaid Embodiments 1 (A) to 6 (A).

Reference numerals **1001**, **1001'**, **1001"** and **1001'''** represent word lines connected to the gates of the FET.

Reference numerals **1002**, **1002'** and **1002"** represent bit lines each connected to either side of the memory element.

Reference numerals **1003**, **1003'** and **1003"** represent power supply lines.

As the peripheral circuits of the memory, the following elements are provided: a bit line voltage setting circuit **1042**, a word line voltage setting circuit **1043**, a selection signal generating circuit **1044** for sequentially selecting the bit lines, bit line selection switches **1045**, **1045'** and **1045"**, a switch **1046** for resetting the bit line reading line **1048** and an amplifier **1047**.

FIG. 9 is a schematic top view of the semiconductor memory shown in FIG. 8.

Three memory cells in one row constitute the word lines **1001**, **1001'** and **1001"** since their gate electrodes **2** are connected by the same electrode layer.

Similarly, the three memory cells in one column constitute the bit lines **1002**, **1002'** and **1002"** since the electrodes of their memory elements are connected by the same wiring layer.

FIG. 10 is a cross sectional view taken along line AA' of FIG. 9.

FIG. 11 is a cross sectional view taken along line BB' of FIG. 9.

Then, the operation of the aforesaid semiconductor memory will now be described.

First, its writing operation will now be described, the writing operation including the following four main operations.

(1) Writing Operation 1: (precharge of bit lines)

The bit line is set to reference voltage V_{DD} by the voltage setting circuit **1042**. As a result, the potential difference between the power supply line and the bit line is eliminated. Therefore, no potential is generated and no current passes between the source and the drain of the FET regardless of the level of voltage applied to the word line. As a result, the insulating film **1041** is not broken. The precharging voltage for the bit line may be the same level as that of the power supply voltage or may be different from the same. In this case, the structure must be arranged in such a manner that the conductive state is not realized due to the breakage of the insulating film region. The value of V_{DD} may be about 1 to 5V.

(2) Writing Operation 2: (discharge of word lines)

The voltage of all of the word lines is fixed to first ground level V_{GND1} , for example, 0V. The aforesaid operation is performed in order to prevent mixture of a signal with the word line adjacent to the word line for performing the writing operation, the mixture being caused from crosstalk.

(3) Writing Operation 3 (selection of writing word line)

In a case where the present writing bit is a cell at the second row and second column when the top left cell shown in FIG. 8 is made to be the origin, the word line in which the writing bit exists becomes **1001**' shown in FIG. 8. Therefore, the potential of this word line is made to be V_G which holds the following relationship:

$$V_{GND1} < V_G < V_{GB} \quad (2)$$

where V_{GB} is gate insulating film breaking voltage.

(4) Writing Operation 4 (selection of bit line)

A bit line potential which corresponds to a writing cell present on a selected line is set to ground potential 1. Since all of the FETs of the selected line are brought to the actuated state, high voltage is applied to the insulating film by making the potential of the bit line to be the ground potential. Therefore, the insulating film is broken and therefore the conductive state is realized. It is preferable that the bit line selections be sequentially performed because an electric current passes between the bit line and the word line when the writing operation is completed. However, a plurality of bit lines may be simultaneously written.

Then, the reading operation will now be described, the reading operation including the following four main operations.

(1) Reading Operation 1 (precharge of bit lines)

It is performed similarly to the-writing operation. The reason for this lies in that a problem taken place in that a blank bit is written due to the reading operation must be prevented. The voltage at this time may be a level similar to power supply voltage V_{DD} .

(2) Reading Operation 2 (discharge of word line)

The voltage of all of the word lines is set to second ground level V_{GND2} which holds the following relationship with first ground level V_{GND1} :

$$V_{GND1} < V_{GND2} \quad (3)$$

(3) Reading Operation 3 (selection of line to be read)

The potential of the word line of the line to be read is fixed to range V_G defined according to Equation (2). As a result, the FET on the aforesaid line is brought to an actuated state.

(4) Reading Operation 4 (resetting of bit line reading line)

The bit line reading line **1048** is reset by the switch **1046**. The resetting potential is determined by the power source connected to the switch **1046**, the potential being made to be V_{GND2} . Then, the switch **1046** is switched off and the bit line reading line is brought into a floating state.

(5) Reading Operation 5 (selection of bit line)

The bit line sequential selection signal generating circuit **1044** is used to raise the level of the gate of the selection bit selection switch, the switch is switched on so as to be connected to the bit line reading line. In a case where the selection cell has not been written, the voltage of the reading line is converged to a value obtained from the following equation assuming that the capacity of the bit line is C_{BIT} and the capacity of the reading line is C_{OUT} :

$$\frac{C_{BIT} \cdot V_{DD} + C_{OUT} \cdot V_{GND2}}{C_{BIT} + C_{OUT}}$$

In a case where the selection cell has been written and therefore the state in which the insulating film has been brought into the conductive state, this reading line is connected to the power source V_{DD} while interposing the transistor. Therefore, the voltage of the reading line is

converged to V_{DD} . The aforesaid difference is used to discriminate whether or not the written cell (bit) has been written. This voltage is detected by the amplifier **1047**. As a result, the reading operation is performed. In the writing mode, the time required for the potential of the reading line to be converged to V_{DD} determines the reading speed. The capacity of the bit line and that of the bit line reading line are in proportion to the capacity of the memory. Therefore, a critical factor is the feasibility of driving the large capacity. The SGT fined satisfactorily and exhibiting excellent driving performance according to this embodiment, and in particular, the improved SGT structure will cause a significant effect to be obtained.

The reason why the two levels of the ground potentials are provided to perform the operation according to this embodiment lies in that the breakage of the insulating film must be prevented at the time of the reading operation. That is, the potential difference to be applied to the two end portions of the insulating film at the time of the reading operation is made to be smaller than the difference at the time of the writing operation.

(Manufacturing Method)

Then, a method of manufacturing the semiconductor memory according to Embodiment 7 shown in FIGS. **12** to **31** will now be described.

(Manufacturing Method 1)

First, an N-type silicon substrate NSUB having a specific resistance of 0.1 to 1 $\Omega \cdot \text{cm}$ is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about 1,000 to 10,000 \AA is formed.

Then, the oxide film formed on a portion on which the NMOS is formed is removed by etching and an oxide film having a thickness of about 100 to 500 \AA is again formed by the heat oxidation (patterning process for P-well). While using the oxide film having the thickness of 1,000 to 10,000 \AA as a mask, a P-type impurity such as BF_3^+ is ion-injected into a region in which the NMOS will be formed. It is preferable that the concentration of the impurity be $1\text{E}13$ to 14 cm^{-2} . Then, heat treatment at about 1,000 to 1,100° C. is performed, resulting in a P-well PWL having a diffusion depth of about 1.0 to 1.5 μm to be formed.

The oxide film is fully peeled off by using an HF type solution, and a heat oxide film **51** having a thickness of 100 to 500 \AA is formed. Then, a low pressure chemical vapor deposition (LP-CVD) method is used to form an Si_3N_4 film **52** having a thickness of about 500 to 2,000 \AA . Then, the element portion is formed by performing patterning in such a manner that the Si_3N_4 film and the SiO_2 film are removed by etching (a process of patterning for the active region). Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film **52** as the mask. The cross sectional shape of the Si substrate is changed by the etching gas and the pressure and the like. In order to make the shape perpendicular, a low pressure method is effective in general. However, it is in a trade-off relation with the selection ratio or the like. As the etching gas, a Cl_2 type gas is used and etching is performed under a pressure of about 1 Pa, so that a rectangular groove is formed.

The state of the substrate thus formed is shown in FIGS. **12**, **13** and **14**. Then, the wafer is cleaned with an NH_3OH type solution, and a heat oxide film having a thickness of 300 \AA or less is formed. This oxide film is again peeled off by an HF type solution. Then, a heat oxide film **53** having a thickness of 50 to 300 \AA is again formed, and then an Si_3N_4 film **54** having a thickness of 500 \AA or less is formed by the LP-CVD method. The Si_3N_4 film **54** is etched back, so that

only the Si_3N_4 film formed in the groove portion is removed. It is preferable that the Si_3N_4 film be left for the S/D contact portion, the etching back be performed by using a parallel and plate type etching device and a CF_4 type gas be used under pressure of a level of 1.8 Pa or lower. Then, a resist pattern is used, so that CF_4 type and P-type high impurity concentration region (element separated region) **55** is formed. It is preferable that the impurity concentration be made about $1\text{E}14$ to $1\text{E}15\text{ cm}^{-2}$. Then, the heat oxidation film is formed in only the groove portion.

The state of the substrate realized by the aforesaid process is shown in FIGS. **15**, **16** and **17**.

Then, by using an HF type solution to perform etching slightly, and an H_3PO_5 type solution is used to peel off the Si_3N_4 film. Then, only the oxide film-formed below the Si_3N_4 film is etched by using the HF type solution, and a gate oxide film **56** having a thickness of 100 \AA or less is formed. Then, a polycrystal silicon is deposited by the LP-CVD method. Then, by etching it, the polycrystal silicon **57** can be left on only the side wall. Then, resist patterning is performed in accordance with the NMOS or PMOS to be formed, so that an N-type polysilicon gate electrode **57** is formed in a case of the NMOS or a P-type polysilicon gate electrode **59** is formed in a case of the PMOS simultaneously with forming of the source and drain NSD or PSD.

Then, a selection CVD method is used to form a low resistance material **58** on only the gate electrodes **57** and **59**.

The method of forming the gate electrode is an essential portion of this embodiment and is arranged in such a manner that etching back (entire-surface etching) is performed while omitting patterning of the gate electrode. As a result, the resistance can be reduced, the NMOS and the PMOS can be individually formed, the work function for the gate electrode can be selected, and the wiring of the circuit for the gate can be completed by the selfalignment manner as shown in FIGS. **18**, **19** and **20**.

Then, a heat oxide film having a thickness of 500 \AA or less is formed, and then oxide silicon serving as an insulating film **60** between layers is deposited by a CVD method such as TEOS exhibiting excellent coating feasibility.

Then, the oxide silicon is etched back, so that the top surface of the columnar semiconductor layer, that is, the source and drain region in the upper portion is caused to appear outside. Then, a storage insulating film **61** for constituting a memory element is formed on the source and drain region NSD of the FET serving as the memory cell. As the insulating film **61**, oxide silicon formed by oxidizing the top surface of the region NSD is exemplified. As an alternative to this, an insulating film made of aluminum oxide, tantalum oxide, or silicon nitride, or the like may be employed. The material and the thickness of the layer are determined so as to be broken with the operating voltage (breakage voltage). Then, a contact hole in the upper source and drain of the NMOS and PMOS is formed. Then, a contact hole for ejecting the gate electrode for the NMOS and PMOS and that for substrate electrode is formed and the conductor is deposited. By patterning this according to a desired wiring shape, a source and drain electrode **64**, a gate electrode **64** and a well electrode **65** are formed as shown in FIGS. **21**, **22** and **23**.

As described above, the CMOS type semiconductor memory can be manufactured.

(Manufacturing Method 2)

A method of manufacturing a semiconductor memory having a memory cell structure according to Embodiment 2 will now be briefly described with reference to FIGS. **24** to **31**. Description will be made here to a process until which

the columnar semiconductor layer is formed. The processes corresponding to FIGS. **18**, **19**, **20**, **21**, **22** and **33** are arranged to be the same as those according to the manufacturing process according to the aforesaid embodiment.

First, an N-type monocrystal silicon substrate NSUB having a specific resistance of 0.1 to $1\ \Omega\text{-cm}$ is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about $1,000$ to $10,000\text{ \AA}$ is formed.

Then, the oxide film formed on a portion on which the NMOS will be formed is removed by etching and an oxide film having a thickness of about 100 to 500 \AA is again formed (patterning process for P-well). While using the oxide film having the thickness of $1,000$ to $10,000\text{ \AA}$ as a mask, a P-type impurity such as BF_3^+ is ion-injected, and then, heat treatment at about $1,000$ to $1,100^\circ\text{ C}$. is performed, resulting in a P-well PWL having a depth of about 2.0 to $3.0\ \mu\text{m}$ to be formed.

Then, a heat oxide film **71** having a thickness of about 100 to 500 \AA is formed, and an Si_3N_4 film **72** having a thickness of about 500 to 2000 \AA is formed by the LP-CVD method.

The aforesaid processes are shown in FIGS. **24** and **25**. These processes are the same as those of the manufacturing method according to the aforesaid embodiment. However, the following processes are different from them.

A region in which the NMOS will be formed is subjected to a high-energy p^+ ion injection operation with a voltage level of 300 KeV to 1 MeV by using a resist mask RM. As a result, the range (R_p) becomes about 1 to $2\ \mu\text{m}$ and thereby a drain region **73** according to this embodiment is formed as an embedded layer of an N^+ type semiconductor displaying a dose quantity of 10^{14} to 10^{15} cm^{-2} . On the aforesaid portion, the P-type region which becomes the channel portion of the NMOSSGT is left (see FIG. **27**).

Similarly, the PMOSSGT is formed by injecting B ion while giving high energy into the substrate NSUB, so that an embedded layer **74** made of p^+ type semiconductor is formed (see FIG. **26**).

Then, patterning for forming the SGT portion is performed, so that Si_3N_4 and SiO_2 are removed by etching (a process of patterning for the active region). Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film **72** as the mask. According to the aforesaid embodiment, the depth of the etched portion becomes substantially the same as the gate length of the SGT. Therefore, a severe accuracy is required in this process. However, according to this embodiment, the gate length is determined since the embedded layer is formed. Therefore, by stopping etching in the aforesaid embedded layer, the gate length can be equalized satisfactorily.

The aforesaid processes are shown in FIGS. **28** and **29**.

Similarly to the aforesaid embodiment, a gate insulating film **80** is then formed, and channel stops **75** and **76** for insulating the element and the field insulating film are formed by the selective oxidation method while using a silicon nitride film **81** as a mask.

The aforesaid processes are shown in FIGS. **30** and **31**.

The present invention is not limited to the aforesaid various embodiments. The present invention includes various combinations and modifications by substituting each technical elements hereinafter.

Then, another embodiment will now be described in which a transistor which can be easily fined and which exhibits excellent current driving performance is used as the memory cell transistor and by making the gate of this transistor to be the word line, a memory connected to the bit line is formed on the source region of this transistor while

interposing a pn junction. As a result, a single-permanent-write enabled memory exhibiting reduced error rate and having high density and high speed read/write characteristics can be realized.

The PN-junction breakage type memory according to this embodiment stores information as follows:

In a case where writing is performed, a signal capable of performing the breakage is applied to the word line and the bit line, so that the PN junction is broken by forming, for example, eutectic alloy of Al and Si for use to form the electrode to cause short circuit to be realized.

A bipolar transistor used as the addressing transistor in order to achieve this will cause a problem in that a large size memory cannot be constituted because each memory cell requires a too large driving current and a problem of heat or the like arises. However, according to this embodiment, the SGT is used as the addressing transistor and memory elements made of semiconductor layers are layered on the transistor. Therefore, the convention problem can be overcome.

EMBODIMENT 8 (A)

FIG. 32 illustrates Embodiment 8 (A) of the present invention. Referring to FIG. 32, reference numeral 1 represents a P- or N-type semiconductor substrate, 2 represents a gate electrode for an MOSFET and made of polysilicon or metal such as Al, Mo, or W or the like. Reference numerals 3 and 4 represent N or P high-concentration layer serving as the source and drain region. Reference numeral 5 represents a gate oxide film and 6 represents an ejecting electrode of an anode (71) for a zener diode to be connected to the source side. Reference numeral 8 represents an insulating film between layers and 9 represents a drain electrode made of metal such as Al, W, or Mo, or the like. Reference numeral 10 represents an element separating diffusion layer formed into the same shape as that of the substrate and displaying high concentration. FIG. 33 is a plan view when FIG. 32 is viewed from an upper portion.

EMBODIMENT 9 (A)

FIG. 34 illustrates Embodiment 9 (A) of the present invention. An object of this embodiment is to improve the controllability of L of the SGT and to prevent deterioration of the voltage resistance of the lower portion. Since a flat layer of P/N⁺/P or N/p⁺/N is formed prior to bulk-etching the substrate 1, the thickness of upper P or N layer serving as the effective channel 4002 is controlled by diffusion. Furthermore, bulk etching is stopped in the aforesaid N⁺ or p⁺ layer, so that scattering of L generated due to unsatisfactory accuracy at the time of etching the gate material and to the unsatisfactory accuracy of Si etching can be prevented. Furthermore, the generation-rebonded current in the lower portion 4001 due to a defect of the depletion layer or the like can be prevented.

EMBODIMENT 10 (A)

Furthermore, a similar effect obtained from the structure shown in FIG. 34 can be obtained by performing the drain diffusion to cover the portion 4001 shown in FIG. 35. Furthermore, the potential of the channel can be made to be the same level as that of the substrate. As a result, a high performance SGT exhibiting excellent OFF characteristics can be realized and thereby a further improved device can be obtained according to the present invention.

FIGS. 36 to 38 illustrate another embodiment of the present invention in which the structure of the memory

element is altered and is formed into zener diodes 71 and 72. The aforesaid structure is required to prevent generation of tunneling current due to high concentration p⁺/n⁺ junction and to satisfactorily form the contact surface of the output side of the zener diode.

EMBODIMENT 11 (A)

Since the source (drain) region 4 on the SGT shown in FIG. 32 displays the impurity concentration of 10²⁰ cm⁻³ or higher, the tunneling current of the zener diode increases when a diffusion layer 71 is formed on it. Furthermore, since the diffusion layer 71 becomes a very shallow diffusion layer, the interface encounters a problem such as a spike if the electrode 6 is made of Al or the like. In this case, there arises a fear of deterioration of the yield. Accordingly, a structure shown in FIG. 36 is arranged in such a manner that an absorbing layer 20 made of polysilicon or barrier metal (TiN) is formed between the electrode 6 and the diffusion layer 71 so as to realize a satisfactory interface characteristics.

EMBODIMENT 12 (A)

In a structure shown in FIG. 37, the cathode of the zener diode is newly formed by polysilicon or a barrier metal 21 individually from the source of the SGT, so that p⁺/N or N⁺/P junction is formed. As a result, the generation of the tunnelling current due to the aforesaid p⁺/N⁺ junction can be prevented and the S/N in the conductive state and that in the non-conductive state can be improved.

EMBODIMENT 13 (A)

FIG. 38 illustrates a structure arranged for the purpose of overcoming the aforesaid two problems and structured in such a manner that the two end portions (the top and the bottom ends) of the zener diode are held by the absorbing layers 20 and 21.

Referring to FIG. 35, the same elements as those shown in FIG. 32 are omitted from description.

FIG. 39 is a plan view which illustrates a structure in which a plurality of cells according to the aforesaid embodiment are disposed in the form of an array. Reference numerals 1001, 1001' and 1001" represent word lines connected to corresponding MOSFETs and 1002, 1002' and 1002" represent bit lines through which output passes from corresponding MOSFETs via the zener diode.

FIGS. 40 and 41 are cross sectional views respectively taken along lines A—A' and B—B' of FIG. 39.

FIG. 42 is a top view and a cross sectional view of a peripheral circuit of the semiconductor memory according to the present invention.

Reference numeral 311 represents source and drain electrode, 312 represents an active region, 313 represents a gate electrode ejecting portion and 314 represents a well electrode ejecting portion.

As described above, also SGT is used in the peripheral circuit.

Then, a method of manufacturing a-memory will now be described in which a predetermined conductive type semiconductor layer is used in place of the insulating film as the aforesaid memory element and which stores 1 and 0 by breaking or non-breaking the PN junction. The basic manufacturing method is the same as that for manufacturing the insulating type memory as described with reference to FIGS. 12 to 30. Therefore, description may be made about only a process of manufacturing the semiconductor memory ele-

ment employed in place of the process of manufacturing the insulating memory element.

For example, a columnar semiconductor layer is formed and the lower wiring and the insulating between the layers are formed. Then, the top surface of the columnar MOSFET is caused to appear outside by etching back. Although the insulating film is formed by heat oxidation **2** in the case of the insulating layer memory element, this embodiment is arranged in such a manner that a P-type semiconductor layer is formed in the case of the NMOS and an N-type semiconductor layer is formed in the case of the PMOS. Furthermore, the PN junction is formed by introducing BF₂ type P-type impurity by using a resist mask, so that the P-layer is formed. The P-type layer may be deposited by the CVD method to perform patterning. Thus, the P-type semiconductor layer **71** as shown in FIG. **43** and serving as the memory element is formed by forming electrodes on a structure realized due to the aforesaid process, the P-type semiconductor layer forming the main electrode region of the MOSFET and the PN junction.

Then, the way of operating the memory device according to this embodiment and method of storage performed by it will now be described. FIG. **44** illustrates an equivalent circuit of the layout of the memory cell shown in FIG. **39**. Referring to FIG. **44**, reference numerals **1001** to **1001**" represent word lines, **1002** to **1002**" represent bit lines and **1003** to **1003**" represent power supply lines. Each cell has a fine transistor **1040** having improved current driving performance and a pn junction **1041** formed in the source layer of the transistor thereof. Thus, a memory cell is constituted.

As the peripheral circuits of the memory, the following elements are provided: a bit line voltage setting circuit **1042**, a word line voltage setting circuit **1043**, a bit line sequentially selection signal generating circuit **1044**, bit line selection switches **1045** to **1045**", a switch for resetting the bit line reading line **1048** and an amplifier **1047**.

Then, the writing operation will now be described.

(1) Writing Operation 1: (precharge of bit lines)

The bit line is set to reference voltage V_{DD} by the voltage setting circuit **1042**. As a result, the potential difference between the power supply line and the bit line is eliminated. Therefore, no potential is generated and no current passes between the source and the drain regardless of the level of voltage applied to the word line. As a result, the pn junction **1041** is not broken. The precharging voltage for the bit line may be different from power supply voltage V_{DD} if the conductive state is not realized due to the breakage of the aforesaid pn junction region. The value of V_{DD} may be about 1 to 5V.

(2) Writing Operation 2: (discharge of word lines)

The voltage of all of the word lines is fixed to first ground level V_{GND1} , for example, 0V. The aforesaid operation is performed in order to prevent mixture of a signal with the word line adjacent to the word line for performing the writing operation, the mixture being caused from crosstalk.

(3) Writing Operation 3 (selection of writing word line)

In a case where the present writing bit is a cell at the second row and second column when the top left cell is made to be the origin, the word line in which the writing bit exists becomes **1001'** shown in FIG. **3**. Therefore, the potential of this word line is made to be V_G which holds the following relationship:

$$V_{GND1} < V_G < V_{GB} \quad (2)$$

where V_{GB} is gate insulating film breaking voltage.

(4) Writing Operation 4 (selection of bit line)

A bit line potential which corresponds to a writing cell present on a selected line is set to ground potential 1. Since all of the transistors of the selected line are brought to the actuated state, high voltage is applied to the pn junction by making the potential of the bit line to be the ground potential. Therefore, the pn junction is broken and therefore the conductive state is realized. It is preferable that the bit line selections be sequentially performed because an electric current passes between the bit line and the word line when the writing operation is completed. However, a plurality of bit lines may be simultaneously written.

Then, the reading operation will now be described.

(1) Reading Operation 1 (precharge of bit lines)

It is performed similarly to the writing operation. The reason for this lies in that a problem taken place in that a blank bit is written due to the reading operation must be prevented. The voltage at this time may be a level similar to power supply voltage V_{DD} .

(2) Reading Operation 2 (discharge of word line)

The voltage of all of the word lines is set to second ground level V_{GND2} which holds the following relationship with first ground level V_{GND1} :

$$V_{GND1} < V_{GND2} \quad (3)$$

(3) Reading Operation 3 (selection of line to be read)

The potential of the word line of the line to be read is fixed to range V_G defined according to Equation (2). As a result, the transistor on the aforesaid line is brought to an actuated state.

(4) Reading Operation 4 (resetting of bit line reading line)

The bit line reading line **1048** is reset by the switch **1046**. The resetting potential is determined by the power source connected to the switch **1046**, the potential being made to be V_{GND2} . Then, the switch **1046** is switched off and the bit line reading line is brought into a floating state.

(5) Reading Operation 5 (selection of bit line)

The bit line sequential selection signal generating circuit **1044** is used to raise the level of the gate of the selection bit selection switch, the switch is switched on so as to be connected to the bit line reading line. In a case where the selection cell has not been written, the voltage of the reading line is converged to a value obtained from the following equation assuming that the capacity of the bit line is C_{BIT} and the capacity of the reading line is C_{OUT} :

$$\frac{C_{BIT} \cdot V_{DD} + C_{OUT} \cdot V_{GND2}}{C_{BIT} + C_{OUT}}$$

In a case where the selection cell has been written and therefore the state in which the pn junction has been brought into the conductive state, this reading line is connected to the power source V_{DD} while interposing the transistor. Therefore, the voltage of the reading line is converged to V_{DD} . The aforesaid difference is used to discriminate whether or not the written cell (bit) has been written. This voltage is detected by the amplifier **1047**. As a result, the reading operation is performed. In the writing mode, the time required for the potential of the reading line to be converged to V_{DD} determines the reading speed. The capacity of the bit line and that of the bit line reading line are in proportion to the capacity of the memory. Therefore, a critical factor is the feasibility of driving the large capacity. The transistor structure is fine satisfactorily and exhibiting excellent driving performance according to this embodiment will cause a significant effect to be obtained.

The reason why the two levels of the ground potentials are provided to perform the operation according to this embodiment lies in that the breakage of the pn junction must be prevented at the time of the reading operation. That is, the potential difference to be applied to the two end portions of the pn junction at the time of the reading operation is made to be smaller than the difference at the time of the writing operation.

According to this embodiment, the semiconductor layer is used as the memory element and information is recorded depending upon a fact that the pn junction is broken or not broken. Therefore, scattering of the state of the breakage in each cell can be prevented, causing satisfactory reliability to be obtained.

In any case, according to the present invention, the memory element is realized by a junction which can be electrically broken, the junction being exemplified by the PN junction, insulating film/semiconductor junction, metal/insulating film/semiconductor junction, PIN junction, semiconductor/insulating film/semiconductor junction, IN junction, PI junction, short-key junction and heterojunction.

EMBODIMENT 1 (H)

FIG. 47 is a schematic cross sectional view which illustrates a semiconductor memory according to Embodiment 1 (H) by a portion corresponding to one cell.

A semiconductor substrate 1 has a columnar semiconductor layer in the upper portion thereof. A gate electrode 2 is formed around the columnar portion while holding a gate insulating film 5. A drain region 3 is formed in the side portion of the lower portion of the columnar portion, the columnar portion having a source region 4 formed thereon. Reference numeral 9 represents a drain electrode. A source electrode 6 is connected to the source region 4 while interposing an insulating film 70' and a barrier metal 70". The vertical size of the columnar semiconductor layer is longer than the necessitated gate length and the length of one side is made to be of the order of sub-micron (0.1 μm). The relationship between the length of the one side, the gate voltage and the concentration of the impurity of the semiconductor are as described above.

Referring to FIG. 47, the gate electrode 2 overlaps the source region 4. Another positional relationship between 2 and 4 may, of course, be employed in which the source region 4 sets off (the LDD structure) in relation to the gate electrode 2 or the same may overlap (the GOLD structure) it similar to the conventional MOSFET.

Reference numerals 10 and 11 respectively represent a channel stopper for insulating the elements and a field insulating film.

FIG. 48 is a schematic top view of the cell shown in FIG. 47.

EMBODIMENT 2 (H) FIG. 49 illustrates a second embodiment arranged in such a manner that the LDD structure is added similarly to the conventional MOSFET.

Although the present invention enables excellent durability against the hot carrier to be obtained as compared with the conventional MOSFET structure, the effect of the hot carrier cannot be completely eliminated. Accordingly, a layer 41 showing a concentration lower than that of the diffusion layer of the source and drain region is additionally formed for the purpose of further improving the durability against the hot carrier.

As described above, the one cell is structured by stacking the barrier metal and the insulating layer on a vertical type MOSFET.

In a case where a P-type semiconductor is employed to form the substrate 1, the N-type semiconductor may be employed to form the source region and the drain region. A contrary structure may also be employed.

The electrodes 2 may be constituted by a multilayer of polysilicon or WSi or their combination. As the metal layer 70", a barrier metal made of TiN, Ti, or W or the like may be employed. As the wiring electrodes 6 and 9, Al, Al-Si, or Al-Si-Cu, or the like may be employed.

The insulating film 70' must be a dielectric member from which a desired capacity can be obtained. Specifically, single or multilayered silicon oxide, silicon nitride, aluminum oxide or tantalum oxide is employed. In order to be broken by a voltage level of 3 to 5V but to withstand a voltage level of 1 to 3V, its thickness, structure and material are selected.

When the insulating film 70' is applied with high voltage at its two end portions and is thereby broken, the wiring metal existing in its upper portions generally reacts with the insulating layer in the broken portion and reaches the lower portion. Since the barrier metal 70" is formed in the lower portion of the insulating layer according to the present invention, the introduction of the wiring metal, which has reached the lower portion of the insulating layer due to the aforesaid reaction, into the source region is prevented. If the aforesaid structure is not employed, the wiring metal which has reached the lower portion of the insulating layer due to the reaction penetrates the source region 4 and reaches the channel. As a result, a short circuit is realized between the source and the channel and leakage takes place. However, according to the present invention, the aforesaid short circuit and the leakage can be completely prevented. Therefore, the breakage or defect of the transistor can be prevented at the time of the writing operation as a memory device.

EMBODIMENT 3 (H)

FIG. 50 illustrates a memory cell according to Embodiment 3 (H).

The difference from the structure shown in FIG. 47 lies in that the drain region 3 is formed to cover the overall lower surface of the column and thereby the channel region is narrowed. According to this structure, the controllability of the effective channel length 4002 of the SGT can be improved and the deterioration of the voltage resistance can be prevented. Furthermore, the generation-re-bonded current in the lower portion of the column can be completely prevented.

EMBODIMENT 4 (H)

FIG. 51 illustrates a memory cell according to Embodiment 4 (H).

The difference from the structures shown in FIGS. 47 and 50 lies in that a portion 3 of the drain region is positioned in a portion of the column.

According to this structure, a cell exhibiting further improved OFF-characteristics can be obtained in addition to the effect obtained from the structure shown in FIG. 50. The reason for this lies in that the channel and the substrate 1 can be maintained at the same potential while interposing a region 1'.

EMBODIMENT 5 (H)

FIG. 52 is a cross sectional view which illustrates a memory cell according to Embodiment 5.

The difference from FIG. 47 lies in that a p⁺ layer 20' and an n-layer 20" made of polysilicon are formed on the barrier

metal **70''** and the wiring electrode **6** is formed on the p⁺ layer **20'**. In general, the potential of the wiring electrode **6** is lower than that of the source layer **4**, the aforesaid layers **20'** and **20''** are made to have an inverse bias relationship and thereby a non-conductive state is realized. When high voltage or large electric current is applied between the electrode **6** and the source **4**, the aforesaid p⁺ layer **20'** and the n⁺ layer **20''** are broken. As a result of this breakage, Si of the aforesaid polysilicon layer and the electrode **6** react with each other and the metal of the electrode **6a** comes in contact with the barrier metal **70''**. As a result, the electrode **6** and the source region **4** are brought into the conductive state. According to the present invention, the barrier metal **70''** is formed as described above, the metal **6** of the electrode **6** is not diffused into the source region **4**. Therefore, the breakage of the transistor at the time of the writing mode in which the conductive state is realized can be prevented. As a result, a reliable memory device can be realized.

EMBODIMENT 5 (H)

FIG. **53** illustrates a memory cell according to Embodiment **6** (H).

The difference from the structure shown in FIG. **52** lies in that the source region **4** is formed into a P- or N-type semiconductor region of an order of 10^{19} or less, preferably of an order of 10^{16} to 10^{17} . Furthermore, the barrier metal **70''** is formed on it while being communicated via an opening of the insulating film **5'**. In addition, the insulating film **70'** is formed on the layer **21**.

Since the necessity of forming the film **70'** by the heat oxidation method can be eliminated, a problem of deterioration of the voltage resistance and that of the insulating characteristics due to dopant can be overcome.

EMBODIMENT 7 (H)

A memory cell according to Embodiment **7** (H) shown in FIG. **54** is constituted by forming the polysilicon layer **20** on the insulating film **70'** according to the embodiment shown in FIG. **53**.

According to aforesaid Embodiments **1** (H) to **7** (H), various problems can be overcome and high performance and fine semiconductor memory can be realized.

By using the MOSFET to constitute the switching device in place of the bipolar transistor, the driving current required per memory cell can be significantly reduced and mounting density can be raised and the power consumption can be reduced.

By using the SGT to constitute the switching device, a further fined device can be formed and therefore a semiconductor memory having a larger size and high performance can be realized.

According to Embodiments **3** (H) and **4** (H), the high concentration source or drain region extends to the source and drain region in the lower portion of the SGT. Therefore, a problem of deterioration of reliability due to the generation-rebonded current and the concentration of the electric field can be effectively overcome.

That is, since the lower drain region **3** can be determined due to the diffusion from the surface of the substrate prior to performing etching of the substrate, the accuracy of the channel length **L** can be significantly improved as compared with the conventional method in which the effective channel length (**L**) is determined by the bulk etching method. Furthermore, a finer MOSFET can be manufactured.

Dark currents are generated in the depletion layer formed between the drain and the gate-mainly due to a defect in the

lower portion of the channel and that at an end point of the drain region. However, since the aforesaid point is covered with the drain region according to the present invention, the concentration of the electric fields, deterioration of the voltage resistance and generation of the dark current can be prevented.

Furthermore, when the gate electrode is formed in a maskless manner by using a metal CVD exhibiting excellent coating feasibility, the electrode ejecting region can be formed by a selfalignment manner.

By using the memory cell having a transistor which can be easily fined and which exhibits excellent current driving performance and by making the gate of this transistor to be the word line, a semiconductor memory connected to the bit line is formed on the source region of this transistor while interposing the insulating film between layers. As a result, a single-permanent-write enabled semiconductor memory exhibiting reduced error rate and having high density and high speed read/write characteristics can be realized.

EMBODIMENT 8 (H)

FIG. **55** is a circuit diagram which illustrates an embodiment of a semiconductor memory having 3x3 cells according to the present invention.

One cell has an addressing transistor **1040** and a memory element **1041**. The memory element **1041** is, of course, a capacitor before the insulating film is broken and is not a capacitor after it has been broken.

The transistor **1040** and the memory element **1041** can be constituted by the structures according to aforesaid Embodiments **1** (H) to **7** (H).

Reference numerals **1001**, **1001'**, **1001''** and **1001'''** represent word lines connected to the gates of the FET.

Reference numerals **1002**, **1002'** and **1002''** represent bit lines each connected to either side of the memory element.

Reference numerals **2003**, **1003'**, **1003''** and **1004** represent power supply lines.

As the peripheral circuits of the memory, the following elements are provided: the bit line voltage setting circuit **1042**, the word line voltage setting circuit **1043**, the selection signal generating circuit **1044** for sequentially selecting the bit lines, the bit line selection switches **1045**, **1045'** and **1045''**, the switch **1046** for resetting the bit line reading line **1048** and an amplifier **1047**.

FIG. **56** is a schematic top view of the semiconductor memory shown in FIG. **55**.

Referring to FIG. **56**, a wiring **1004** is used for the purpose of reducing the resistance generated in the flow from the power supply line **1004** to each memory cell. In order to prevent a delay of the memory access time, it is formed to have a certain interval in the rows and columns.

Three memory cells in one row constitute the word lines **1001**, **1001'** and **1001''** since their gate electrodes **2** are connected by the same electrode layer.

Similarly, the three memory cells in one column constitute the bit lines **1002**, **1002'** and **1002''** since the electrodes of their memory elements are connected by the same wiring layer.

FIG. **57** is a cross sectional view taken along line AA' of FIG. **56**. FIG. **11** is a cross sectional view taken along line BB' of FIG. **56**.

Then, the operation of the aforesaid semiconductor memory will now be described.

First, its writing operation will now be described, the writing operation including the following four main operations.

(1) Writing Operation 1: (precharge of bit lines)

The bit line is set to reference voltage V_{DD} by the voltage setting circuit **1042**. As a result, the potential difference between the power supply line and the bit line is eliminated. Therefore, no potential is generated and no current passes between the source and the drain of the FET regardless of the level of voltage applied to the word line. As a result, the insulating film **1041** is not broken. The precharging voltage for the bit line may be the same level as that of the power supply voltage or may be different from the same. In this case, the structure must be arranged in such a manner that the conductive state is not realized due to the breakage of the insulation film region. The value of V_{DD} may be about 1 to 5V.

(2) Writing Operation 2: (discharge of word lines)

The voltage of all of the word lines is fixed to first ground level V_{GND1} , for example, 0V. The aforesaid operation is performed in order to prevent mixture of a signal with the word line adjacent to the word line for performing the writing operation, the mixture being caused from crosstalk.

(3) Writing Operation 3 (selection of writing word line)

In a case where the present writing bit is a cell at the second row and second column when the top left cell shown in FIG. **55** is made to be the origin, the word line in which the writing bit exists becomes **1001'** shown in FIG. **55**. Therefore, the potential of this word line is made to be V_G which holds the following relationship:

$$V_{GND1} < V_G < V_{GB} \quad (2)$$

where V_{GB} is gate insulating film breaking voltage.

(4) Writing Operation 4 (selection of bit line)

A bit line potential which corresponds to a writing cell present on a selected line is set to ground potential. Since all of the FETs of the selected line are brought to the actuated state, high voltage is applied to the insulating film by making the potential of the bit line to be the ground potential. Therefore, the insulating film is broken and therefore the conductive state is realized. It is preferable that the bit line selections be sequentially performed because an electric current passes between the bit line and the word line when the writing operation is completed. However, a plurality of bit lines may be simultaneously written.

Then, the reading operation will now be described, the reading operation including the following four main operations.

(1) Reading Operation (precharge of bit lines)

It is performed similarly to the writing operation. The reason for this lies in that a problem taken place in that a blank bit is written due to the reading operation must be prevented. The voltage at this time may be a level similar to power supply voltage V_{DD} .

(2) Reading Operation 2 (discharge of word line)

The voltage of all of the word lines is set to second ground level V_{GND2} which holds the following relationship with first ground level V_{GND1} :

$$V_{GND1} < V_{GND2} \quad (3)$$

(3) Reading Operation 3 (selection of line to be read)

The potential of the word line of the line to be read is fixed to range V_G defined according to Equation (2). As a result, the FET on the aforesaid line is brought to an actuated state.

(4) Reading Operation 4 (resetting of bit line reading line)

The bit line reading line **1048** is reset by the switch **1046**. The resetting potential is determined by the power source

connected to the switch **1046**, the potential being made to be V_{GND2} . Then, the switch **1046** is switched off and the bit line reading line is brought into a floating state.

(5) Reading Operation 5 (selection of bit line)

The bit line sequential selection signal generating circuit **1044** is used to raise the level of the gate of the selection bit selection switch, the switch is switched on so as to be connected to the bit line reading line. In a case where the selection cell has not been written, the voltage of the reading line is converged to a value obtained from the following equation assuming that the capacity of the bit line is C_{BIT} and the capacity of the reading line is C_{OUT} :

$$\frac{C_{BIT} \cdot V_{DD} + C_{OUT} \cdot V_{GND2}}{C_{BIT} + C_{OUT}}$$

In a case where the selection cell has been written and therefore the state in which the insulating film has been brought into the conductive state, this reading line is connected to the power source V_{DD} while interposing the transistor. Therefore, the voltage of the reading line is converged to V_{DD} . The aforesaid difference is used to discriminate whether or not the written cell (bit) has been written. This voltage is detected by the amplifier **1047**. As a result, the reading operation is performed. In the writing mode, the time required for the potential of the reading line to be converged to V_{DD} determines the reading speed. The capacity of the bit line and that of the bit line reading line are in proportion to the capacity of the memory. Therefore, a critical factor is the feasibility of driving the large capacity. The SGT fined satisfactorily and exhibiting excellent driving performance according to this embodiment, and in particular, the improved SGT structure will cause a significant effect to be obtained.

The reason why the two levels of the ground potentials are provided to perform the operation according to this embodiment lies in that the breakage of the insulating film must be prevented at the time of the reading operation. That is, the potential difference to be applied to the two end portions of the insulating film at the time of the reading operation is made to be smaller than the difference at the time of the writing operation.

(Manufacturing Method)

Then, a method of manufacturing the semiconductor memory according to Embodiment 8 (H) shown in FIGS. **57** to **31** will now be described.

(Manufacturing Method 1)

First, an N-type silicon substrate NSUB having a specific resistance 0.1 to 1 $\Omega \cdot \text{cm}$ is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about 1,000 to 10,000 \AA is formed.

Then, the oxide film formed on a portion on which the NMOS is formed is removed by etching and an oxide film having a thickness of about 100 to 500 \AA is again formed by the heat oxidation (patterning process for P-well).

While using the oxide film having the thickness of 1,000 to 10,000 \AA as a mask, a P-type impurity such as BF_3 is ion-injected into a region in which the NMOS will be formed. It is preferable that the concentration of the impurity be $1\text{E}13$ to 14 cm^{-2} .

Then, heat treatment at about 1,000 to 1,100 $^\circ$ C. is performed, resulting in a P-well PWL having a diffusion depth of about 1.0 to 1.5 μm to be formed. The oxide film is fully peeled off by using an HF type solution, and a heat oxide film **51** having a thickness of 100 to 500 \AA is again formed. Then, a low pressure chemical vapor deposition (LP-CVD) method is used to form an Si_3N_4 film **52** having a thickness of 500 to 2,000 \AA is formed.

Then, the element portion is formed by performing patterning in such a manner that the Si_3N_4 film and the SiO_2 film are removed by etching (a process of patterning for the active region).

Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film **52** as the mask. The cross sectional shape of the Si substrate is changed by the etching gas and the pressure and the like. In order to make the shape perpendicular, a low pressure method is effective in general. However, it is in a trade-off relation with the selection ratio or the like. As the etching gas, a Cl_2 type gas is used and etching is performed under a pressure of about 1 Pa, so that a rectangular groove is formed.

The state of the substrate thus formed is shown in FIGS. **12**, **13** and **14**.

Then, the wafer is cleaned with an NH_3OH type solution, and a heat oxide film having a thickness of 300 Å or less is formed. This oxide film is again peeled off by an HF type solution. Then, a heat oxide film **53** having a thickness of 50 to 300 Å is again formed, and then an Si_3N_4 film **54** having a thickness of 500 Å or less is formed by the LP-CVD method. The Si_3N_4 film **54** is etched back, so that only the Si_3N_4 film formed in the groove portion is removed. However, the Si_3N_4 film is left in the S/D contact portion, the etching back is performed by using a parallel and plate type etching device and a CF_4 type gas be used under pressure of a level of 1.8 Pa or lower. Then, a resist pattern is used, so that BF_3^+ (in the case of NMOS) type and P-type (N-type such as Al in a case of PMOS) high impurity concentration region (element separated region) **55** or **55'** is formed.

It is preferable that the impurity dose quantity be made about $1\text{E}14$ to $1\text{E}15 \text{ cm}^{-2}$. Then, the heat oxidation film is formed in only the groove portion. The state of the substrate realized by the aforesaid process is shown in FIGS. **58**, **59** and **60**.

Then, by using an HF type solution to perform etching slightly, and an H_3PO_5 type solution is used to peel off the Si_3N_4 film. Then, only the oxide film formed below the Si_3N_4 film is etched by using the HF type solution, and a gate oxide film **56** having a thickness of 100 Å or less is formed. Then, a polycrystal silicon is deposited by the LP-CVD method. Then, by etching it back, the polycrystal silicon **57** can be left on only the side wall. Then, resist patterning is performed in accordance with the NMOS or PMOS to be formed, so that an N-type polysilicon gate electrode **57** is formed in a case of the NMOS or a P-type polysilicon gate electrode **59** is formed in a case of the PMOS simultaneously with forming of the source and drain NSD or PSD.

Then, a selection CVD method is used to form a low resistance material **58** on only the gate electrodes **57** and **59**.

The method of forming the gate electrode is an essential portion of this embodiment and is arranged in such a manner that etching back (entire-surface etching) is performed while emitting patterning of the gate electrode. As a result, the resistance can be reduced, the NMOS and the PMOS can be individually formed, the work function for the gate electrode can be selected, and the wiring of the circuit for the gate can be completed by the selfalignment manner.

Then, a heat oxide film having a thickness of 500 Å or less is formed, and then oxide silicon serving as an insulating film **60** between layers is deposited by a CVD method such as TEOS exhibiting excellent coating feasibility.

Then, the oxide silicon is etched, so that the top surface of the columnar semiconductor layer, that is, the source and

drain region in the upper portion is caused to appear outside. Then, a barrier metal is formed on the source and drain region NSD of the FET serving as the memory cell and a storage insulating film **61** for constituting a memory element is formed. As the insulating film **61**, oxide silicon formed by oxidizing the top surface of the region NSD is exemplified. As an alternative to this, an insulating film made of aluminum oxide, tantalum oxide, or silicon nitride, or the like may be employed. The material and the thickness of the layer are determined so as to be broken with the operating voltage (breakage voltage). Then, a contact hole in the upper source and drain of the NMOS and PMOS is formed. Then, a contact hole for ejecting the gate electrode for the NMOS and PMOS and that for substrate electrode is formed and the conductor is deposited. By patterning this according to a desired wiring shape, a source and drain electrode **64**, a gate electrode **64** and a well and substrate electrode **65** are formed as shown in FIGS. **21**, **64** and **65**.

As described above, the CMOS type semiconductor memory can be manufactured.

(Manufacturing Method 2)

A method of manufacturing a semiconductor memory having a memory cell structure according to Embodiment 2 (H) will now be briefly described with reference to FIGS. **65** to **30**. Description will be made here to a process until which the columnar semiconductor layer is formed. The processes corresponding to FIGS. **61**, **62**, **63**, **21**, **64** and **65** are arranged to be the same as those according to the manufacturing process according to the aforesaid embodiment.

First, an N-type monocrystal silicon substrate NSUB having a specific resistance of 0.1 to $1 \Omega\text{-cm}$ is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about 1,000 to 10,000 Å is formed.

Then, the oxide film formed on a portion on which the NMOS will be formed is removed by etching and an oxide film having a thickness of about 100 to 500 Å is again formed (patterning process for P-well).

While using the oxide film having the thickness of 1,000 to 10,000 Å as a mask, a P-type impurity such as BF_3^+ is ion-injected, and then, heat treatment at about 1,000 to $1,100^\circ \text{C}$. is performed, resulting in a P-well PWL having a depth of about 2.0 to 3.0 μm to be formed.

Then, the heat oxide film **71** having a thickness of about 100 to 500 Å is formed, and the Si_3N_4 film **72** having a thickness of about 500 to 2000 Å is formed by the LP-CVD method. The processes to the aforesaid stage are shown in FIGS. **24** and **25**. The aforesaid processes are the same as those of the manufacturing processes according to the aforesaid embodiment, but the difference lies in the following processes. A region in which the NMOS will be formed is subjected to a high-energy p^+ ion injection operation with a voltage level of 300 KeV to 1 MeV by using a resist mask RM.

As a result, the range (R_p) becomes about 1 to 2 μm and thereby the drain region **73** according to this embodiment is formed as an embedded layer of an N^+ type semiconductor displaying a dose quantity of 10^{14} to 10^{15} cm^{-2} . On the aforesaid portion, the P-type region which becomes the channel portion of the MNOSSGT is left (see FIG. **27**). Similarly, the PMOSSGT is formed by injecting B^+ ion while giving high energy into the substrate NSUB, so that the embedded layer **74** made of p^- type semiconductor is formed (see FIG. **26**).

Then, patterning for forming the SGT portion is performed, so that Si_3N_4 and SiO_2 are removed by etching (a process of patterning for the active region).

Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film **72** as the

mask. According to the aforesaid embodiment, the depth of the etched portion becomes substantially the same as the gate length of the SGT. Therefore, a severe accuracy is required in this process. However, according to this embodiment, the channel gate length is determined since the embedded layer is formed. Therefore, by stopping etching in the aforesaid embedded layer, the gate length can be equalized satisfactorily. The aforesaid processes are shown in FIGS. 28 and 29.

Similarly to the aforesaid embodiment, the gate insulating film 80 is then formed, and the channel stops 75 and 76 for insulating the element and the field insulating film are formed by the selective oxidation method while using a silicon nitride film 81 as a mask. The aforesaid processes are shown in FIGS. 30 and 31.

The present invention is not limited to the aforesaid various embodiments. The present invention includes various combinations and modifications by substituting each technical elements hereinafter.

EMBODIMENT 1 (B)

FIG. 68 illustrates Embodiment 1 (B).

Referring to FIG. 68, reference numeral 501 represents a P- or N-type semiconductor substrate.

Reference numeral 502 represents a MOSFET gate electrode made of metal such as polysilicon, Al, Mo, or W, or the like.

Reference numeral 503 and 504 represent high-concentration N or P layers serving as the source-drain region.

Reference numeral 505 represents a gate oxidation film and 506 represents a source ejecting electrode.

The channel region, the gate insulating film 219 and the gate electrode 218 are formed into circular shapes in order to prevent forming edges.

FIG. 69 is a top view which illustrates Embodiment 2 (B) of the present invention. By forming the SGT cell into an elliptic shape, the gate width w can be changed while eliminating the necessity of enlarging the radius of the circular portion and thereby an effect can be obtained in that the design freedom can be improved.

Then, Embodiment 3 (B) of the present invention will now be described with reference to FIG. 70. FIG. 70A illustrates an example in which the present invention is applied to a dynamic RAM and FIG. 70B is a cross section of this example. The same elements as those according to the embodiment shown in FIG. 68 are given the same reference numerals and their descriptions are omitted here.

A strage node 401 and a field node 301 are formed below the SGT. Both of the SGT and the capacitor are formed into a cylindrical shapes. As for the circuit structure, the gate 502 of the SGT is connected to the word line. By selecting the word line, information in the capacitor is read out into the bit line 506.

FIGS. 71A and 71B respectively are cross sectional shape and a top view of Embodiment 4 (B) of the present invention. The same elements as those shown in FIG. 68 are given the same reference numerals and their descriptions are omitted here.

This embodiment is an example of an application of the present invention to a permanent information storing memory. Reference numeral 571 represents a pn junction formed between the source layer 4 of the SGT and the bit line 506, the pn junction being used to determine whether or not the memory is conductive. Reference numeral 509

represents a drain ejecting electrode and 508 represents an insulating film between layers.

Furthermore, a similar effect can be obtained from a memory the conduction state of which is determined by breaking/not breaking the insulating film in place of the pn junction.

By using the memory cell having a transistor which can be easily fined and which exhibits excellent current driving performance and by making the gate of this transistor to be the word line and by forming a semiconductor memory connected to the bit line on the source region of this transistor while interposing the insulating film between layers. As a result, a single-permanent-write enabled semiconductor memory exhibiting reduced error rate and having high density and high speed read/write characteristics can be realized.

The aforesaid Embodiments 1 (B), 2 (B), 3 (B) and 4 (B) are used as the addressing transistor or a cell in the circuit shown in FIGS. 8, 44 and 45.

The aforesaid manufacturing methods according to Embodiments 1 (B) to 4 (B) are the same as those shown in FIGS. 12 to 23 except for a fact that the shape of the mask is changed in order to curve the edge portion of the side surface.

EMBODIMENT 1 (C)

Embodiment 1 (C) of the present invention will be described with reference to the drawings. FIG. 72 is a cross sectional view which illustrates a surrounding gate type (hereinafter called an "SGT type") N-MOS Tr according to Embodiment 1 (C).

Referring to FIG. 72, reference numeral 651 represents a N-type Si substrate, 652 represents a P⁻ layer, 653 represents a drain N⁺ layer of the NMOS, 655 represents a source N⁺ layer of the N-MOS, 656 represents an Al electrode for ejecting the gate, 657 represents a source ejecting Al electrode, 658 represents drain ejecting Al electrode, 659 represents a gate oxide film, 661 represents a P⁻ Epi layer, 664 represents a field oxide film, 665 represents a gate electrode made of polysilicon, 666 represents a selection CVD metal film (Al, Mo, or W, or the like), 667 represents a P⁺ layer for taking a contact with the substrate, 668 represents a CVD insulating film and 669 represents a P-type impurity region for separating the element.

The essential portion of this embodiment lies in a fact that the field oxide film 664 which is thicker than the gate oxide film 659 is formed just below the gate electrode 665. As a result, the gate source capacity of this transistor can be reduced.

Then, a method of forming the N-MOS according to the present invention will now be described with reference to a flow chart of the process shown in FIGS. 73 to 78.

First, an N-type silicon substrate 651 having a specific resistance of 0.1 to 1 Ω -cm is subjected to a heat oxidation process, so that a heat oxidation film (omitted from illustration) having a thickness of about 1,000 to 10,000 Å is formed.

Then, the oxide film formed on a portion on which the NMOS will be formed is removed by etching and an oxide film (omitted from illustration) having a thickness of about 100 to 500 Å is again formed.

While using the aforesaid oxide film as a mask, a P-type impurity such as BF₂⁺ is ion-injected into a region in which the N-MOS will be formed. The concentration of the impurity is about 1E13 to 14 cm⁻².

Then, heat treatment at about 1,000 to 1,100° C. is performed, resulting in a diffusion depth of about 1.0 to 1.5 μm to be formed.

The surface oxide film is fully peeled off by using an HF type solution. In order to form the N-MOS drain region **653**, resist patterning is performed and As ions are injected. The concentration of the impurity is about $5\text{E}15$ to $5\text{E}16$ cm^{-2} .

Then, the surface oxide film is fully peeled off by using an HF type solution and the P⁻ layer **661** having a thickness of about 0.5 μm is formed by low temperature epitaxial growth (FIG. 74).

Then, the heat oxide film having a thickness of 100 to 500 Å is again formed. Then, the LP-CVD method is used to form an Si_3N_4 film having a thickness of 500 to 2,000 Å.

Then, the element portion is formed by performing patterning in such a manner that the Si_3N_4 film and the SiO_2 film are removed by etching. Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film as the mask. The cross sectional shape of the Si substrate is changed by the etching gas and the pressure and the like. In order to make the shape perpendicular, a low pressure method is effective in general. However, it is in a trade-off relation with the selection ratio or the like. As the etching gas, a Cl type gas is used and etching is performed under a pressure of about 0.5 to 5 Pa, so that a rectangular groove is formed.

Then, the wafer is cleaned with an NH_4OH type solution, and a heat oxide film having a thickness of 300 Å or less is formed. This oxide film is again peeled off by an HF type solution.

Then, a heat oxide film having a thickness of 500 to 2000 Å is again formed, and then an Si_3N_4 film having a thickness of 500 Å to 1500 Å is formed by the LP-CVD method. The Si_3N_4 film is etched by forming a resist pattern in the source contact region and the substrate contact region of the NMOS according to this embodiment. The projection portion of the element region is covered with the Si_3N_4 film and required portions are left by the resist. The most critical factor is to form the heat oxide film having the thickness of 500 to 2,000 Å. As a result, the thickness of the field oxide film to be formed at the time of oxidizing the field can be arbitrary thickened (see FIG. 75).

Then, a resist pattern is used, so that BF_3^+ type and P-type impurity region (element separated region) **669** is formed. The impurity concentration is made about $1\text{E}14$ to $1\text{E}15$ cm^{-2} .

Then, the field is oxidized to realize a thickness of 2,000 to 8,000 Å.

Then, by using an HF type solution to perform etching slightly, and an H_3PO_5 type solution is used to peel off the Si_3N_4 film. Then, only the oxide film formed below the Si_3N_4 film is etched by using the HF type solution, and a gate oxide film having a thickness of 150 Å or less is formed (see FIG. 76).

Then, a polycrystal silicon is formed by the LP-CVD method. Then, by etching it back, the polycrystal silicon can be left on only the side wall of the columnar semiconductor layer.

Then, resist patterning is performed in accordance with the N-MOS or P-MOS to be formed, so that an N-type poly gate electrode is formed in a case of the NMOS or a P-type poly gate electrode is formed in a case of the PMOS simultaneously with forming of the source and drain.

Then, the gate polysilicon **665** is subject to the selection CVD method to form a low resistance material on only the

gate electrode **65**. According to this process, etching back is performed while omitting patterning of the gate electrode. As a result, the resistance can be reduced, the NMOS and the PMOS can be individually formed, the work function for the gate electrode can be selected, and the wiring of the circuit for the gate can be completed by the selfalignment manner (see FIG. 77).

Then, a heat oxide film having a thickness of 500 Å or less is formed, and a CVD method such as TEOS exhibiting excellent coating feasibility is performed, so that the insulating film between the layers is formed. Then, the oxide silicon is etched back, so that only the top surface of the columnar MOS is caused to appear outside. Then, opening for contact from the gate electrode, source and drain and the substrate is formed and wiring is arranged, so that the N-MOS Tr having the SGT structure is formed (see FIG. 78).

According to this embodiment, the N-MOS Tr is described. However, the P-MOS Tr can be formed by the similar process while considering the conduction type. Therefore, its description is omitted here.

The essential portion of this embodiment lies in that the field oxide film **664** is formed just below the gate electrode **665**. As a result, the capacity of the gate and source of the transistor can be reduced.

EMBODIMENT 2 (C)

Embodiment 2 (C) will now be described with reference to FIG. 79.

FIG. 79 illustrates this embodiment in which the present invention is applied to a memory having a MOS Tr+ zener diode. Referring to FIG. 79, the same elements as those according to Embodiment 1 (C) are given the same reference numerals and their descriptions are omitted here.

Referring to FIG. 79, reference numeral **670** represents a P⁺ region formed on the N-MOS Tr source region according to Embodiment 1 (C) and serving as an anode of the PN diode. Reference numeral **655** represents a source region of the N-MOS Tr source region and serving as a cathode of the PN diode.

FIG. 81 is a plan view which illustrates a pattern layout of this memory. Line Y—Y' shown in FIG. 79 corresponds to line Y—Y' shown in FIG. 81. Referring to FIG. 81, reference numerals **666**, **666'** and **666''** represent word lines and **657**, **657'** and **657''** represent bit lines.

Since the way of operation and storing method of the memory device according to the aforesaid embodiments are the same as those of the structure shown in FIG. 44 and therefore their descriptions are omitted here.

Since the thickness of the field oxide film **664** shown in FIG. 79 is made to be a thick film having a thickness of 2,000 to 8,000 Å according to this embodiment, the gate source capacity can be reduced and operation speed of the memory can be raised.

EMBODIMENT 3 (C)

Then, Embodiment 3 (C) according to the present invention will now be described.

FIG. 80 is a cross sectional view which illustrates the structure of this embodiment in which the pn junction of the memory portion according to Embodiment 2 (C) is placed by an insulating film. Also referring to FIG. 80, the same elements as those according to Embodiment 1 (C) shown in FIG. 72 are given the same reference numerals.

The memory according to this embodiment is arranged to utilize the breakage of the insulating film in place of the breakage of the pn junction according to Embodiment 2 (C).

According to this embodiment, reference numeral **655** represents a source region of the N-MOS, **657** represents an insulating film for the memory. The insulating film is a heat oxide film, or a CVD oxide film, or the like. The operation is the same as that according to Embodiment 2 (C) and also the pattern layout is the same as that shown in FIG. **81**. The operation method is the same as that shown in FIG. **8** and FIG. **55**.

Also according to this embodiment, the thickness of the field oxide film **664** shown in FIG. **80** is thickened to 2,000 to 8,000 Å. Therefore, the gate source capacity can be reduced and operation speed of the memory can be raised.

EMBODIMENT 1 (D)

Embodiment 1 (D) is an application of the present invention to the process of manufacturing the vertical n-type MOS transistor as shown in FIGS. **83A** and **83B**.

A p-type layer **7010** obtained by doping and diffusing a p-type layer in a p-type silicon substrate or an n-type silicon substrate is subjected to anisotropic etching by 1 μm or less while leaving a portion. As a result, a columnar silicon **7011** which includes the transistor will be built in is formed.

Then, heat oxidation by 50 Å is performed, so that a gate oxide film **7012** is formed. Then, the polysilicon is removed by the anisotropic etching until the polysilicon on the top surface of the columnar silicon is completely removed. As a result of this process, a gate polysilicon **7013** as a gate electrode surrounding the columnar silicon is formed.

Then, arsenic ions are injected by 5E15 (cm⁻²), and then heat treatment at 900° C. is performed for 20 minutes, so that n⁺ type source layer **7014** and n⁺ type drain layer **7015** in which ions are activated are formed (see FIG. **83A**).

Then, a manufacturing method according to the present invention is applied. That is, heat treatment at 850° C. is performed for about 10 minutes in a gas containing O₂, for example, a gas arranged to be H₂:O₂=2:3 (volume ratio) As a result, the oxide film formed on the n⁺ drain **7015** is thicken and also the surface of the gate polysilicon electrode **7013** is oxidized. Furthermore, a portion of the oxide film which surrounds the n⁺ source region **7014** and which is not covered with the polysilicon gate electrode **7013** is thickened. According to this embodiment, the thickness of the oxide film on the top surface of the columnar silicon **7011** becomes about 200 Å.

Then, a CVD oxide film is deposited by about 3000 Å on the entire surface so that an insulating film **7018** is formed. Then, a contact hole **7048** is formed and an Al electrode **7019** is formed, so that a structure shown in FIG. **83B** is formed.

According to Embodiment 1D of the present invention, the following improvements can be realized as compared with the conventional structure:

- (1) The voltage resistance between the gate and the source was improved to 20 to 30V from the conventional level of 5V.
- (2) The capacity between the gate and the source was reduced from 2.2 fF to 0.5 fF.
- (3) The deterioration in the yield due to an excessive leak current between the gate and the source can be significantly prevented.

EMBODIMENT 2 (D)

Embodiment 2 (D) is arranged in such a manner that the present invention is applied to the method of manufacturing

the vertical type MOS transistor in a way different from Embodiment 1 (D) as shown in FIGS. **83A** and **84**. The manufacturing processes to that shown in FIG. **83A** are the same as those according to Embodiment 1D. Then, processes to a state shown in FIG. **84** will now be described.

In a state shown in FIG. **83A**, a CVD silicon oxide film having a thickness of 3,500 Å is deposited. Then, anisotropic etching is performed by using a mixture gas composed of CF₄ and SF until the top surface of the columnar silicon appears. As a result, an oxide film **7030** is left in such a manner that it surrounds the polysilicon.

Then, the manufacturing method according to the present invention is applied. That is, heat treatment at 850° C. is performed in a gas arranged to be H₂:O₂=2:3 to oxidize the exposed surface of the silicon layer.

Then, the oxide film on the top surface of the columnar silicon is removed by a mixture gas composed of CH₄ and SF₆. According to this embodiment, the oxide film has a thickness of 200 Å. By etching thus performed, also the oxide film in the portion of the top surface of the n⁺ drain region **7015** which is not covered with the CVD SiO₂ **7030** is removed.

Furthermore, the gate oxide film **7031** adjacent to the top surface of the columnar silicon is thickened (to 230 Å or less).

Then, an Al electrode **7032** is formed, so that the source electrode is formed (see FIG. **84**).

The vertical type transistor according to this embodiment 1D caused the following improvements to be realized as compared with the conventional structure:

- (1) The voltage resistance between the gate and the source was improved to 15 to 20V from the conventional level of 5V.
- (2) The capacity between the gate and the source was reduced from 2.2 fF to 1.2 fF.
- (3) The defect of the element due to the leak between the source and the gate can be substantially eliminated.

Although the effects obtainable from this embodiment is not so significant as compared with those obtainable from Embodiment 1D, the necessity of performing patterning the contact hole and the etching process can be eliminated. Therefore, the area (the surface of the n⁺ silicon layer) for connecting the Al electrode and the n⁺ source layer can be reduced. In other words, the contact area between the Al electrode and the n⁺ silicon can be enlarged assuming that the columnar silicon has the same size, so that the contact resistance can be reduced.

EMBODIMENT 3 (D)

A manufacturing method according to Embodiment 3 (D) of the present invention will now be described with reference to FIGS. **83A** and **85**.

This embodiment is arranged in such a manner that the present invention is applied to a memory transistor of a junction breaking type memory element shown in FIG. **85**.

The processes from forming the structure shown in FIG. **83A** to the process in which the contact hole **7048** is formed are the same as Embodiment 1 (D).

According to this embodiment, the contact hole **7048** is formed, and then BF⁺ ions are injected by 1E16 (cm⁻²), so that a p⁺ type layer **7046** is formed.

Then, Al is deposited and is subjected to patterning, so that an Al electrode **7047** is formed (see FIG. **85**).

As a result of the application of the present invention, the following effects were obtained according to the present invention:

(1) The voltage resistance between the n⁺ gate or p⁺ gate and the source was improved to 20 to 30V from the conventional level of 5V.

(2) The leak current between the n⁺ gates or the p⁺ gates can be significantly prevented.

(3) The capacity between the n⁺ gates was reduced from 2.2 fF to 0.3 fF.

Although embodiments 1 (D) to 3 (D) were described about the NMOS, PMOS can be similarly manufactured by inverting the polarity of the electrode and the conduction type of the semiconductor. Furthermore, both the PMOS and the NMOS can be formed on the same substrate by performing proper patterning and masking. In addition, the memory cell according to Embodiment 3 (D) can be manufactured on the same substrate on which the PMOS and the NMOS are formed.

EMBODIMENT 1 (E)

FIG. 87 is a plan view which illustrates a CMOS inverter circuit formed by the columnar semiconductor according to an embodiment of the present invention. FIG. 88 is a cross sectional view taken along line X—X' of FIG. 87.

Referring to the drawings, reference numerals 814 and 815 represent MOSFET land, 829 represents a contact hole, 824 represents a gate electrode (wiring), and 827, 828, 830 and 831 represent Al wirings.

Reference numerals 816 and 820 represent an N-type source and drain regions, 817 and 821 represent P-type source and drain regions, 822 and 823 represent gate oxide films, 880 and 884 represent gate electrodes (gate polysilicon) and 818 and 819 represent channel stop regions serving as device separation regions.

Referring to the drawings, reference numeral 829 represents a contact hole with V_{out} to be ejected from the PMOS and NMOS according to the present invention. The contact hole 829 having a size 0.1 μm×0.2 μm is formed substantially perpendicular to columnar semiconductor lands (hereinafter called "lands") 814 and 815 each having a size 0.1 μm in width×0.3 μm. A sufficient alignment margin of 0.1 μm is made from the lands 814 and 815.

The CMOS inverter according to this embodiment and formed as described above was measured, resulting in that the base MOSFET land and the Al wiring were connected to each other satisfactorily. Therefore, a reliable contact was confirmed.

In order to make a comparison, the CMOS inverter was manufactured in such a manner that the longer side of the contact hole with the aforesaid land is placed in parallel to the longer side of the land, resulting in that a portion of the CMOS invertors could not be operated due to the deviation of the alignment.

A method of manufacturing the structure shown in FIGS. 87 and 88 according to this embodiment will now be described.

(Manufacturing Method)

The manufacturing method according to the present invention will now be described with reference to flow charts shown in FIGS. 89 to 96.

FIGS. 89 to 92 are cross sectional views which illustrate the process of manufacturing the NMOS according to this embodiment.

First, an N-type silicon substrate 810 having a specific resistance of 0.1 to 1 Ω·cm is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about 1,000 to 10,000 Å is formed.

Then, the oxide film formed on a portion on which the NMOS is formed is removed by etching and an oxide film having a thickness of about 100 to 500 Å is again formed (patterning process for P-well).

5 While using the oxide film having the thickness of 1,000 to 10,000 Å as a mask, a P-type impurity such as BF₂⁺ is ion-injected into a region in which the NMOS will be formed. The concentration of the impurity is 1E13 to 14 cm⁻².

10 Then, heat treatment at about 1,000 to 1,100° C. is performed, resulting in a PWL 21 having a diffusion depth of about 1.0 to 1.5 μm to be formed.

The oxide film is fully peeled off by using an HF type solution, and a heat oxide film having a thickness of 100 to 500 Å is formed. Then, a LP-CVD method is used to form an Si₃N₄ film 801 having a thickness of 500 to 2,000 Å.

15 Then, the element portion is formed by performing patterning in such a manner that the Si₃N₄ film 801 and the SiO₂ film 802 are removed by etching (a process of patterning for the active region).

Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si₃N₄ film 801 as the mask. The cross sectional shape of the Si substrate is changed by the etching gas and the pressure and the like. In order to make the shape perpendicular, a low pressure method is effective in general. However, it is in a trade-off relation with the selection ratio or the like. As the etching gas, a Cl₂ type gas is used and etching is performed under a pressure of about 1 Pa, so that a rectangular groove is formed (FIG. 89).

20 Then, the wafer is cleaned with an NH₃OH type solution, and a heat oxide film having a thickness of 300 Å or less is formed. This oxide film is again peeled off by an HF type solution. Then, a heat oxide film having a thickness of 50 to 300 Å is again formed, and then an Si₃N₄ film 801 having a thickness of 500 Å or less is formed by the LP-CVD method. The Si₃N₄ film 54 is etched back, so that only the Si₃N₄ film formed in the groove portion is removed (however, the Si₃N₄ film is left for the source/drain contact portion).

The etching back is performed by using a parallel and plate type etching device and a CF₄ type gas be used under pressure of a level of 1.8 Pa.

25 Then, a resist pattern is used, so that CF₂⁺ type and P-type high impurity concentration region (element separated region) 819 is formed. The impurity concentration is made about 1E14 to 1E15 cm⁻².

30 Then, the heat oxidation film 803 is formed in only the groove portion (see FIG. 90).

Then, by using an HF type solution to perform etching slightly, and an H₃PO₃ type solution is used to peel off the Si₃N₄ film 801.

35 Then, only the oxide film formed below the Si₃N₄ film is etched by using the HF type solution, and a gate oxide film having a thickness of 100 Å or less is formed. Then, a polycrystal silicon is formed by the LP-CVD method.

40 Then, by etching it back, the polycrystal silicon 880 can be left on only the side wall.

Then, resist patterning is performed, so that an N-type polysilicon gate electrode 880 is formed in a case of the NMOS simultaneously with forming of the source and drain regions 816 and 820.

45 Then, a selection CVD method is used to form a low resistance material 824 on only the gate electrodes 880 (see FIG. 5).

Then, heat oxidation is performed by 500 Å or less and the CVD such as TEOS exhibiting excellent coating feasibility is performed, so that an insulating film between layers is formed.

Then, this insulating film is etched back, so that only the top surface of the columnar MOS is allowed to appear outside.

Then, the insulating film is deposited and a process, which is an essential portion of the present invention and in which a contact hole **829** is formed in a direction perpendicular to the top surface of the columnar semiconductor layer. Furthermore, an opening for the electrode is formed from the gate and the substrate, and the wiring is arranged, so that the cell according to this embodiment is structured (see FIG. **92**).

FIGS. **93** to **96** are cross sectional views which illustrate the process of manufacturing the PMOSFET. Since the process is the same as the aforesaid process of manufacturing NMOSFET except for the conduction type of each semiconductor region and it can be manufactured similarly, its description is omitted here.

Therefore, the peripheral circuits can be formed by the CMOS structure.

EMBODIMENT 2 (E)

Embodiment 2 (E) of the present invention will now be described with reference to FIGS. **97** to **100**.

FIG. **97** is a circuit diagram for a junction breaking type memory device according to the present invention. FIG. **98** is a plan view which illustrates a memory cell portion of the junction breaking type memory device. FIGS. **99** and **100** respectively are cross section taken along line A—A' and B—B'.

Referring to the drawings, reference numeral **871** represents a gate wiring and a gate electrode, **872** represents bit lines, **873** represents a memory cell land and **874** represents a contact hole of the memory cell land **873** and the bit line **872**.

Also according to this embodiment, as shown in FIG. **98**, a sufficient margin from the bit line can be provided by forming the hole perpendicular to the land in a case where the contact is realized on the rectangular columnar semiconductor layer. Furthermore, the area of the contact hole can be reduced. For example, assuming that the width of the bit line is 0.33 μm, the size of the land is 0.1 × 0.3 μm and that of the contact hole is 0.1 × 0.2 μm, x becomes 0.1 μm, resulting in a yield of 100%.

EMBODIMENT 1 (F)

Embodiment 1 (F) of the present invention will now be described with reference to the drawings.

FIG. **108** illustrates a process in which an electrode material **114** is formed on projecting lands (hereinafter called "lands") **111** to **113** formed on the semiconductor wafer, and then the top surfaces of the lands are caused to appear by etching back.

Referring to FIG. **108A**, the lands **111** to **113** are formed, the electrode material **114** is supplied to the entire surface as shown in FIG. **108B**, and then etching back is performed to remove the electrode material **114** by a desired thickness in the direction of its thickness.

If normal etching back is performed, the electrode material **114** is separated from other regions as is shown in the land **113** shown in FIG. **108C**. In order to connect it to the

other regions, a photolithography process with a resist or the like is performed to subject the electrode material **114** to patterning in order to obtain a desired shape. However, if the thickness *h* of the electrode **114** is thin, a severe patterning accuracy (alignment accuracy) is required. Therefore, if the position of the resist **115** is slightly deviated as is shown in the land **113** shown in FIG. **108D**, a disconnection can be taken place.

Accordingly, as shown in FIG. **108**, a dummy land **111** regardless of the element function is formed adjacent to the land **112** which has the device function at a proper interval L_1 ($\leq 2h$). As a result, as can be seen from FIG. **108D**, patterning of the resist **115** is freed from the severe accuracy. That is, assuming that the horizontal length of the dummy land **111** is L_2 , the accuracy required for the alignment may be (L_1+L_2) as shown in a plan view FIG. **109**. Thus, the margin allowed by only L_1 can be increased by L_2 and therefore the risk of the disconnection or the like can be significantly reduced. Therefore, even if the electrode material **114** is used as the gate electrode of the SGT, this gate electrode material can be used as the gate wiring as it is. Furthermore, by using a plurality of dummy lands **111** or by using an elongated dummy land **111**, the lands **112** can be connected to each other by only the etching back method using no mask (see FIGS. **110** and **111**). If a hooked dummy land **111**, angled wiring can be arranged (see FIG. **112**). As described above, the shape of the dummy land **111** is not limited. The dummy land **111** corresponds to the columnar layer according to the present invention, while the land **112** corresponds to the columnar semiconductor layer according to the present invention.

FIG. **113** is a plan view which illustrates a CMOS inverter according to the present invention and FIG. **114** is a cross sectional view taken along line A—A' of FIG. **113**.

Referring to FIGS. **113** and **114**, reference numerals **911**, **912** and **913** represent dummy lands. Reference numeral **914** represents a land constituting a vertical type nMOSFET and **915** represents a land constituting a vertical pMOSFET. Reference numerals **916** and **920** respectively represent a source region and a drain region of the nMOSFET, **917** and **921** respectively represent a source region and a drain region of the PMOSFET, **918** and **919** represent channel stop layers, **922** and **923** represent gate oxide films and **924** represents a gate wiring also serving as a gate electrode. Reference numeral **929** represents a contact portion.

The gate wiring **924** is patterned by using masks **925** and **926** which respectively establishing alignment between the dummy land **911** and the FET land **914**, between the dummy lands **912**, **913** and FET lands **914** and **915**. The element **924** is used as the gate wiring as well as using it as the gate electrode. The mask **926** is matched by using the dummy lands **912** and **913**. That is, the alignment can be performed with an accuracy in a range of the size of the dummy land regardless of the total thickness of the polysilicon **980** serving as the gate electrode and the low resistance material **924**. Referring to FIGS. **113** and **114**, in the portion of the dummy land **912**, the end portion of the mask is positioned at an intermediate position of the distance from the nMOSFET **914**, while the end portion of the mask is positioned on the dummy land in the portion of the dummy land **913**.

If the dummy land is formed by the same method as that for forming the MOSFET land, the dummy land undesirably becomes a parasitic MOSFET. For example, if the dummy lands **911** to **913** shown in FIGS. **113** and **114** form the parasitic MOSFET, the equivalent circuit becomes as shown in FIG. **115**, causing a defect to take place in the operation

of the circuit. The generation of the parasitic MOS must be prevented. Accordingly, the overall body of the dummy land **111** is oxidized at the LOCOS process by the same process as that shown in FIG. **108** (see FIG. **116B**). Then, a process which is the same as that shown in FIG. **1** is performed, causing a state shown in FIGS. **116C** and **116D** to be realized. Therefore, the parasitic MOS is not formed and forming of the parasitic MOS can be prevented while maintaining the function as the dummy land.

It is necessary for at least the portion around the dummy land to be insulating material, preferably the overall body of the dummy land is made of insulating material. FIG. **114** illustrates an example in which the overall body of the dummy land is made of the insulating material. FIG. **117** illustrates an example in which the side surface of the dummy land is made of the insulating material. Referring to FIGS. **117**, the same elements as those shown in FIG. **114** are given the same reference numerals.

Then, a process for manufacturing the aforesaid semiconductor device will now be described.

(Manufacturing Example 1)

According to Manufacturing Example 1, a structure, in which the overall body of the dummy land is made of the insulating material, is formed.

FIGS. **118** to **121** illustrate a process of forming a pMOS portion. FIGS. **122** to **125** illustrate a process of forming the nMOS portion.

First, an N-type silicon substrate having a specific resistance of 0.1 to 1 $\Omega\cdot\text{cm}$ is subjected to a heat oxidation process, so that a heat oxidation film having a thickness of about 1,000 to 10,000 \AA is formed. Then, the oxide film formed on a portion on which the nMOS is formed is removed by etching and an oxide film having a thickness of about 100 to 500 \AA is again formed by the heat oxidation (patterning process for P-well). While using the oxide film having the thickness of 1,000 to 10,000 \AA as a mask, a P-type impurity such as BF_2^+ is ion-injected into a region in which the nMOS will be formed. The concentration of the impurity is $1\text{E}13$ to 14 cm^{-2} . Then, heat treatment at about 1,000 to 1,100° C. is performed, resulting in a diffusion depth of about 1.0 to 1.5 μm to be formed.

The oxide film is fully peeled off by using an HF type solution, and a heat oxide film having a thickness of 100 to 500 \AA is again formed. Then, a LP-CVD method is used to form an Si_3N_4 film having a thickness of about 500 to 2,000 \AA . Then, the element portion and the dummy land are formed by performing patterning in such a manner that the Si_3N_4 film and the SiO_2 film are removed by etching. Then, the resist film is peeled off, and then the Si substrate is subjected to etching while using the Si_3N_4 film as the mask. The cross sectional shape of the Si substrate is changed by the etching gas and the pressure and the like. In order to make the shape perpendicular, a low pressure method is effective in general. However, it is in a trade-off relation with the selection ratio or the like. As the etching gas, a Cl_2 type gas is used and etching is performed under a pressure of about 1 Pa, so that a rectangular groove is formed (FIG. **118**).

Then, the wafer is cleaned with an NH_4OH type solution, and a heat oxide film having a thickness of about 300 \AA is formed. This oxide film is again peeled off by an HF type solution. Then, a heat oxide film having a thickness of 50 to 300 \AA is again formed, and then an Si_3N_4 film having a thickness of about 500 \AA is formed by the LP-CVD method. The Si_3N_4 film is etched back, so that only the Si_3N_4 film formed in the groove portion is removed. The etching back

can be performed by using a parallel and plate type etching device and a CF_4 type gas can be used under pressure of a level of 1.8 Pa. Then, resist patterning is performed for the purpose of peeling off the Si_3N_4 film in the dummy land portion. Then, by using an HF type solution to perform etching slightly, and an H_3PO_5 type solution is used to peel off the Si_3N_4 film. Then, a resist pattern is used to form the BF_2^+ type p-type impurity region (element separation region) is formed. The concentration of the impurity is about $1\text{E}14$ to $1\text{E}15\text{ cm}^{-2}$. Then, a heat oxide film is formed in only the groove portion and the dummy land portion (FIG. **119**).

Then, by using an HF type solution to perform etching slightly, and an H_3PO_4 solution is used to peel off the Si_3N_4 film. Then, only the oxide film formed below the Si_3N_4 film is again etched by using the HF type solution, and a gate oxide film having a thickness of about 100 \AA is formed. Then, a polycrystal silicon is formed by the LP-CVD method. Then, by etching it back, the polycrystal silicon can be left on only the side wall. Then, resist patterning is performed, so that a P-type polysilicon gate electrode is formed simultaneously with forming of the source and the drain. Then, a selection CVD method is used to form a low resistance material on only the gate electrode (see FIG. **120**).

Then, etching back (etching of the entire surface) is performed. Then, head oxidation about 500 \AA is performed, and then a CVD such as TEOS (Tetraethylorthosilicate) exhibiting excellent coating feasibility is performed, so that an insulating film between layers is formed. Then, this insulating film is etched back, so that only the top surface of the columnar MOS is caused to appear outside. Then, opening for the electrode from the gate and the substrate is formed and wiring is formed, so that the cell structure according to this embodiment is realized (see FIG. **121**).

Although the pMOSFET is described, the nMOSFET can be manufactured similarly while considering the conduction type. Therefore, its description is omitted here. The process of forming the nMOS portion is shown in FIGS. **122** to **125** which correspond to FIGS. **118** to **121** which illustrate the process of forming the pMOS portion.

Therefore, the peripheral circuits can be manufactured by the MOS structure.

(Manufacturing Example 2)

This embodiment is arranged in such a manner that only the side surface of the dummy land is made of the insulating material.

FIGS. **126A** to **126D** illustrate a process of forming the dummy land in the nMOS portion. These drawings are extractions of portions corresponding to the dummy land portions shown in FIGS. **118** to **121**. According to this embodiment, the heat oxide film is formed in only the groove portion while leaving the Si_3N_4 film on the dummy land portion as shown in FIG. **126B**. Then, the Si_3N_4 film is removed, so that an insulating layer can be formed on only the surface of the dummy land. The residual portions are the same as those according to Manufacturing Example 1.

The process of forming the dummy land in the nMOS portion is arranged similarly.

(Manufacturing Example 3)

When a portion for taking the CMOS inverter V_{in} shown in FIG. **114** or **117** is manufactured, patterning of the gate wiring (common to the gate electrode) is performed by using a mask **925**. According to this embodiment, the end portion of the mask reaches an intermediate portion between the nMOS lands **914** and the dummy land **911** in the process of

matching the mask **925**. Then, contact with V_{in} can easily be established on the gate wiring **924** extending toward the dummy land.

According to Manufacturing Examples 1 and 3, a CMOS using a reliable gate wiring and all of circuits included in a width of $0.33\ \mu\text{m}$ could be formed. The size of the columnar semiconductor layer was $0.1\ \mu\text{m}\times 0.3\ \mu\text{m}$, that of the dummy land was $0.1\ \mu\text{m}\times 0.1\ \mu\text{m}$ and the total thickness of the gate electrode was $1150\ \text{\AA}$. Furthermore, since the aforesaid dummy land is fully formed by the insulating material, the circuit operation could not be hindered.

FIG. **127** is a plan view which illustrates a CMOS manufactured by forming the gate electrode wiring while using a common V_{in} for the pMOS and nMOS positioned away from each other. Reference **981** represents a pMOS, **982** represents an nMOS, **983** represents a dummy land, **984** represents a dummy electrode wiring and **985** represents a contact portion.

The CMOS is manufactured by a method similarly to that according to Manufacturing Example 1. However, according to this embodiment, the gate electrode material **984** is deposited, and the entire surface is etched by the etching back method by using no mask.

According to this method, the CMOS is manufactured by using a 5" inch wafer and the contact hole **985** is formed to reach the dummy land **983**, so that the Al electrode is formed. It was measured, resulting in no disconnection to be found over the surface of the 5" wafer. The size of the SGT was $0.1\ \mu\text{m}\times 0.1\ \mu\text{m}$ and the thickness of the gate electrode was $0.1\ \mu\text{m}$. A satisfactory large size of the Al contact hole $0.25\ \mu\text{m}\times 0.25\ \mu\text{m}$ was obtained.

According to the present invention, the SGT exhibiting excellent driving performance is used as the addressing transistor of the memory cell and a junction, which can be electrically broken, is used as the memory element of the memory cell. As a result, the writing and reading operations can be performed at high speed. Furthermore, the main electrode region of the SGT and the insulating film of the memory element are stacked on each other, so that a memory cell the size of which can be minimized is obtained. In addition, in the aforesaid structure, the wiring can be disposed in the separation portion for separating the elements of the memory cell, so that a highly integrated semiconductor device can be obtained.

According to the present invention, the SGT exhibiting excellent driving performance is used as the addressing transistor of the memory cell and a junction, which can be electrically broken, is used as the memory element of the memory cell. As a result, the writing and reading operations can be performed at high speed. Furthermore, the main electrode region of the SGT and the insulating film of the memory element are stacked on each other, so that a memory cell the size of which can be minimized is obtained. In addition, in the aforesaid structure, the wiring can be disposed in the separation portion for separating the elements of the memory cell, so that a highly integrated semiconductor device can be obtained.

Furthermore, the SGT cell is formed into a cylindrical shape, so that a region in which the thickness of the oxide film is locally reduced can be eliminated and thereby the concentration of the electric field can be relieved.

As a result, the voltage resistance of the oxide film can be improved and a reliable semiconductor device can be realized.

As described above, according to the present invention, the surrounding gate type semiconductor device having the

gate insulating film and the gate electrode around the columnar semiconductor layer formed on the substrate is arranged in such a manner that an oxide film which is thicker than the gate insulating film formed around the columnar semiconductor layer is formed just below the aforesaid gate electrode. The gate source capacity can be reduced, the switching characteristics of the transistor can be improved and the operation speed of the transistor and that of the memory can be raised.

According to the present invention, the following effects can be obtained in manufacturing the vertical type MOS transistor:

1. The voltage resistance between the source and the gate can be improved. That is, the source electrode and the gate electrode are assuredly separated from each other by the oxide film which is sufficiently thicker than the gate oxide film, so that the breakdown voltage resistance between the source and the gate is improved.

2. The breakdown voltage resistance between the source and the gate can be improved. That is, the drain electrode and the gate electrode are assuredly separated from each other by the oxide film which is sufficiently thicker than the gate oxide film, so that the breakdown voltage resistance between the drain and the gate is improved.

3. The leak current between the source and the gate can be reduced. That is, although the gate oxide film formed adjacent to the source electrode can be easily damaged at the time of injecting ions into the source, the leak current which can be generated in the oxide film can be reduced by thickening the oxide film to be formed between the source and the gate.

4. The alignment margin at the time of the manufacturing process can be enlarged.

5. The parasitic capacity between the source and the gate can be reduced and thereby the switching operation speed can be raised.

According to the present invention, the rectangular or the rectangular-like contact hole is formed substantially in such a manner that its longer side is perpendicular to the rectangular or the rectangular-like member which is the subject of the contact. As a result, even if the short side of the member which is the subject of the contact is very short, the contact can be easily and assuredly established.

As a result, the yield can be improved and a problem taken place in that the semiconductor device cannot be operated due to the deviation of the alignment can be prevented.

Furthermore, the alignment margin can be satisfactorily enlarged and the area of the contact hole can be reduced.

That is, according to the present invention, contact can be easily established in a fine region while maintaining a desired margin. In particular, a significantly effect can be obtained in a case where contact is established in a fine region having a large aspect ratio and a narrow width.

As described above, according to the present invention, one or more columnar layers, which do not constitute a circuit, are located at arbitrary positions different from the positions of the one or more columnar semiconductor layers in addition to these columnar semiconductors. Therefore, the ejecting wiring from the periphery portion of the columnar semiconductor layer for use at the time of etching the layer formed on the aforesaid columnar semiconductor layer by the etching back method can be significantly improved. As a result, a very fine device can be manufactured, causing a significant effect to be obtained when the surrounding gate type MOSFET is manufactured.

In addition, the aforesaid columnar layer is arranged in such a manner that its surface is made of an insulating film. Therefore, the generation of the parasitic capacity or the like which adversely effects upon the circuit characteristics can be prevented.

Although the invention has been described in its preferred form with a certain degree of particularity, it is understood that the present disclosure of the preferred form has been changed in the details of construction and the combination and arrangement of parts may be resorted to without departing from the spirit and the scope of the invention as hereinafter claimed.

What is claimed is:

1. A process for producing a semiconductor device, comprising the steps of:

forming a plurality of island regions at a surface of a semiconductor substrate, with a respective recessed portion between each two adjacent ones of the island regions;

forming a gate electrode and a gate insulating film at the side surface of each of the plurality of island regions, the gate electrode being spaced from the island region by the gate insulating film;

forming a field insulating film, which is thicker than the gate insulating film, at the bottom surface of one of the recessed portions;

forming a respective two transistor-component regions, each having a first conductivity type, above and under the gate electrode for each of the plurality of island regions, one said region for each island region being a source and one being a drain; and

providing a semiconductor region, having a conductivity type different from the first conductivity type, under the field insulating film at the bottom surface of each recessed portion and extending below the transistor-component region formed under the gate insulating film, the semiconductor region laterally separating that transistor-component region, which constitutes a source or drain of a first transistor corresponding to one of the plurality of island regions, from a neighboring one of the transistor-component regions, which constitutes a source or drain of a second transistor corresponding to another of the plurality of island regions.

2. The process according to claim 1, wherein the transistor-component region positioned below the gate elec-

trode is disposed directly below and extending laterally outward from its respective island region.

3. The process according to claim 1, wherein the transistor-component region positioned below the gate electrode comprises two regions spaced apart laterally from each other.

4. A process for producing a semiconductor device, comprising the steps of:

forming a plurality of island regions at a surface of a semiconductor substrate, with a respective recessed portion between each two adjacent ones of the island regions;

forming a gate electrode and a gate insulating film at the side surface of each of the plurality of island regions, the gate electrode being spaced from the island region by the gate insulating film;

forming a field insulating film, which is thicker than the gate insulating film, at the bottom surface of one of the recessed portions;

forming an upper doped region and a lower doped region, each having a first conductivity type, above and under the gate electrode for each of the plurality of island regions; and

providing a semiconductor region, having a conductivity type different from the first conductivity type, under the field insulating film at the bottom surface of each recessed portion extending between and below the lower doped region formed under the gate insulating film and the lower doped region of a neighboring one of the island regions to separate those two lower doped regions laterally, one of those two lower doped regions constituting a source or drain of a first transistor corresponding to one of the plurality of island regions, and the other of those two lower doped regions forming a source or drain of a second transistor corresponding to the neighboring island regions.

5. The process according to claim 4, wherein the lower doped region positioned below the gate electrode is disposed directly below and extending laterally outward from its respective island region.

6. The process according to claim 4, wherein the lower doped region positioned below the gate electrode comprises two regions spaced apart laterally from each other.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 1 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

IN THE DRAWINGS

Sheet 108, FIG. 121, "ELECTROE" should read
--ELECTRODE--.

COLUMN 1

Line 35, "cross-sectional" should read
--cross sectional--;
Line 59, "290" should read --209-- and
"represent" should read --represents--; and
Line 64, "arises" should read --raises.

COLUMN 2

Line 4, "to fining" should read --in fining--;
Line 17, "current are" should read
--current, which are--;
Line 60, "characteristics" should read
--characteristics are--; and
Line 64, "by only" should read --only by--.

COLUMN 3

Line 43, "correspond" should read --corresponding--;
Line 44, "floating" should read --floating gate--;
Line 45, "arises" should read --arise--; and
Line 46, "stored-permanently" should read
--stored permanently--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 2 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 4

Line 4, "an vertical" should read --a vertical--;
Line 30, "correspond" should read --corresponding--;
Line 33, "floating" should read --floating gate--;
Line 34, "arises" should read --arise--; and
Line 56, "an wedge" should read --a wedge--.

COLUMN 5

Line 9, "a" should read --an--;
Line 36, "monocrytal" should read --monocrystal--; and
Line 39, "arises" should read --arise--.

COLUMN 6

Line 51, "be" should be deleted.

COLUMN 8

Line 27, "11A" should read --10A--.

COLUMN 10

Line 37, "illustrates" should read --illustrates a--.

COLUMN 12

Line 12, "land" should read --island--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 3 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 13

Line 12, "thicken." should read --thickened.--.

COLUMN 15

Line 12, "as well as it must" should read
--must also--.

COLUMN 17

Line 47, "that" should be deleted; and
Line 64, "layers. As a result, a" should read
--layers, a--,

COLUMN 18

Line 15, "10012"" should read --1002"--; and
Line 48, "bet line" should read --bit line--.

COLUMN 19

Line 27, "the-writing" should read --the writing--;
Line 52, "switch," should read --switch;--
Line 64, "the state in which" should be deleted and
"ben" should read --been--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 4 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 21

Line 15, "film-formed" should read --film formed--; and
Line 67, "until" should read --to the step at--.

COLUMN 24

Line 19, "realize a" should read --realize--;
Line 43, "1001'" (second occurrence) should read
--1001"--;
Line 56, "also SGT is" should read --SGT is also--; and
Line 59, "a-memory" should read --a memory--.

COLUMN 25

Line 14, "P-layer" should read --P-type layer--;
Line 35, "tially" should read --tial--;
Line 38, "Then, the" should read --The--;
Line 41, "bet line" should read --bit line--; and
Line 57, "from" should read --by--.

COLUMN 26

Line 52, "ben" should read --been--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115
DATED : June 29, 1999
INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 5 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 27

Line 37, "relationship" (second occurrence) should be deleted; and

Lines 52-55, close up margins.

COLUMN 29

Line 57, "car be" should read --can be--; and

Line 66, "gate-mainly" should read --gate mainly--.

COLUMN 30

Line 34, "10012" should read --1002"--;

Line 36, "2003," should read --1003,-- and

"1003'" (second occurrence) should read --1003"--; and

Line 63, "Then, the" should read --The--.

COLUMN 31

Line 25, "exists" should read --that exists--; and

Line 45, "Then, the" should read --The--.

COLUMN 32

Line 6, "switch," should read --switch;--

Line 18, "ben" should read --been--; and

Line 34, "of-the" should read --of the--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115
DATED : June 29, 1999
INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 6 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 33

Line 26, "back be" should read --back is--;
Line 27, "be used" should read --is used--;
Line 39, "and" should be deleted;
Line 50, "drain" should read --draining--;
Line 57, "emitting" should read --omitting--.

COLUMN 34

Line 58, "MNOSSGT" should read --NMOSSGT--.

COLUMN 35

Line 18, "elements" should read --element--;
Line 29, "numeral" should read --numerals--;
Line 52, "a cylindrical" should read --cylindrical--;
and
Line 54, "into to the" should read --into the--.

COLUMN 36

Line 13, "layers. As a result, a" should read
--layers, a--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 7 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 37

Line 35, "Si₃N₄. film" should read --Si₃N₄ film--;
Line 42, "arbitrary" should read --arbitrarily--;
Line 43, "thicken" should read --thickened--;
Line 48, "filed is" should read --film is--;
Line 51, "and an" should read --an--; and
Line 58, "on on" should read --on--.

COLUMN 38

Line 48, "44 and" should read --44,--.

COLUMN 39

Line 23, "will" should read --that will--;
Line 36, "10" -- not boldface;
Line 37, "ratio)" should read --ratio).--; and
Line 39, "thicken" should read --thickened--.

COLUMN 40

Line 4, "Then, pro-" should read --pro- --; and
Line 40, "patterning" should read --patterning of--.

COLUMN 43

Line 33, "section" should read --sections--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115

DATED : June 29, 1999

INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 8 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 44

Line 48, "establishing" should read --establish--; and
Line 51, "using it as" should be deleted.

COLUMN 45

Line 11, "material," should read --material;--.

COLUMN 46

Line 3, "pattering" should read --patterning--:
Line 6, "and an" should read --an--;
Line 9, "is formed" should be deleted; and
Line 14, "and an" should read --an--.

COLUMN 47

Line 19, "similarly" should read --similar--; and
Line 25, "inch" should be deleted.

COLUMN 48

Line 29, "car;" should read --can--; and
Line 53, "significantly" should read --significant--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 5,918,115
DATED : June 29, 1999
INVENTOR(S) : SHIN KIKUCHI, ET AL.

Page 9 of 9

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

COLUMN 49

Line 28, "a respective two" should read --two
respective--.

Signed and Sealed this
Fifteenth Day of August, 2000

Attest:



Q. TODD DICKINSON

Attesting Officer

Director of Patents and Trademarks