




(86) Date de dépôt PCT/PCT Filing Date: 1991/12/13  
 (87) Date publication PCT/PCT Publication Date: 1992/06/25  
 (45) Date de délivrance/Issue Date: 2003/04/08  
 (85) Entrée phase nationale/National Entry: 1993/06/08  
 (86) N° demande PCT/PCT Application No.: US 1991/009345  
 (87) N° publication PCT/PCT Publication No.: 1992/010146  
 (30) Priorité/Priority: 1990/12/13 (626,976) US

(51) Cl.Int.<sup>5</sup>/Int.Cl.<sup>5</sup> A61C 17/32, A46B 13/04, A61C 15/00  
 (72) Inventeurs/Inventors:  
 GIULIANI, DAVID, US;  
 MARTIN, ROY W., US  
 (73) Propriétaire/Owner:  
 OPTIVA CORPORATION, US  
 (74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : BROSSE A DENTS DISTRIBUTRICE DE DENTIFRICE OU DE MEDICAMENT  
 (54) Title: DENTIFRICE-MEDICATION DISPENSING TOOTHBRUSH

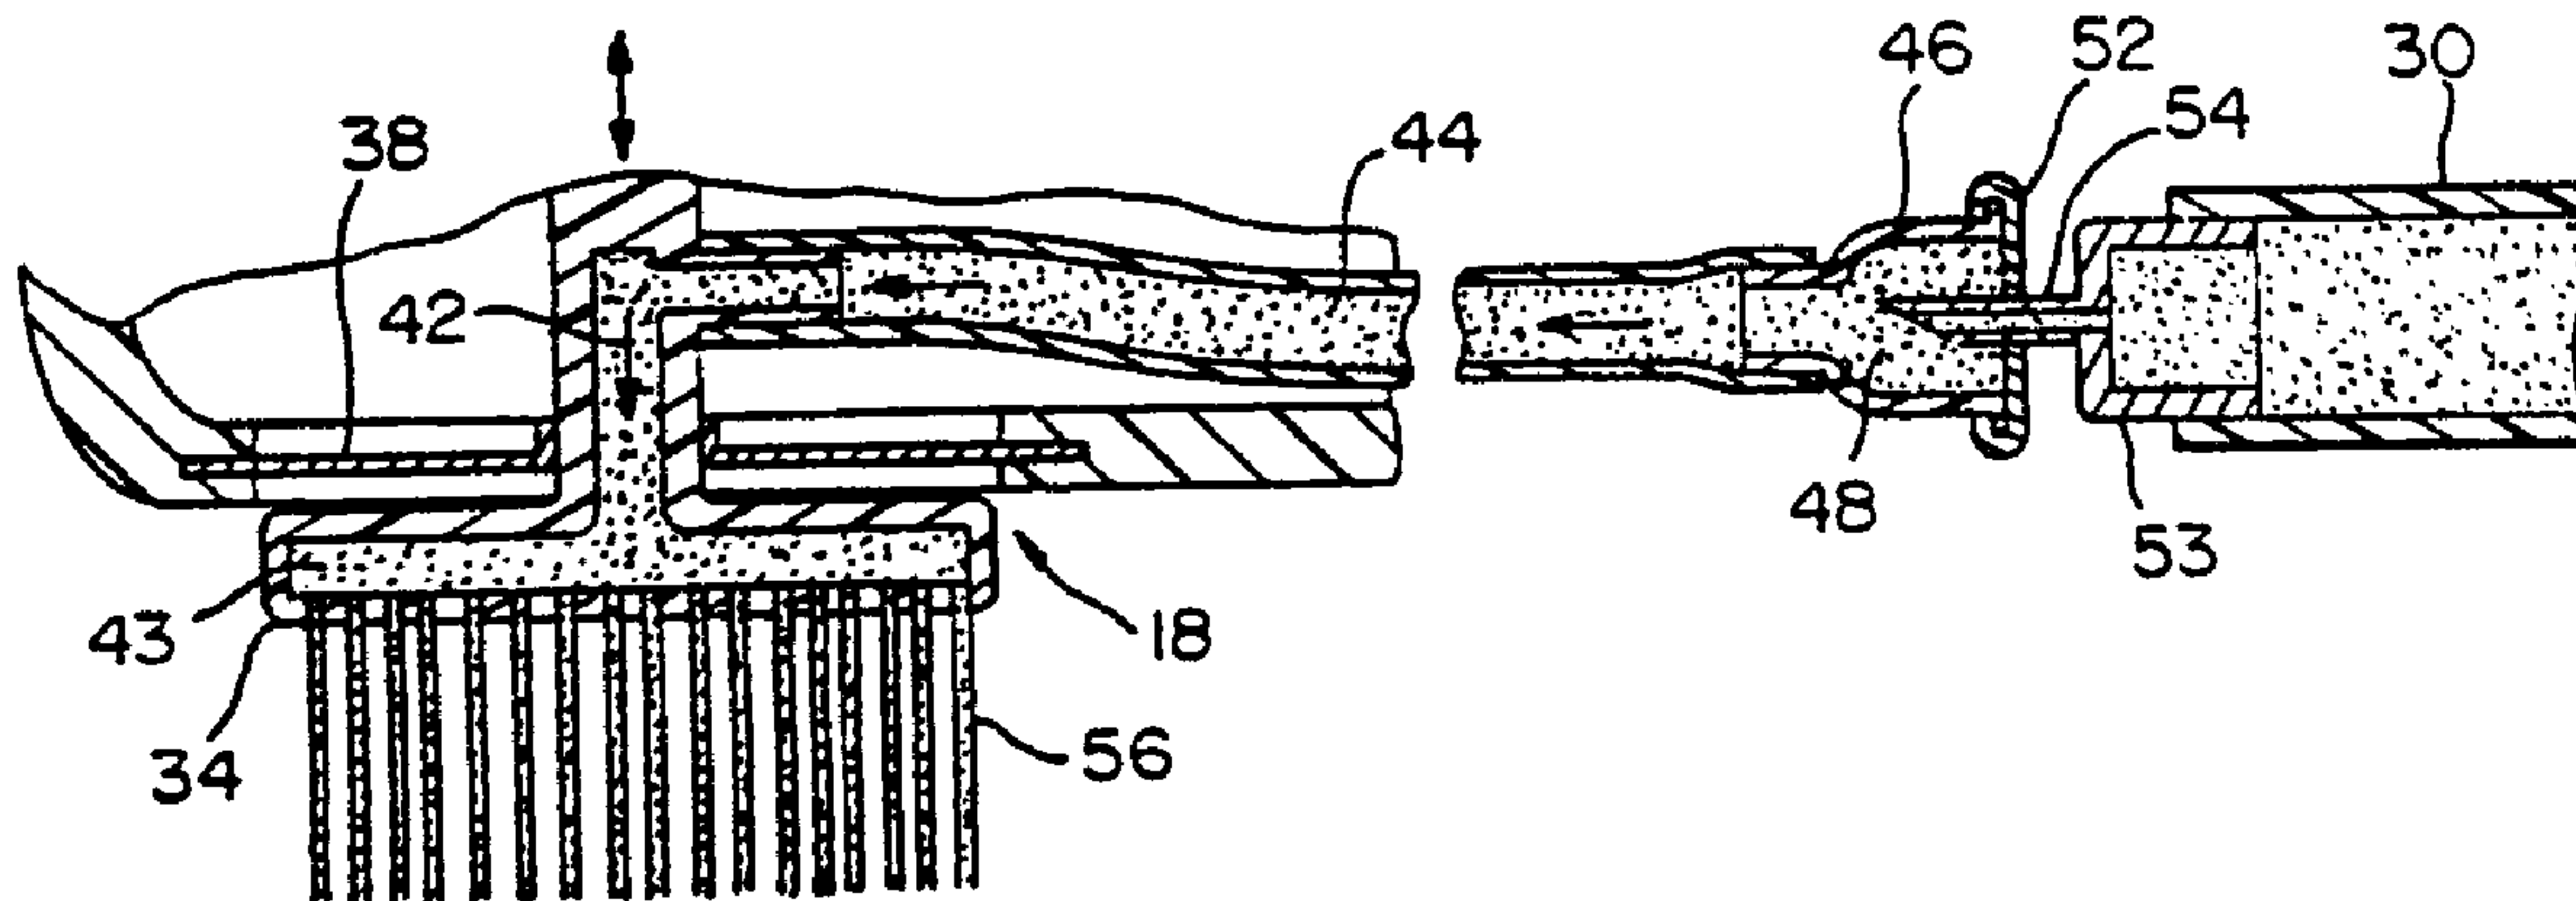


(57) Abrégé/Abstract:

A vibrating toothbrush which includes a brushhead (18) mounted for vibrating movement, a reservoir (30) for containing dentifrice which is located in the handle (14) of the toothbrush, and fluid connecting means (32) connecting the reservoir (30) to the brushhead (18). The brushhead (18) includes either hollow bristles (80) or nozzles (87) in the brushhead (18) to permit egress of the dentifrice from the brushhead (18) in the area of the bristles. The brushhead (18) is driven so as to provide a scrubbing action for the teeth and to provide acoustical energy for acoustical cleansing as well. The action of the brushhead (18) and the load thereon will result in dentifrice being released out of the brushhead (18) or bristles (80) as needed, supporting cavitation and streaming for the acoustical energy, as well as providing the cleansing/therapeutic effect of the dentifrice.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification<sup>5</sup> :</b> <b>A61C 15/00</b> <b>2097505</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 92/10146</b> <b>(43) International Publication Date:</b> 25 June 1992 (25.06.92)
<b>(21) International Application Number:</b> PCT/US91/09345 <b>(22) International Filing Date:</b> 13 December 1991 (13.12.91) <b>(30) Priority data:</b> 626,976      13 December 1990 (13.12.90)      US <b>(71) Applicant:</b> GEMTECH, INC. [US/US]; 2448 - 76th Avenue Southeast, #103, Mercer Island, WA 98040 (US). <b>(72) Inventors:</b> GIULIANI, David ; 8415 Benotho Place, Mercer Island, WA 98040 (US). MARTIN, Roy, W. ; 3312 - 181st Place Northeast, Redmond, WA 98052 (US). <b>(74) Agent:</b> PUNTIGAM, Clark, A.; 2033 - 6th Avenue, Suite 1020, Seattle, WA 98121 (US).	<b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).  <b>Published</b> <i>With international search report.</i> <i>With amended claims.</i>	

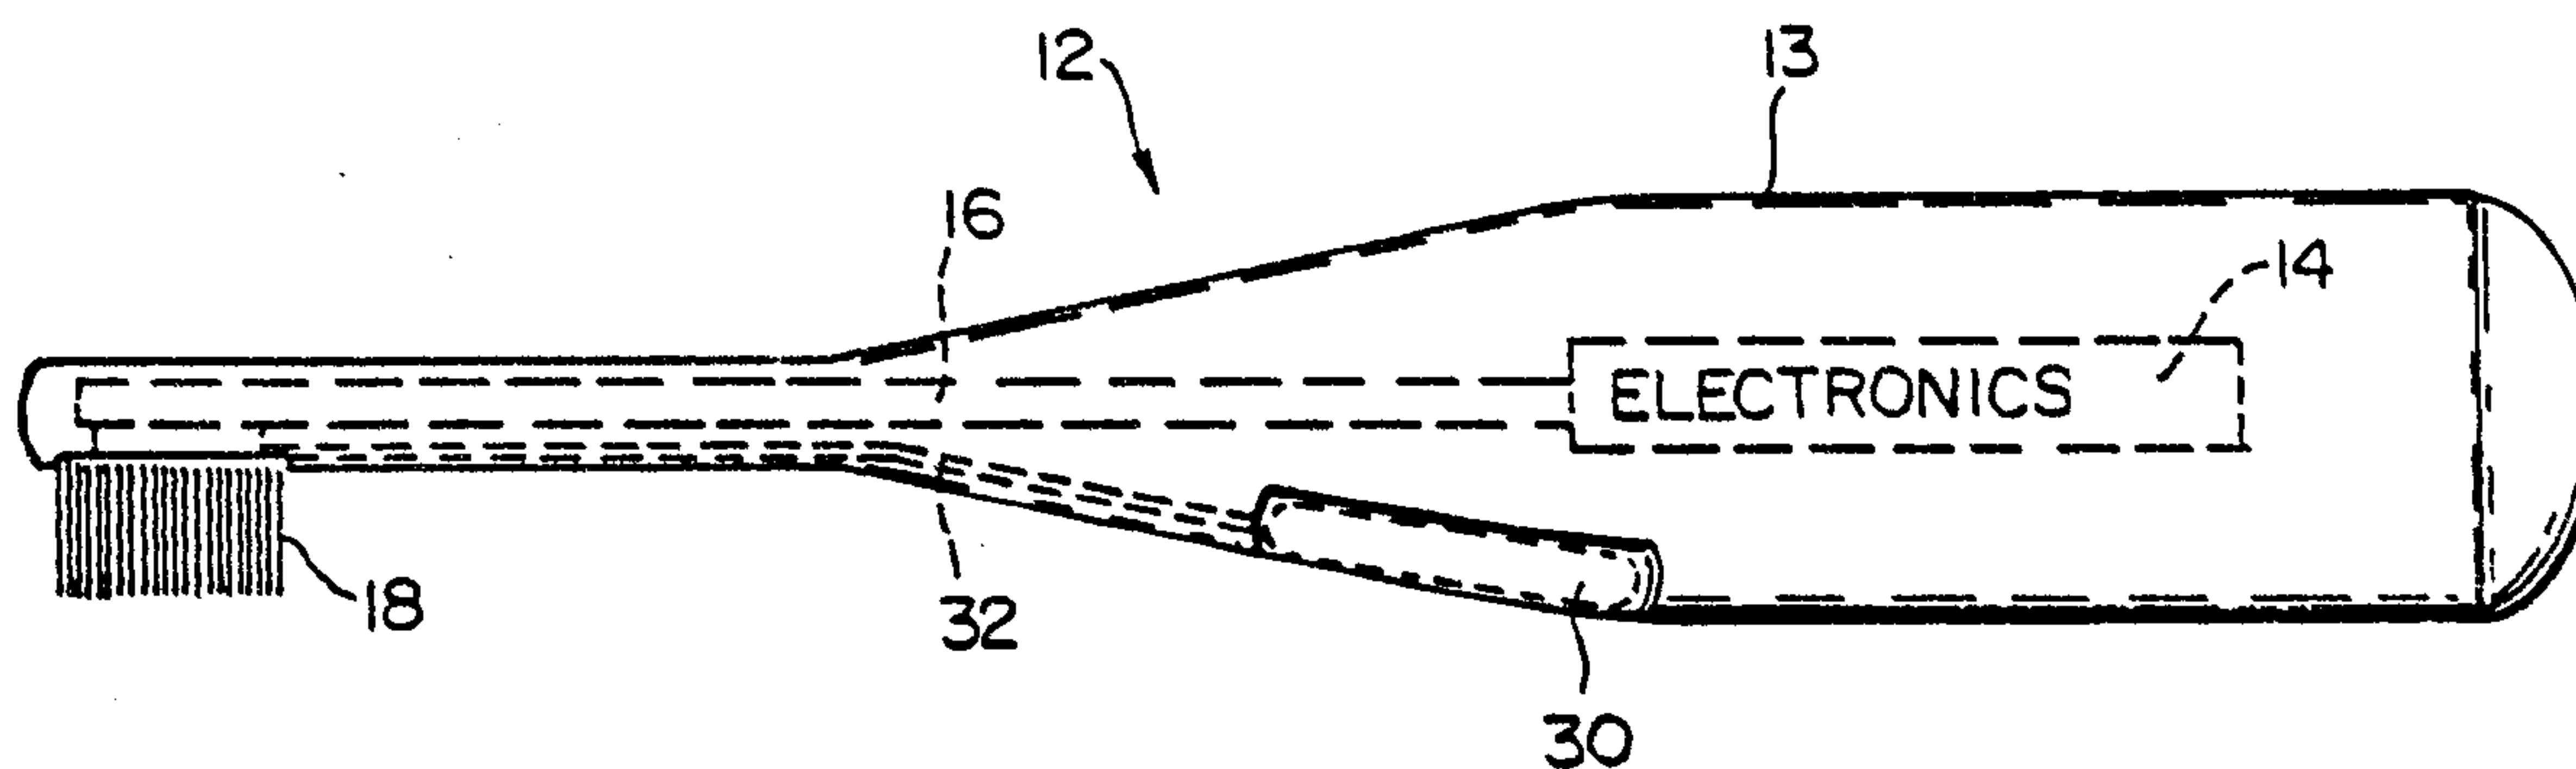**(54) Title: DENTIFRICE-MEDICATION DISPENSING TOOTHBRUSH****(57) Abstract**

A vibrating toothbrush which includes a brushhead (18) mounted for vibrating movement, a reservoir (30) for containing dentifrice which is located in the handle (14) of the toothbrush, and fluid connecting means (32) connecting the reservoir (30) to the brushhead (18). The brushhead (18) includes either hollow bristles (80) or nozzles (87) in the brushhead (18) to permit egress of the dentifrice from the brushhead (18) in the area of the bristles. The brushhead (18) is driven so as to provide a scrubbing action for the teeth and to provide acoustical energy for acoustical cleansing as well. The action of the brushhead (18) and the load thereon will result in dentifrice being released out of the brushhead (18) or bristles (80) as needed, supporting cavitation and streaming for the acoustical energy, as well as providing the cleansing/therapeutic effect of the dentifrice.

Description

5

DENTIFRICE/MEDICATION DISPENSING TOOTHBRUSHTechnical Field

10 This invention relates generally to dental hygiene devices and more specifically concerns a dentifrice/medication dispensing vibrating toothbrush.

Background Art

15 It is well-known that periodontal disease affects a significant portion of the population. It is also well-established that periodontal disease is primarily caused by complex aggregates of microorganisms, primarily bacteria, in the crevice regions between the teeth and the teeth and the gums.  
20 These aggregates are commonly referred to as dental plaque.

While brushing with conventional toothbrushes and flossing are currently the standard methods of removing, disrupting and dispersing dental plaque, such  
25 techniques have proven to be at best only partially effective, as indicated by the widespread incidence of periodontal disease in the population.

U. S. Patent No. 4,787,847 is illustrative of a new development in toothbrushes which shows promise in  
30 reducing periodontal disease when used regularly. The device utilizes a transducer to produce vibrations in a brushhead, which results in mild cavitation being produced in the gingival (between teeth and gums) fluids in the mouth. This tends to remove the subgingival  
35 plaque and to demobilize motile bacteria therein.

However, the device relies on the presence of saliva and toothpaste foam as the medium through which the acoustical energy is conducted and in which



cavitation occurs. For many users of the device, this may not be sufficient, especially for the upper teeth. There is no means included in the device for supplying fluid to assure an adequate medium.

5           In another line of development, medications are known which are capable of inhibiting or killing bacteria responsible for periodontal disease, and the use of such medications has been promoted to the public for such a purpose. Such medications may be used in  
10 toothpaste, mouthwash, or solutions applied to the areas of interest. However, such medications are typically expensive when used on a daily basis, have been found to stain teeth in some cases with prolonged use, and in other cases, such as when they are in a mouthwash, are  
15 only marginally effective. Applying medication with brushing is convenient for the user and results in the treated area simultaneously undergoing cleaning and the application of medication. However, medication is typically not carefully applied in controlled amounts  
20 during brushing. There currently is no convenient way of assuring the application of only therapeutic amounts, so as to prevent waste of the medication, while still being fully effective.

          In still another independent line of  
25 development in dentistry relating specifically to toothbrushes and toothpaste, it is known to include structure for dispensing a dentifrice in an otherwise conventional toothbrush. In one approach, the toothbrush includes an attachment which dispenses  
30 toothpaste in some manner onto the tips of the bristles. Typically, these devices include a reservoir for storing the dentifrice and a means for pumping out the dentifrice from the reservoir onto the tips of the bristles. Examples of this approach include U.S. Patent  
35 No. 4,787,765 and U.S. Patent No. 4,695,177, both to Kuo. In another approach, dentifrice is dispensed to the base of the toothbrush bristles. U.S. Patent No.

**SUBSTITUTE SHEET**

4,221,492 to Boscardin et al is an example of this approach, as is U.S. Patent No. 4,655,627 to Bradley, which also discloses a self-sealing reservoir.

U. S. Patent No. 4,039,261 to Evans shows a  
5 still further approach, involving hollow bristles, in which the dentifrice is moved into the bristles at the base thereof and then is moved through the bristles under pressure to the tips. However, the bristles are  
oversize and do not provide the typical brushing action  
10 for the teeth. Also, there is no provision of a cap or similar element to prevent leakage and/or drying of the dentifrice.

The above-described dentifrice-dispensing toothbrushes, however, have several disadvantages. They  
15 typically include complicated mechanisms for supplying the dentifrice to the brushes, resulting in inconvenient overall size of the toothbrush, high cost, and reliability problems. Those devices which use pastes have the additional problems of clogging and the  
20 formation of hard, cake-like deposits, which prevent reliable flow of the paste when needed. None of these devices supply fluid at a controlled rate which is needed to assure a proper acoustical effect for a vibrating toothbrush, as described above. Further, the  
25 lack of fluid control makes such devices unsuitable for use as applicators of therapeutic (medication) agents.

#### Disclosure of the Invention

Accordingly, the present invention is a  
30 toothbrush having a dentifrice dispensing capability, which includes a toothbrush assembly which includes a toothbrush body, a brushhead in the vicinity of one end of the body having bristles extending therefrom, means for supporting said brushhead for vibrating movement and  
35 means for driving said brushhead such that it vibrates. The toothbrush further includes a reservoir for dentifrice, means permitting release of dentifrice from



the brushhead and means connecting said reservoir to  
said release means, wherein said release means is  
configured and arranged such that in operation of said  
brushhead dentifrice is discharged from the reservoir  
5 through the release means.

#### Brief Description of the Drawings

Figure 1 is a simple schematic diagram of one  
embodiment of the dentifrice-dispensing toothbrush of  
10 the present invention.

Figure 2 is a diagram showing the general  
electrical structure of a vibrating toothbrush.

Figure 3 is a cross-sectional diagram of the  
embodiment of Figure 1.

15 Figure 4 is a simple schematic diagram of  
another embodiment of the dentifrice-dispensing  
toothbrush of the present invention.

Figure 5 is a cross-sectional diagram of the  
embodiment of Figure 4.

20 Figure 6 is a cross-sectional diagram showing  
an alternative embodiment of one portion of the  
structure of Figure 5.

Figure 7 is a cross-sectional diagram showing  
one embodiment of the dentifrice reservoir portion of  
25 the toothbrush of the present invention.

Figure 8 is a cross-sectional diagram showing  
a variation of the reservoir embodiment of Figure 7.

#### Best Mode for Carrying Out the Invention

30 Figure 1 shows a simplified schematic diagram  
of one embodiment of the present invention, while Figure  
2 shows the general electrical structure of an  
electromechanical vibrating toothbrush. The present  
invention is thus illustrated and described in the  
35 context of a particular toothbrush configuration, i.e.  
the vibrating toothbrush shown in Figure 2, but it  
should be understood that the present invention can be

used in other toothbrushes in which the brushhead is vibrated in some manner.

Referring specifically to Figures 1 and 2, the vibrating toothbrush includes a body 12 which contains drive electronics 14 located in a handle portion 13 and a transducer 16, at the far end of which is positioned a brushhead 18, which extends out from the toothbrush body 12. The brushhead 18 is mounted for vibrating, i.e. up/down or side to side, movement relative to the body 12. The drive electronics 14 comprises basically a DC power supply 20, an oscillator 22, an amplifier 24 and a transformer 26. The output of the transformer acts on a piezoelectric bimorph transducer to produce the movement of the brushhead. The toothbrush structure shown generally in Figure 2 is explained in more detail in U.S. Patent No. 4,787,847, which is referred to briefly above.

Figure 1 shows, in the body 12 of the toothbrush, a dentifrice reservoir 30 located in handle portion 13, and a connecting tube element 32 which provides fluid communication between reservoir 30 and brushhead 18. Figure 3 shows the embodiment of Figure 1 in more detail. A section of body 12 is shown, as well as the brushhead 18, which is supported within an opening at the end of the body 12 by an isolating membrane 38. Within the brushhead 18 is a channel 42 and a small chamber 43. A tube 44 is connected to channel 42 in the brushhead 18 and extends in body 12 toward handle 13. Tube 44 connects with one end of a bell-shaped casing 46, which has an internal chamber 48. At the other end of casing 46 is a membrane 52. Extending from chamber 48 through membrane 52 and outwardly therefrom is a narrow tube 54 which extends into a cap 53 at the front end of the dentifrice reservoir 30. Such an arrangement permits replacement of the reservoir 30 without introducing air into the



other portions of the dentifrice delivery system.

The reservoir 30 is preferably made in the form of a collapsible membrane in order to allow fluid to move from the reservoir without creating a vacuum therein. The collapsible membrane reservoir 30 could, for instance, be a thin wall heat-sealed pouch of vinyl or polyurethane with a tube or rubber o-ring seal. Such a reservoir can be filled, sealed and supplied in a foil wrapped outer pouch to protect any solvents, e.g. alcohol, or oxygen for a gas-releasing dentifrice. The user will remove the membrane reservoir from its outer pouch, attach it to the casing 46 and then prime the system by pushing in on the membrane until dentifrice appears at the bristles. As an alternative to a collapsible membrane, the reservoir 30 could include an air vent.

An alternate embodiment for the reservoir is shown in Figure 7. In this embodiment, reservoir 37 is positioned within the body of the toothbrush, typically in the handle portion thereof (not shown). The reservoir 37 could also be located within a removable head assembly attached to the body of the toothbrush. The reservoir 37 includes a door 39 which, in one embodiment, could be a thumb-activated sliding door. A spring 41 biases the door 39 to its closed position. The door is not air tight, to provide a vent for the reservoir, but does prevent the dentifrice fluid from leaking out. A tube 43 connects the reservoir 37 to a feed tube 45 which is connected to the vibrating brushhead.

The reservoir 37 could also include a wick element 47, such as a polypropylene felt, which extends between the reservoir 37 and the feed tube 45 in order to prevent air bubbles in the reservoir from moving into the feed tube, thereby maintaining a continuous stream of fluid between the reservoir and the feed tube.

Alternatively, referring to Figure 8, a

**SUBSTITUTE SHEET**



flexible tube 49 with a weight 51 could be included in reservoir 37. The flexible tube is connected to or is an extension of connecting tube 43. The weight 51 is positioned near the free open end 55 of flexible tube 49, such that gravity would tend to hold the free open end of tube 49 in any fluid in reservoir 37, regardless of the orientation of the toothbrush and hence the reservoir.

In addition, a sponge member could be placed in the reservoir 37. The sponge comprises a material which is able to store fluid, such as water or a medicine. The sponge will release the fluid as fluid is drawn out of the feed tube.

Referring now again to Figure 3, a plurality of bristles 56 extend from one surface of the brushhead 34 and are in fluid communication with chamber 43 in the brushhead. A selected number of the bristles are hollow, to permit the correct amount of dentifrice to be dispensed. This arrangement permits the dentifrice to move from the reservoir through the tube 54, the casing 46, the tube 44 and then into the channel 42, the chamber 43, and then through the hollow bristles to the ends thereof, such that in use of the device, the dentifrice is applied to the actual area of interest.

Figures 4, 5 and 6 show another embodiment of the present invention and a further variation of a portion of that embodiment. Figure 4 is a simple schematic view of a vibrating toothbrush which includes a body portion 60 which has a brushhead 62 extending therefrom at one end 64 thereof. The brushhead 62 is mounted and driven for vibratory (i.e. up/down or side to side) action by a drive mechanism such as that described above with respect to the embodiment of Figures 1 and 3 and the structure shown in U.S. Patent No. 4,787,847. Referring to Figure 4, the brushhead 62 itself contains the dentifrice reservoir. When the dentifrice is depleted, the old brushhead is removed

2097505 8

from the driving mechanism and a new one inserted. Figure 5 shows the brushhead portion of the body 60 of Figure 4, in which is mounted a supporting membrane 68. The drive plunger 70 is driven by a transducer (not shown) and includes at one end thereof a threaded portion 72 to which may be conveniently removably secured a brushhead 62.

The brushhead 62 includes an interior chamber 74 in which is positioned the fluid reservoir 76 containing the dentifrice. The reservoir 76 comprises a collapsible membrane, so that atmospheric pressure, which is introduced through a pressure relief opening 78 in the brushhead 62, collapses the reservoir 76 as fluid is delivered therefrom. This prevents a vacuum from forming in the reservoir which would impede the flow of dentifrice therefrom. The reservoir 76 is in fluid communication with a plurality of hollow bristles 80 which extend from one side of the brushhead 62. Again, the number of hollow bristles is selected so that the desired amount of dentifrice is dispensed. In operation, the dentifrice is delivered from the reservoir through the hollow bristles to the tips thereof, where it is applied to the area of interest, as the bristles are brought into contact with the teeth and gums.

Figure 6 shows a variation of the brushhead arrangement of Figures 4 and 5, which can also be used in the brushhead of Figure 1 and 3. Instead of hollow bristles, the bristles 84 are solid, with the area 86 of the brushhead from which the bristles 84 extend including one or more nozzle-like openings 87 therein, which are either in fluid communication with the fluid reservoir 88 in the brushhead (similar to reservoir 76 in Figures 4 and 5) or an internal chamber in the brushhead, like chamber 43 in Figure 3, which contains dentifrice delivered from a remote reservoir.

Dentifrice is supplied to the area of interest



by the action of the toothbrush in two ways. One way is through capillary action. Either with the hollow bristle embodiment or with a brush having tufts of solid bristles, as fluid is removed from the vicinity of the brushhead in the use of the device, capillary action draws fluid from the reservoir to replenish what has been used. The more fluid used, the more is replaced. This is true "demand feed" action. Capillary action has been demonstrated over a frequency range of 100-300 Hz. A frequency of 140 Hz for the vibrating toothbrush provides very effective results. It has been found that the supply of fluid when the toothbrush is under a heavy load is nearly twice that when the toothbrush is unloaded. Again, the capillary feed action is due to the use of hollow bristles or by locating solid bristles sufficiently proximate to each other that capillary action occurs.

The other way dentifrice is delivered is through the action of centrifugal force. Centrifugal force produced by the reciprocating vibration of the brushhead acts to force the dentifrice through the hollow bristles or through the nozzles in the brushhead to the vicinity of the tips of the bristles. In both instances, the surface tension properties of the dentifrice and the chambers are such that the dentifrice is retained behind the nozzle or the hollow bristles when the toothbrush is not vibrating, but when the toothbrush is vibrating, sufficient centrifugal force is produced to force the dentifrice out from the nozzles or the bristles. The rate of dispersion of the dentifrice is controlled by the amount of vibration energy of the brushhead, the size of the openings of the nozzles or in the bristles, and the number thereof, as well as the viscosity of the dentifrice.

For a sinusoidal motion of the tip of the bristles of the brushhead, having an amplitude  $X(t) = X_0 \sin \omega t$ , the resulting centrifugal force on an

2097505 10

incremental radial section  $\Delta r$  will be  $F_{\Delta r} = A d X_0^2 \omega^2 r \Delta r / G r_0^2$  where  $A$  is the area of the fluid column,  $d$  is the density of the dentifrice,  $X_0$  is the amplitude of the motion of the bristles,  $\omega$  is the frequency of oscillation,  $r$  is the distance from the center of the motion,  $\Delta r$  is the radial thickness of the section, and  $G$  equals the gravitational acceleration. The factor  $G$  is included so that the force will be expressed in grams. For a column of fluid distributed from  $r=0$  to  $r=r_0$ , the resulting centrifugal force  $F_c$  is:

$$F_c = A d X_0^2 \omega^2 / G r_0^2 \int_0^{r_0} r dr = A d X_0^2 \omega^2 / 2G.$$

In a specific example, where  $r_0 = 1.0$  inches,  $f = 200$  Hz,  $d$  (for water) =  $16.3$  g/inch<sup>3</sup>,  $X_0 = 0.10$  inches, and a tube diameter of  $0.10$  inches, the resulting force  $F_c = 2.7$  grams.

This centrifugal force of almost 20 times that of the force of gravity on the same volume of fluid ( $0.008$  inch<sup>3</sup>) is sufficient to force a fluid through a nozzle or hollow bristle when the brushhead is vibrating, but no drop will move through the nozzle or bristle when the vibration is not present. The centrifugal force is so much stronger than gravity that the fluid delivery performance of the toothbrush is relatively independent of position.

The rate at which fluid is dispensed is controlled by the dimensions of the dispensing mechanism and the choice of fluid. This includes the size of the exit orifice for the fluid, the fluid pressure and the viscosity of the fluid. The fluid pressure is determined by centrifugal force considerations discussed above. It has been determined by the inventors that rate control under loads of  $\pm 15-20\%$  are practical.

While the dentifrice dispensed by the toothbrush of the present invention may be any one of a number of solutions, including a bacterial agent such as an antibiotic like chlorhexidine to control infection, other medications for various treatment and/or



preventative purposes may be used, as well as a  
cleansing or foaming agent, or even water, which will  
aid the action of the energy of the vibrating  
toothbrush. The dosage of therapeutic solutions can be  
5 carefully controlled and administered, simultaneously  
with the accomplishment of conventional oral hygiene.  
This can minimize stain buildup. Correct dosages will  
minimize systemic absorption of the medication. All of  
these types of solutions and others are included under  
10 the general term dentifrice. Preferably, the dentifrice  
is a fluid.

The medication or dentifrice to be used in the  
present invention can initially be in the form of a  
solid pellet, either in a porous bag or in a package  
15 form. The dentifrice/medication will be placed in the  
reservoir along with tap water in which the dentifrice  
will dissolve. The rate of dissolution can be  
controlled so that several separate applications may be  
made with a single pellet or the like.

20 It should be understood that certain  
modifications may be made to the present invention to  
improve its performance. For instance, the reservoir 30  
in Figure 3 may be pressurized in some manner to aid in  
the flow of dentifrice or a small pump may be attached  
25 to the reservoir 30 or at some place along the tube  
connection to aid in the dispensing of the dentifrice.  
A small pump could be operated by the power source for  
the vibrating brushhead. In an example, a pump could be  
constructed with two one-way valves, surrounding a  
30 deformable member which is squeezed by the vibration of  
the transducer. In another variation, the reservoir 30  
could be attachable to a water faucet or the like with  
a flexible tube connecting the reservoir to the  
toothbrush. In another variation, the reservoir 30  
35 could be refillable, with water or other dentifrice.

In operation of the toothbrush of the present  
invention, power is supplied to commence vibration of

2097505  
12

the brushhead and hence the bristles thereon. This action of the bristles can be used to mechanically "scrub" the teeth to remove food particles and disrupt plaque reachable with the bristles. The user typically  
5 will concentrate on the sulcus and interdental regions of the teeth.

The vibrating action of the brushhead also at the same time provides acoustical energy sufficient to support cavitation and streaming throughout the entire  
10 mouth area, including areas beyond the reach of the bristle contact. The dentifrice-dispensing feature of the present invention assures effective cavitation and streaming throughout the entire dental area with its active supply of fluid. The acoustical cleaning effect  
15 is thus more effective than that which would result by reliance on saliva and toothpaste alone.

The present device thus combines the benefits of scrubbing bristles with controlled cavitation and streaming, accomplished by the combination of a source  
20 of vibration for a brushhead, an appropriate brushhead design and means for supplying fluid at a controlled rate to the brushhead. It should also be noted that the disclosed fluid dispensing mechanism results in the bristles being continuously wet, but not excessively so,  
25 which would result in splattering when the device is not in the mouth or in causing the user to remove excess fluid by swallowing, etc., when the device is in actual use. Fluid is supplied basically on demand, to the extent actually needed to maintain effective cavitation  
30 and streaming.

A further important advantage of the present invention occurs when the dentifrice is a medicine or chemical agent such as an antibacterial agent, i.e. chlorhexidine. Application of the sonic energy to a  
35 medicinal cavitation fluid enhances the effect of the medicinal or chemical agent, thus resulting in a synergistic effect between the acoustical energy of the



toothbrush and the medicine or chemical agent. Although it is known generally that acoustic energy can intensify the effect of antibacterial and other chemical agents, the use of acoustic energy delivered by a toothbrush with concurrent delivery of a medicinal agent to provide an enhanced cleansing/medicinal effect for teeth is not believed to be known.

Thus, a new dentifrice-dispensing toothbrush has been disclosed which delivers the dentifrice reliably to an area of interest by virtue of the vibrating action of the toothbrush. This toothbrush permits a careful, accurate targeting of a particular location for application of a dentifrice medication.

The apparatus of the present invention is capable of using the vibration driving source to supply the fluid to the bristles, without the need for a separate pump, although a separate pump can be used. Medication can be automatically applied in precisely controlled amounts during brushing, without the direct intervention of the operator.

Although a preferred embodiment of the invention has been disclosed herein for illustration, it should be understood that various changes, modifications and substitutions may be incorporated in such embodiment without departing from the spirit of the invention as defined by the claims which follow:

**CLAIMS:**

1. A toothbrush having a dentifrice dispensing capability, comprising:  
a toothbrush assembly including a toothbrush body, a brushhead in the vicinity of one end of the body, the brushhead including bristles, means for supporting said brushhead for vibrating movement, and means for driving said brushhead such that it vibrates, so that the toothbrush assembly is capable of producing a mechanical scrubbing of the teeth as well as producing an acoustical cleaning effect for the teeth and surrounding areas;  
a reservoir for dentifrice;  
means defined in the brushhead permitting release of dentifrice from said brushhead; and  
means connecting said reservoir to said release means, wherein said driving means includes means for vibrating said brushhead at such frequency and amplitude that dentifrice is drawn from said reservoir and moved out through said release means by the vibrating movement of the brushhead to support acoustical cleaning of the teeth and surrounding areas.
2. An apparatus of Claim 1, wherein the frequency of vibration of the brushhead is within a range of 100-300 Hz.
3. An apparatus of Claim 1, wherein said brushhead includes a small



chamber therein which is in fluid communication with said release means and wherein said connecting means includes means connecting said reservoir with said small chamber in said brushhead.

4. An apparatus of Claim 3, wherein said reservoir is located relatively away from said brushhead.

5. An apparatus of Claim 1, wherein the reservoir includes a wicking member which extends between said reservoir and said connecting means.

6. An apparatus of Claim 1, wherein the reservoir includes a sponge to store the dentifrice.

7. An apparatus of Claim 3, including a flexible tube-like element positioned within the said reservoir and in fluid communication with said connecting means at an outlet end thereof, wherein said tube-like element includes a weighted portion in the vicinity of an inlet end thereof, such that the inlet end tends to remain in contact with fluid in the reservoir regardless of the orientation of the toothbrush.

8. An apparatus of Claim 3, including means for removably connecting said reservoir to said connecting means so as to permit convenient replacement of said reservoir when it is empty.

9. An apparatus of Claim 3, wherein said reservoir is refillable.
10. An apparatus of Claim 1, wherein said reservoir is located in the brushhead and is in fluid communication with said release means.
11. An apparatus of Claim 1, wherein said brushhead is driven at a frequency and amplitude sufficient that acoustic energy is supplied to the dentifrice with the brushhead, which facilitates cavitation of the dentifrice when the dentifrice exits from the release means.
12. An apparatus of Claim 10, wherein the brushhead is removably connected to said brushhead driving means.
13. An apparatus of Claim 2, wherein at least some of said bristles are hollow and are in fluid communication with said connecting means and hence said reservoir, said hollow bristles thereby defining said release means.
14. An apparatus of Claim 2, wherein said release means comprises nozzle-like openings in said brushhead, wherein said bristles are solid and arranged in tufts and wherein said nozzle-like openings are in fluid communication with said connecting means and hence said reservoir.
15. An apparatus of Claim 10, wherein said reservoir is made from a flexible



material such that said reservoir tends to collapse as dentifrice is removed therefrom.

16. An apparatus of Claim 1, including means for pressurizing said reservoir.

17. An apparatus of Claim 1, including pump means connected to said connecting means to assist in movement of dentifrice from said reservoir to said release means.

18. An apparatus of Claim 8, including air vent means in said reservoir means.

19. An apparatus of Claim 9, including air vent means in said brushhead.

20. An oral hygiene apparatus, comprising:  
a housing;  
a brushhead extending from said housing, the brushhead having bristles which extend therefrom for brushing teeth;  
a source of acoustic energy within the housing;  
means for supplying a medicinal agent fluid from a reservoir therefor to the bristles in the brushhead; and  
means coupling the acoustic energy to the brushhead, such that the brushhead and hence the bristles thereon vibrate at a sufficient frequency and

amplitude to both mechanically scrub the teeth and to produce acoustic energy in the vicinity thereof sufficient to enhance the effect of the medicinal agent fluid at the teeth.

21. An oral hygiene apparatus, comprising:
- a housing;
  - a brushhead extending from said housing, the brushhead having bristles which extend therefrom for brushing teeth;
  - a reservoir for dentifrice;
  - a means for providing a fluid connection between the reservoir and the brushhead; and
  - means for vibrating the brushhead at a sufficient frequency and amplitude to scrub the teeth, and to simultaneously draw dentifrice from the reservoir out through the brushhead by the vibrating movement of the brushhead.

22. An apparatus of Claim 21, wherein the vibration of the bristles is sufficient to support cavitation at the teeth and the surrounding area.

23. An apparatus of Claim 20, wherein said fluid supplying means includes bristles which have a hollow opening longitudinally therethrough and which extend from the brushhead, said hollow bristles being in fluid communication with a reservoir of fluid located in said housing.

24. An apparatus of Claim 20, wherein said fluid supplying means includes



openings in said brushhead in the vicinity of the bristles which extend therefrom, said openings being in fluid communication with a reservoir of fluid located in said housing.

25. An apparatus of Claim 23, wherein the source of acoustic energy is capable of vibrating the brushhead at such a frequency and amplitude that fluid is discharged from the bristles at least partially by capillary action.

26. An apparatus of Claim 23, wherein the size of the hollow openings in the bristles is such and wherein the source of acoustic energy is capable of vibrating the brushhead as such a frequency and amplitude that fluid is discharged from the bristles at least partially by centrifugal force.

27. An apparatus of Claim 24, wherein the bristles are positioned on the brushhead relative to each other in such a manner and wherein the source of acoustic energy is capable of vibrating the brushhead at such a frequency and amplitude that fluid is discharged from the openings at least partially by capillary action.

28. An apparatus of Claim 24, wherein the size of the openings is such and wherein the source of acoustic energy is capable of vibrating the brushhead at such a frequency and amplitude that fluid is discharged from the openings at least partially by centrifugal force.

29. An apparatus of Claim 1, wherein said driving means includes an arm

-20-

which extends from the toothbrush body, the brushhead being supported at one end of said arm, wherein the driving means further includes means for vibrating the arm and hence the brushhead, and wherein the connecting means extends through the arm and moves therewith.



FIG. 1



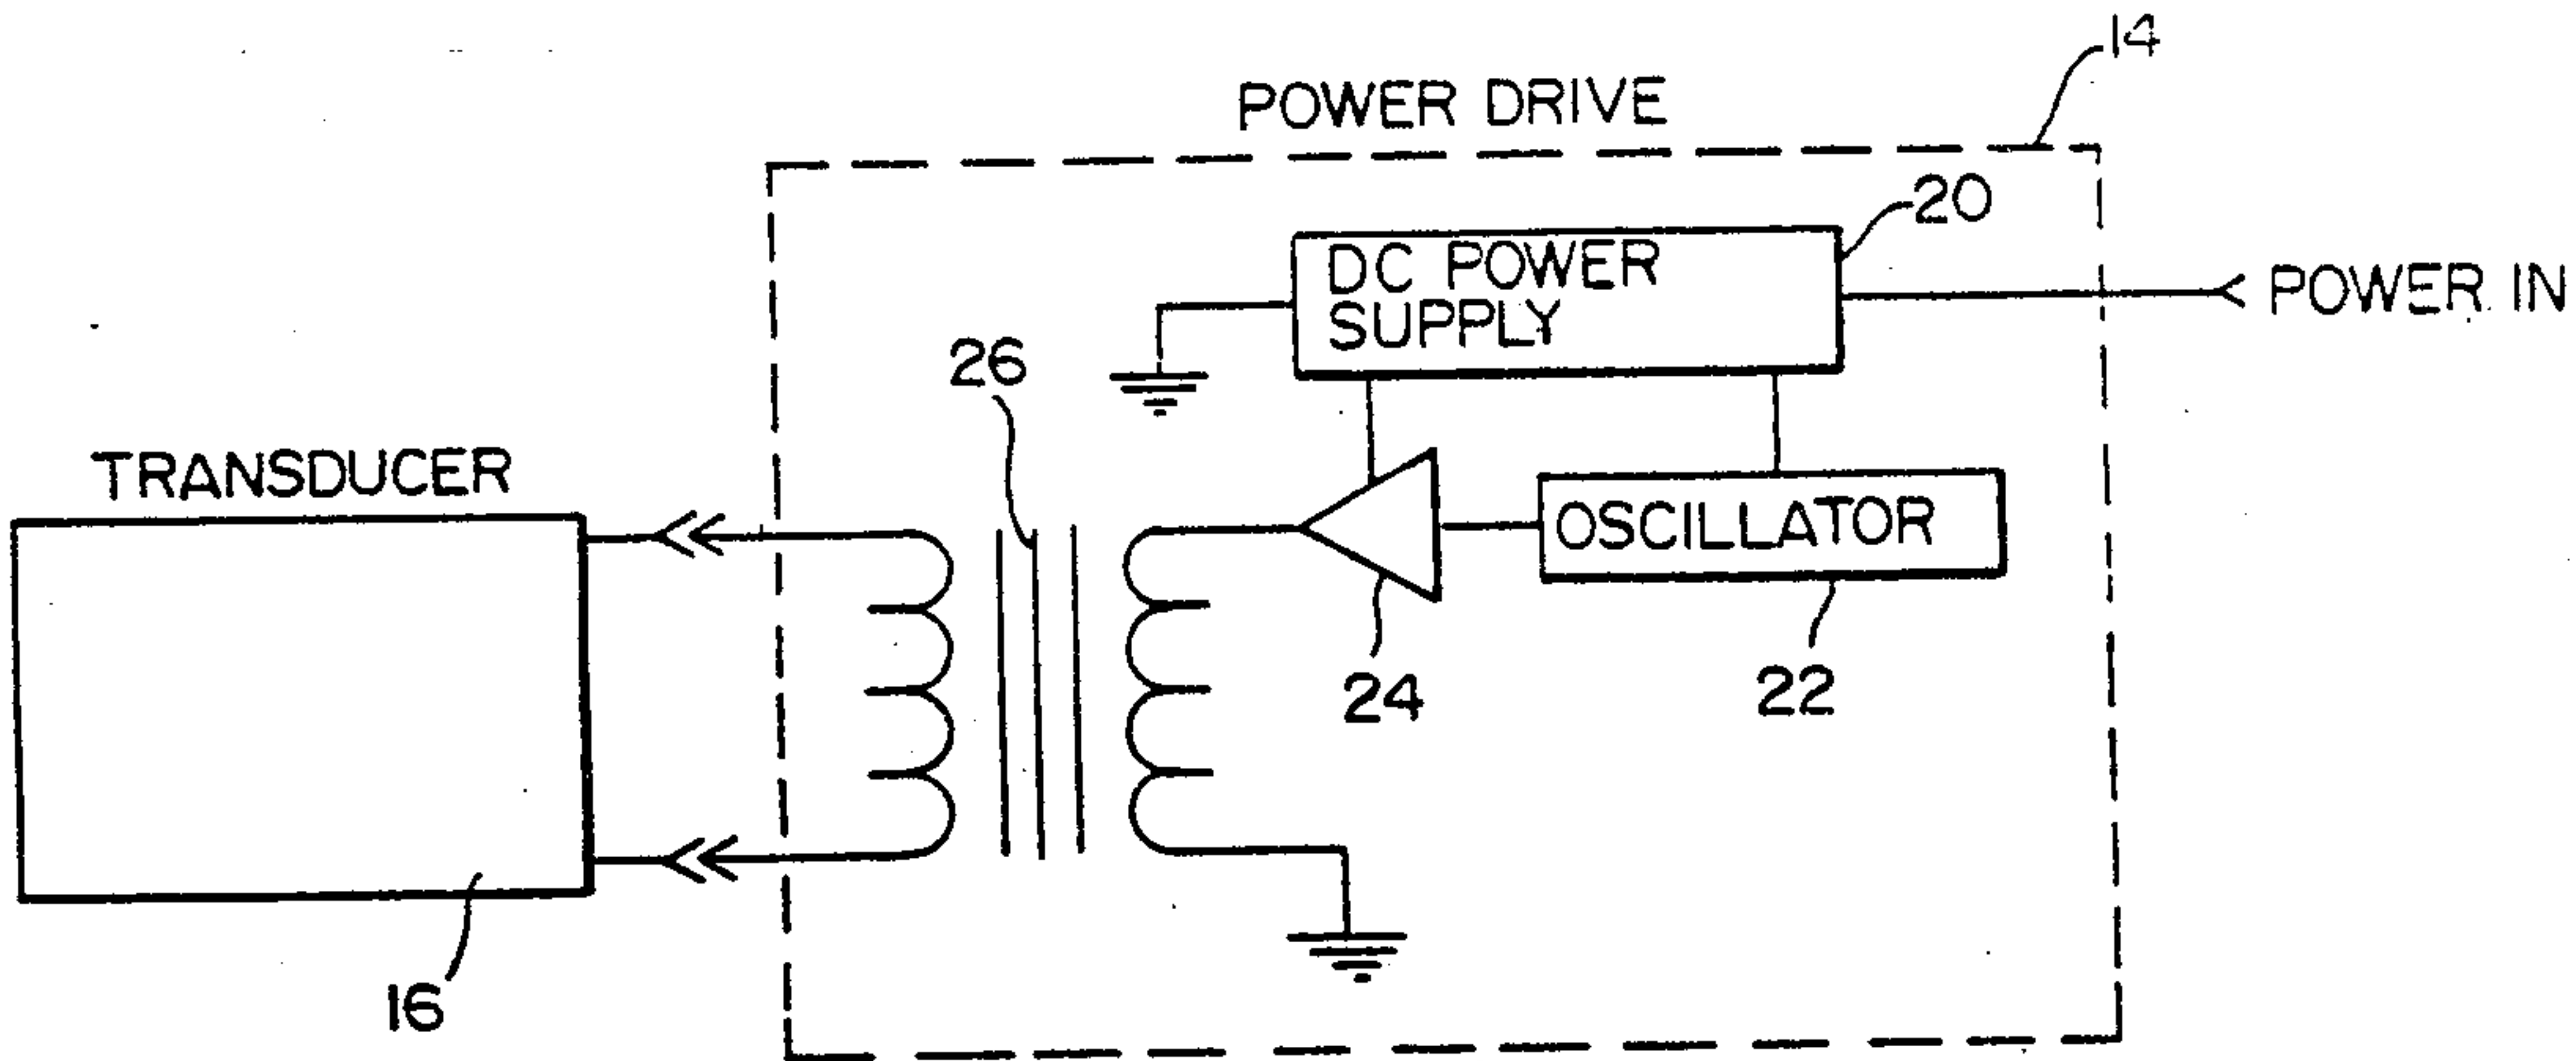


FIG. 2

FIG. 3

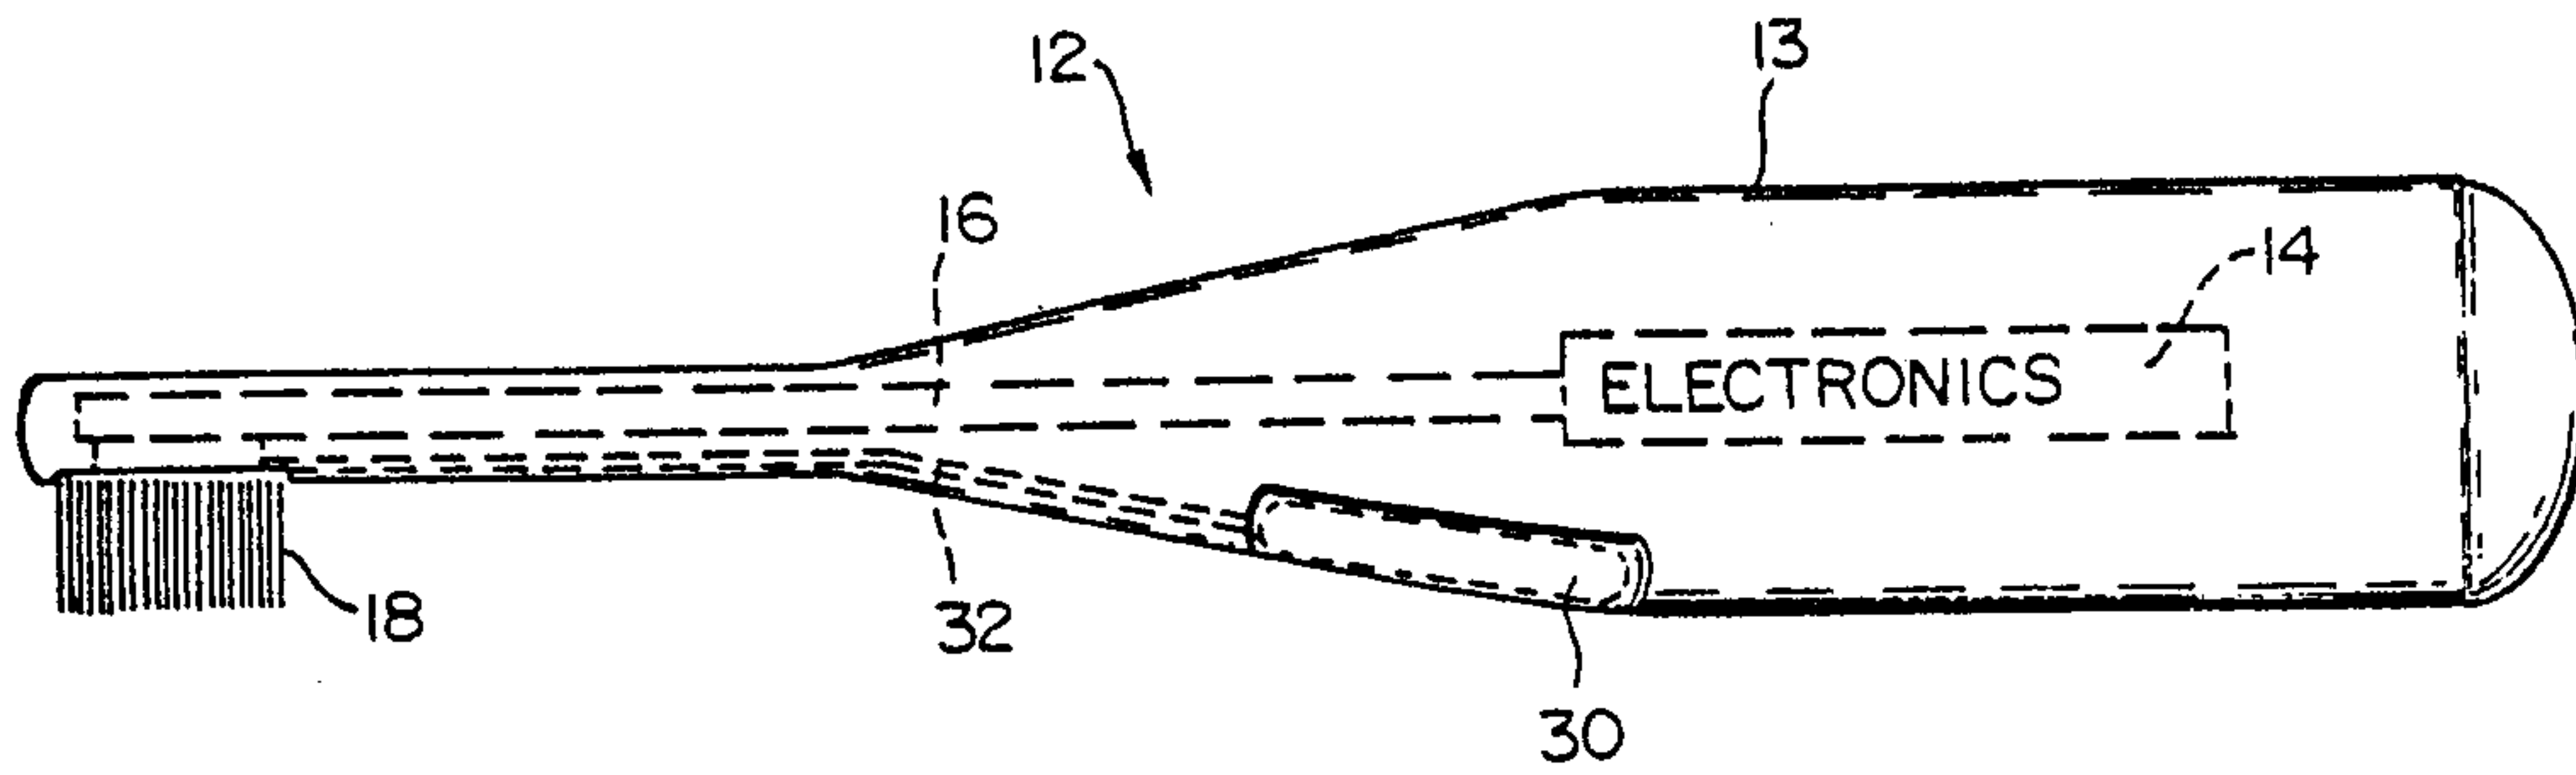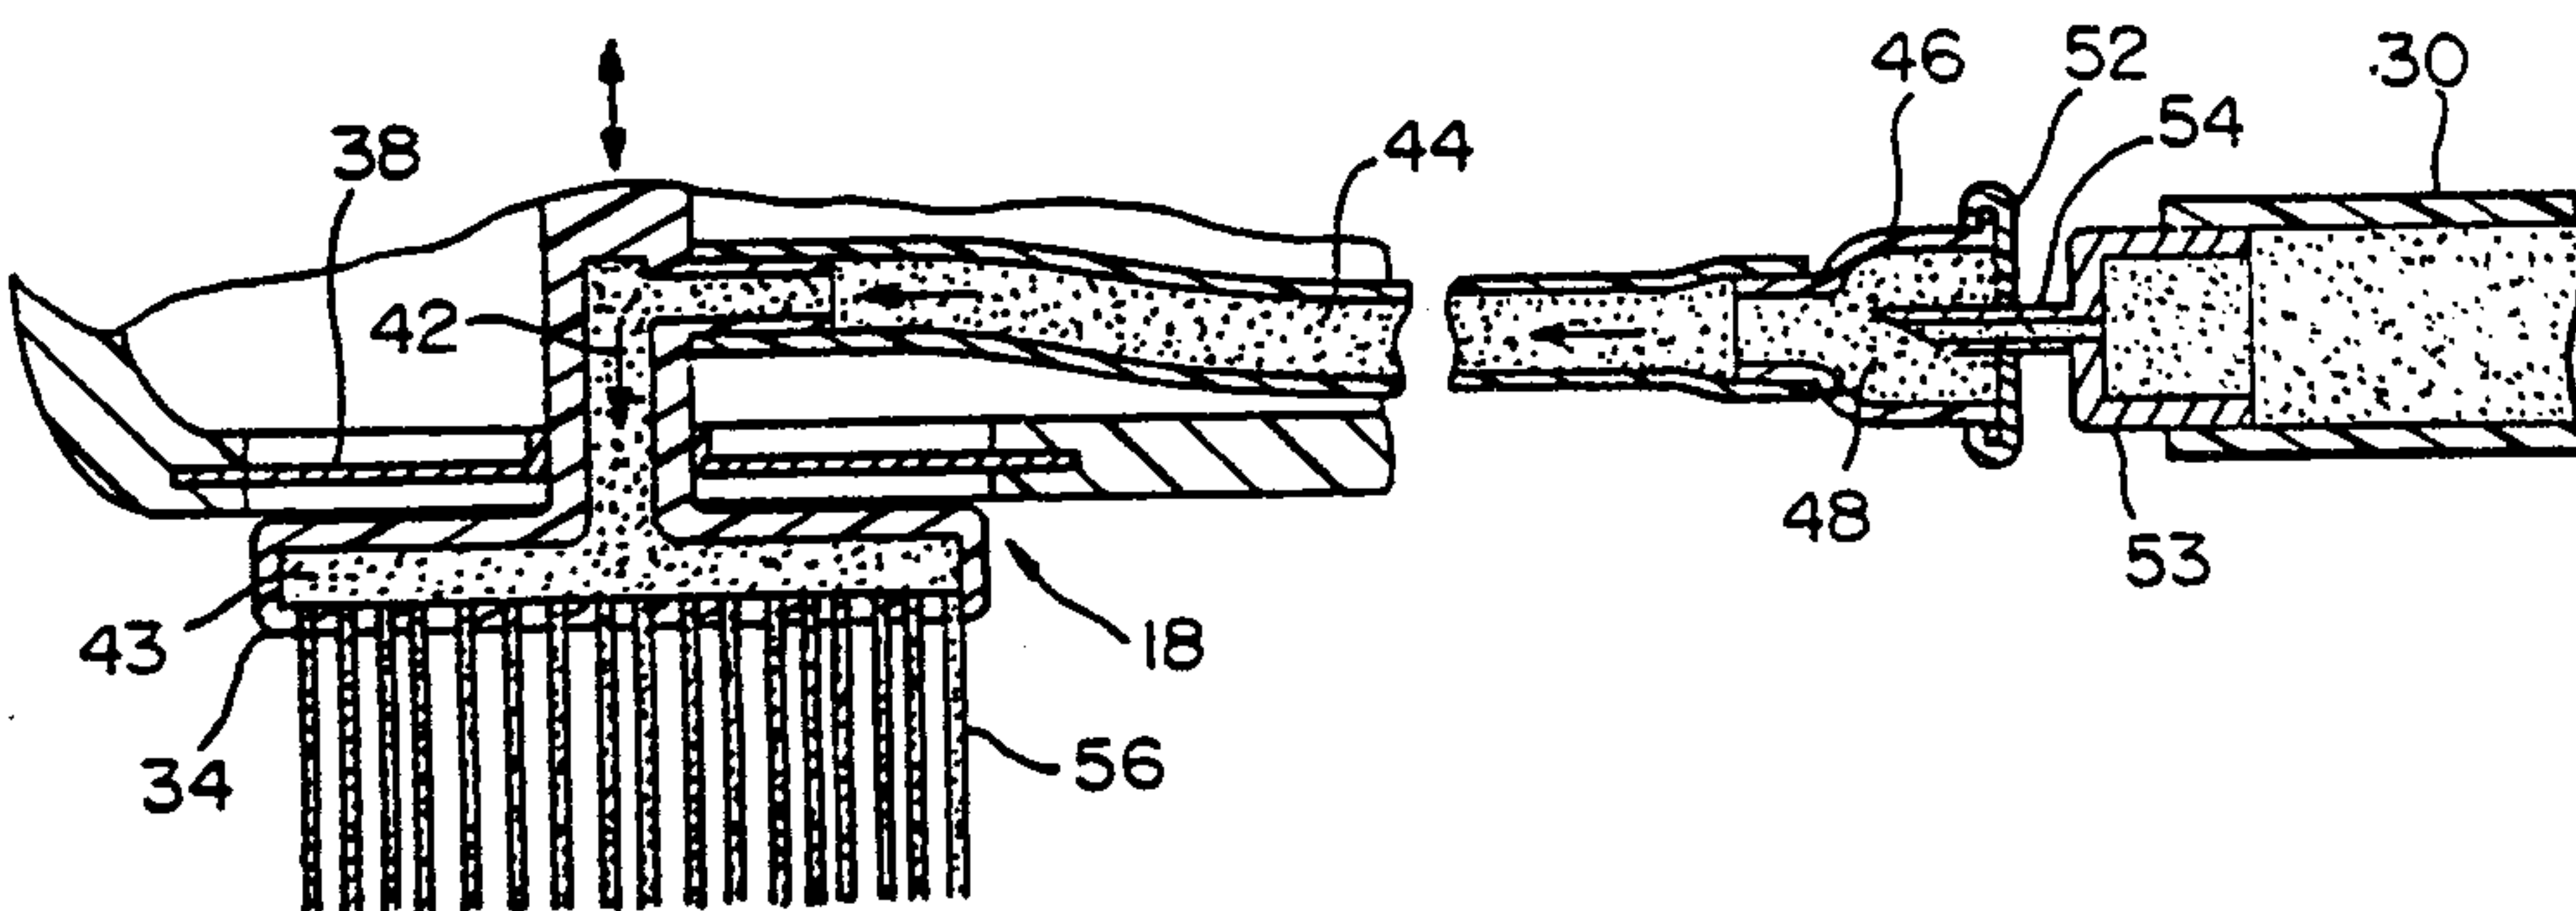

2097505

-2/2-

FIG. 4

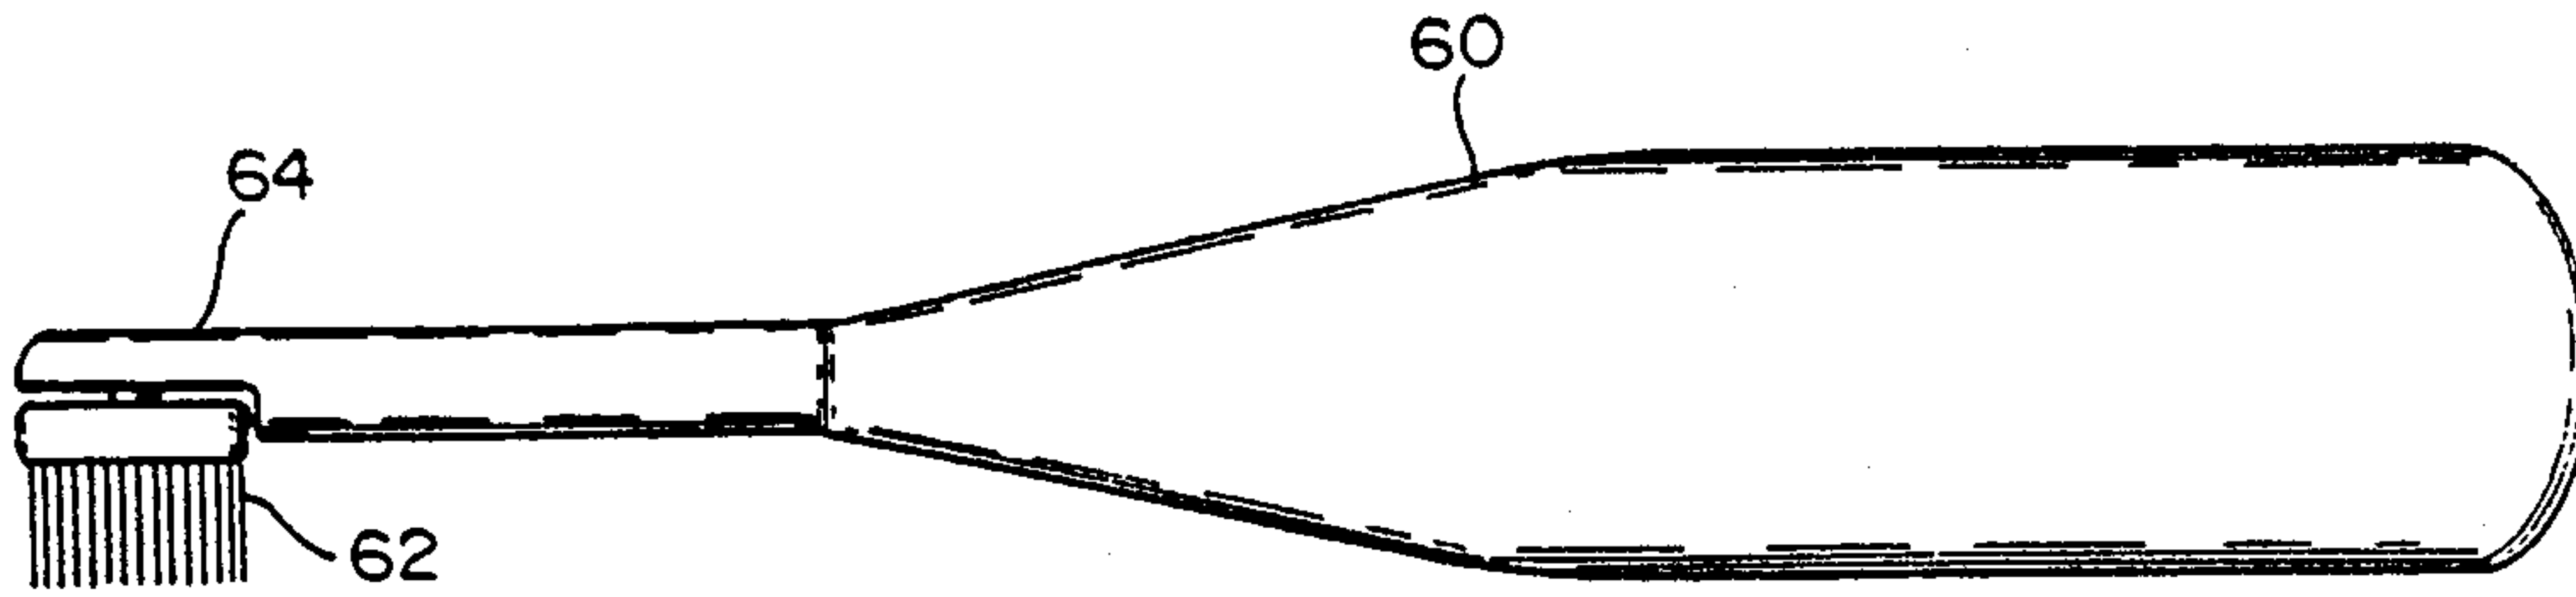


FIG. 5

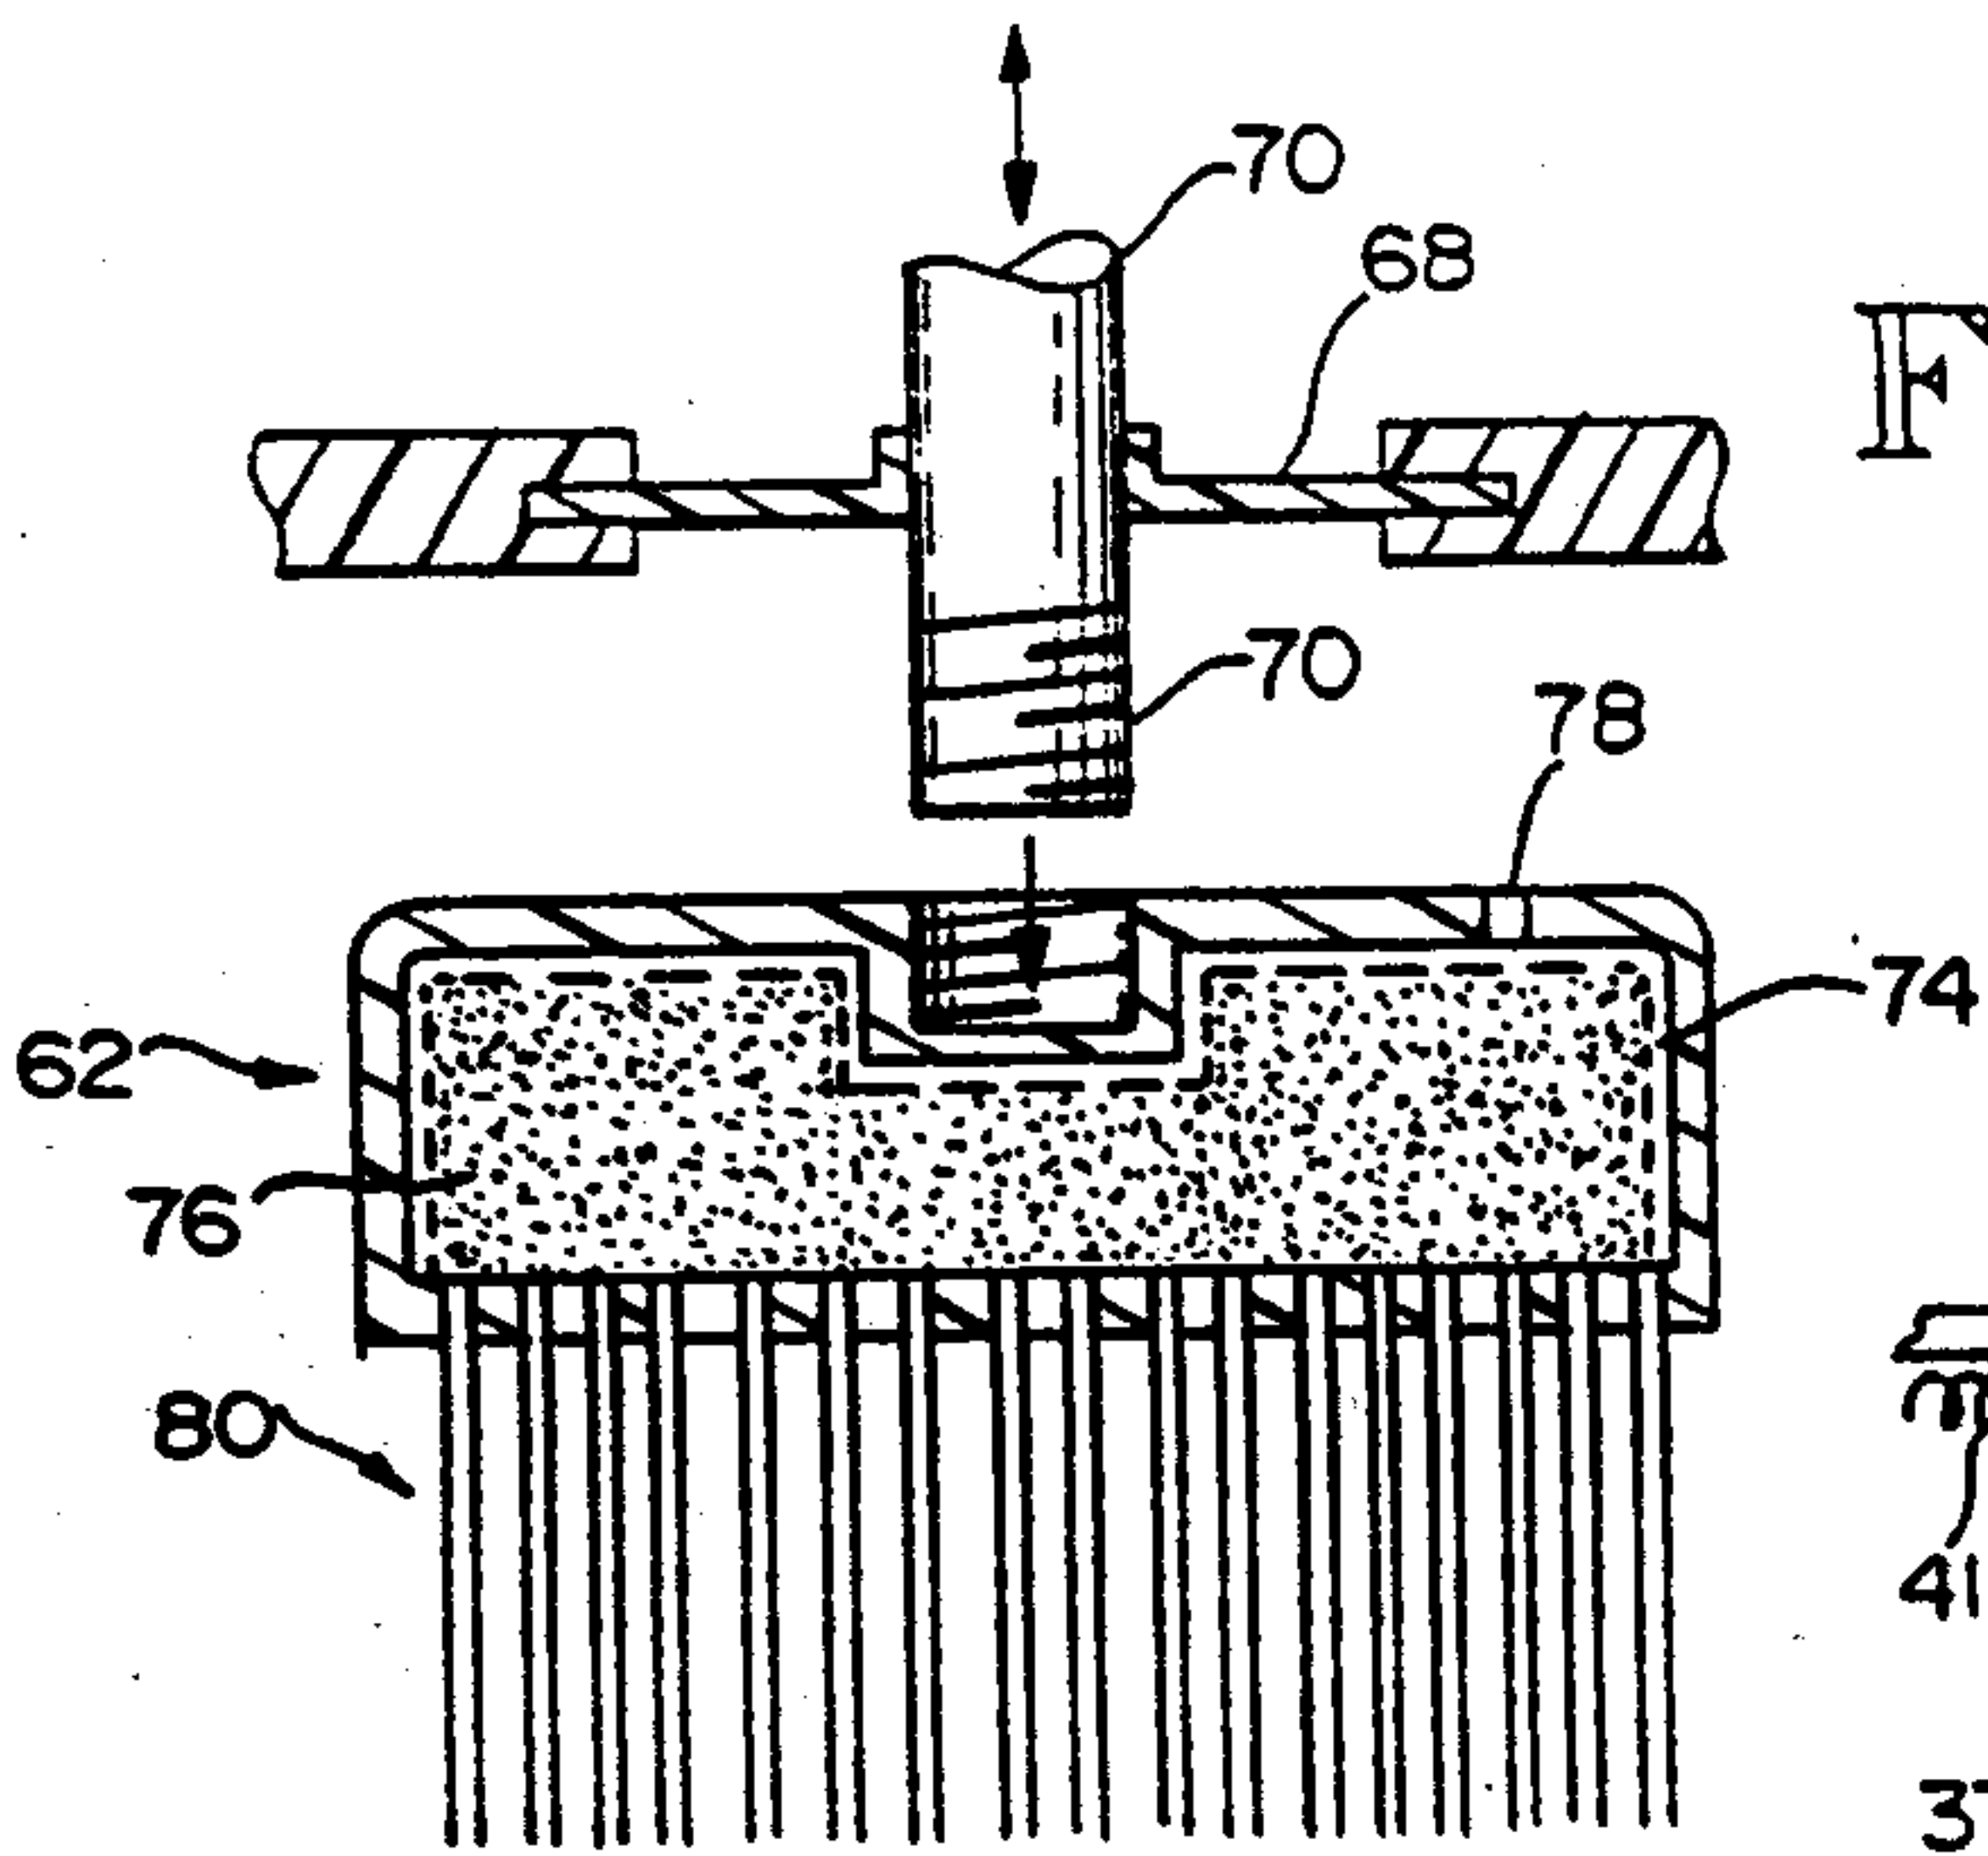


FIG. 7

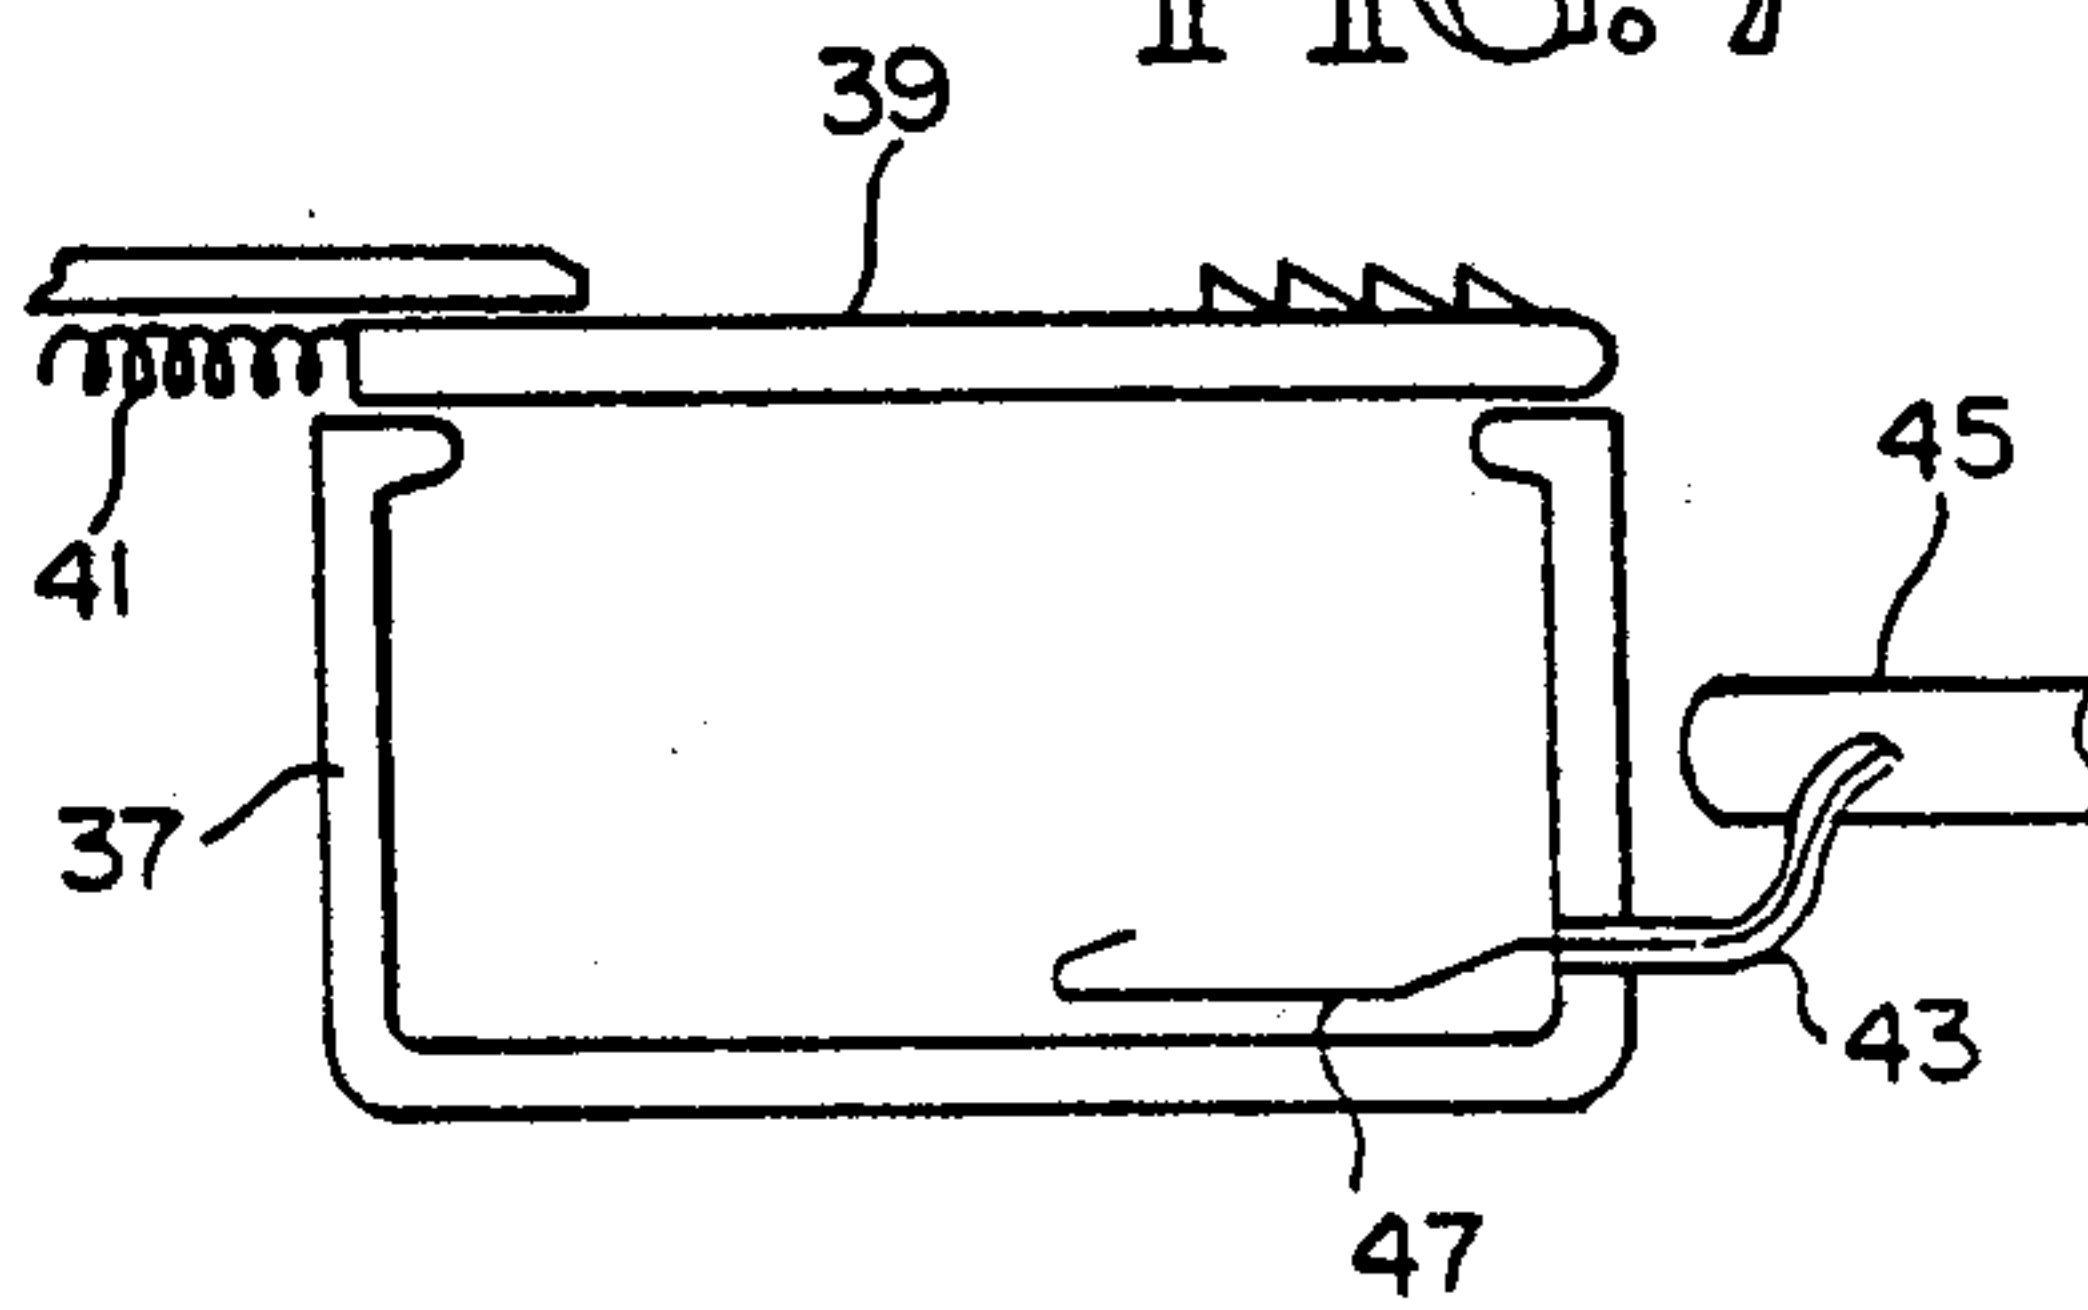


FIG. 8


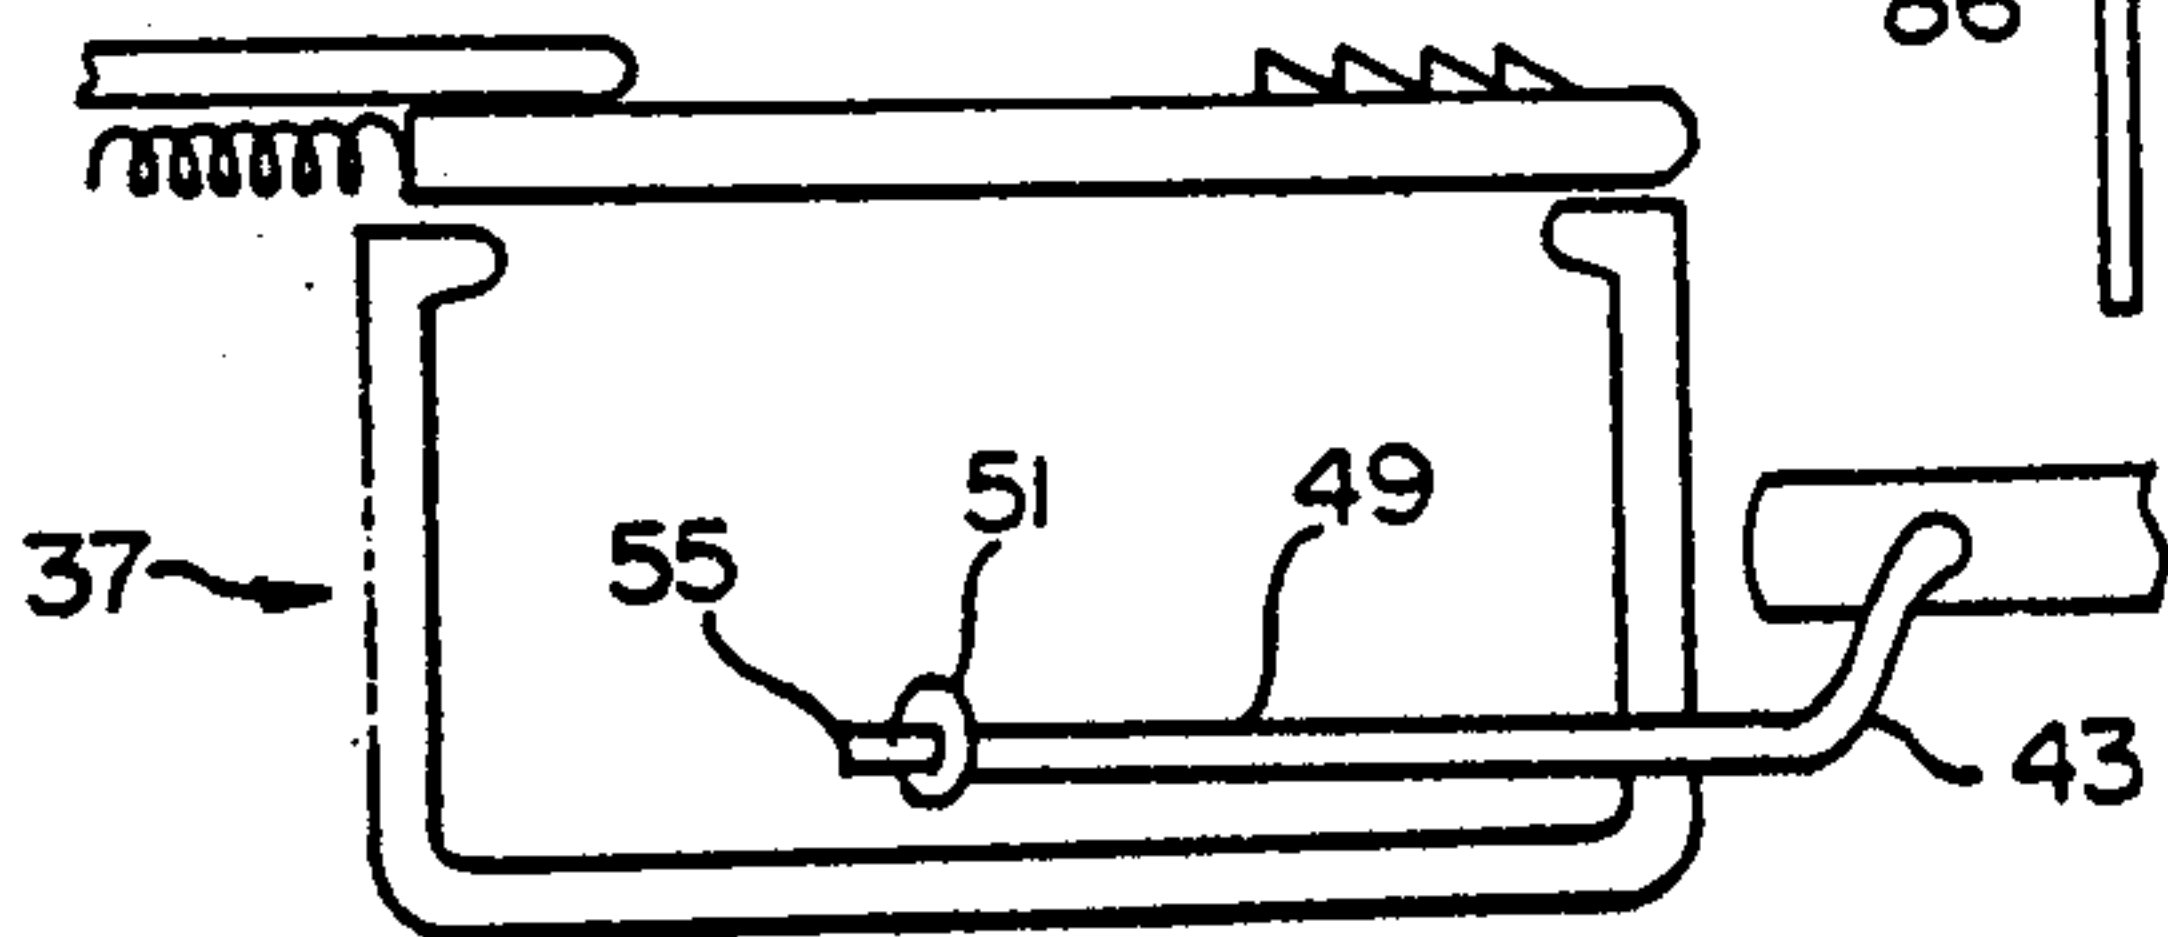


FIG. 6



SUBSTITUTE SHEET



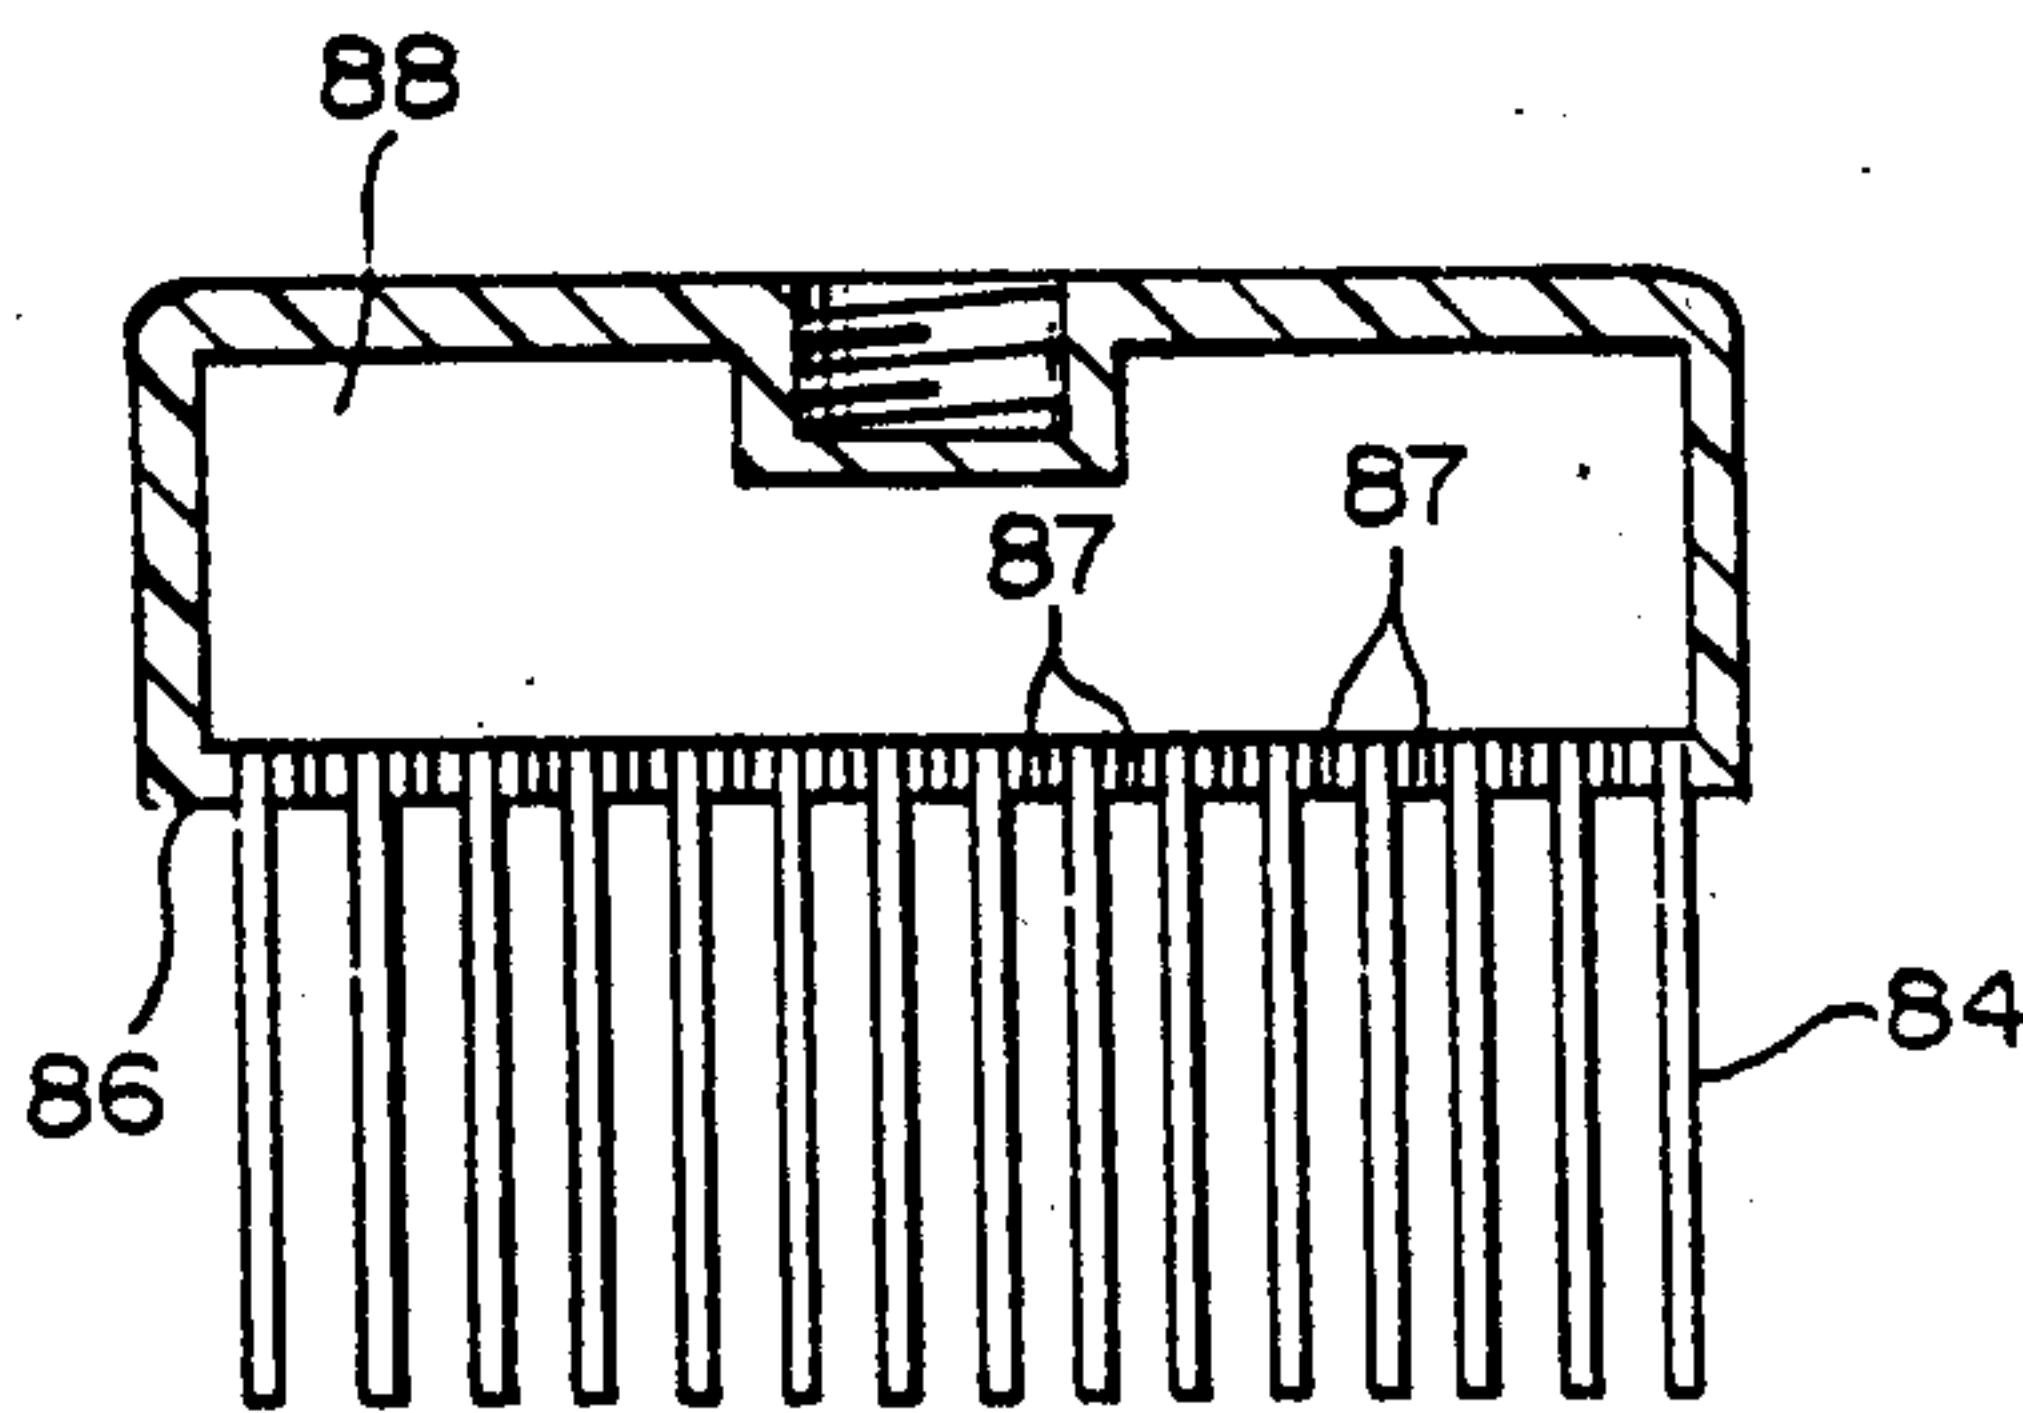