



US006752550B2

(12) **United States Patent**  
**Toyofuku et al.**

(10) **Patent No.:** **US 6,752,550 B2**  
(45) **Date of Patent:** **Jun. 22, 2004**

(54) **HOLDING MECHANISM FOR REPLACEMENT INK RIBBON**

(56) **References Cited**

(75) Inventors: **Toshiyuki Toyofuku**, Tokyo-To (JP);  
**Hiroyuki Kaneko**, Tokyo-To (JP);  
**Satoru Kato**, Tokyo-To (JP); **Yousuke Kobayashi**, Tokyo-To (JP); **Hisashi Yamada**, Tokyo-To (JP); **Katsuyuki Oshima**, Tokyo-To (JP); **Kozo Odamura**, Tokyo-To (JP); **Takayuki Imai**, Tokyo-To (JP)

U.S. PATENT DOCUMENTS

3,001,644	A	*	9/1961	Fourness et al.	206/449
3,288,323	A	*	11/1966	Schechter	220/270
3,530,980	A	*	9/1970	Link	206/394
4,285,461	A	*	8/1981	Meyers	229/123.2
4,605,142	A	*	8/1986	Itoh et al.	220/359.4
5,110,228	A	*	5/1992	Yokomizo	400/208
5,203,455	A		4/1993	Hewelt et al.	206/333
5,399,035	A		3/1995	Nakae	400/207
5,415,486	A	*	5/1995	Wouters et al.	400/692
5,865,545	A	*	2/1999	Kondo	400/207

(73) Assignees: **Olympus Optical Co., LTD** (JP);  
**Mitsubishi Denki Kabushiki Kaisha** (JP); **Dai Nippon Printing Co., Ltd.** (JP)

FOREIGN PATENT DOCUMENTS

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

JP	2-48981	2/1990
JP	2-204074	8/1990
JP	7-61081	3/1995
JP	8-310091	11/1996
JP	10-315558	12/1998

(21) Appl. No.: **10/070,734**

(22) PCT Filed: **Jul. 13, 2001**

(86) PCT No.: **PCT/JP01/06106**

§ 371 (c)(1),  
(2), (4) Date: **Mar. 25, 2002**

(87) PCT Pub. No.: **WO02/06053**

PCT Pub. Date: **Jan. 24, 2002**

(65) **Prior Publication Data**

US 2002/0164186 A1 Nov. 7, 2002

(30) **Foreign Application Priority Data**

Jul. 13, 2000	(JP)	2000-212858
Jul. 13, 2000	(JP)	2000-212860

(51) **Int. Cl.<sup>7</sup>** ..... **B41J 35/28**

(52) **U.S. Cl.** ..... **400/207; 400/208; 206/410; 206/415; 396/514**

(58) **Field of Search** ..... 400/207, 208, 400/208.1; 206/404, 406, 410, 415; 396/513, 514


\* cited by examiner

*Primary Examiner*—Andrew H. Hirshfeld  
*Assistant Examiner*—Dave Ghatt  
(74) *Attorney, Agent, or Firm*—Parkhurst & Wendel, L.L.P.

(57) **ABSTRACT**

A holding mechanism **10** for holding an ink ribbon **20** includes a transparent shell **11** and a board **12**. The transparent shell **11** of the ink ribbon **20** is provided with wind slack preventive portions **11a** to **11d** which prevent rotations of a feed bobbin **21** and reel bobbin **22**, and wind meandering preventive portions **11e**, **11f** which bears down an axial end **23a** of a film **23**. The ink ribbon **20** can be stably held by the holding mechanism **10** during a transportation and a loading thereof. The transparent shell **11** is provided with support portions **11g**, **11f** which improve a stability when loading.

**20 Claims, 8 Drawing Sheets**

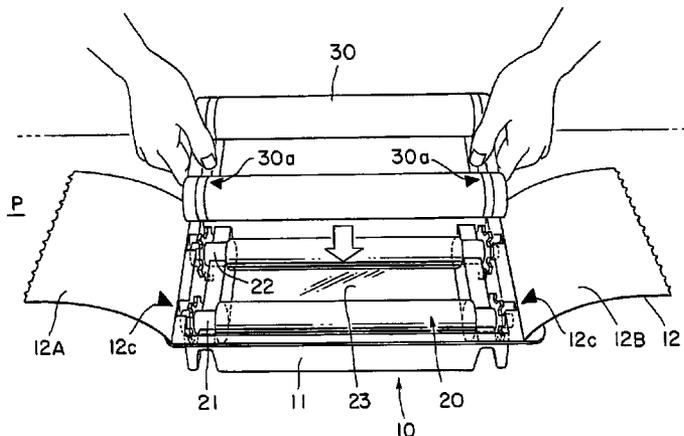

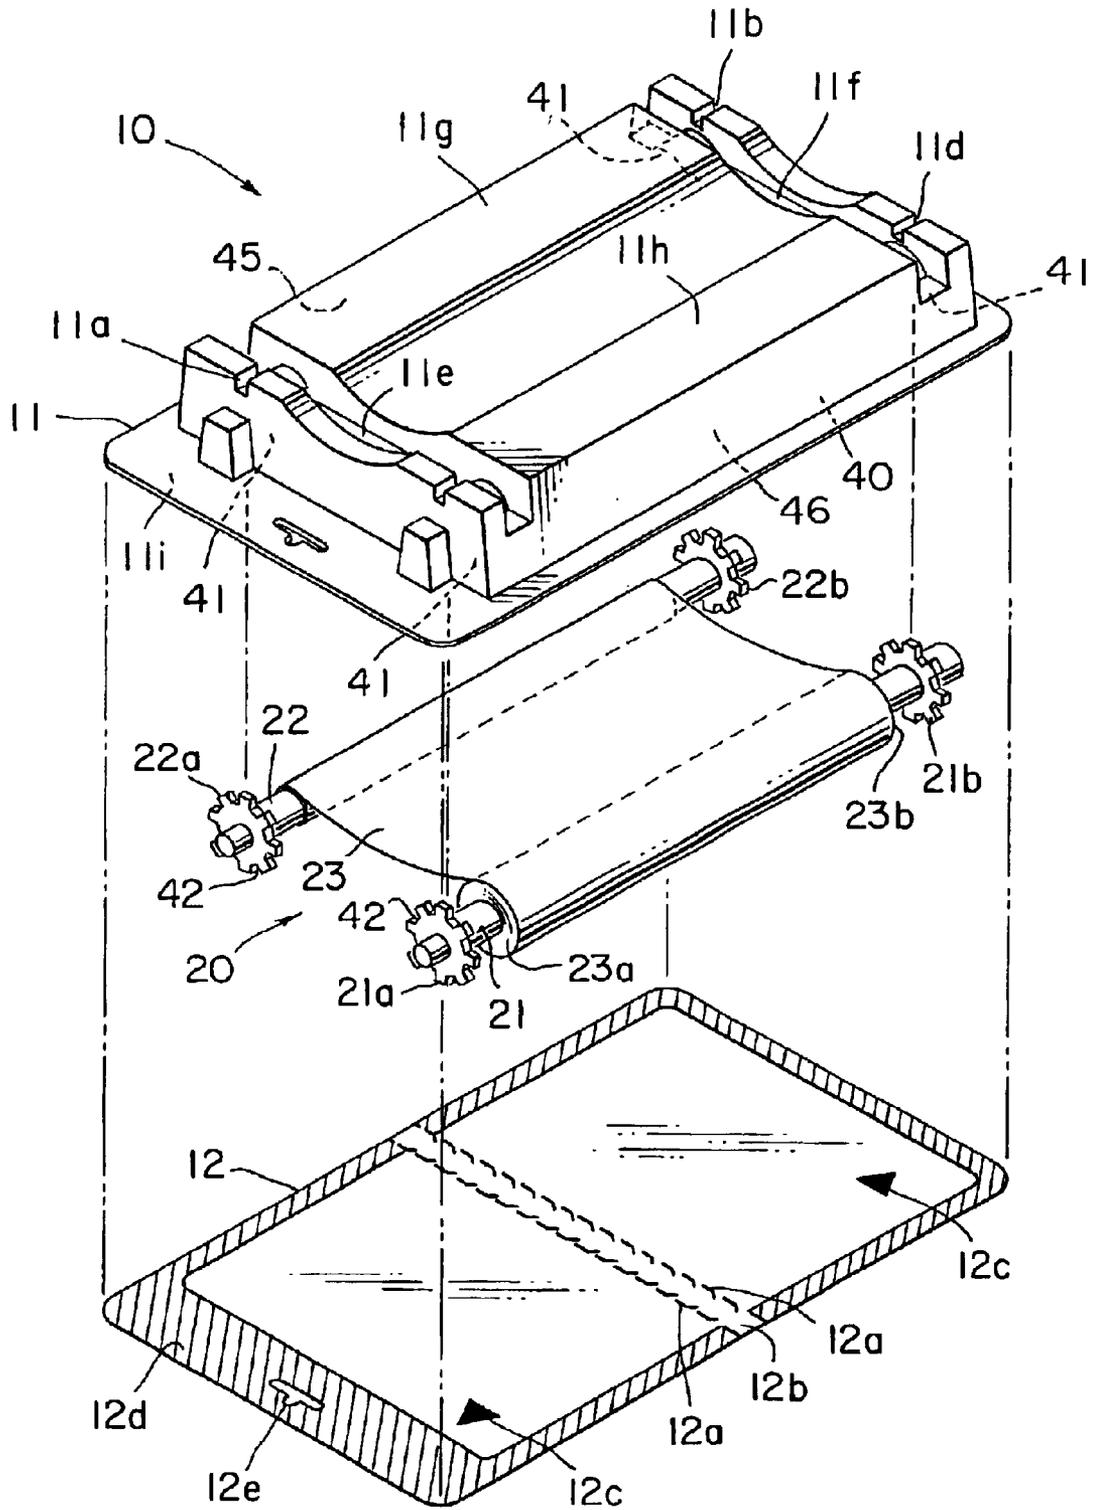


FIG. 1

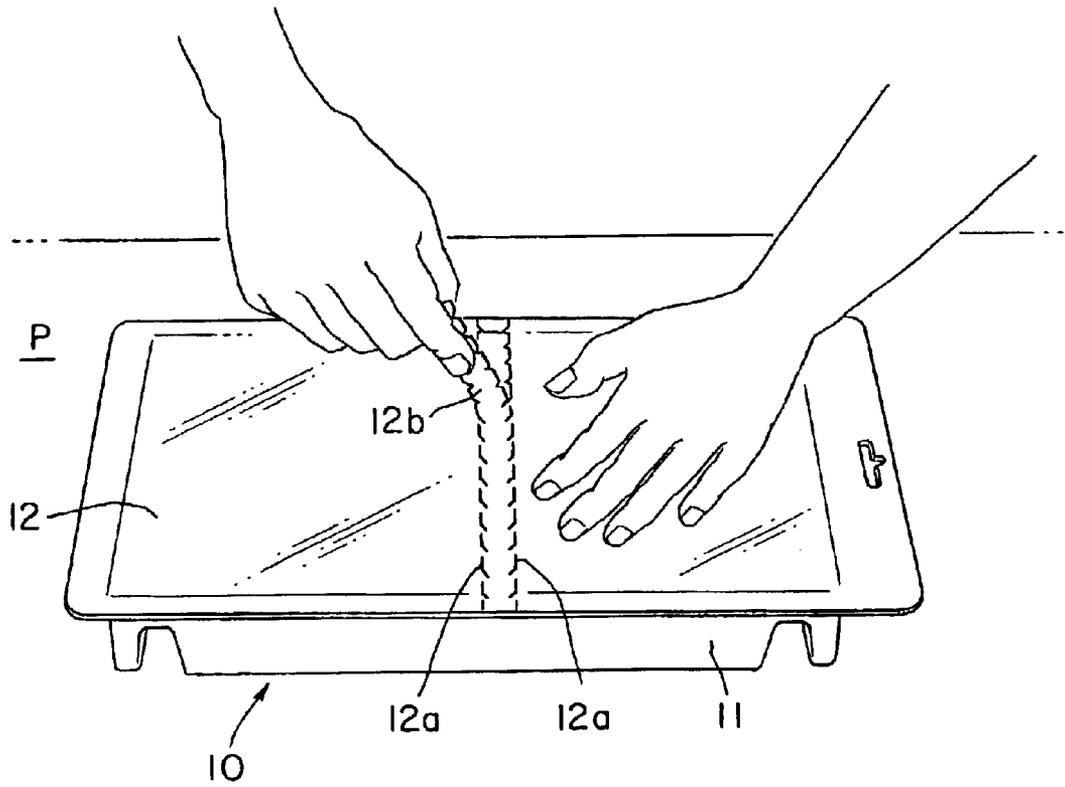


FIG. 2

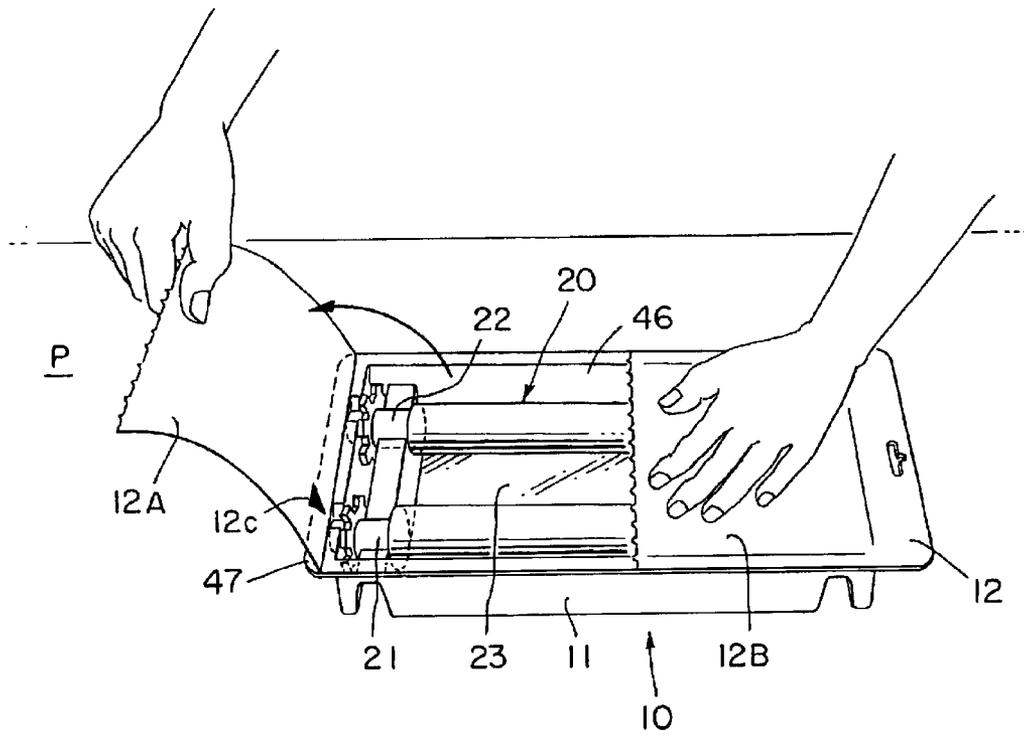


FIG. 3

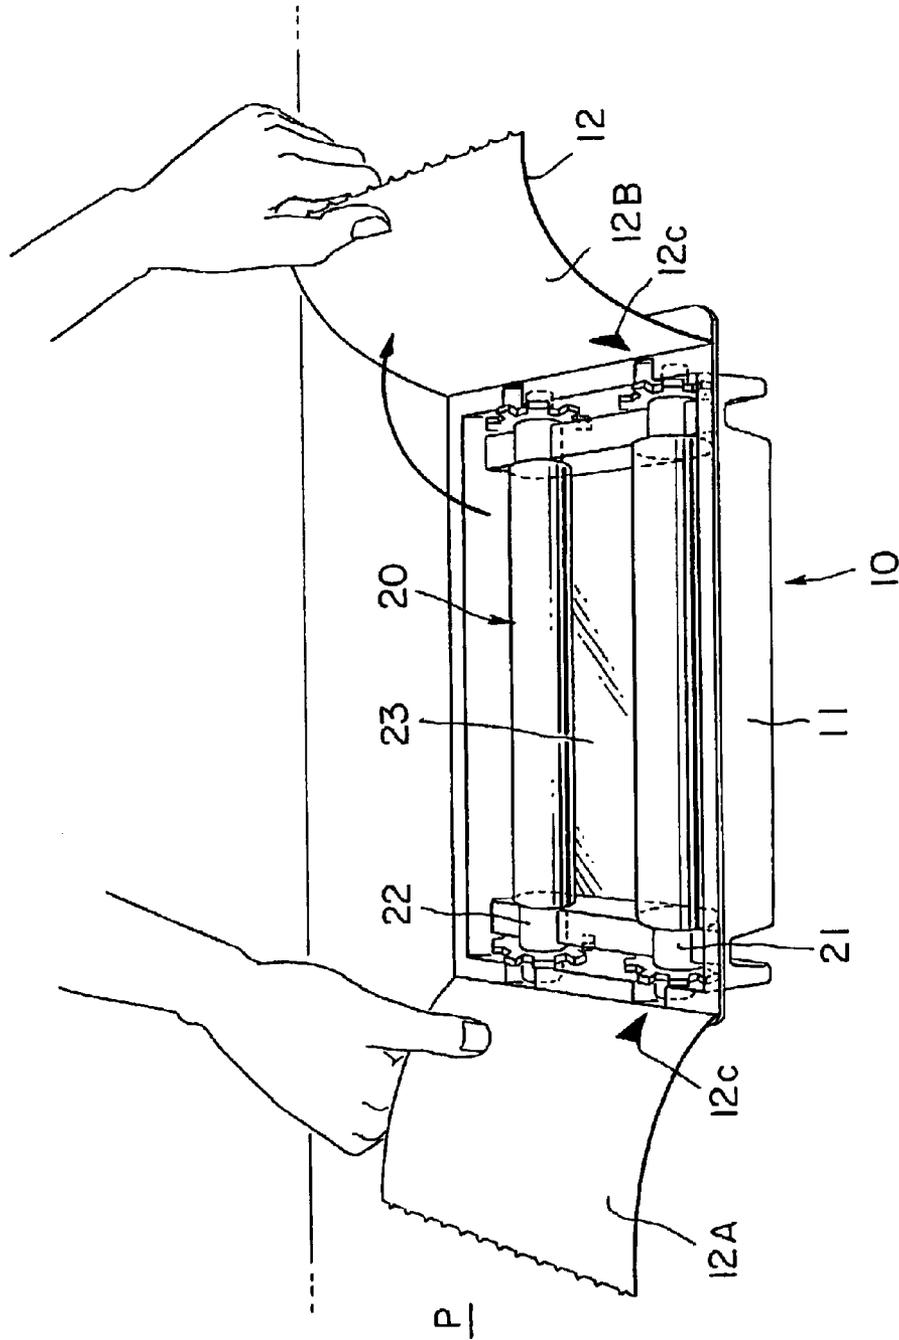


FIG. 4

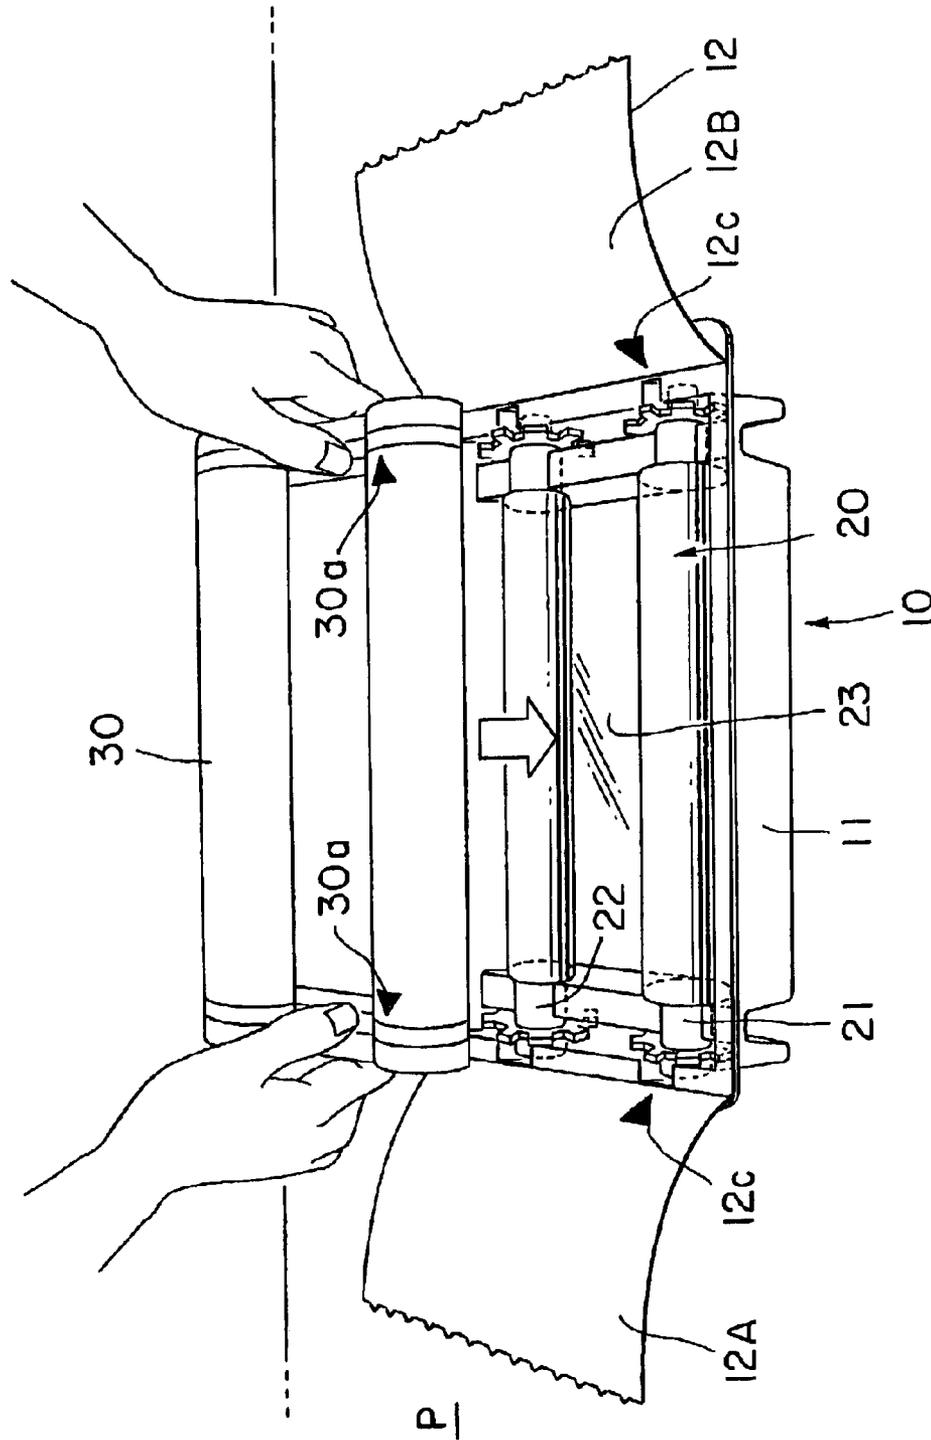


FIG. 5

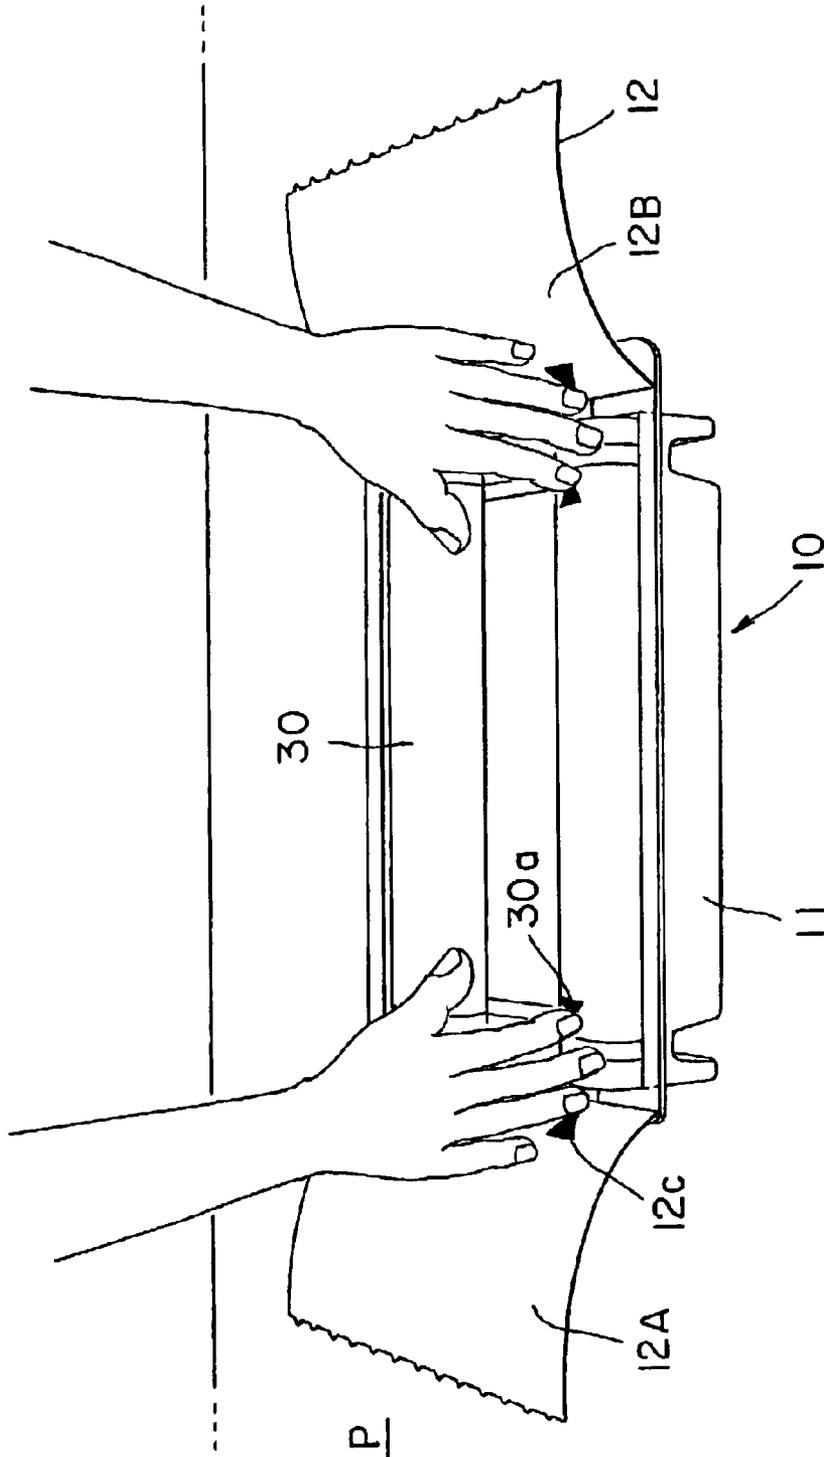


FIG. 6

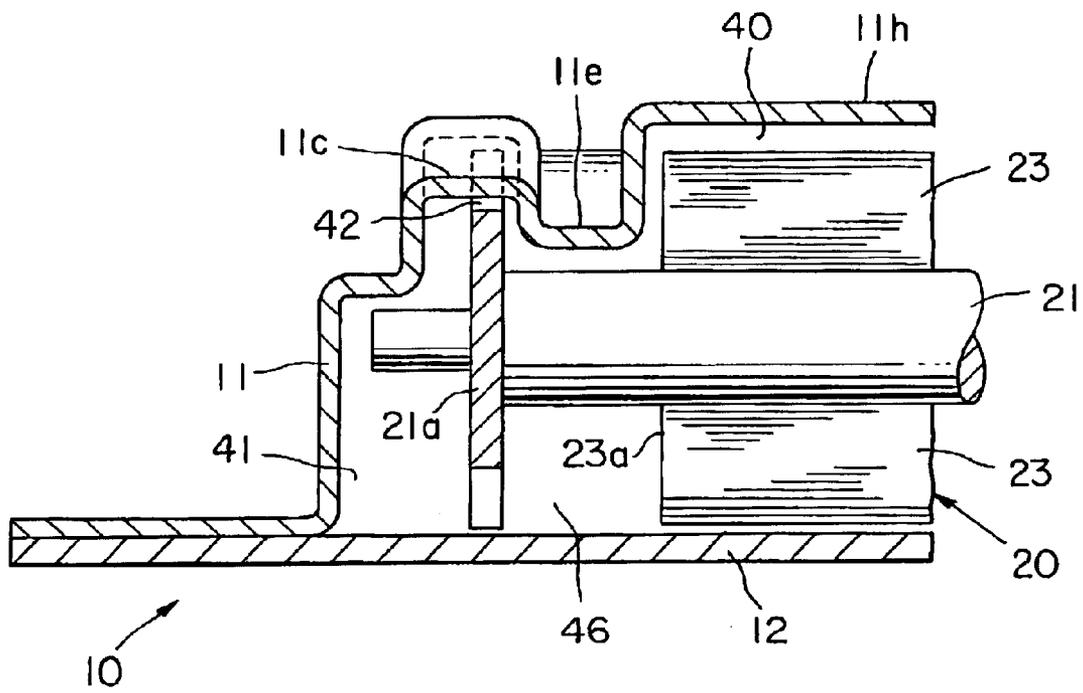


FIG. 7



1

## HOLDING MECHANISM FOR REPLACEMENT INK RIBBON

### FIELD OF THE INVENTION

The present invention relates to a holding mechanism for holding a replacement ink ribbon to be used for a printer which carries out a thermal transfer printing.

### RELATED ART

As a thermal transfer recording method, a sublimating transfer recording method, for example, has been remarked which forms an image on a thermal transfer image receiving sheet by heating a thermal transfer film having a thermal transfer layer containing a sublimating dye formed on a support body such as polyester film by means of a thermal head or laser, etc.

Since the thermal transfer film to be used for these purposes is loaded in a thermal transfer printer to be consecutively used, the thermal transfer film is used in a form of an ink ribbon having a pair of feed bobbin including wound bobbin roll and a reel bobbin for reeling. In the conventional ink ribbon, the feed bobbin having the film provided thereon and the reel bobbin are received in a cassette exclusively used for the film.

However, the above-described conventional ink ribbon is sold with the ink ribbon received in a film cassette. Thus, the price can not be reduced. Particularly, a printer instrument in these days which corresponds to an enlarged print size needs a larger film cassette, because the size of the required ink ribbon is also enlarged. Thus, the price of the ink ribbon is increased as well as resources have been wasted.

It may be considered that the feed bobbin having the film provided thereon and the reel bobbin are supplied just as they are, without using the film cassette.

However, such a form is not user-friendly, as a user may accidentally touch the film during loading the ink ribbon in the printer instrument, or the wind of the film may be slipped, etc. With a printer for business use employed in only a plant or others, there may be no problem because a technical personnel having an expertise uses the printer. However, with a household printer instrument, users are unspecified, and it is difficult to deal with an ink ribbon without using a film cassette.

### SUMMARY OF THE INVENTION

An object of the present invention is to provide an inexpensive holding mechanism for a replacement ink ribbon which can supply, without using a film cassette, a feed bobbin with a film provided thereon and a reel bobbin as they are, and can stably hold an ink ribbon during transportation and loading of the replacement ink ribbon.

The holding mechanism for holding a replacement ink ribbon according to the present invention comprises a feed bobbin provided at one end of a strip film and a reel bobbin provided at the other end of the strip film, comprising a first holding member having a feed bobbin receiving portion for receiving and holding the feed bobbin and a reel bobbin receiving portion for receiving and holding the reel bobbin, with the first holding member having an opening, and a second holding member having a plate-shape for covering the opening of the first holding member.

In the holding mechanism, a wind slack preventive portion may be provided in at least one of the feed bobbin receiving portion and the reel bobbin receiving portion, for preventing a rotation of the feed bobbin or the reel bobbin.

2

In the holding mechanism, the feed bobbin and the reel bobbin may respectively include flanges at both ends thereof, and the feed bobbin receiving portion and the reel bobbin receiving portion may include flange receiving portions for receiving the corresponding flanges.

In the holding mechanism, a lock portion may be provided at each flange receiving portion of the feed bobbin receiving portion and the reel bobbin receiving portion, which engages with a corresponding engagement portion of the flanges to function as a wind slack preventive portion.

In the holding mechanism, the first holding member may include a wind meandering preventive portion for preventing wind meandering of the strip film by contacting one side of the strip film so as to define lateral movement of the film.

In the holding mechanism, the first holding member may include a support portion that supports the first holding member such that, when the holding mechanism is disposed on a plane surface with the opening facing upward, the opening is substantially parallel with the plane surface.

In the holding mechanism, a bottom surface of the support portion may be a flat surface.

In the holding mechanism, the feed bobbin receiving portion and the reel bobbin portion of the first holding member may be so positioned that the feed bobbin receiving portion and the reel bobbin receiving portion can receive and hold the feed bobbin and the reel bobbin at an interval identical with that between the feed bobbin and the reel bobbin when printing.

In the holding mechanism, the first holding member may be formed of synthetic resin, and the second holding member may be formed of paper.

In the holding mechanism, the second holding member may have a cut-planned line at substantially the center portion thereof.

In the holding mechanism, the cut-planned line may be composed of perforations.

In the holding mechanism, the second holding member may have, on a surface facing the first holding member, an index for loading in place the replacement ink ribbon in an ink ribbon loading apparatus.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view schematically illustrating an embodiment of a holding mechanism for a replacement ink ribbon according to the present invention;

FIG. 2 is a view illustrating a manner of cutting a cut-planned portion;

FIG. 3 is a view illustrating a manner of releasing a board;

FIG. 4 is a view illustrating a manner of releasing a board;

FIG. 5 is a view illustrating a step of loading an ink ribbon in a cassette;

FIG. 6 is a view illustrating a manner of pushing a cassette into an ink ribbon from above;

FIG. 7 is a cross-sectional view of a holding mechanism and a feed bobbin of an ink ribbon at the shaft center, which are in a packaged state; and

FIG. 8 is an explanatory view of a cassette.

### BEST MODE FOR CARRYING OUT THE INVENTION

An embodiment of the present invention will be herein-after described with reference to the drawings. FIGS. 1 to 8 are views showing a holding mechanism for replacement ink ribbon according to the present invention.

The holding mechanism for replacement ink ribbon according to the present invention is to be employed when replacing ink ribbons, by improving a packaging form so-called blister package.

In FIGS. 1 to 8, a replacement ink ribbon **20** includes a feed bobbin **21** provided at one end of a thermal transfer strip film **23** and a reel bobbin **22** provided at the other end of the film **23**.

A holding mechanism for replacement ink ribbon **10** according to the present invention holds such a replacement ink ribbon **20**. The holding mechanism for replacement ink ribbon **10** includes a transparent shell (a first holding member) **11** having a feed bobbin receiving portion **40** for receiving and holding the feed bobbin **21** and a reel bobbin receiving portion **45** for receiving and holding the reel bobbin **22**, with the transparent shell **11** having an opening **46** in one surface, and a board (a second holding member) **12** having a plate-shape for covering the opening **46** of the transparent shell **11**.

The transparent shell **11** is obtained by forming a transparent and colorless PET (polyethylene terephthalate) sheet by vacuum molding. The transparent shell **11** covers the ink ribbon **20** with a portion other than the opening **46**.

The feed bobbin **21** and the reel bobbin **22** respectively have flanges **21a**, **21b**, **22a**, **22b** at both ends thereof. The feed bobbin receiving portion **40** and the reel bobbin receiving portion **45** of the transparent shell **11** have flange receiving portions **41** (see FIG. 7) for receiving the corresponding flanges **21a**, **21b**, **22a**, **22b**.

Wind slack preventive portions (lock portions) **11a**, **11b**, **11c**, **11d** are provided at each flange receiving portion **41** of the transparent shell **11**, which are engaged with grooves **42** (engagement portions) of the corresponding flanges **21a**, **21b**, **22a**, **22b** to prevent rotations of the feed bobbin **21** and the reel bobbin **22**.

As described above, the wind slack preventive portions **11a** to **11d** prevent the rotations of the feed bobbin **21** and the reel bobbin **22** so as to avoid a wind slack of the film **23**. The wind slack preventive portions **11a** to **11d** are concavely recessed when seen from outside, and are in engagement with the grooves **42** provided at the flanges **21a**, **21b**, **22a**, **22b**.

The transparent shell **11** also includes wind meandering preventive portions **11e**, **11f** which are concavely recessed when seen from outside. The wind meandering preventive portions **11e**, **11f** contact an end **23a** of the film **23** provided on the feed bobbin **21** so as to prevent a wind meandering (axial displacement of the wind position) of the film **23**.

On the opposite sides of the feed bobbin receiving portion **40** and the reel bobbin receiving portion **45** of the transparent shell **11**, support portions **11g**, **11h** are provided. The support portions **11g**, **11h** support the overall holding mechanism **10**. When the holding mechanism **10** is disposed on a plane surface P such as a desk surface with the transparent shell **11** positioned downward and the opening **46** facing upward, the opening **46** of the transparent shell **11** and a board **12** are substantially parallel with the plane surface P such as a desk surface. In the present embodiment, bottom surfaces of the support portions **11g**, **11h** are flat and parallel with the opening **46** of the transparent shell **11** and the board **12**.

The transparent shell **11** has a flat joining surface **11i**. The joining surface **11i** is in heat bonded with a joining region **12d** of the board **12**, which is coated with an adhesive.

The board **12** is now explained. The board **12** is made of a thick paper fixed to the transparent shell **11**. The board **12**

has a pair of perforated lines **12a**, a cut-planned portion **12b** surrounded by a pair of perforated lines **12a**, an index **12c** provided at a surface facing the transparent shell **11**, and the joining region **12d** to be bonded to the joining surface **11i** of the transparent shell **11**, etc.

The perforated line **12a** is a cut-planned line provided on both sides of the cut-planned portion **12b**, which facilitates cutting of the board **12** when the cut-planned portion **12b** is to be cut.

The cut-planned portion **12b** is firstly to be cut when loading the ink ribbon **20** in a printer. The cut-planned portion **12b** is not bonded to the transparent shell **11** for easily cutting the portion **12b** from the other portion of the board **12**.

The index **12c** is provided on the inner surface of the board **12** on the side of the feed bobbin **21**. The index **12c** is provided on the board **12** at a region which is not bonded and is located near a shaft end of the feed bobbin **21**.

The joining region **12d** is provided on an outer peripheral portion of the inner surface of the board **12** to be bonded to the joining surface **11i** of the transparent shell **11**. The joining region **12d** has a hook hole **12e** to be used for hanging the holding mechanism on a hook or others when displayed in a shop.

The ink ribbon **20** is a replacement ink ribbon having the feed bobbin **21**, the reel bobbin **22** and the film **23**, as described above. A printer using the ink ribbon **20** of the present embodiment can carry out an A-4 size printing. The printer carries out a consecutive printing by means of a large-sized printer head. Thus, the ink ribbon **20** is made enlarged corresponding to the A-4 size.

As described above, the feed bobbin **21** and the reel bobbin **22** are shafts which have respectively the film **23** provided thereon. During use, the film **23** is sequentially reeled from the feed bobbin **21** to the reel bobbin **22**. The feed bobbin **21** and the reel bobbin **22** respectively have flanges **21a**, **21b**, **22a**, **22b** near the shaft ends thereof. These flanges **21a**, **21b**, **22a**, **22b** have slit grooves **42**.

The film **23** is a thermal transfer film including a thermal transfer layer containing a sublimating dye. The film **23** has one end provided at the feed bobbin **21** in tight contact therewith, and the other end provided at the reel bobbin **22** by using an adhesive tape or the like.

The holding mechanism **10** serves to hold the ink ribbon **20** so that one can set the ink ribbon **20** without touching the ink ribbon **20**, when loading the ink ribbon **20** to a cassette **30** (see FIG. 8). The holding mechanism **10** also serves as a package until the ink ribbon **20** is used.

FIG. 7 is a cross-sectional view of the holding mechanism **10** and the feed bobbin **21** of the ink ribbon **20** at the shaft center, which are in a packaged state.

In the packaged state, since the wind slack preventive portion **11c** of the transparent shell **11** is engaged with the groove **42** provided at the flange **21a** of the feed bobbin **21**, the feed bobbin **21** is not rotated during a transportation so that a wind slack of the film **23** is prevented.

At the same time, the wind meandering preventive portion **11e** bears down the end **23a** of the film **23**. Thus, even if vibrated during a transportation, the film **23** can be held in a right state without wind meandering thereof.

As to the portions other than those shown in FIG. 7, the wind slack preventive portions **11a**, **11b**, **11d**, and wind meandering preventive portion **11f** act in the same manner as the wind slack preventive portion **11c** and the wind meandering preventive portion **11e**.

## 5

A process for loading the ink ribbon **20** in the cassette (ink ribbon loading apparatus) **30** is hereinafter explained.

FIGS. **2** to **6** illustrate a process for loading the ink ribbon **20** in the cassette **30**.

First, the holding mechanism **10** is disposed on a flat surface P such as a desk, with the transparent shell **11** facing downward and the board **12** facing upward. Since the transparent shell **11** is provided with the support portions **11g**, **11h** having flat bottom surfaces, the holding mechanism **10** can stably disposed on the plane surface P and the operations thereafter can be readily performed.

Then, the cut-planned portion **12b** of the board **12** is cut along the cut-planned line **12a** (FIG. **2**). By cutting the cut-planned portion **12b**, the board **12** is divided into a board **12A** and a board **12B**. The boards **12A** and **12B** are sequentially released thereafter (FIGS. **3** and **4**). However, the boards **12A** and **12B** are not fully released, with an end portion **47** of the board **12** left bonded to the transparent shell **11**.

After the boards **12A** and **12B** are released to be in a state shown in FIG. **4**, the ink ribbon **20** is to be loaded in the cassette **30**.

FIG. **8** illustrates the cassette **30**. The cassette **30** is provided in a printer not shown. The ink ribbon **20** is loaded in the printer through the cassette **30**. The cassette **30** has a cassette index **30a** and bearings **30b** to **30e**. The shafts of the feed bobbin **21** and the reel bobbin **22** are fit in the bearings **30b** to **30e**. The ink ribbon **20** is loaded in the printer together with the cassette **30**.

Each interval between the bearings **30b** to **30e** of the cassette **30**, namely an interval between the feed bobbin **21** and the reel bobbin **22** when printing, is identical with that between the feed bobbin receiving portion **41** and the reel bobbin receiving portion **45**.

When loading the ink ribbon **20** into the cassette **30**, the cassette **30** is so oriented that the index **12c** provided at the board **12** may be aligned with the index **30a** provided at the cassette **30**, as shown in FIG. **5**, to thereby position the cassette **30** in a right loading direction with respect to the ink ribbon **20**.

Then, the cassette **30** is pushed from above (FIG. **6**) to securely fit the shafts of the feed bobbin **21** and the reel bobbin **22** in the four bearings **30b** to **30e**. Thus, the loading of the ink ribbon **20** in the cassette **30** is completed.

Since the intervals between the bearings **30b** to **30e** are identical with the interval between the feed bobbin receiving portion **41** and the reel bobbin receiving portion **45**, the cassette **30** can be readily loaded to the ink ribbon **20** simply by pushing the cassette **30**.

During the above loading operation of the ink ribbon **20** into the cassette **30**, the wind slack and the wind meandering of the film are prevented by the wind slack preventive portions **11a** to **11d** and the wind meandering preventive portions **11e**, **11f**. Accordingly, the ink ribbon **20** can be readily loaded in the cassette **30** without displacement thereof.

According to the present embodiment, the transparent shell **11** has the wind slack preventive portions **11a** to **11d** to be engaged with the groove **42** provided at the flanges **21a**, **21b**, **22a**, **22b** of the feed bobbin **21** and the reel bobbin **22**. Thus, the feed bobbin **21** and the reel bobbin **22** can be stably secured without rotation thereof, during a transportation and a loading operation of the ink ribbon **20** into the cassette **30**. Therefore, the film **23** is prevented from being slack.

## 6

The transparent shell **11** has the wind meandering preventive portions **11e**, **11f**. Thus, the feed bobbin **21**, the reel bobbin **22**, and the film **23** can be stably secured in an axial direction, during a transportation and a loading operation of the ink ribbon **20** in the cassette **30** so that the wind meandering of the film **23** is prevented.

Since the transparent shell **11** is provided with the support portions **11g**, **11h** having the flat surfaces, the ink ribbon **20** and the holding mechanism **10** can be supported in a stable manner when loading the ink ribbon **20** into the cassette **30**. Further, the ink ribbon **20** and the holding mechanism **10** can be superposed in a stable manner during a transportation and in a shop, etc.

According to the present embodiment, the ink ribbon **20** is held by the transparent shell **11** and the board **12**, and loaded in the cassette **30** when it is to be used. Thus, it is not necessary to prepare a cassette attached to every ink ribbon, whereby a price of consumable article of the ink ribbon **20** can be lowered. As only one printer is needed for one cassette **30**, it is economical with resources.

The board **12** has the perforated lines **12a** provided at substantially the center portion thereof, and is to be opened from these lines one by one. Thus, it can be stably and readily opened without touching the ink ribbon **20**.

Further, by providing the index **12c** at the board **12**, the index **30a** at the corresponding portion of the cassette **30** can be aligned with the index **12c**. Thus, the ink ribbon **20** can be readily and securely loaded into the cassette **30**, keeping the right loading direction.

## Variations

Not limited to the above-described embodiment, various changes and modifications can be made, which are within the equivalent scope of the present invention.

- (1) In the above embodiment, the transparent shell **11** is transparent and colorless. However, not limited thereto, the transparent shell **11** may, for example, include additives to have a UV protection function so as to protect the ink ribbon **20**.
- (2) In the above embodiment, the ink ribbon **20** is loaded into the cassette **30**. However, not limited thereto, the ink ribbon **20** may be, for example, directly loaded in a printer as an ink ribbon loading apparatus. In this case, for example, the transparent shell **11** may be held by hand when loading.
- (3) In the above embodiment, the wind slack preventive portions **11a** to **11d** are engaged with the groove **42** provided at the flanges **21a**, **21b**, **22a**, **22b**. However, not limited thereto, for example, an engagement portion may be provided at the shafts of the feed bobbin **21** and the reel bobbin **22**, and a lock portion to be engaged with the engagement portion may be additionally provided.
- (4) In the above embodiment, the support portions **11g**, **11h** have the flat surfaces parallel with the board **12**. However, not limited thereto, the support portions **11g**, **11h** may have, for example, a plurality of projected portions provided at the bottom surfaces thereof, each having the top end substantially in the same plane.

As described above in detail, according to the present invention, the holding mechanism for an ink ribbon includes a first holding member having a feed bobbin receiving portion and a reel bobbin receiving portion for respectively receiving a feed bobbin and a reel bobbin, and a second holding member for covering a whole area of an opening of

7

the first holding member. Thus, positions of the feed bobbin and/or the reel bobbin can be secured during a transportation and a loading of an ink ribbon. Consequently, wind slack of the film can be prevented as well as the loading operation can be performed in a stable manner.

A wind slack of the film can be more efficiently prevented by providing a wind slack preventive portion at the first holding member.

The first holding member has a wind meandering preventive portion for preventing wind meandering of the film by bearing down at least one of the film ends in an axial direction of the bobbins. Thus, the feed bobbin, the reel bobbin and the film can be securely held in an axial direction during the transportation and the loading of the ink ribbon, and wind meandering of the film can be prevented.

As the first holding member includes a support portion, the ink ribbon and the holding mechanism for a replacement ink ribbon can be supported in a stable manner on a plane such as a desk, during the transportation and the loading operation of the ink ribbon. Further, the ink ribbon and the holding mechanism can be superposed in a stable manner during a transportation and in a shop.

Since the support portion of the first holding member has a flat bottom surface, the ink ribbon and the holding mechanism for a replacement ink ribbon can be supported in a stable manner on a plane such as a desk, and superposed in a stable manner during the transportation or in a shop. Further, the manufacturing of the holding mechanism can be facilitated because of the simple form. Permeability can be improved because of less irregular surface, and therefore the ink ribbon in the holding mechanism can be easily recognized from the outside.

According to the present invention, the holding mechanism includes the first holding member for covering the overall ink ribbon except an opened surface, with the feed bobbin and the reel bobbin being held with an interval therebetween which is substantially the same with that between the shafts of the feed bobbin and the reel bobbin when printing, and the second holding member for covering the full area of the opening of the first holding member. Thus, the ink ribbon can be loaded into a printer or a cassette or others in a simple manner.

The first holding member is formed of transparent or translucent resin, and the second holding member is formed of opaque board. Thus, the ink ribbon contained in the holding mechanism and the state thereof can be easily recognized in a shop before being used. Therefore, the ink ribbon can be prevented from being damaged or touched when opened.

The second holding member includes cut-planned lines at substantially the center portion thereof. Thus, the second holding member can be divided half and half, which facilitates the opening operation, without damaging or touching the ink ribbon when it is opened.

The cut-planned lines can be provided at an extremely low price because it is composed of perforations.

As the second holding member includes an index for indicating a loading position with respect to the printer and/or cassette, the ink ribbon can be readily and securely loaded, with keeping a right loading direction of the ink ribbon.

What is claimed is:

1. A holding mechanism for holding a replacement ink ribbon comprising a feed bobbin located at one end of a strip film and a reel bobbin located at the other end of the strip film, comprising:

a first holding member having a feed bobbin receiving portion for receiving and holding the feed bobbin and

8

a reel bobbin receiving portion for receiving and holding the reel bobbin, with the first holding member having an opening; and

a second holding member having a plate-shape for covering the opening of the first holding member, wherein the first holding member is made of synthetic resin, the second holding member is made of paper, the second holding member has a cut-planned line, the feed bobbin and the reel bobbin each comprising flanges at both ends thereof,

the feed bobbin receiving portion and the reel bobbin receiving portion each comprising flange receiving portions for receiving the corresponding flanges, and a lock portion is located at each flange receiving portion of the feed bobbin receiving portion and the reel bobbin receiving portion, which engages with a corresponding engagement portion of the flanges to function as a wind slack preventive portion.

2. The holding mechanism according to claim 1, further comprising a wind slack preventive portion located in at least one of the feed bobbin receiving portion and the reel bobbin receiving portion, for preventing a rotation of the feed bobbin or the reel bobbin.

3. The holding mechanism according to claim 1, wherein the first holding member comprises a planar member having said opening thereon, a support portion that supports the first holding member such that, when the holding mechanism is located on a plane surface with the opening facing upward, the planar member having the opening is substantially parallel with the plane surface.

4. The holding mechanism according to claim 3, wherein a bottom surface of the support portion is a flat surface.

5. The holding mechanism according to claim 1, wherein the feed bobbin receiving portion and the reel bobbin receiving portion of the first holding member are so positioned that the feed bobbin receiving portion and the reel bobbin receiving portion can receive and hold the feed bobbin and the reel bobbin at an interval identical with that between the feed bobbin and the reel bobbin when printing.

6. The holding mechanism according to claim 1, wherein the second holding member has a cut-planned line at substantially the center portion thereof.

7. The holding mechanism according to claim 6, wherein the cut-planned line comprises perforations.

8. The holding mechanism according to claim 1, wherein the second holding member further comprises, on a surface facing the first holding member, an index for loading replacement ink ribbon in an ink ribbon loading apparatus.

9. A holding mechanism for holding a replacement ink ribbon, comprising:

a feed bobbin located at one end of a strip film and a reel bobbin located at the other end of the strip film;

a first holding member having a feed bobbin receiving portion for receiving and holding the feed bobbin and a reel bobbin receiving portion for receiving and holding the reel bobbin, with the first holding member having an opening; and

a second holding member having a plate-shape for covering the opening of the first holding member, wherein the first holding member is made of synthetic resin, the second holding member is made of paper, and the second holding member has a cut-planned line, the first holding member comprises a wind meandering preventive portion for preventing wind meandering of the strip film by contacting one side of the strip film to control lateral movement of the film.

10. A holding mechanism in combination with a replacement ink ribbon, comprising:

a replacement ink ribbon comprising a feed bobbin located at one end of a strip film and a reel bobbin located at another end of the strip film,

a first holding member having a feed bobbin receiving portion for receiving and holding the feed bobbin and a reel bobbin receiving portion for receiving and holding the reel bobbin, with the first holding member having an opening; and

a second holding member having a plate-shape for covering the opening of the first holding member, wherein the first holding member comprises synthetic resin, the second holding member comprises paper, and the second holding member has a cut-planned line.

11. The holding mechanism in combination with a replacement ink ribbon according to claim 10, further comprising a wind slack preventive portion located in at least one of the feed bobbin receiving portion and the reel bobbin receiving portion, for preventing a rotation of the feed bobbin or the reel bobbin.

12. The holding mechanism in combination with a replacement ink ribbon according to claim

wherein the feed bobbin and the reel bobbin each comprising flanges at both ends thereof, and

wherein the feed bobbin receiving portion and the reel bobbin receiving portion each comprises flange receiving portions for receiving the corresponding flanges.

13. The holding mechanism in combination with a replacement ink ribbon according to claim 12, wherein a lock portion is located at each flange receiving portion of the feed bobbin receiving portion and the reel bobbin receiving portion, which engages with a corresponding engagement portion of the flanges to function as a wind slack preventive portion.

14. The holding mechanism in combination with a replacement ink ribbon according to claim 10, wherein the

first holding member comprises a wind meandering preventive portion for preventing wind meandering of the strip film by contacting one side of the strip film to control lateral movement of the film.

15. The holding mechanism in combination with a replacement ink ribbon according to claim 10, wherein the first holding member comprises a planar member having said opening thereon, a support portion that supports the first holding member such that, when the holding mechanism is located on a plane surface with the opening facing upward, the planar member having the opening is substantially parallel with the plane surface.

16. The holding mechanism in combination with a replacement ink ribbon according to claim 15, wherein a bottom surface of the support portion is a flat surface.

17. The holding mechanism in combination with a replacement ink ribbon according to claim 10, wherein the feed bobbin receiving portion and the reel bobbin portion of the first holding member are so positioned that the feed bobbin receiving portion and the reel bobbin receiving portion can receive and hold the feed bobbin and the reel bobbin at an interval identical with that between the feed bobbin and the reel bobbin when printing.

18. The holding mechanism in combination with a replacement ink ribbon according to claim 10, wherein the second holding member has a cut-planned line at substantially the center portion thereof.

19. The holding mechanism in combination with a replacement ink ribbon according to claim 18, wherein the cut-planned line comprises perforations.

20. The holding mechanism in combination with a replacement ink ribbon according to claim 10, wherein the second holding member further comprises, on a surface facing the first holding member, an index for loading replacement ink ribbon in an ink ribbon loading apparatus.

\* \* \* \* \*