



(86) Date de dépôt PCT/PCT Filing Date: 2007/06/29  
(87) Date publication PCT/PCT Publication Date: 2008/01/17  
(45) Date de délivrance/Issue Date: 2014/06/17  
(85) Entrée phase nationale/National Entry: 2008/12/31  
(86) N° demande PCT/PCT Application No.: US 2007/072482  
(87) N° publication PCT/PCT Publication No.: 2008/008645  
(30) Priorité/Priority: 2006/07/14 (US11/486,503)


(51) Cl.Int./Int.Cl. *E04H 15/50* (2006.01)

(72) Inventeur/Inventor:  
CARTER, MARK C., US

(73) Propriétaire/Owner:  
CARTER, MARK C., US


(74) Agent: SMART & BIGGAR

(54) Titre : EQUERRE  
(54) Title: CORNER BRACE

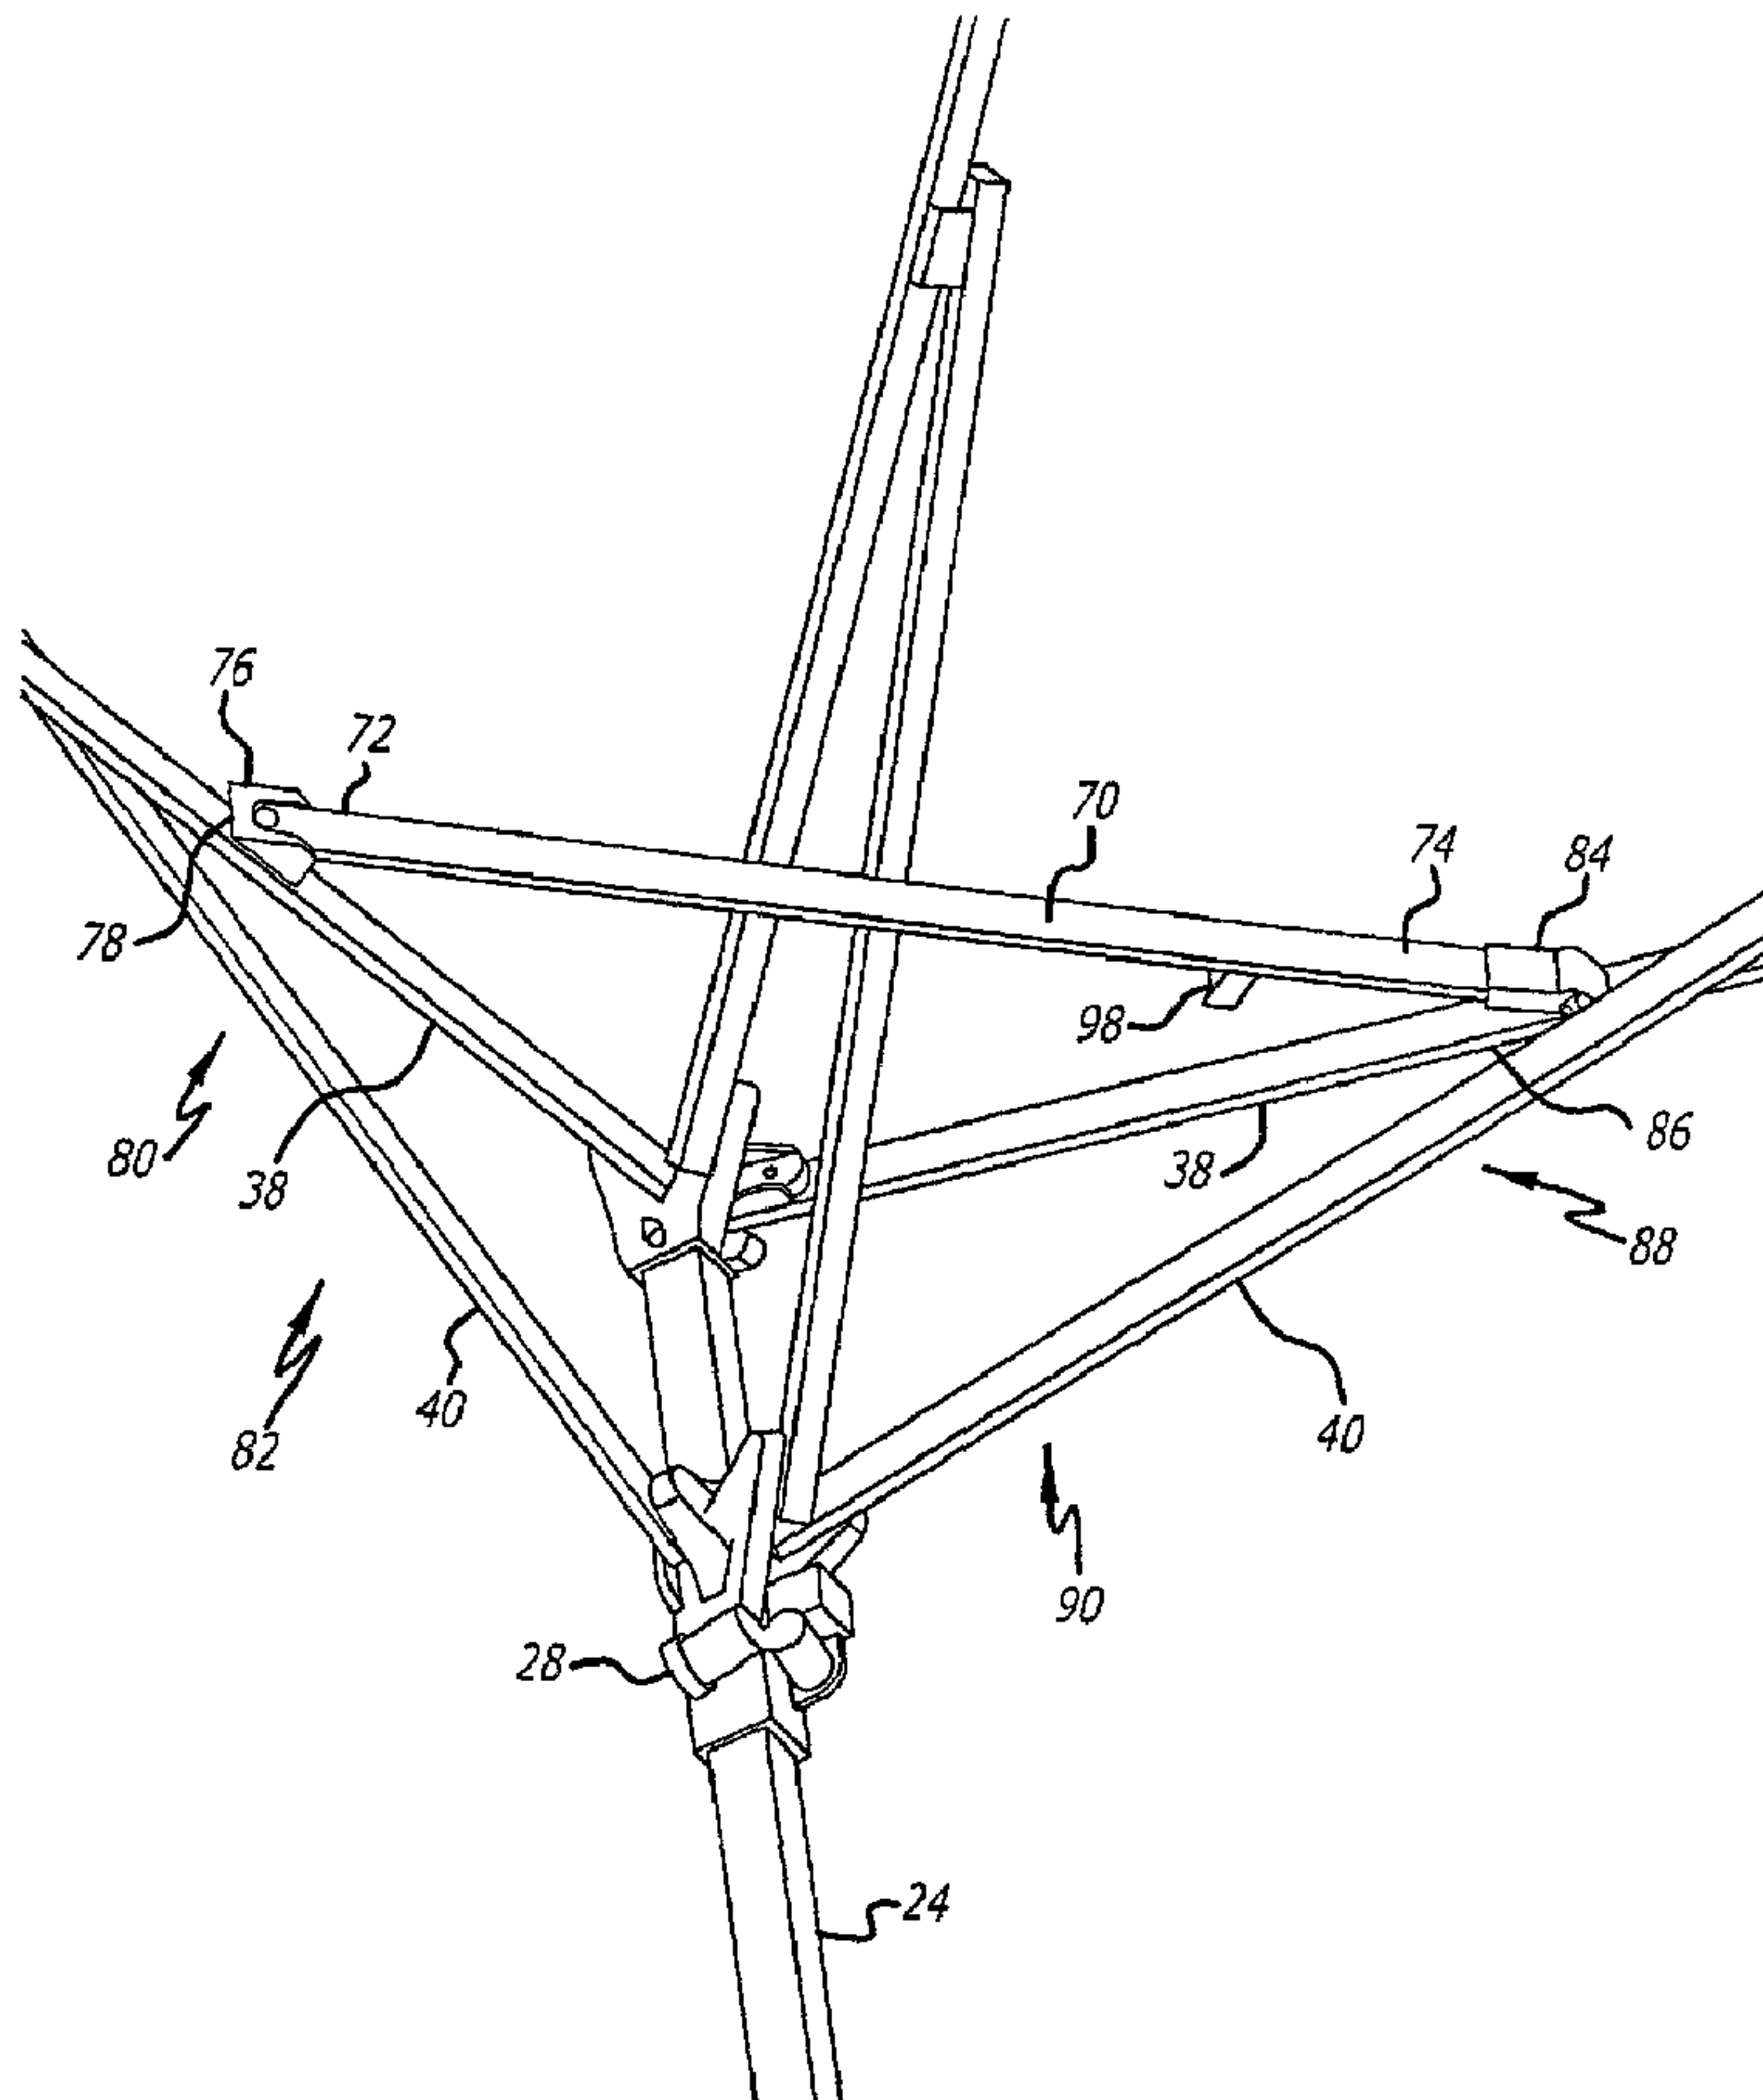

(57) Abrégé/Abstract:

The corner brace of a framework of a quickly erectable canopy shelter is connected between portions of a perimeter truss assembly connected to a leg of the framework of the canopy shelter. The corner brace includes a corner brace mounting pin on a

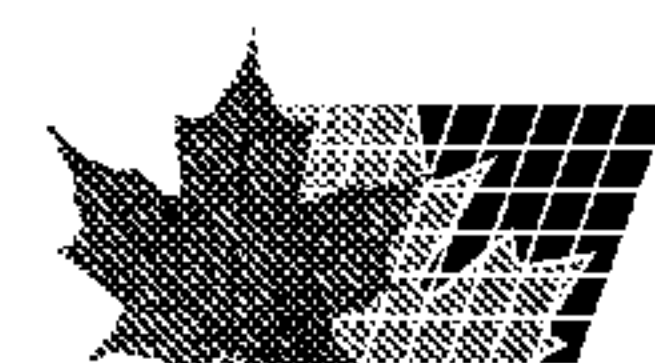



(57) **Abrégé(suite)/Abstract(continued):**

first link member of an outer truss of the perimeter truss assembly, and a support truss tube member pivotally and rotatably connected at one end to an outer truss on one side of the leg. The other end of the support truss tube member is removably connected to an outer truss on the other side of the leg. The support truss tube member of the corner brace may include a support truss clip that fits to a link member of the framework. The framework may also include a canopy framework support assembly for supporting a canopy.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
17 January 2008 (17.01.2008)

PCT

(10) International Publication Number  
**WO 2008/008645 A1**(51) International Patent Classification:  
*E04H 15/50* (2006.01)(21) International Application Number:  
PCT/US2007/072482

(22) International Filing Date: 29 June 2007 (29.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/486,503 14 July 2006 (14.07.2006) US

(71) Applicant and

(72) Inventor: CARTER, Mark C. [US/US]; 1601 Iowa Avenue, Riverside, California 92507 (US).

(74) Agent: JAMES W. PAUL; Fulwider Patton LLP, Howard Hughes Center, 6060 Center Drive, 10th Floor, Los Angeles, California 90045 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,


ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: CORNER BRACE

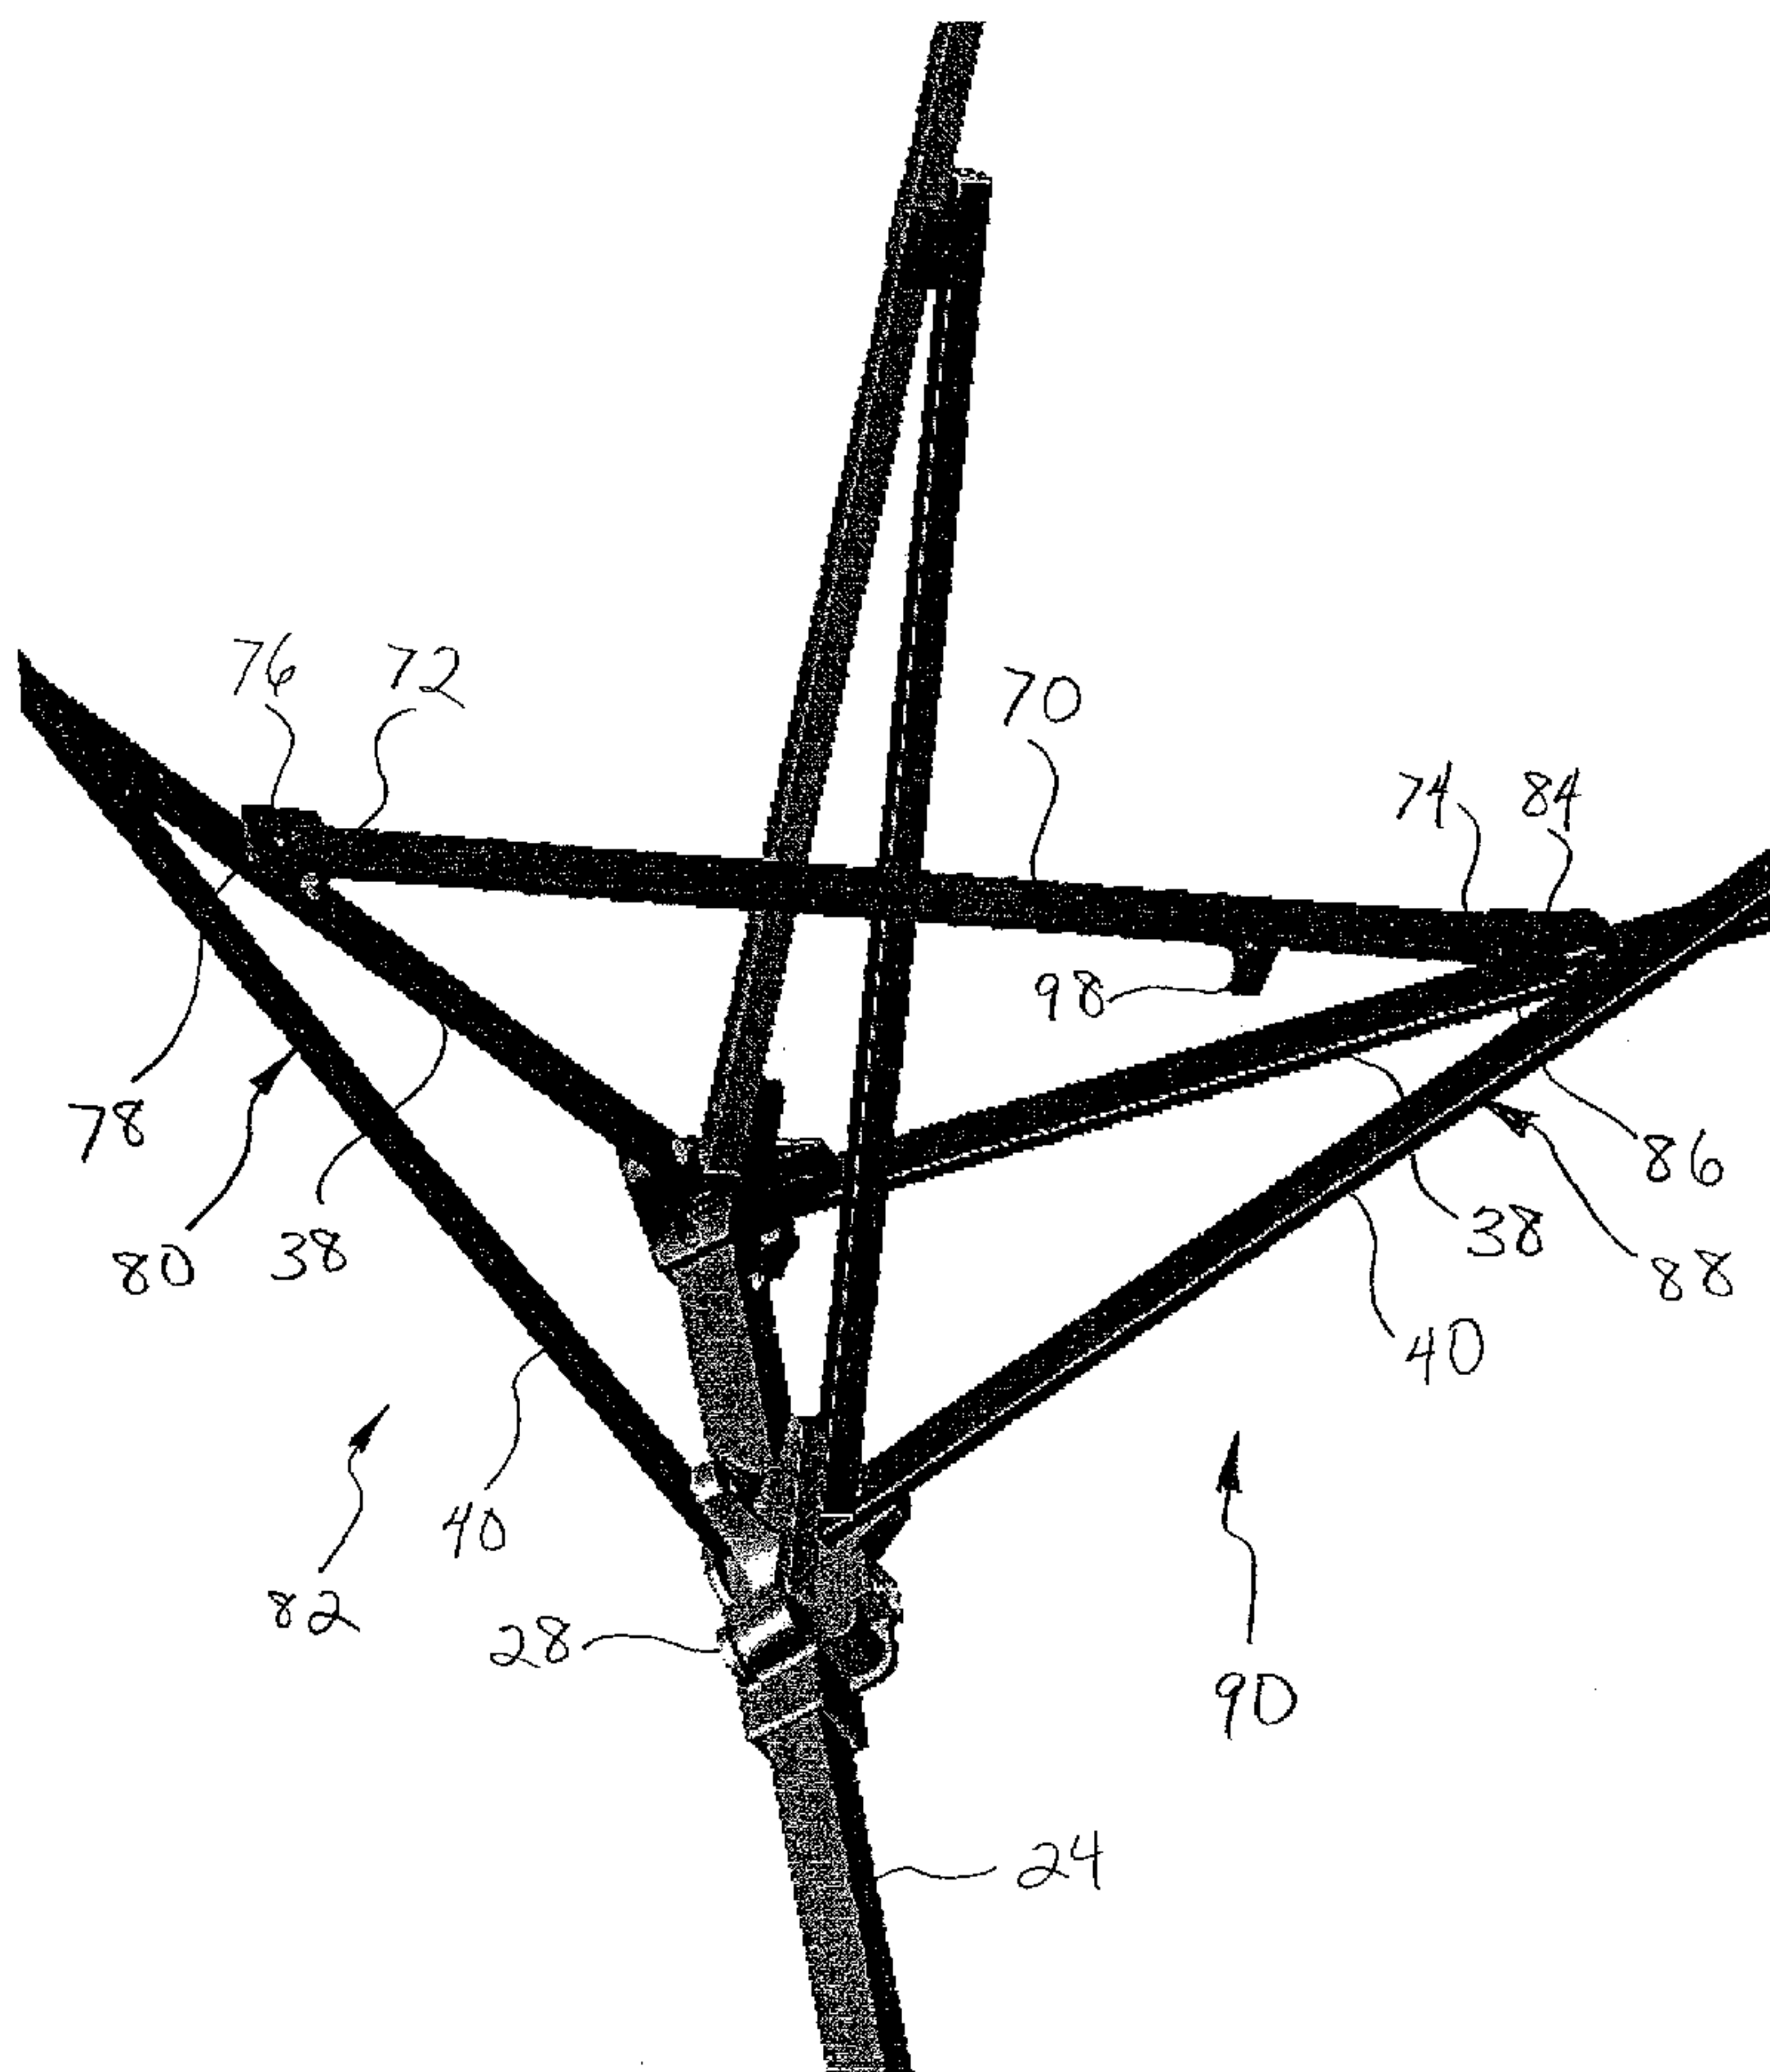

**(57) Abstract:** The corner brace of a framework of a quickly erectable canopy shelter is connected between portions of a perimeter truss assembly connected to a leg of the framework of the canopy shelter. The corner brace includes a corner brace mounting pin on a first link member of an outer truss of the perimeter truss assembly, and a support truss tube member pivotally and rotatably connected at one end to an outer truss on one side of the leg. The other end of the support truss tube member is removably connected to an outer truss on the other side of the leg. The support truss tube member of the corner brace may include a support truss clip that fits to a link member of the framework. The framework may also include a canopy framework support assembly for supporting a canopy.

WO 2008/008645 A1



**WO 2008/008645 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



## CORNER BRACE

## BACKGROUND OF THE INVENTION

This invention relates generally to folding, collapsible structures, and more particularly relates to a corner brace for a framework of a canopy shelter.

5 Temporary shelters that can be easily transported and rapidly set up at emergency sites can be particularly useful in providing temporary care and housing. Such shelters can also be useful for non-emergency outdoor gatherings, such as for temporary military posts, field trips, and the like. One known quickly erectable, collapsible shelter includes a framework of X-shaped linkages, telescoping legs, and a canopy covering the framework.

10 The legs of that shelter are capable of telescoping to about twice their stowed length, and the framework of X-shaped truss pairs is capable of horizontal extension between the legs to support a canopy. The framework can be constructed of lightweight material, and the telescoping legs can be extended to raise the framework of the shelter.

In order to increase the portability and versatility of such temporary shelters, it is

15 important that they be not only lightweight and small enough in a folded, compact configuration so that can be readily transported and carried, but also large enough and with sufficient headroom when unfolded for a group of people to stand underneath them. As such structures have become larger and more lightweight, reinforcing features that contribute to strength, roominess, and ease of use in setting up and taking down such

20 structures have also become increasingly important.

One modern type of tent structure provides a lightweight roof structure with four roof rods joined together at the center by a head connector member, with each of the roof rods formed of two rod members interconnected by intermediate pivot connecting members. The roof rods are supported on top of a base structure formed by four legs and

25 scissors-type linkages connected to a top fixed connector and a lower sliding connector of each leg. Each intermediate pivot connecting member between the individual rod members of the roof rods confines upward rotation of the rod members to an uppermost, upwardly arching position, but allows the roof rods to be folded downwardly when the tent is collapsed. Reinforcing linking rods provided at the corners of the roof structure are

30 coupled at one end to the lower sliding connectors on the legs, and are slidably coupled at the other end to the roof rods, to assist in stabilizing the roof rods in the upwardly arched position when the shelter is fully unfolded and extended. However, the sliding coupling of the corner linking rods must slide over a considerable length of the roof rods which can



lead to abrasion and wear of the roof rods and eventually interfere with the sliding of the linking rods during setting up and taking down of the structure, without providing any significant reinforcing strength or vertical support of the roof structure when the shelter is fully unfolded and extended.

5           Lightweight shelters with raised roof structures are particularly useful for holding gatherings in inclement weather, to provide needed headroom and shed precipitation and debris, but raised roof structures can be particularly vulnerable to downward forces placed on a roof structure by strong winds. One approach to providing a lightweight shelter with a raised roof structure has been to make the roof structure flexible so that it can move  
10   between a raised, upwardly arching configuration when weather permits, and a lowered, downwardly arching configuration if the downward force of the wind is sufficiently strong, to automatically present a reduced profile to strong winds when necessary. However, there remains a significant problem for collapsible shelters that have a clear span across a middle portion of the perimeter truss assembly that is not directly connected to and  
15   supported by a leg. There thus remains a need for improved strength of the canopy on such unsupported sides of the canopy, to help prevent the unsupported sides from caving in due to heavy loading from strong winds. The present invention meets these and other needs.

#### SUMMARY OF THE INVENTION

20           Briefly and in general terms, the present invention provides for a corner brace for a framework of a quickly erectable canopy shelter, in which the corner brace is connected between portions of a perimeter truss assembly about a leg of the framework of the canopy shelter, to provide improved strength and stability for a canopy shelter having a clear span across a middle portion of the perimeter truss framework of the canopy shelter that is not  
25   directly supported by a leg.

          The present invention accordingly provides a corner brace assembly for a framework of a quickly erectable canopy shelter, the framework of the canopy shelter including a leg and a perimeter truss assembly connected to a leg having an upper end and a lower end, and a slider member slidably mounted to the leg. The perimeter truss  
30   assembly includes first and second outer trusses of pairs of link members connected to the leg, each pair of link members of the first and second outer trusses including a first link member and a second link member pivotally connected together, the first link member



having an outer end pivotally connected to the upper end of the leg, and the second link member having an outer end pivotally connected to the slider member.

The corner brace assembly includes a corner brace mounting pin mounted to and extending from the first link member of the second outer truss; and a corner brace member.

5 In one presently preferred aspect, the corner brace mounting pin includes an enlarged head spaced apart from the second outer truss. The corner brace member includes a support truss tube member pivotally connected to a support truss swivel bracket that is rotatably connected to an outer section of the first link member of the first outer truss on one side of the leg for rotational movement with respect to the first link member. The second end of  
10 the support truss tube member includes a support truss end fitting removably connected to an outer section of the first link member of the second outer truss on the other side of the leg, and the support truss end fitting includes a slot for removably receiving the corner brace mounting pin, to removably connect the first and second outer trusses together. In a presently preferred aspect, at least one of the outer trusses of pairs of link members is  
15 connected to a middle truss pair of link members. In another presently preferred aspect, the support truss tube member of the corner brace includes a support truss clip adapted to snap fit to one of the link members of the framework of the canopy shelter.

In another presently preferred aspect, the framework of the canopy shelter includes a canopy framework support assembly including a peak beam member having an inner end  
20 and an outer end pivotally mounted to the leg to extend across the shelter. The peak beam member typically includes an inner peak beam tube section and an outer peak beam tube section pivotally joined together through an over-center spacer. In a presently preferred aspect, the over-center spacer includes a locking flange allowing the inner peak beam tube section to rotate about the over-center spacer to an extended position braced against the  
25 locking flange. In another preferred aspect, the inner end of the peak beam member may be pivotally connected to a central peak hub assembly.

In another preferred aspect, the framework for the canopy shelter may also include a support strut member having an outer end pivotally mounted to the slider member below the peak beam member, and an inner end of the support strut member pivotally connected  
30 to the peak beam member to support the peak beam member.

Other features and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments in conjunction with the accompanying drawings, which illustrate, by way of example, the operation of the invention.



### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an outside elevational view of a corner portion of a framework of a canopy shelter, illustrating the corner brace according to the invention.

Fig. 2 is an inside elevational view of the corner portion of a framework of a canopy shelter of Fig. 1.

Fig. 3 is a top plan view of the corner portion of the corner portion of a framework of a canopy shelter of Fig. 1.

Fig. 4 is a side elevational view of the corner portion of a framework of a canopy shelter of Fig. 1.

Fig. 5 is an enlarged top outside perspective view of the corner portion of a framework of a canopy shelter of Fig. 1.

Fig. 6 is an enlarged bottom inside perspective view of the corner portion of a framework of a canopy shelter of Fig. 1.

Fig. 7 is an enlarged perspective view of the swivel bracket of the support truss tube member of the corner brace of Fig. 1.

Fig. 8 is an enlarged perspective view of the support truss end fitting of the support truss tube member of the corner brace of Fig. 1.

Fig. 9 is an enlarged bottom perspective view of the support truss end fitting of the support truss tube member of the corner brace of Fig. 1.

Fig. 10 is an enlarged perspective elevational view of the over-center spacer of the peak beam member of the canopy framework support assembly of the framework of a canopy shelter of Fig. 1.

Fig. 11 is an enlarged side elevational view of the corner portion shown in Fig. 4.

Fig. 12 is an enlarged top perspective view of the central peak hub assembly of the framework of a canopy shelter of Fig. 1.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

While lightweight canopy shelters have been developed with raised roof structures and large spans suitable for holding gatherings in inclement weather, there remains a significant problem of instability due to heavy loading from strong winds for such canopy shelters that have a wide span across a middle portion of the perimeter truss assembly that is not directly connected to and supported by a leg.

As is illustrated in the drawings, the present invention accordingly provides for a corner brace assembly 20 for a framework 22, only a portion of which is shown, of a



quickly erectable canopy shelter, typically including a perimeter truss framework and a central truss framework, which is connected to legs of the canopy shelter to stabilize and support the collapsible shelter, as is described in U.S. Patent No. 5,490,533, which is incorporated by reference herein. Referring to Figs. 1-4, the corner brace assembly is typically provided at a portion of the perimeter framework connected to a leg 24 having upper end 25 and lower end 26. The framework of the canopy shelter preferably has four legs, but can also have three, five, or more legs. A slider member 28 is typically slidably mounted to the leg, such as at an upper section of the leg. The extendible perimeter assembly 30 of link members connecting legs of the framework together typically includes X-shaped outer trusses 32 formed of pairs of link members 34 that are pivotally connected together at pivot point 36. The pairs of link members include first link member 38 and second link member 40. The first link member has an outer end 42 pivotally connected to the upper end of a leg, and the second link member having an outer end 44 pivotally connected to the slider member. The first and second link members are thus connected together in a scissors configuration so as to be extendable from a first collapsed position extending horizontally between pairs of legs to a second extended position extending horizontally between the pairs of legs, as is described in U.S. Patent No. 5,490,533.

Referring to Figs. 1-4, on at least one side 46 of the framework of the canopy shelter such an X-shaped outer truss may be connected to another X-shaped outer truss at their inner ends 48, or may be connected to an adjacent leg, and on another side 50 of the framework of the canopy shelter forming a wide, clear span across the middle of the framework, the extendible perimeter assembly of link members may also include one or more X-shaped middle trusses 52 not directly connected to the legs, and only supported by the outer trusses. The middle truss is similarly formed by a pair of link members 54 pivotally connected together at pivot point 56, and includes a first link member 58 and a second link member 60. The first link member of the middle truss has a first end 62 pivotally connected to the inner end of the second link member of the adjacent outer truss, and the second link member of the middle truss has a first end 64 pivotally connected to the inner end of the first link member of the adjacent outer truss. The middle truss is thus similarly formed in a scissors configuration so as to be extendable from a first collapsed position extending horizontally between pairs of legs to a second extended position extending horizontally between the pairs of legs, as is described in U.S. Patent No. 5,490,533. The middle truss may be connected to another middle truss at their inner ends 66, or may be connected to another outer truss.



As is illustrated in Figs. 1-4, In order to provide additional support and reinforcement for side of the framework forming the wide, clear span 69 across the middle of the framework, the corner brace assembly of the present invention includes a support truss tube member 70 having a first end 72 and a second end 74. Referring to Figs. 5-9, the first end of the support truss tube member is pivotally connected to a support truss swivel bracket or universal joint 76 that is in turn rotatably connected to an outer section 78 of the first link member of a first outer truss 80 on one side 82 of the leg for rotational movement with respect to the first link member, so that the support truss tube member is capable of pivoting, reciprocal movement and rotational movement with respect to the first link member of the first outer truss 80. The second end of the support truss tube member includes a support truss end fitting 84 that is removably connected to an outer section 86 of the first link member of a second outer truss 88 on the other side 90 of the leg. As is illustrated in Figs. 7 and 8, the support truss end fitting includes a slot 92, such as a T-shaped slot, for receiving a pin or bolt 94 with a correspondingly similar configuration, mounted to and extending from the first link member of the second outer truss, and typically having an enlarged head 96 spaced apart from the second outer truss, allowing the support truss tube member to be rotated to slide the slot of the support truss end fitting over the extending pin on the first link member of the second outer truss, to removably connect the adjacent outer trusses at the leg together when the framework is in the extended configuration as shown. As is shown in Figs. 3 and 5-6, the support truss tube member of the corner brace assembly may optionally include a support truss clip 98 adapted to snap fit to one of the link members of the framework when the support truss end fitting is disconnected from the first link member of the second outer truss and the framework of the canopy shelter is to be folded and collapsed, such as for transporting or storing the canopy shelter.

In another presently preferred aspect, as is illustrated in Figs. 1-4 and 10-12, the canopy shelter framework includes a canopy framework support assembly 100 including a peak beam member 102 having an outer end 104 pivotally mounted to the leg to extend across the shelter and movable between a lowered position (not shown) and a raised, upwardly extending position. Referring to Figs. 3 and 4, each of the pole members typically comprises an inner peak beam tube section 106 and an outer peak beam tube section 108 that are pivotally joined together through an over-center spacer 110. The over-center spacer advantageously includes a locking flange 112 allowing the inner peak beam tube section to rotate about the over-center spacer from a collapsed position folded against



the outer peak beam tube section to an unfolded, extended position shown in Fig. 10 and braced against the locking flange.

With reference to Figs. 3-7 and 11, the canopy framework support assembly may also include a support strut member 114 with an outer end 116 pivotally mounted to the leg below the peak beam member. In a presently preferred aspect, the support strut member is pivotally mounted to the slider member. The support strut member has an inner end 118 with a support bracket 120 pivotally connected to the outer peak beam member to support the peak beam member in a raised, upwardly extending position as shown. As is illustrated in Figs. 1-4 and 12, the inner end 122 of the peak beam member is pivotally connected to a central peak hub assembly 124, which is adapted to be connected to a plurality of other peak beam members of the framework of the canopy shelter. A canopy cover (not shown) may be placed over the canopy framework support assembly secured to the tops of the legs of the canopy shelter.

It will be apparent from the foregoing that while particular forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims.



I Claim:

1. In a framework of a quickly erectable canopy shelter, the framework of the canopy shelter including a leg and a perimeter truss assembly connected to leg having an upper end and a lower end, a slider member slidably mounted to the leg, the perimeter  
5 truss assembly including first and second outer trusses of pairs of link members connected to the leg, each pair of link members of the first and second outer trusses including a first link member and a second link member pivotally connected together, said first link member having an outer end pivotally connected to the upper end of the leg, and said second link member having an outer end pivotally connected to the slider member, the  
10 improvement of a corner brace assembly comprising:  
a corner brace mounting pin mounted to and extending from the first link member of the second outer truss; and  
a corner brace for the framework of the canopy shelter, the corner brace including a support truss tube member having a first end and a second end, the first end of the support  
15 truss tube member being pivotally connected to a support truss swivel bracket that is rotatably connected to an outer section of the first link member of the first outer truss on one side of the leg for rotational movement with respect to the first link member, and the second end of the support truss tube member including a support truss end fitting removably connected to an outer section of the first link member of the second outer truss  
20 on the other side of the leg, the support truss end fitting including a slot for removably receiving the corner brace mounting pin, to removably connect the first and second outer trusses together.
2. The corner brace assembly of Claim 1, wherein the corner brace mounting pin includes an enlarged head spaced apart from the second outer truss.
- 25 3. The corner brace assembly of Claim 1, wherein the support truss tube member of the corner brace includes a support truss clip adapted to snap fit to one of the link members of the framework of the canopy shelter.
4. The corner brace assembly of Claim 1, wherein at least one of the outer trusses of pairs of link members is connected to a middle truss pair of link members.
- 30 5. The corner brace assembly of Claim 1, further comprising a canopy framework support assembly including a peak beam member having an inner end and an outer end pivotally mounted to the leg to extend across the shelter.



6. The corner brace assembly of Claim 5, wherein the peak beam member comprises an inner peak beam tube section and an outer peak beam tube section pivotally joined together through an over-center spacer.

7. The corner brace assembly of Claim 6, wherein said over-center spacer  
5 includes a locking flange allowing the inner peak beam tube section to rotate about the over-center spacer to an extended position braced against the locking flange.

8. The corner brace assembly of Claim 5, wherein the inner end of the peak beam member is pivotally connected to a central peak hub assembly.

9. The corner brace assembly of Claim 5, further comprising a support strut  
10 member having an inner end and an outer end, the outer end being pivotally mounted to the leg below the peak beam member, the support strut member being pivotally mounted to the slider member.

10. The corner brace assembly of Claim 9, wherein the inner end of the support  
strut member comprises a support bracket pivotally connected the peak beam member to  
15 support said peak beam member.

11. In a framework of a quickly erectable canopy shelter, the framework of the  
canopy shelter including a leg and a perimeter truss assembly connected to leg having an  
upper end and a lower end, a slider member slidably mounted to the leg, the perimeter  
truss assembly including first and second outer trusses of pairs of link members connected  
20 to the leg and a middle truss pair of link members connected to at least one of the outer  
trusses of pairs of link members, said middle truss pair of link members being only  
indirectly connected to the leg by said at least one of the outer trusses of pairs of link  
members, each pair of link members of the first and second outer trusses including a first  
link member and a second link member pivotally connected together, said first link  
25 member having an outer end pivotally connected to the upper end of the leg, and said  
second link member having an outer end pivotally connected to the slider member, the  
improvement of a corner brace assembly comprising:

a corner brace mounting pin mounted to and extending from the first link member  
of the second outer truss; and

30 a corner brace for the framework of the canopy shelter, the corner brace including a  
support truss tube member having a first end and a second end, the first end of the support  
truss tube member being pivotally connected to a support truss swivel bracket that is  
rotatably connected to an outer section of the first link member of the first outer truss on  
one side of the leg for rotational movement with respect to the first link member, and the



second end of the support truss tube member including a support truss end fitting removably connected to an outer section of the first link member of the second outer truss on the other side of the leg, the support truss end fitting including a slot for removably receiving the corner brace mounting pin, to removably connect the first and second outer  
5 trusses together.

12. The corner brace assembly of Claim 11, wherein the corner brace mounting pin includes an enlarged head spaced apart from the second outer truss.

13. The corner brace assembly of Claim 11, wherein the support truss tube member of the corner brace includes a support truss clip adapted to snap fit to one of the  
10 link members of the framework of the canopy shelter.

14. The corner brace assembly of Claim 11, further comprising a canopy framework support assembly including a peak beam member having an inner end and an outer end pivotally mounted to the leg to extend across the shelter.

15. The corner brace assembly of Claim 14, wherein the peak beam member  
15 comprises an inner peak beam tube section and an outer peak beam tube section pivotally joined together through an over-center spacer.


16. The corner brace assembly of Claim 15, wherein said over-center spacer includes a locking flange allowing the inner peak beam tube section to rotate about the over-center spacer to an extended position braced against the locking flange.

20 17. The corner brace assembly of Claim 14, wherein the inner end of the peak beam member is pivotally connected to a central peak hub assembly.

18. The corner brace assembly of Claim 14, further comprising a support strut member having an inner end and an outer end, the outer end being pivotally mounted to the leg below the peak beam member, the support strut member being pivotally mounted to  
25 the slider member.

19. The corner brace assembly of Claim 18, wherein the inner end of the support strut member comprises a support bracket pivotally connected the peak beam member to support said peak beam member.



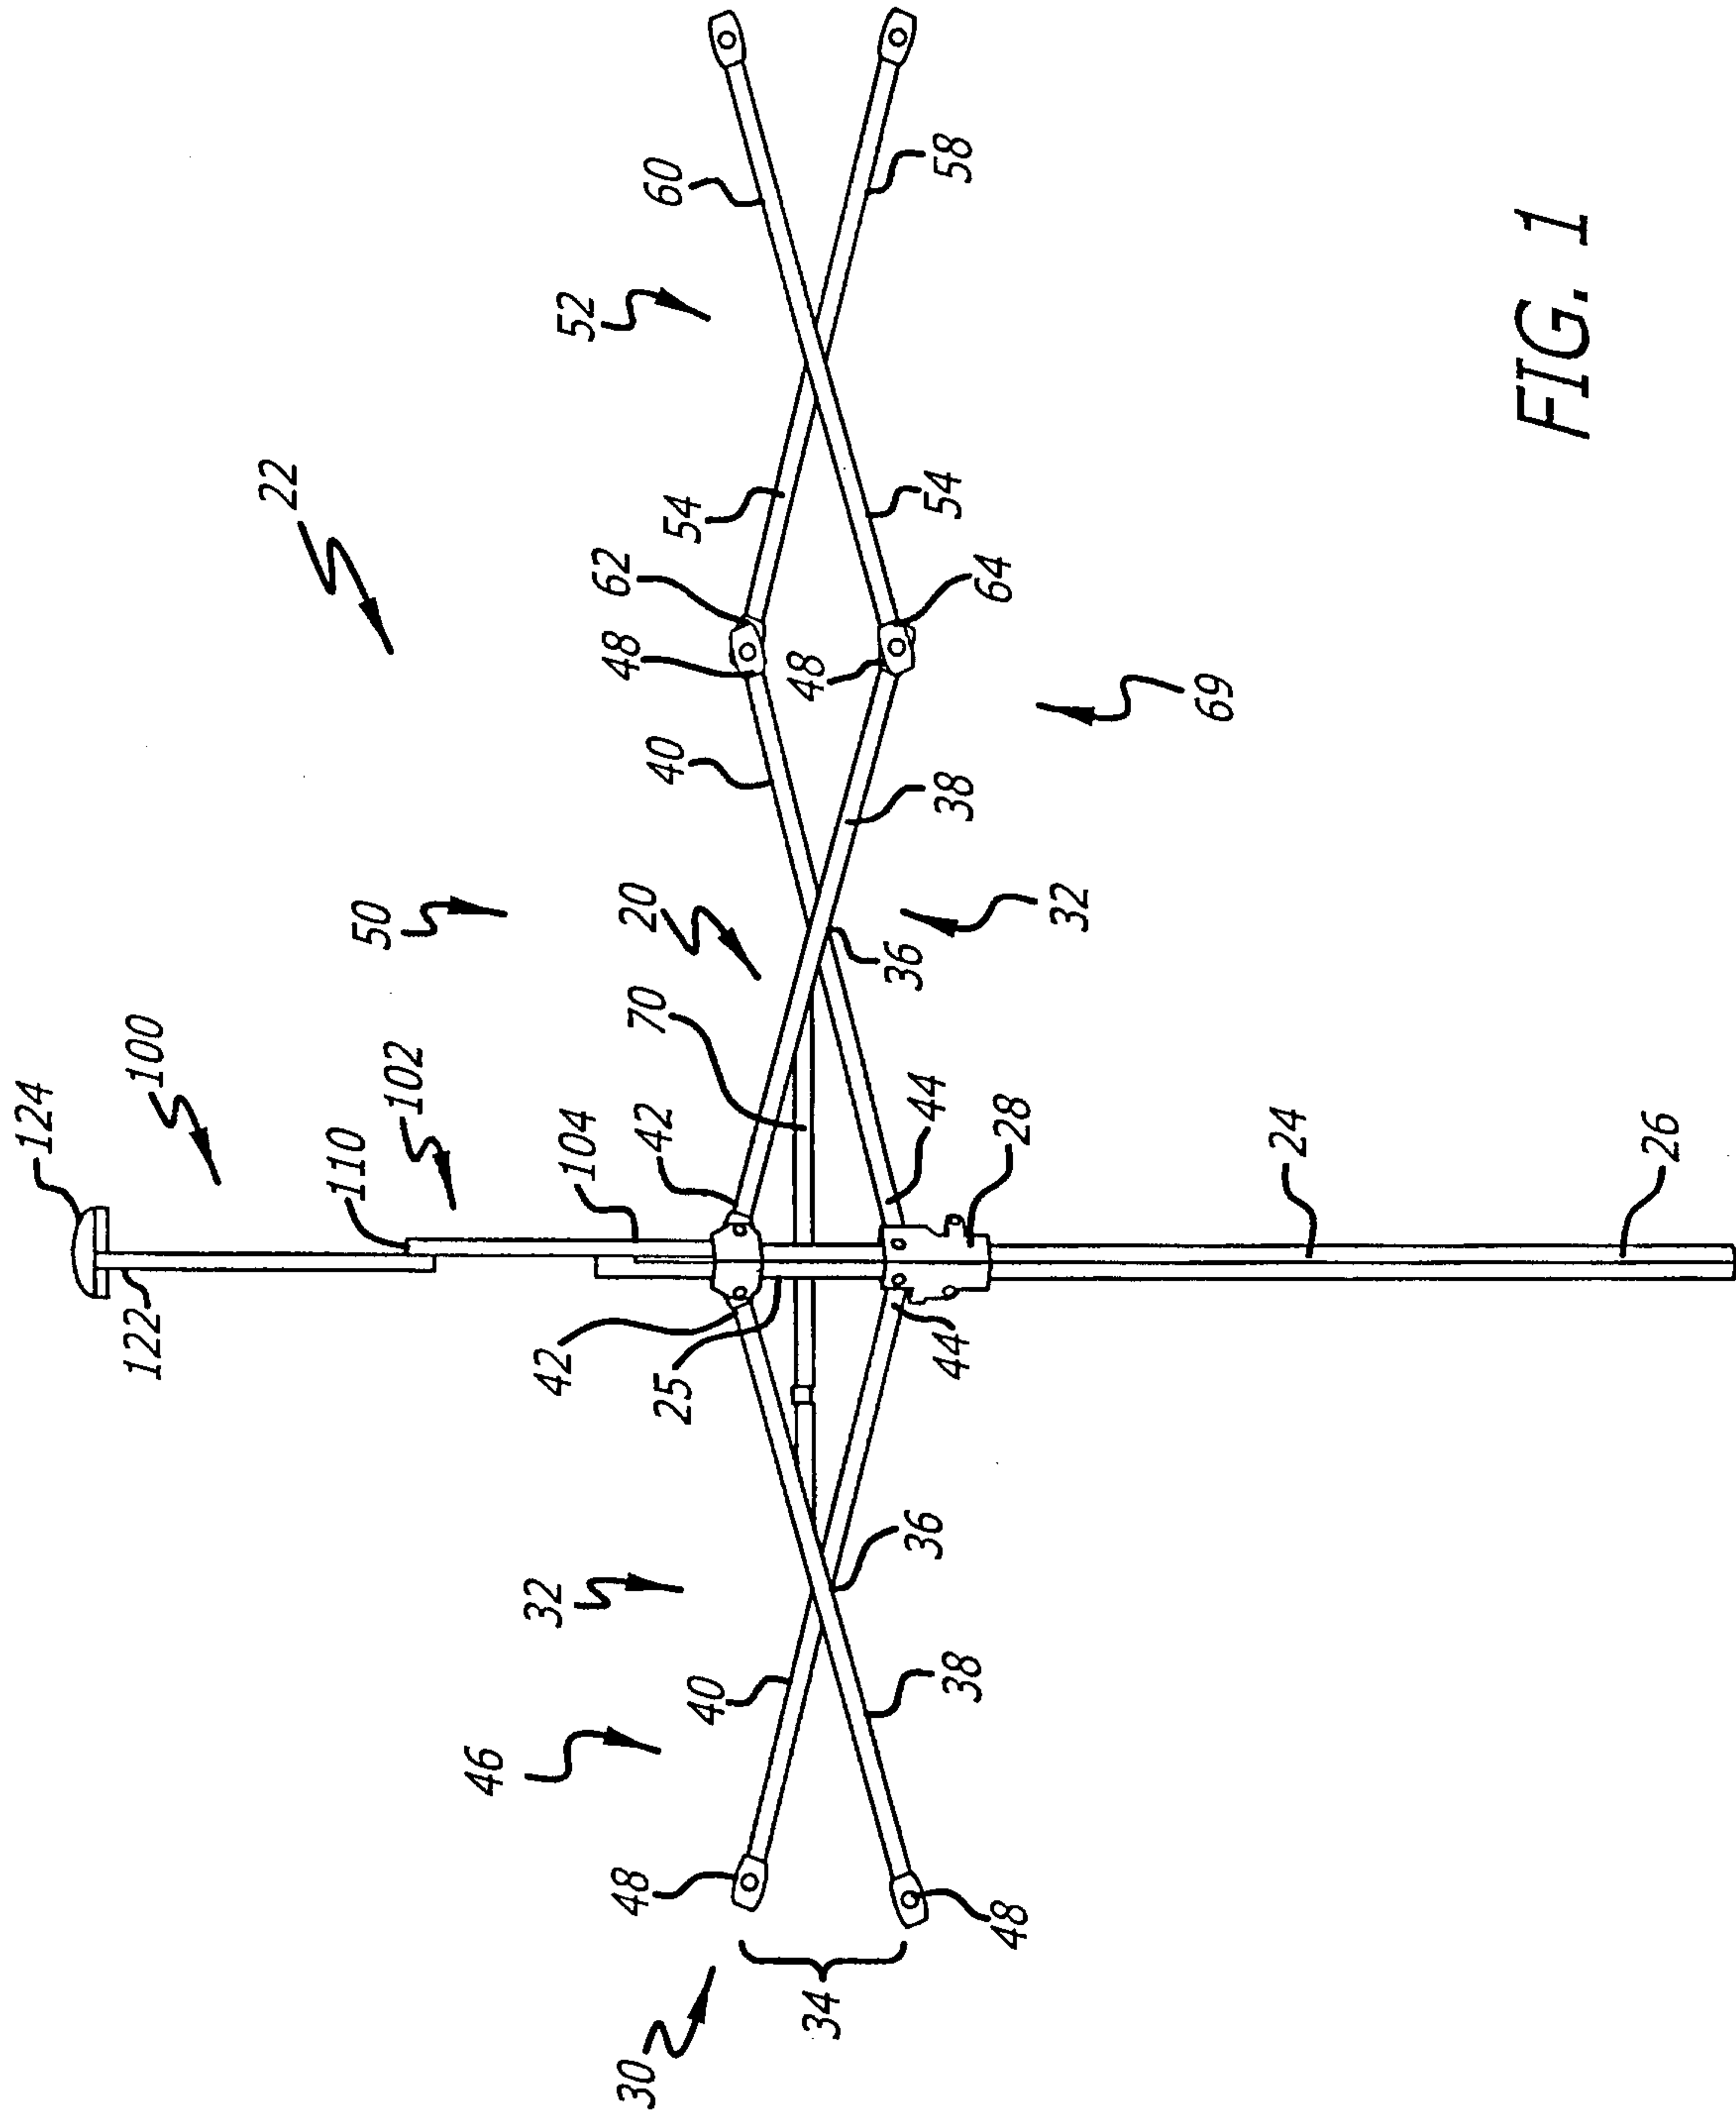



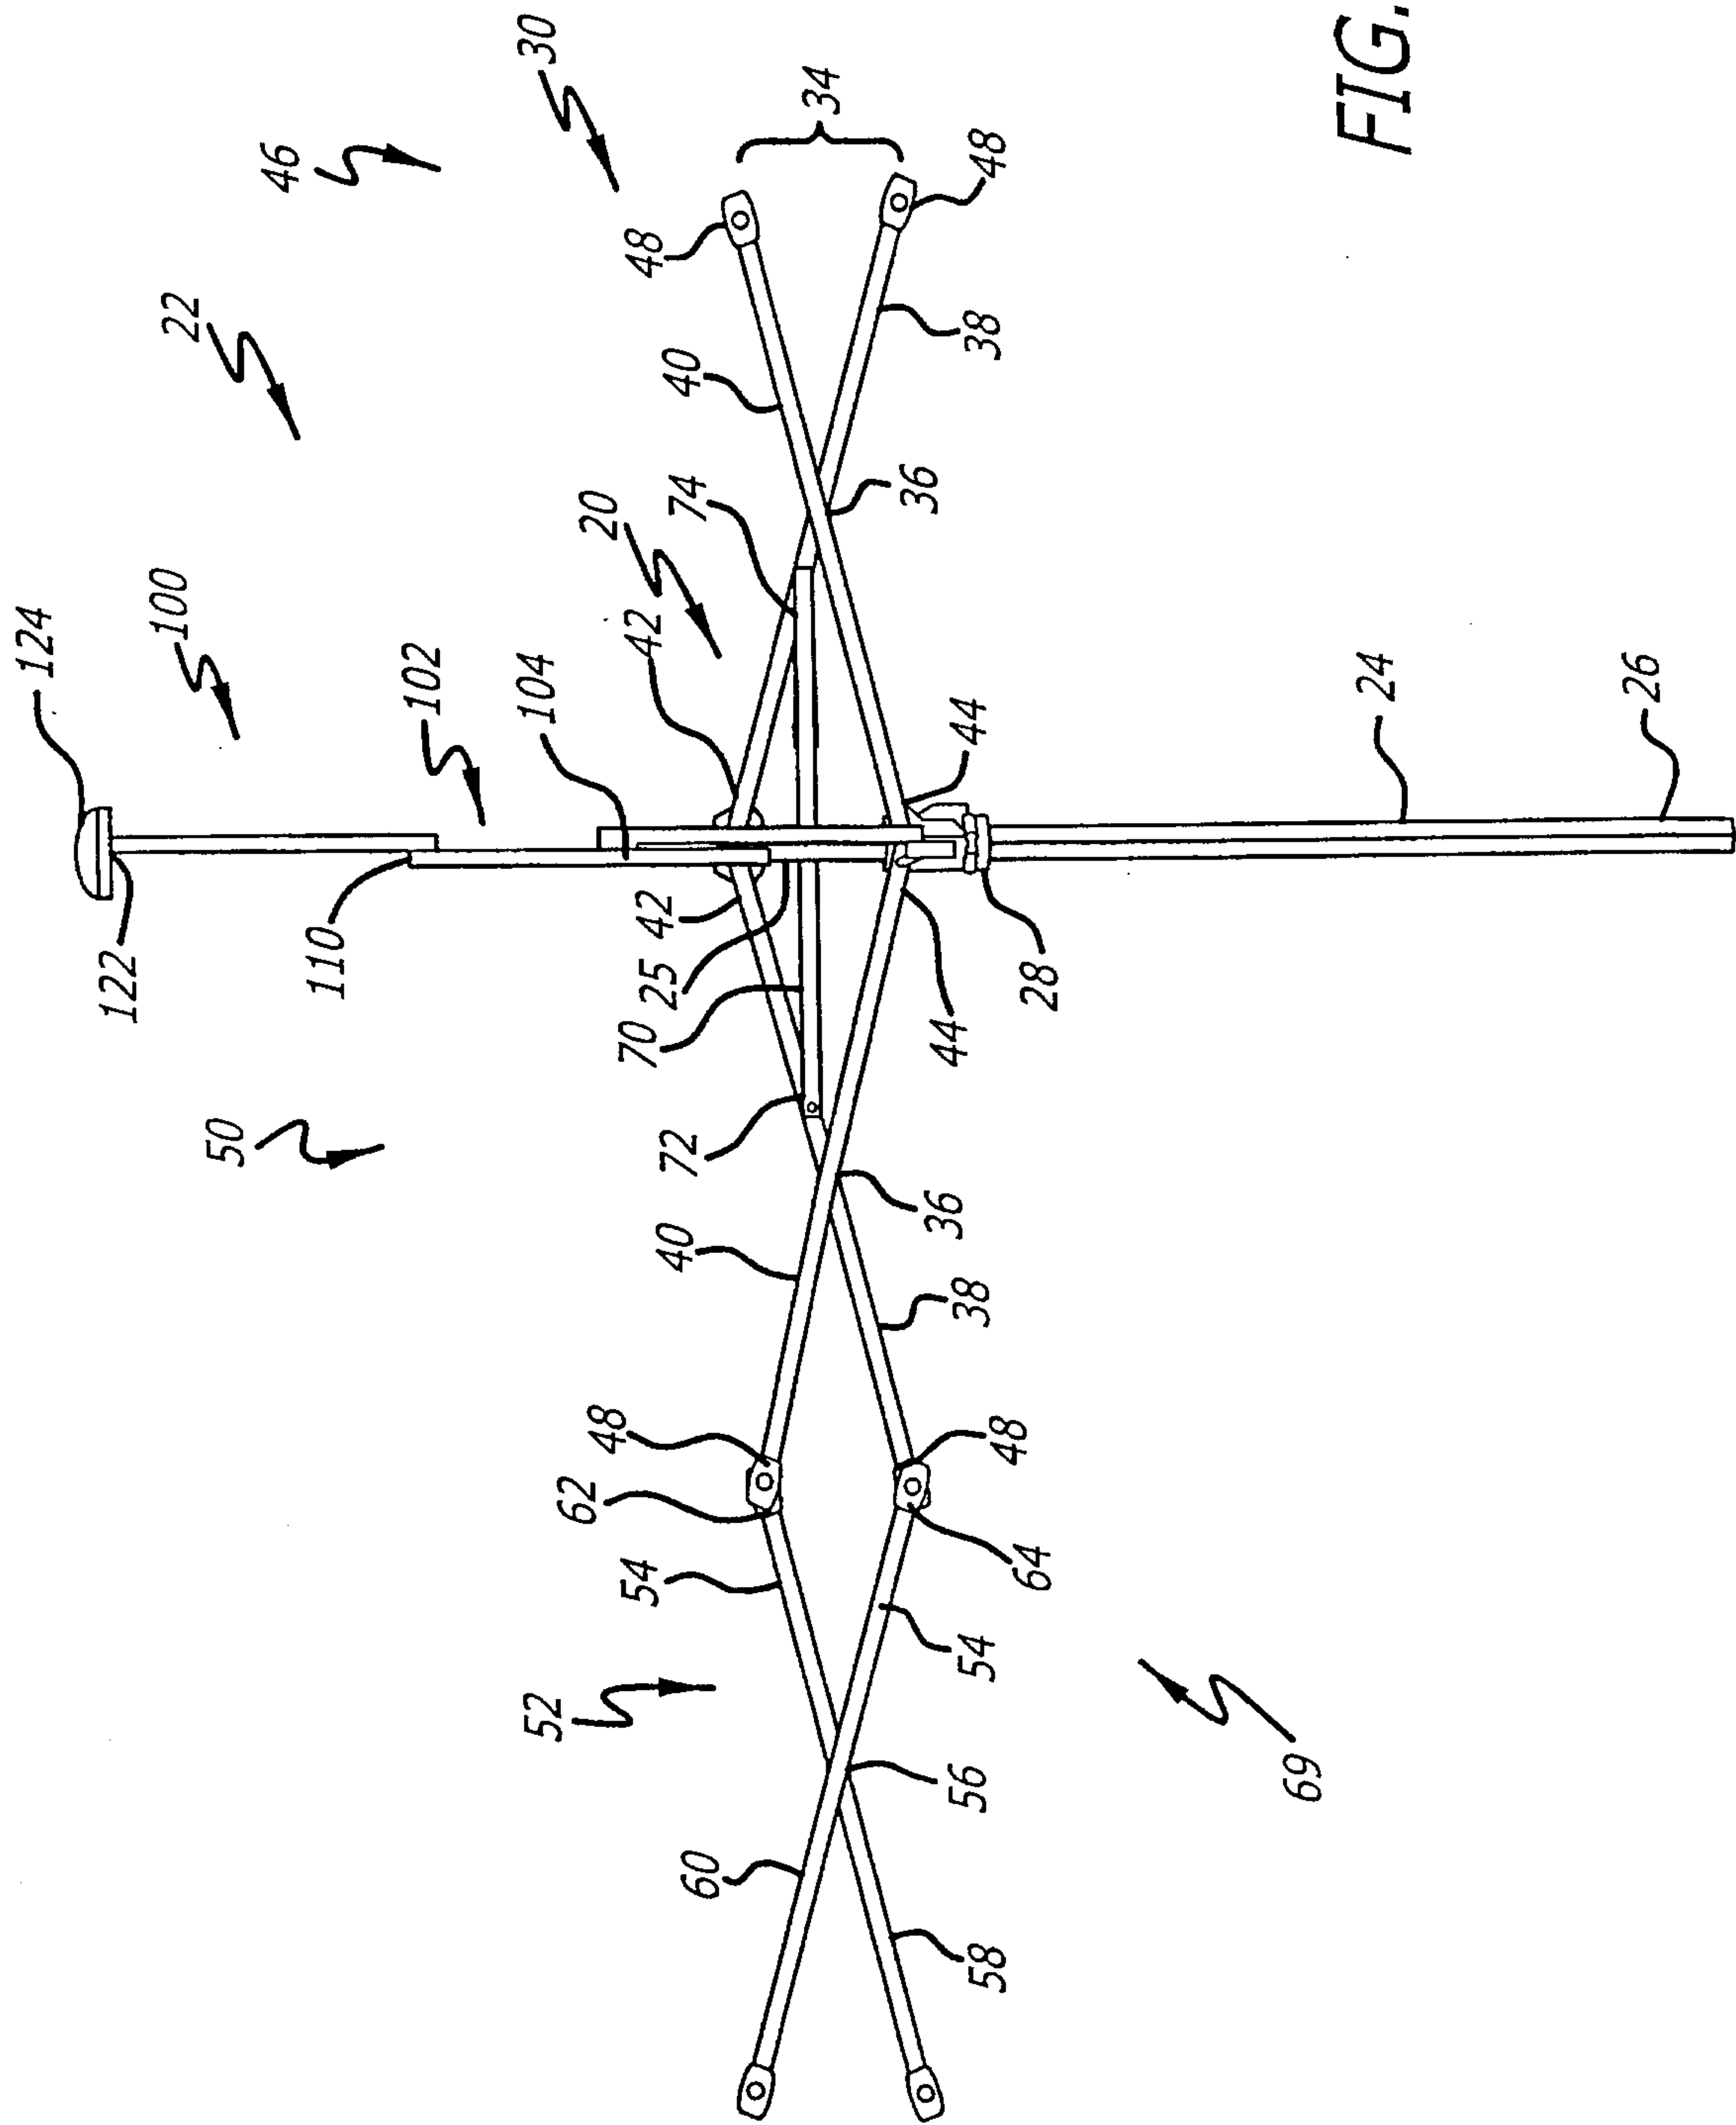
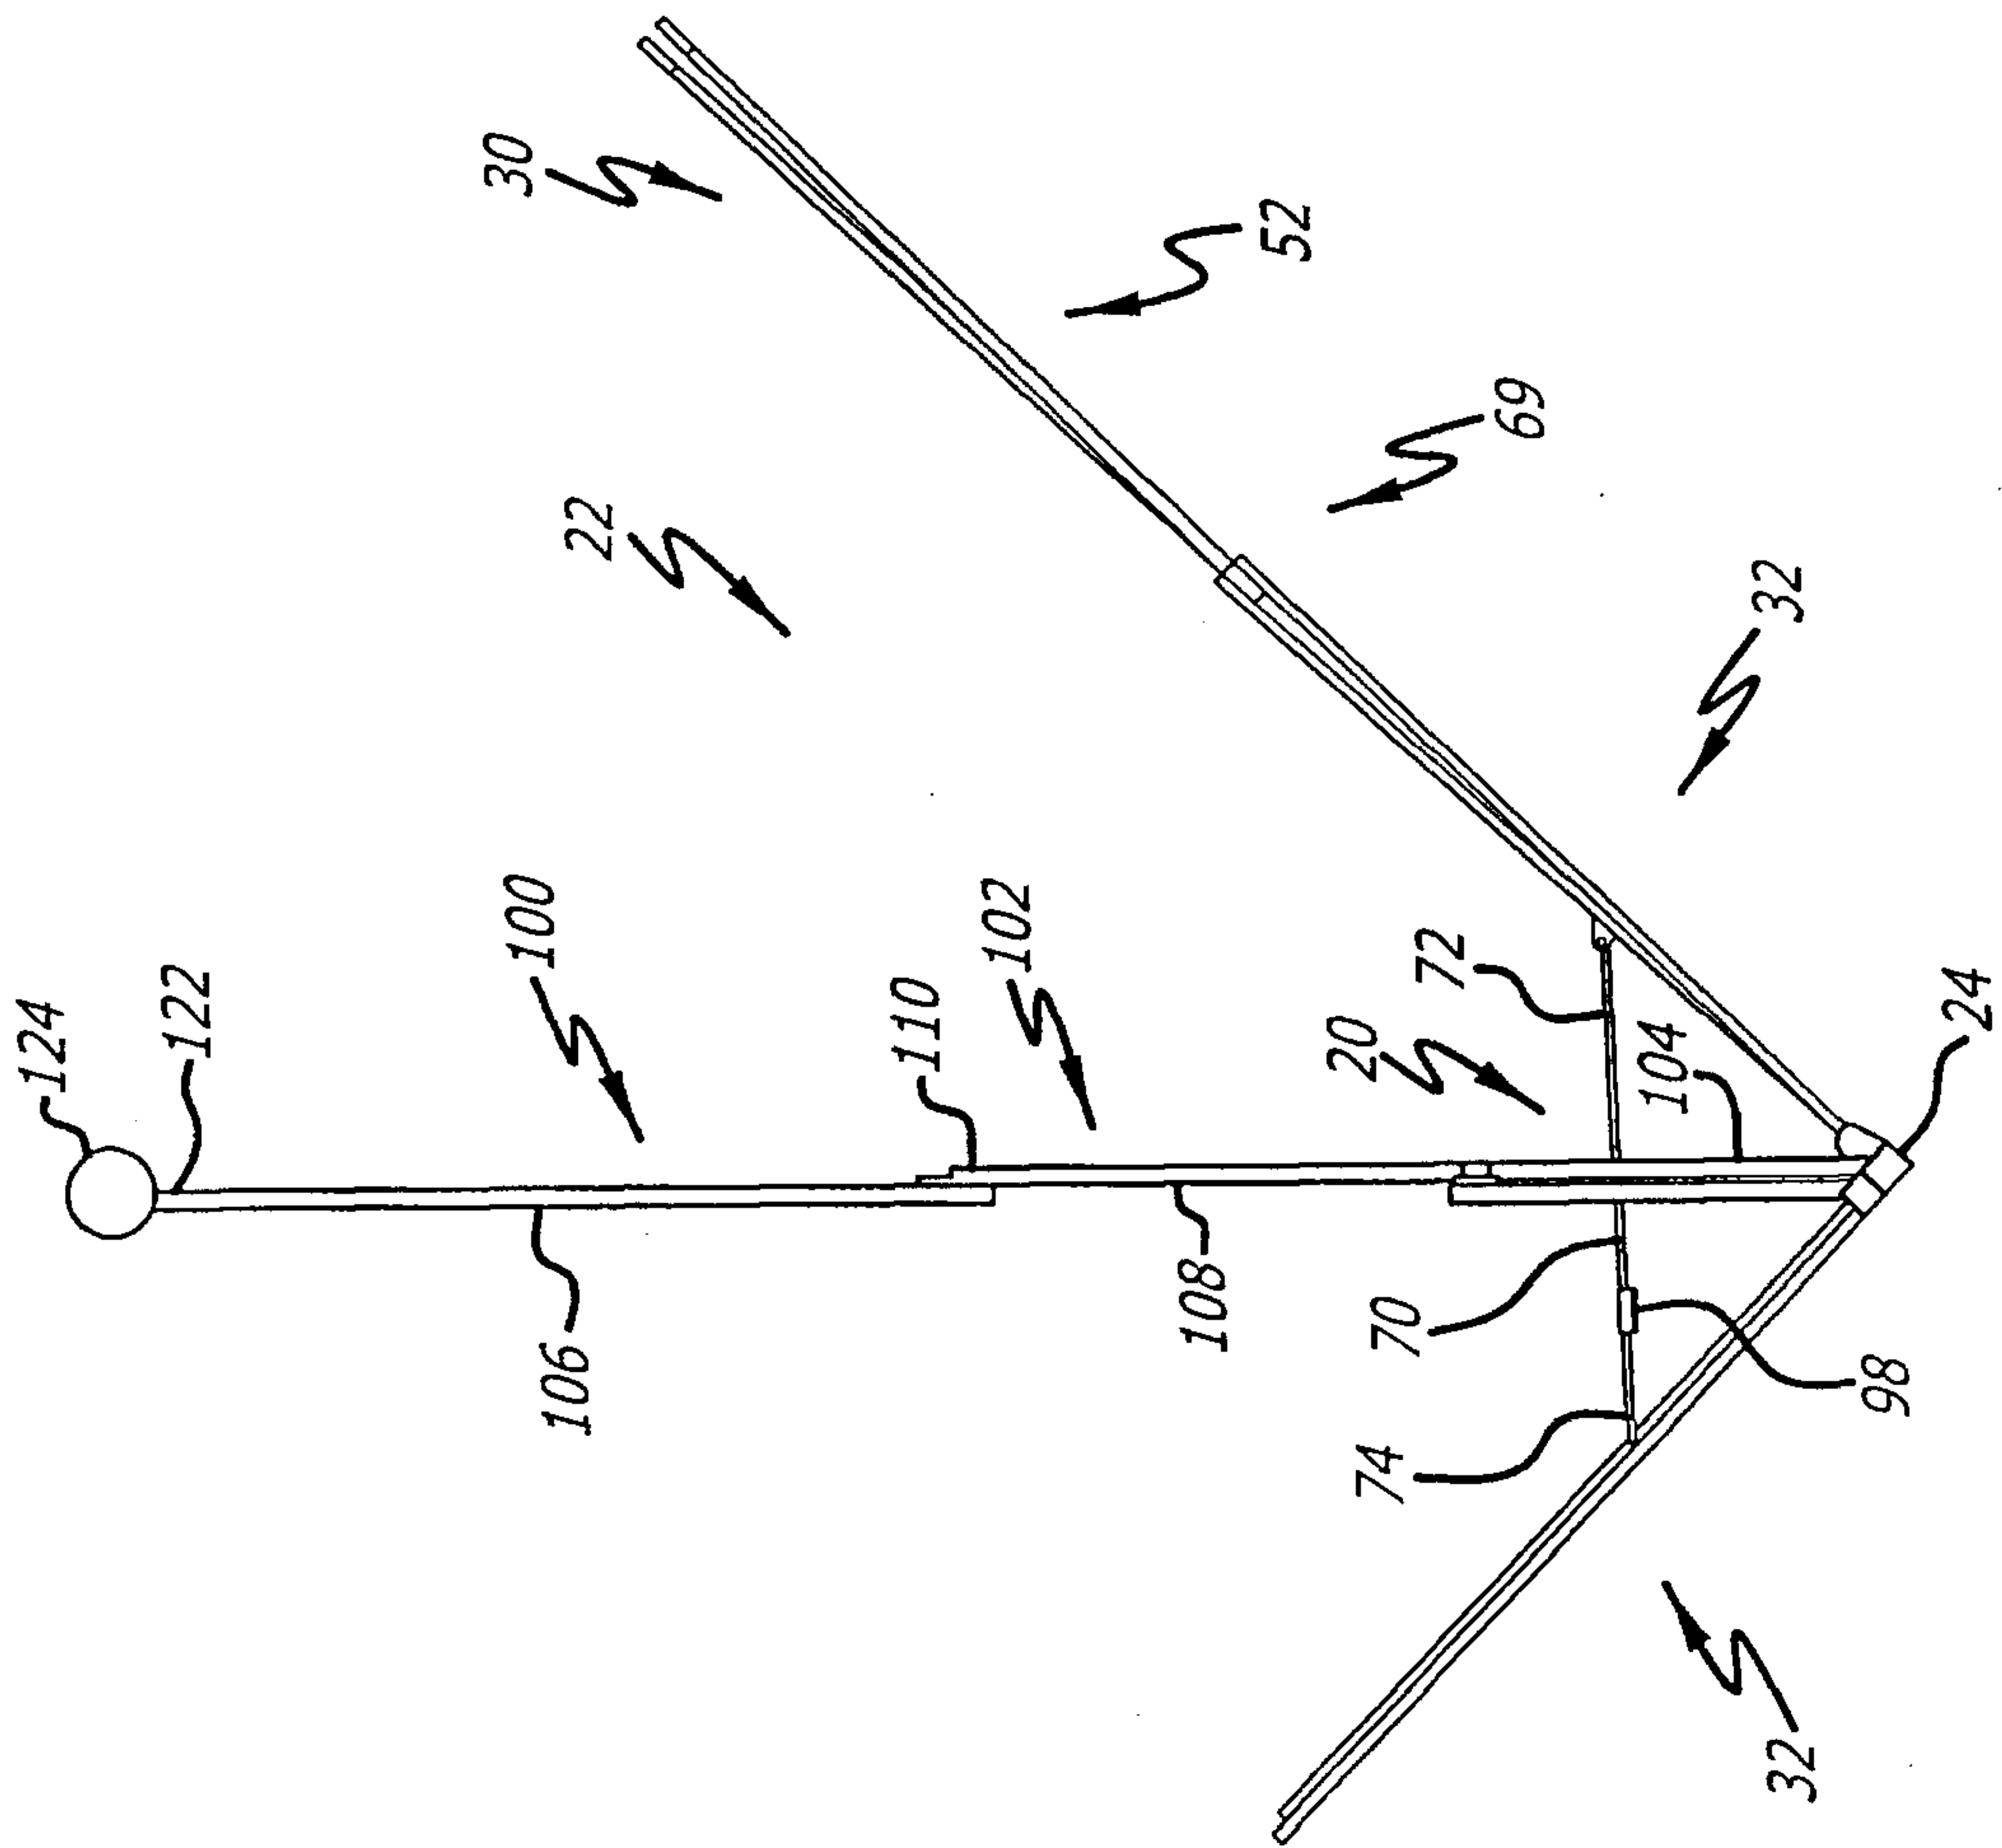
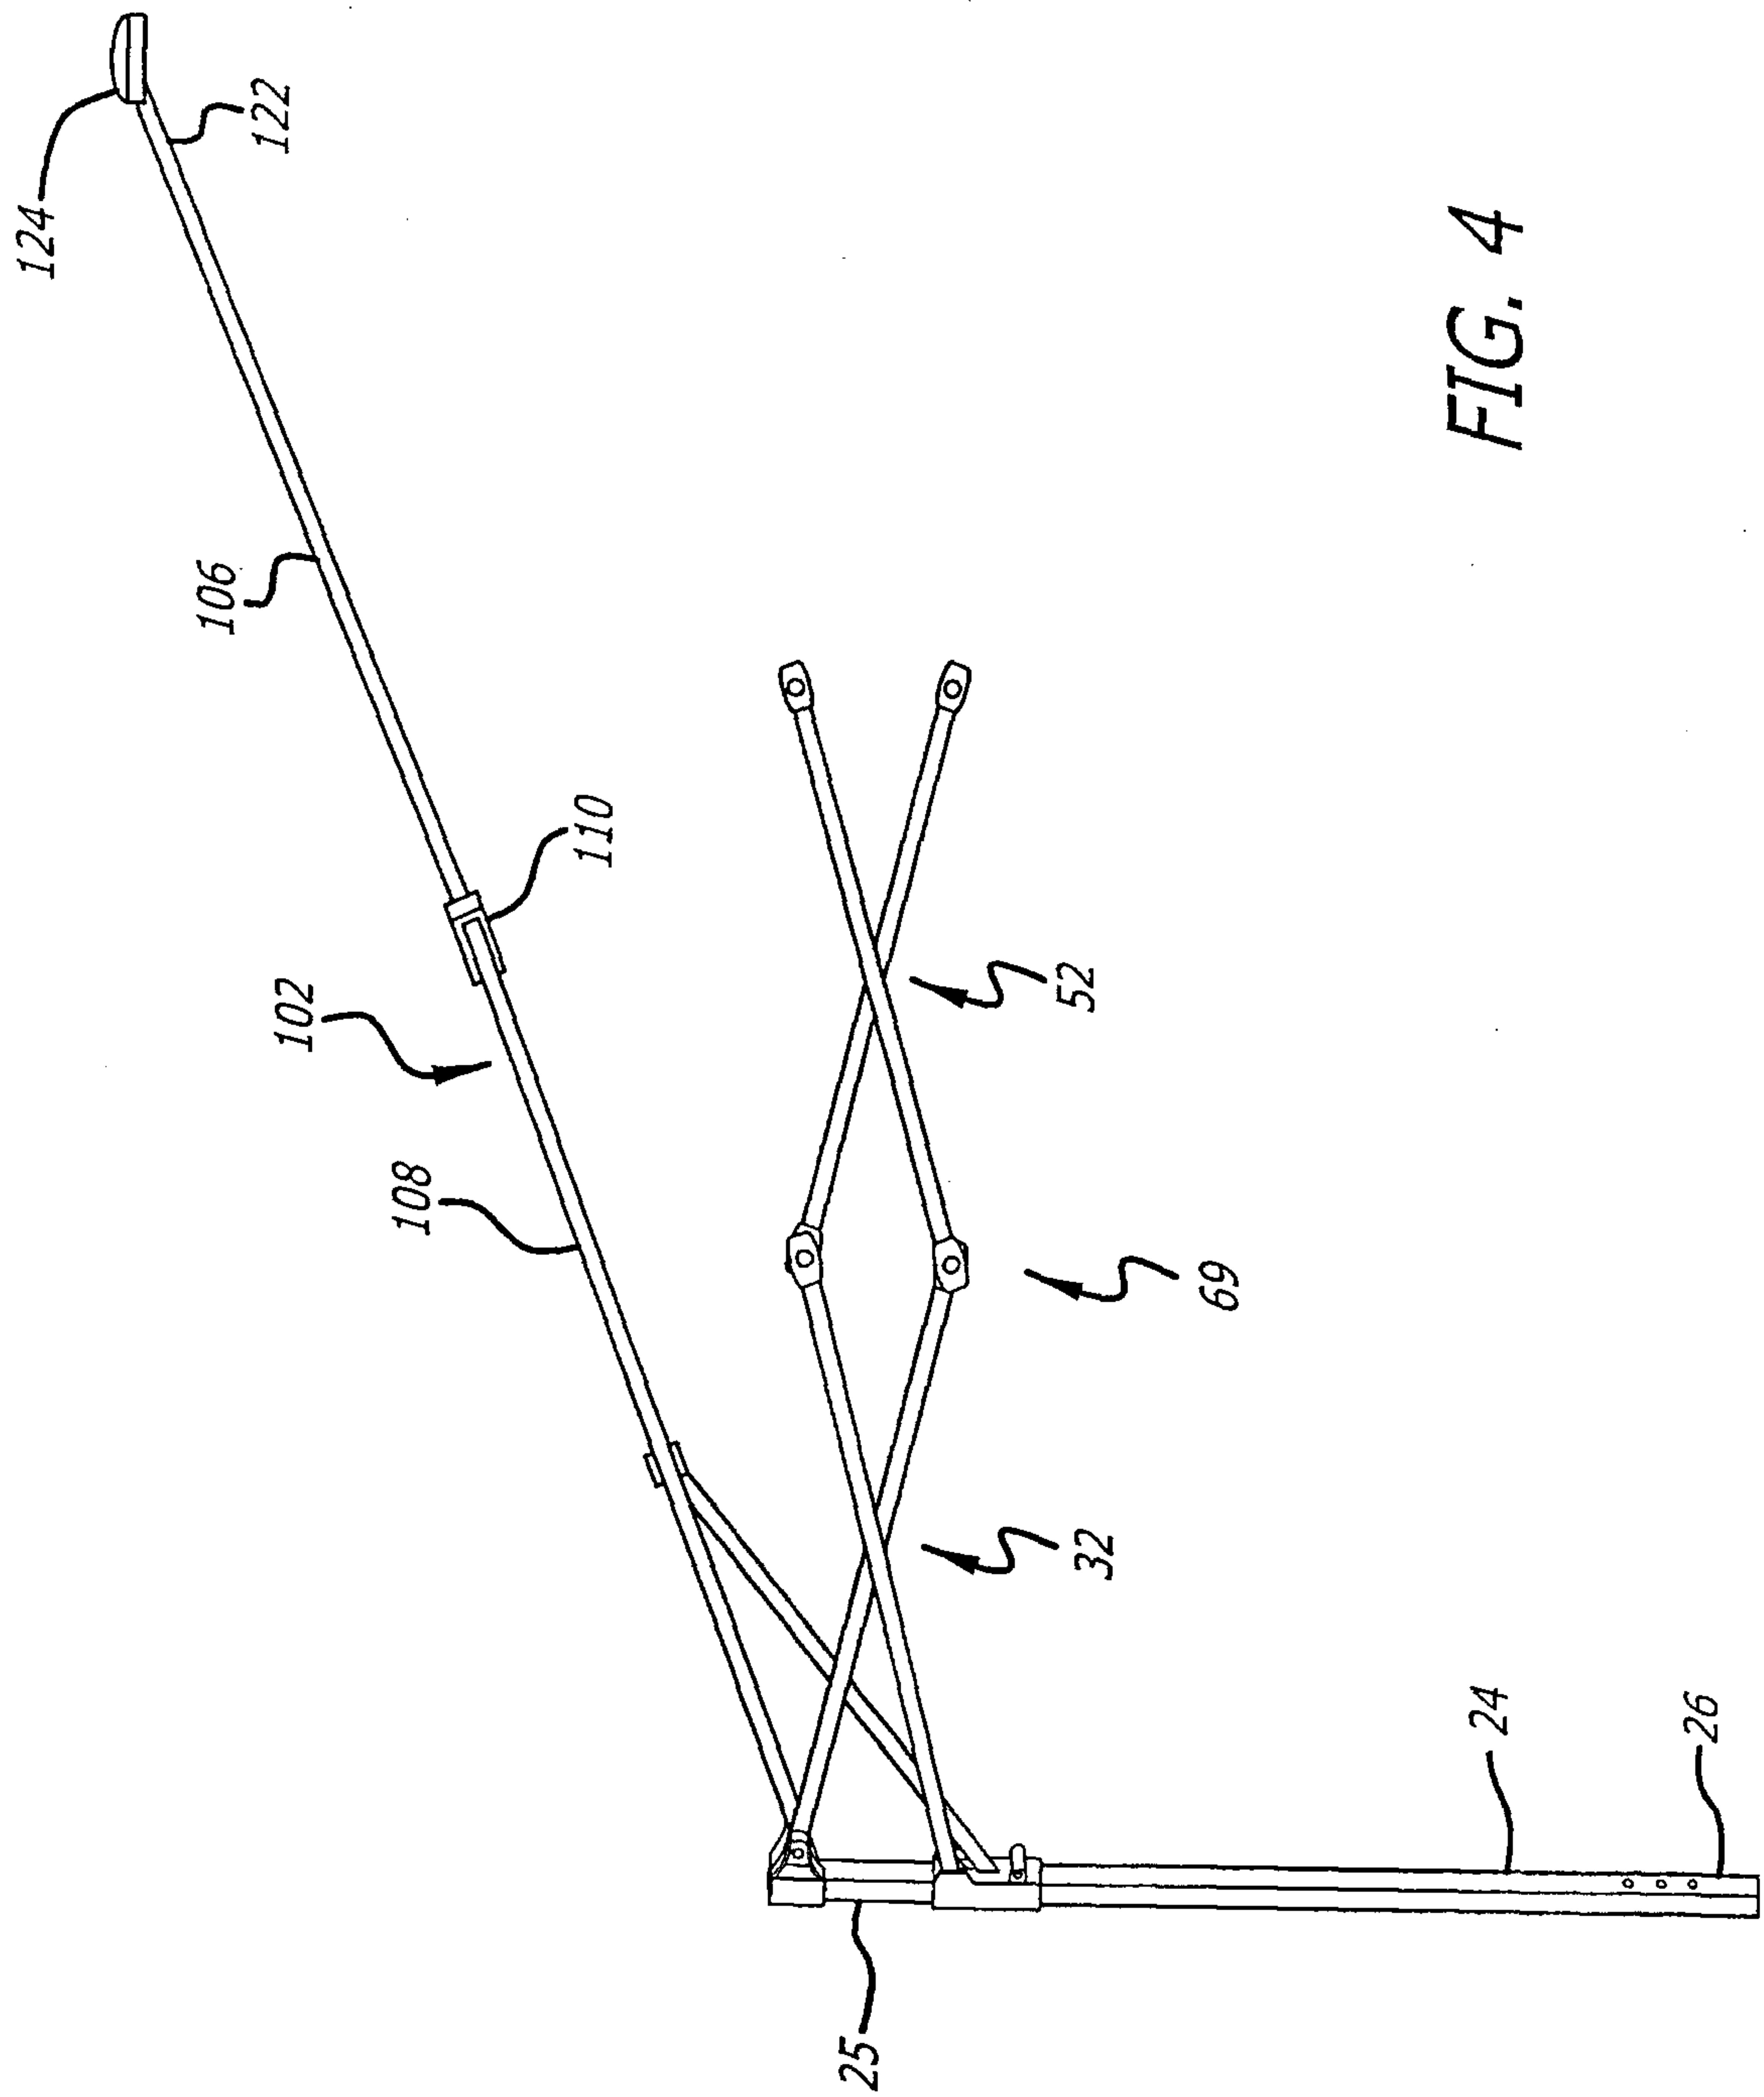





FIG. 3









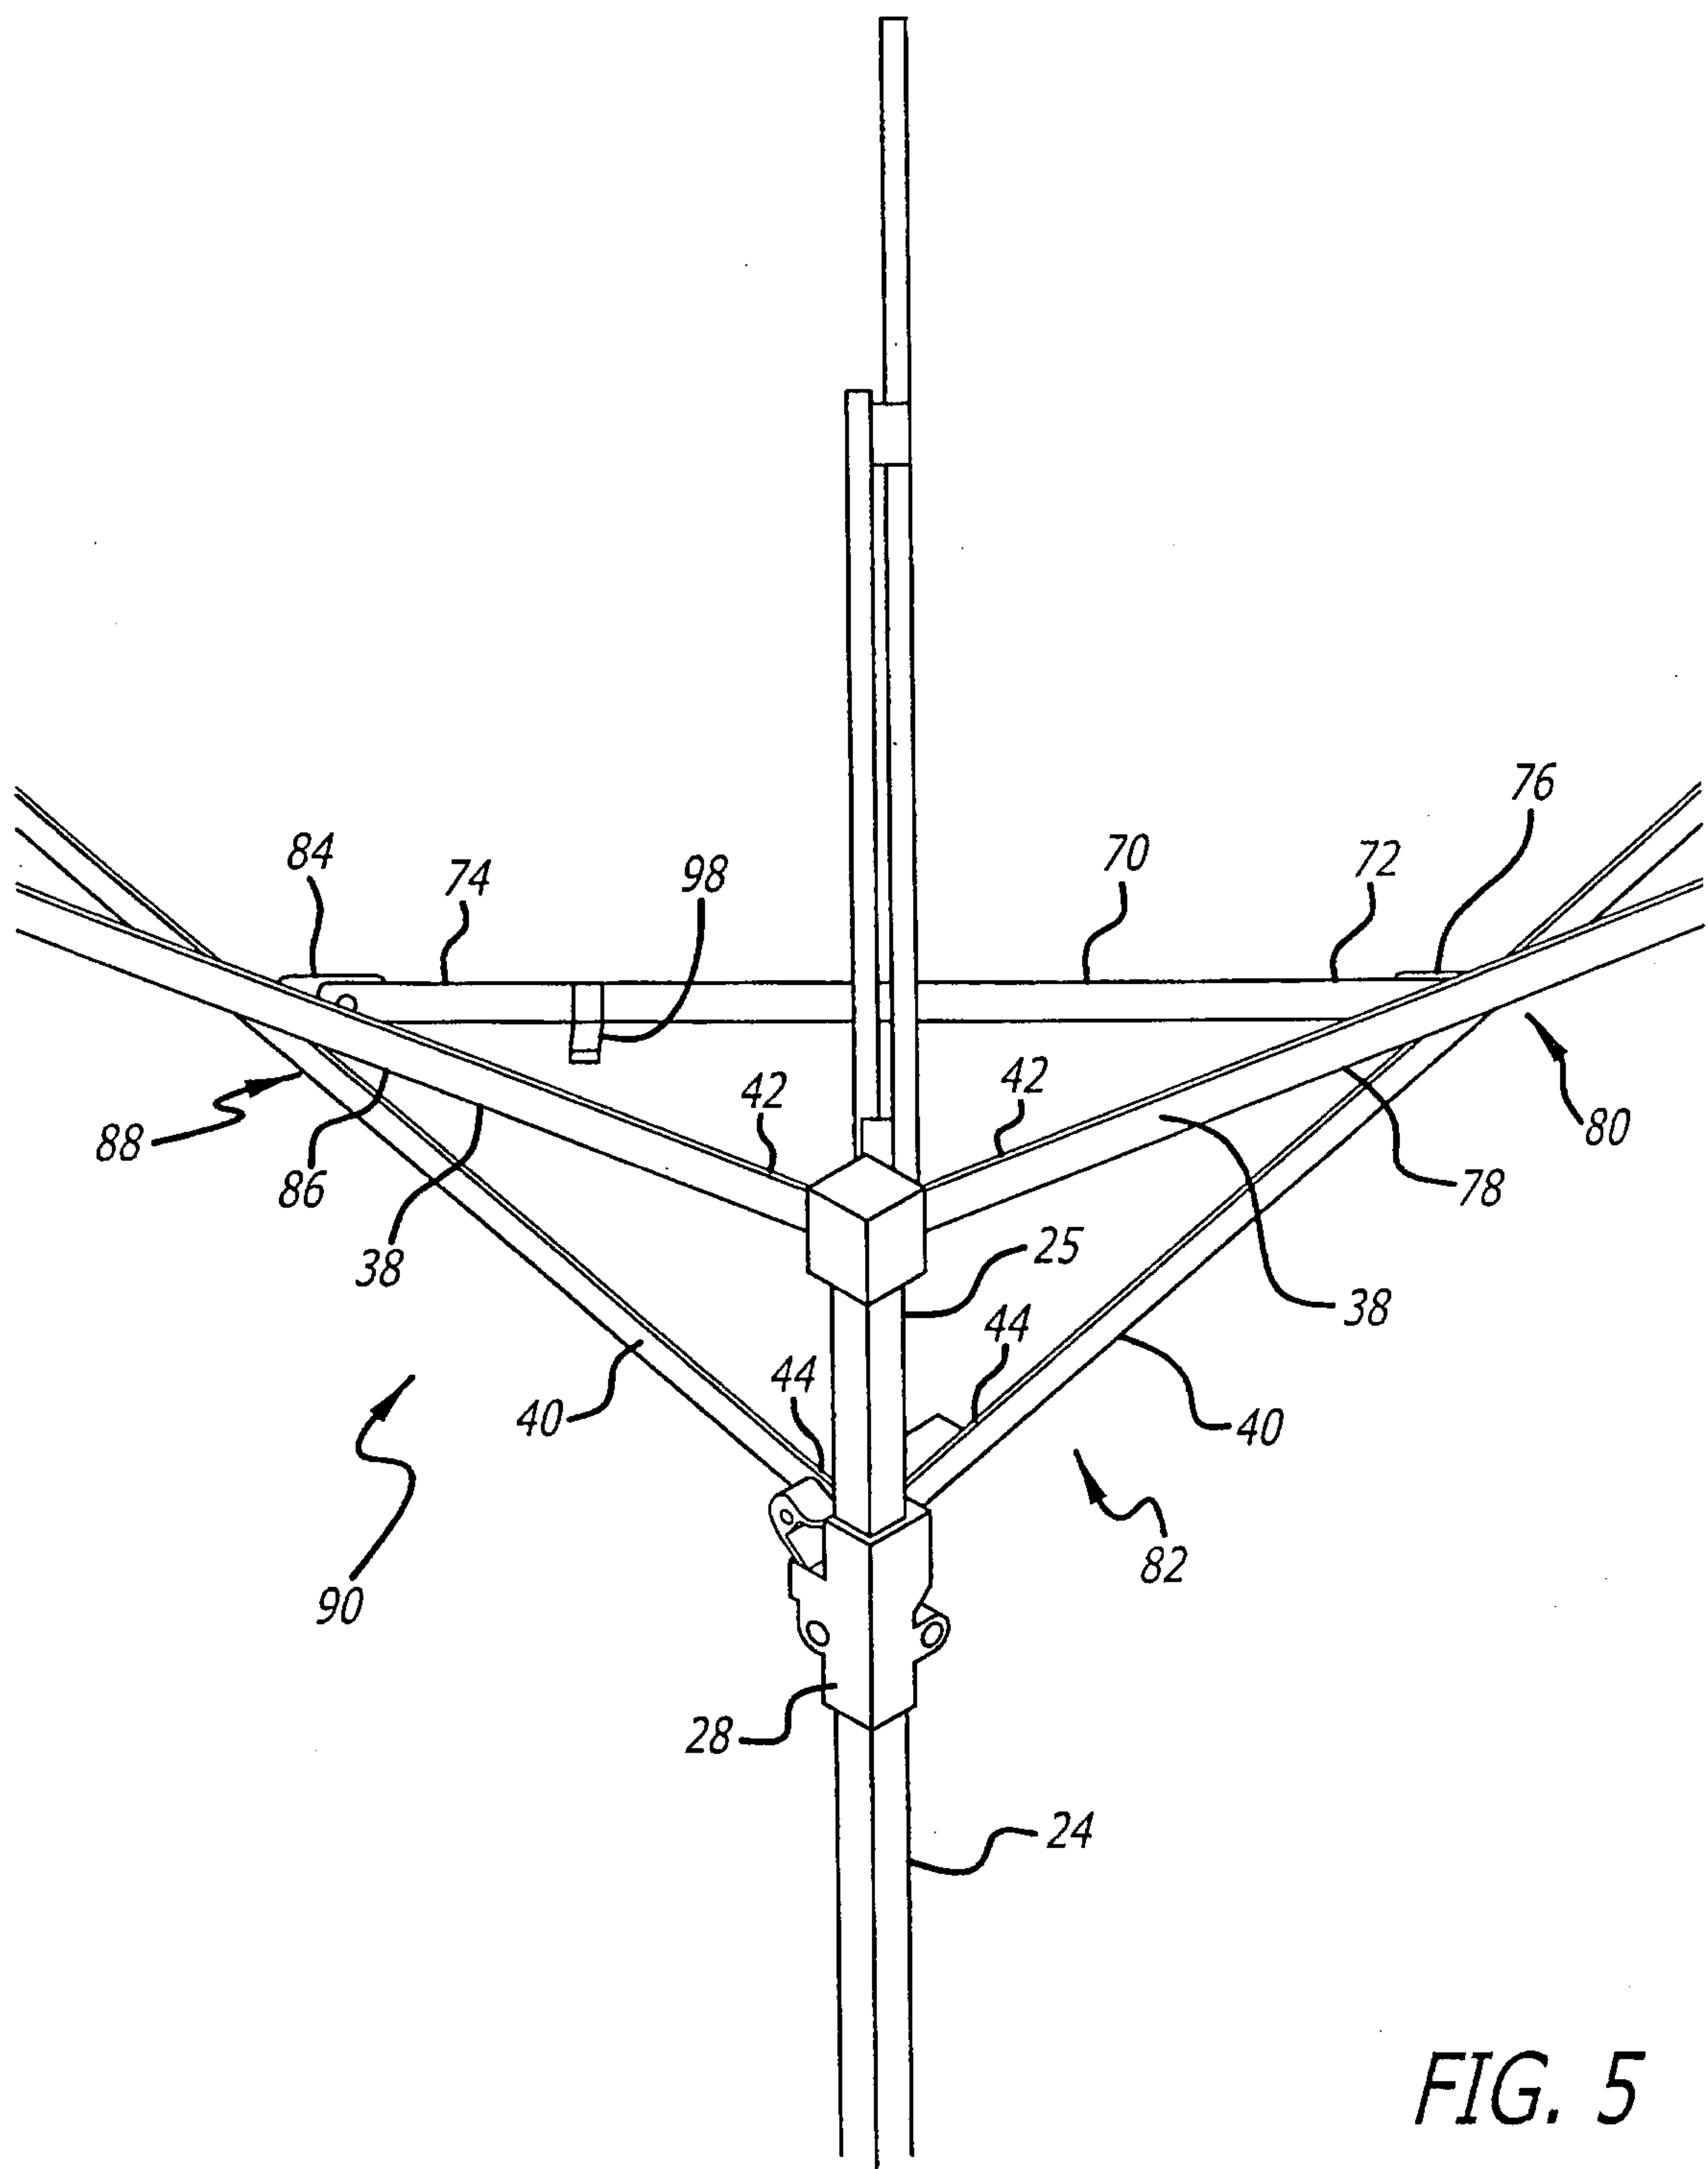



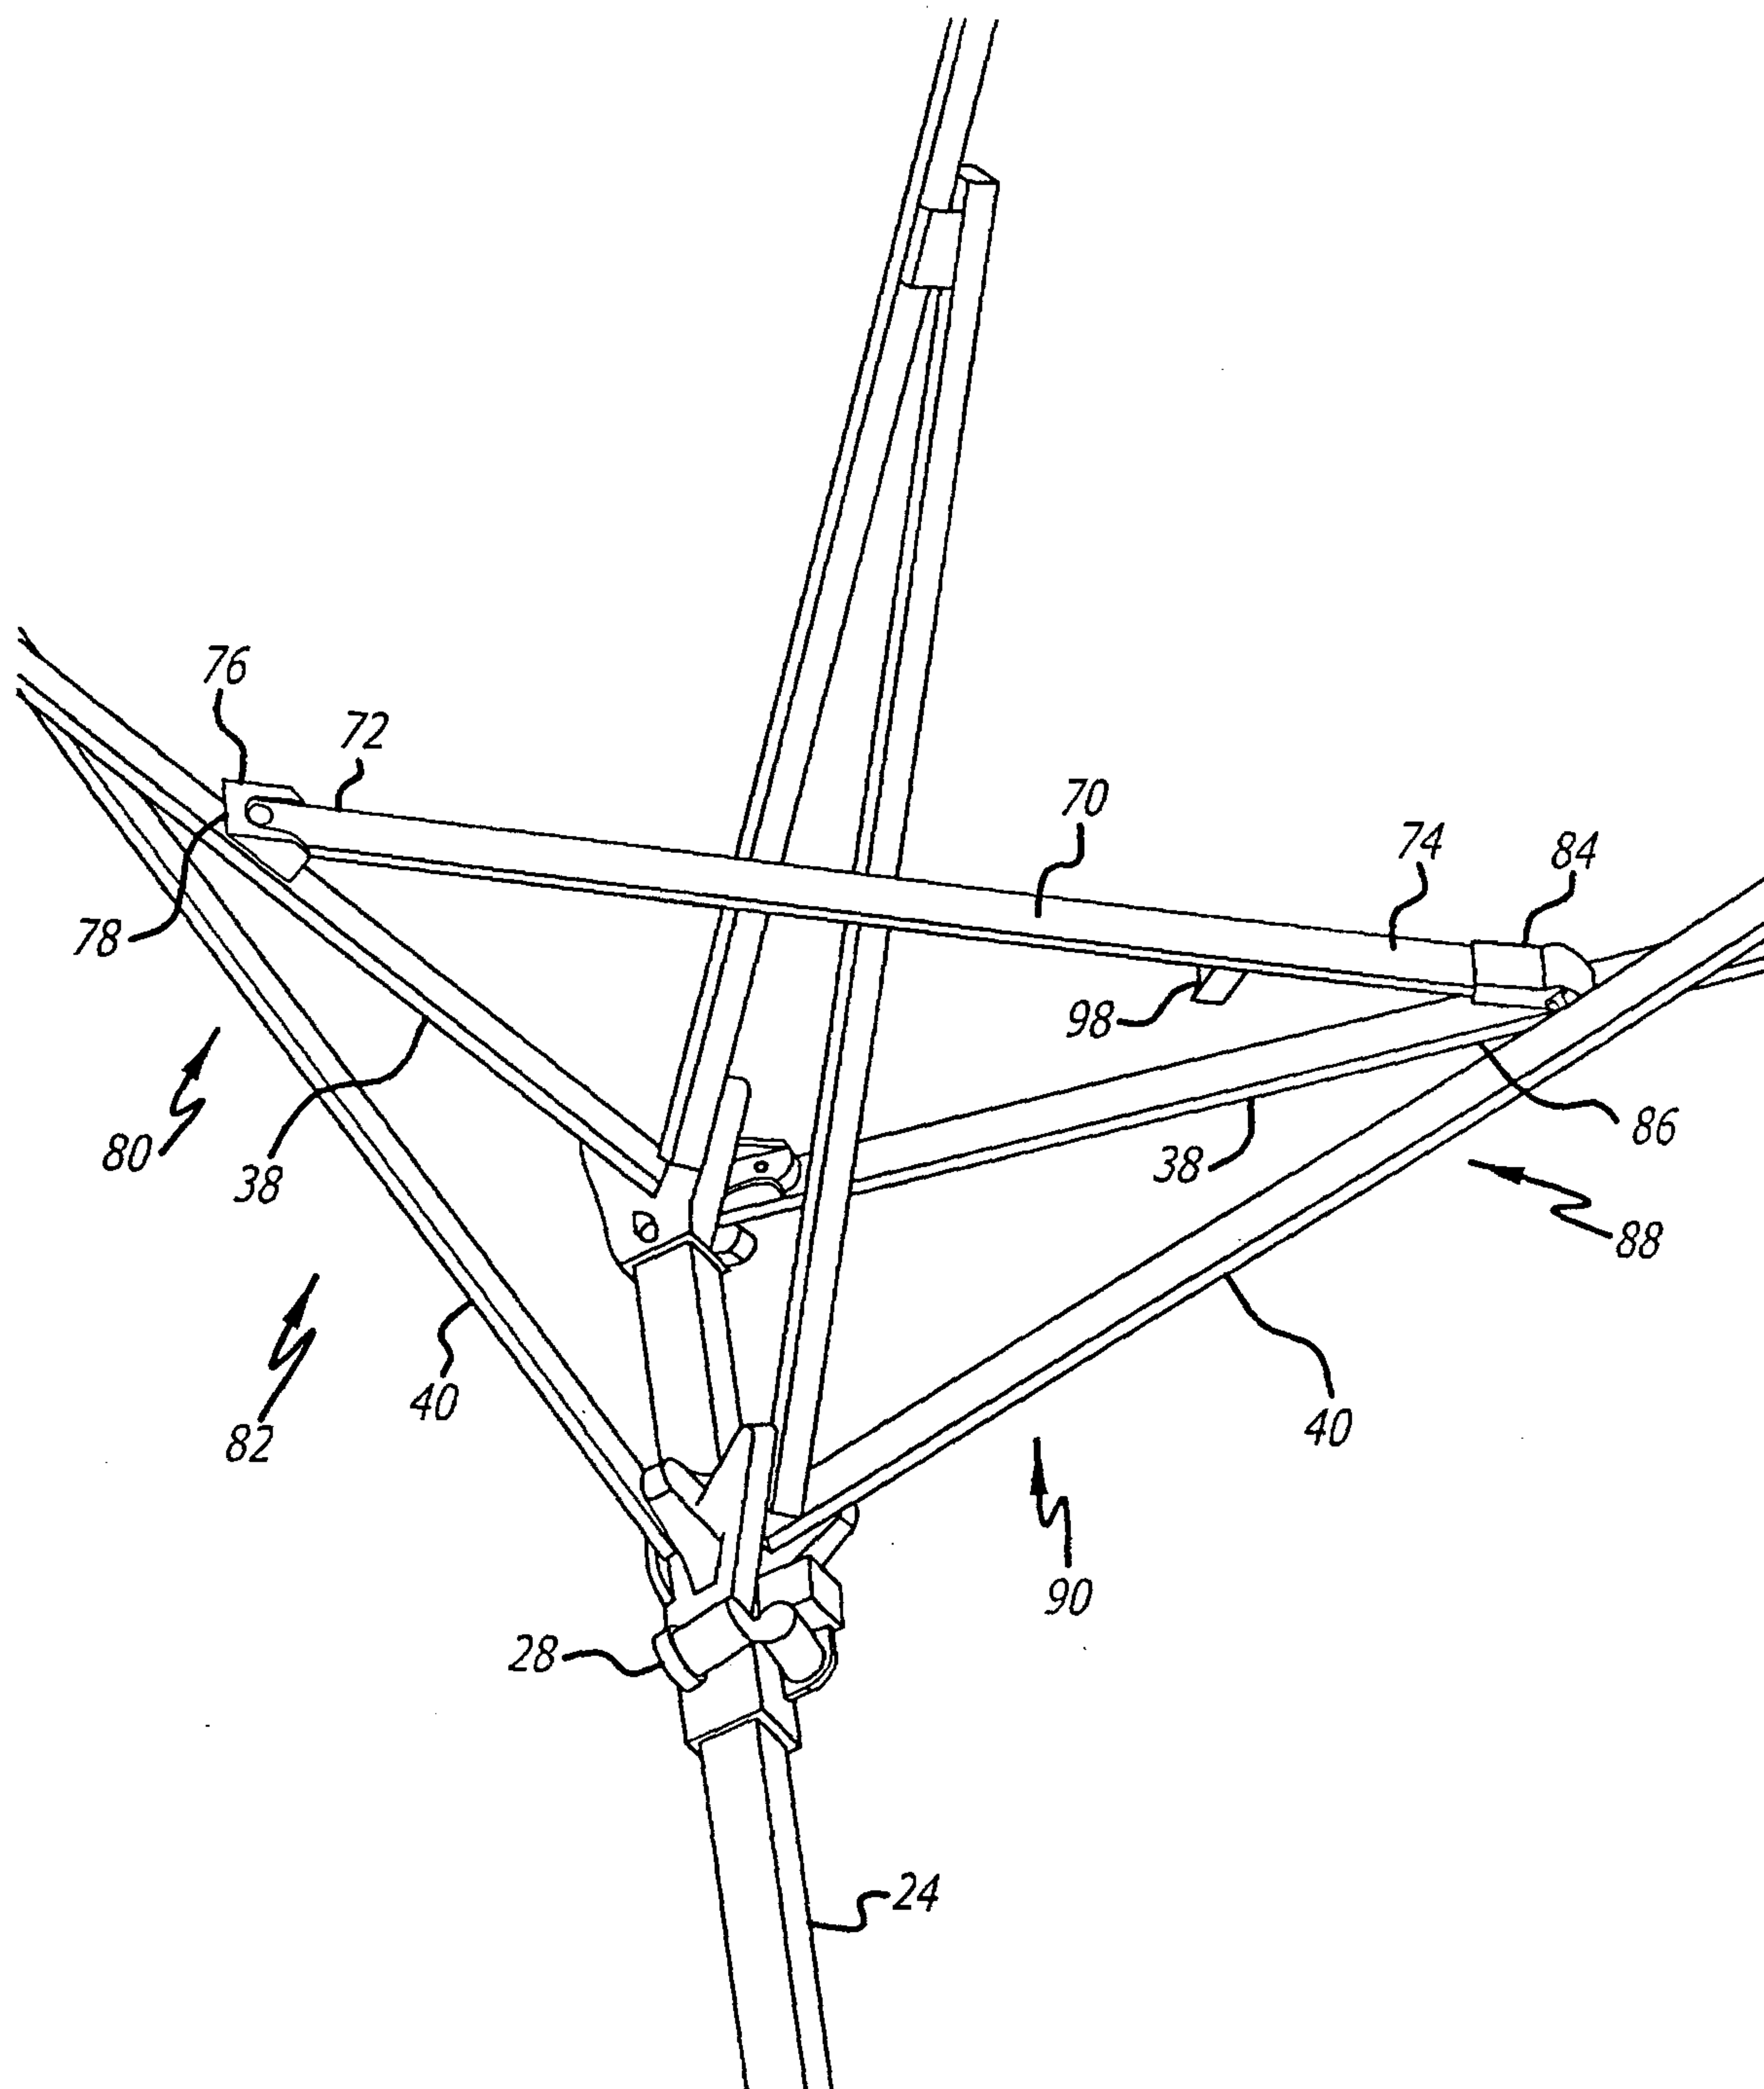


FIG. 6



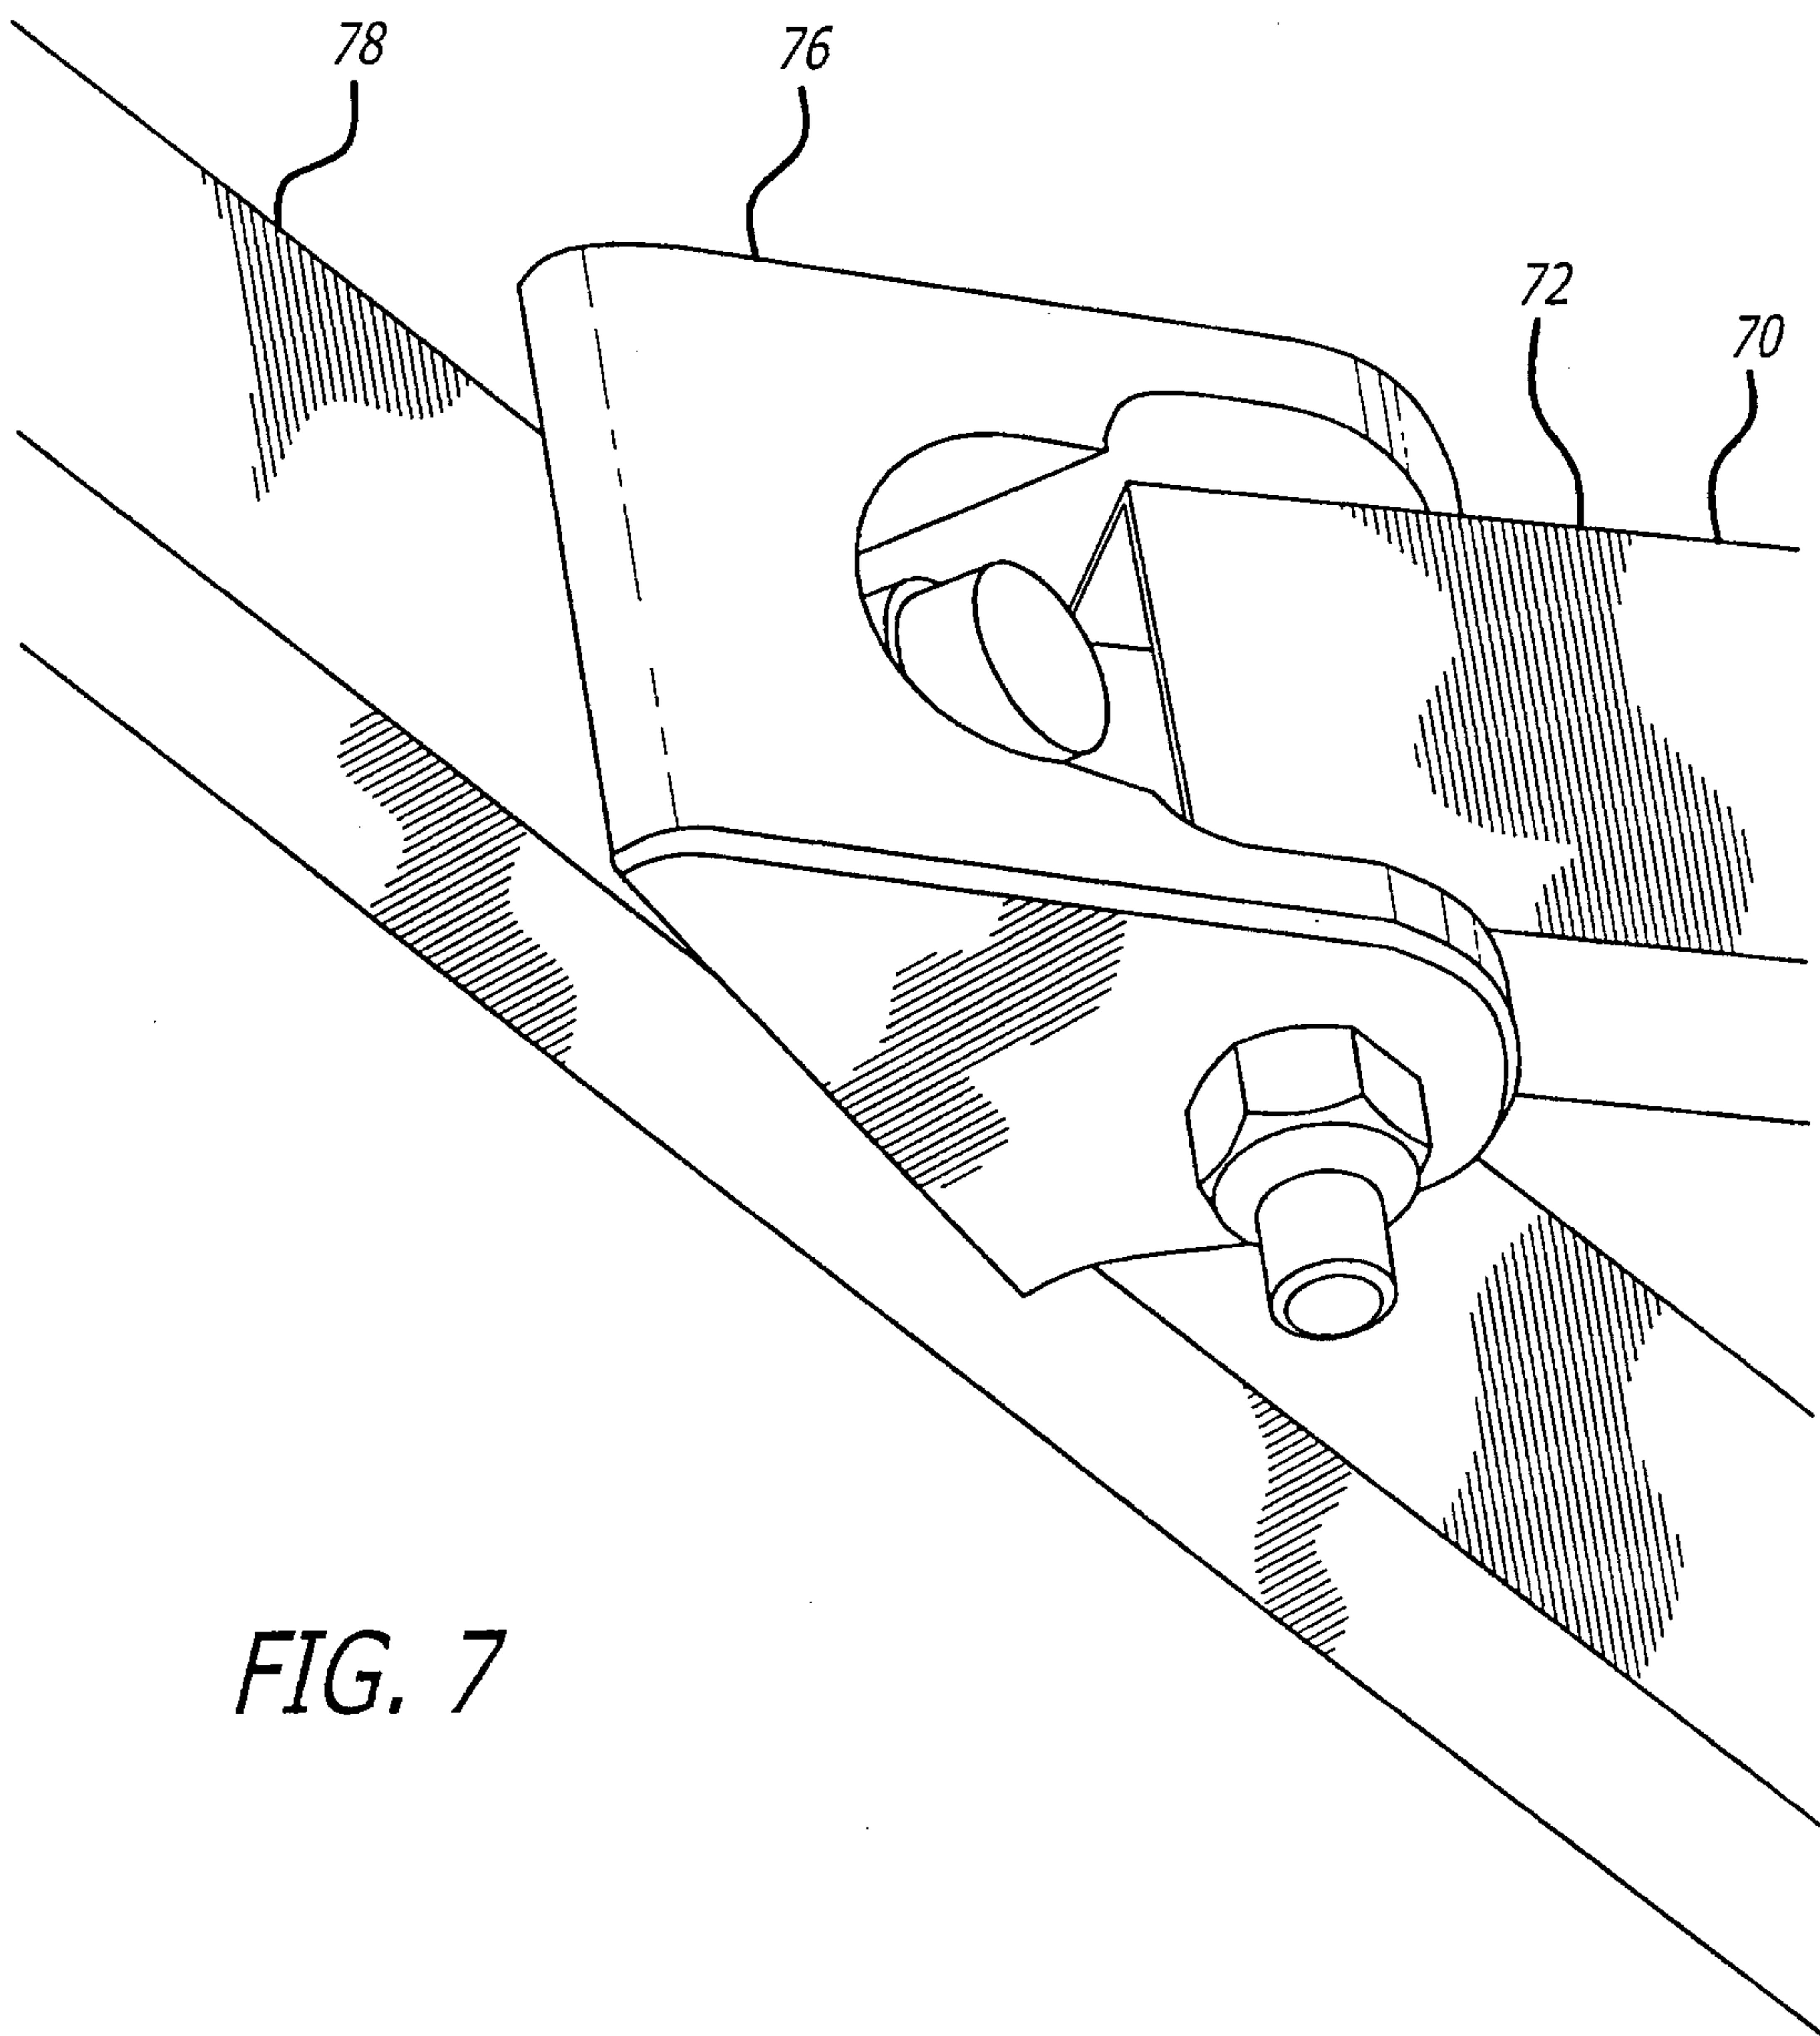


FIG. 7



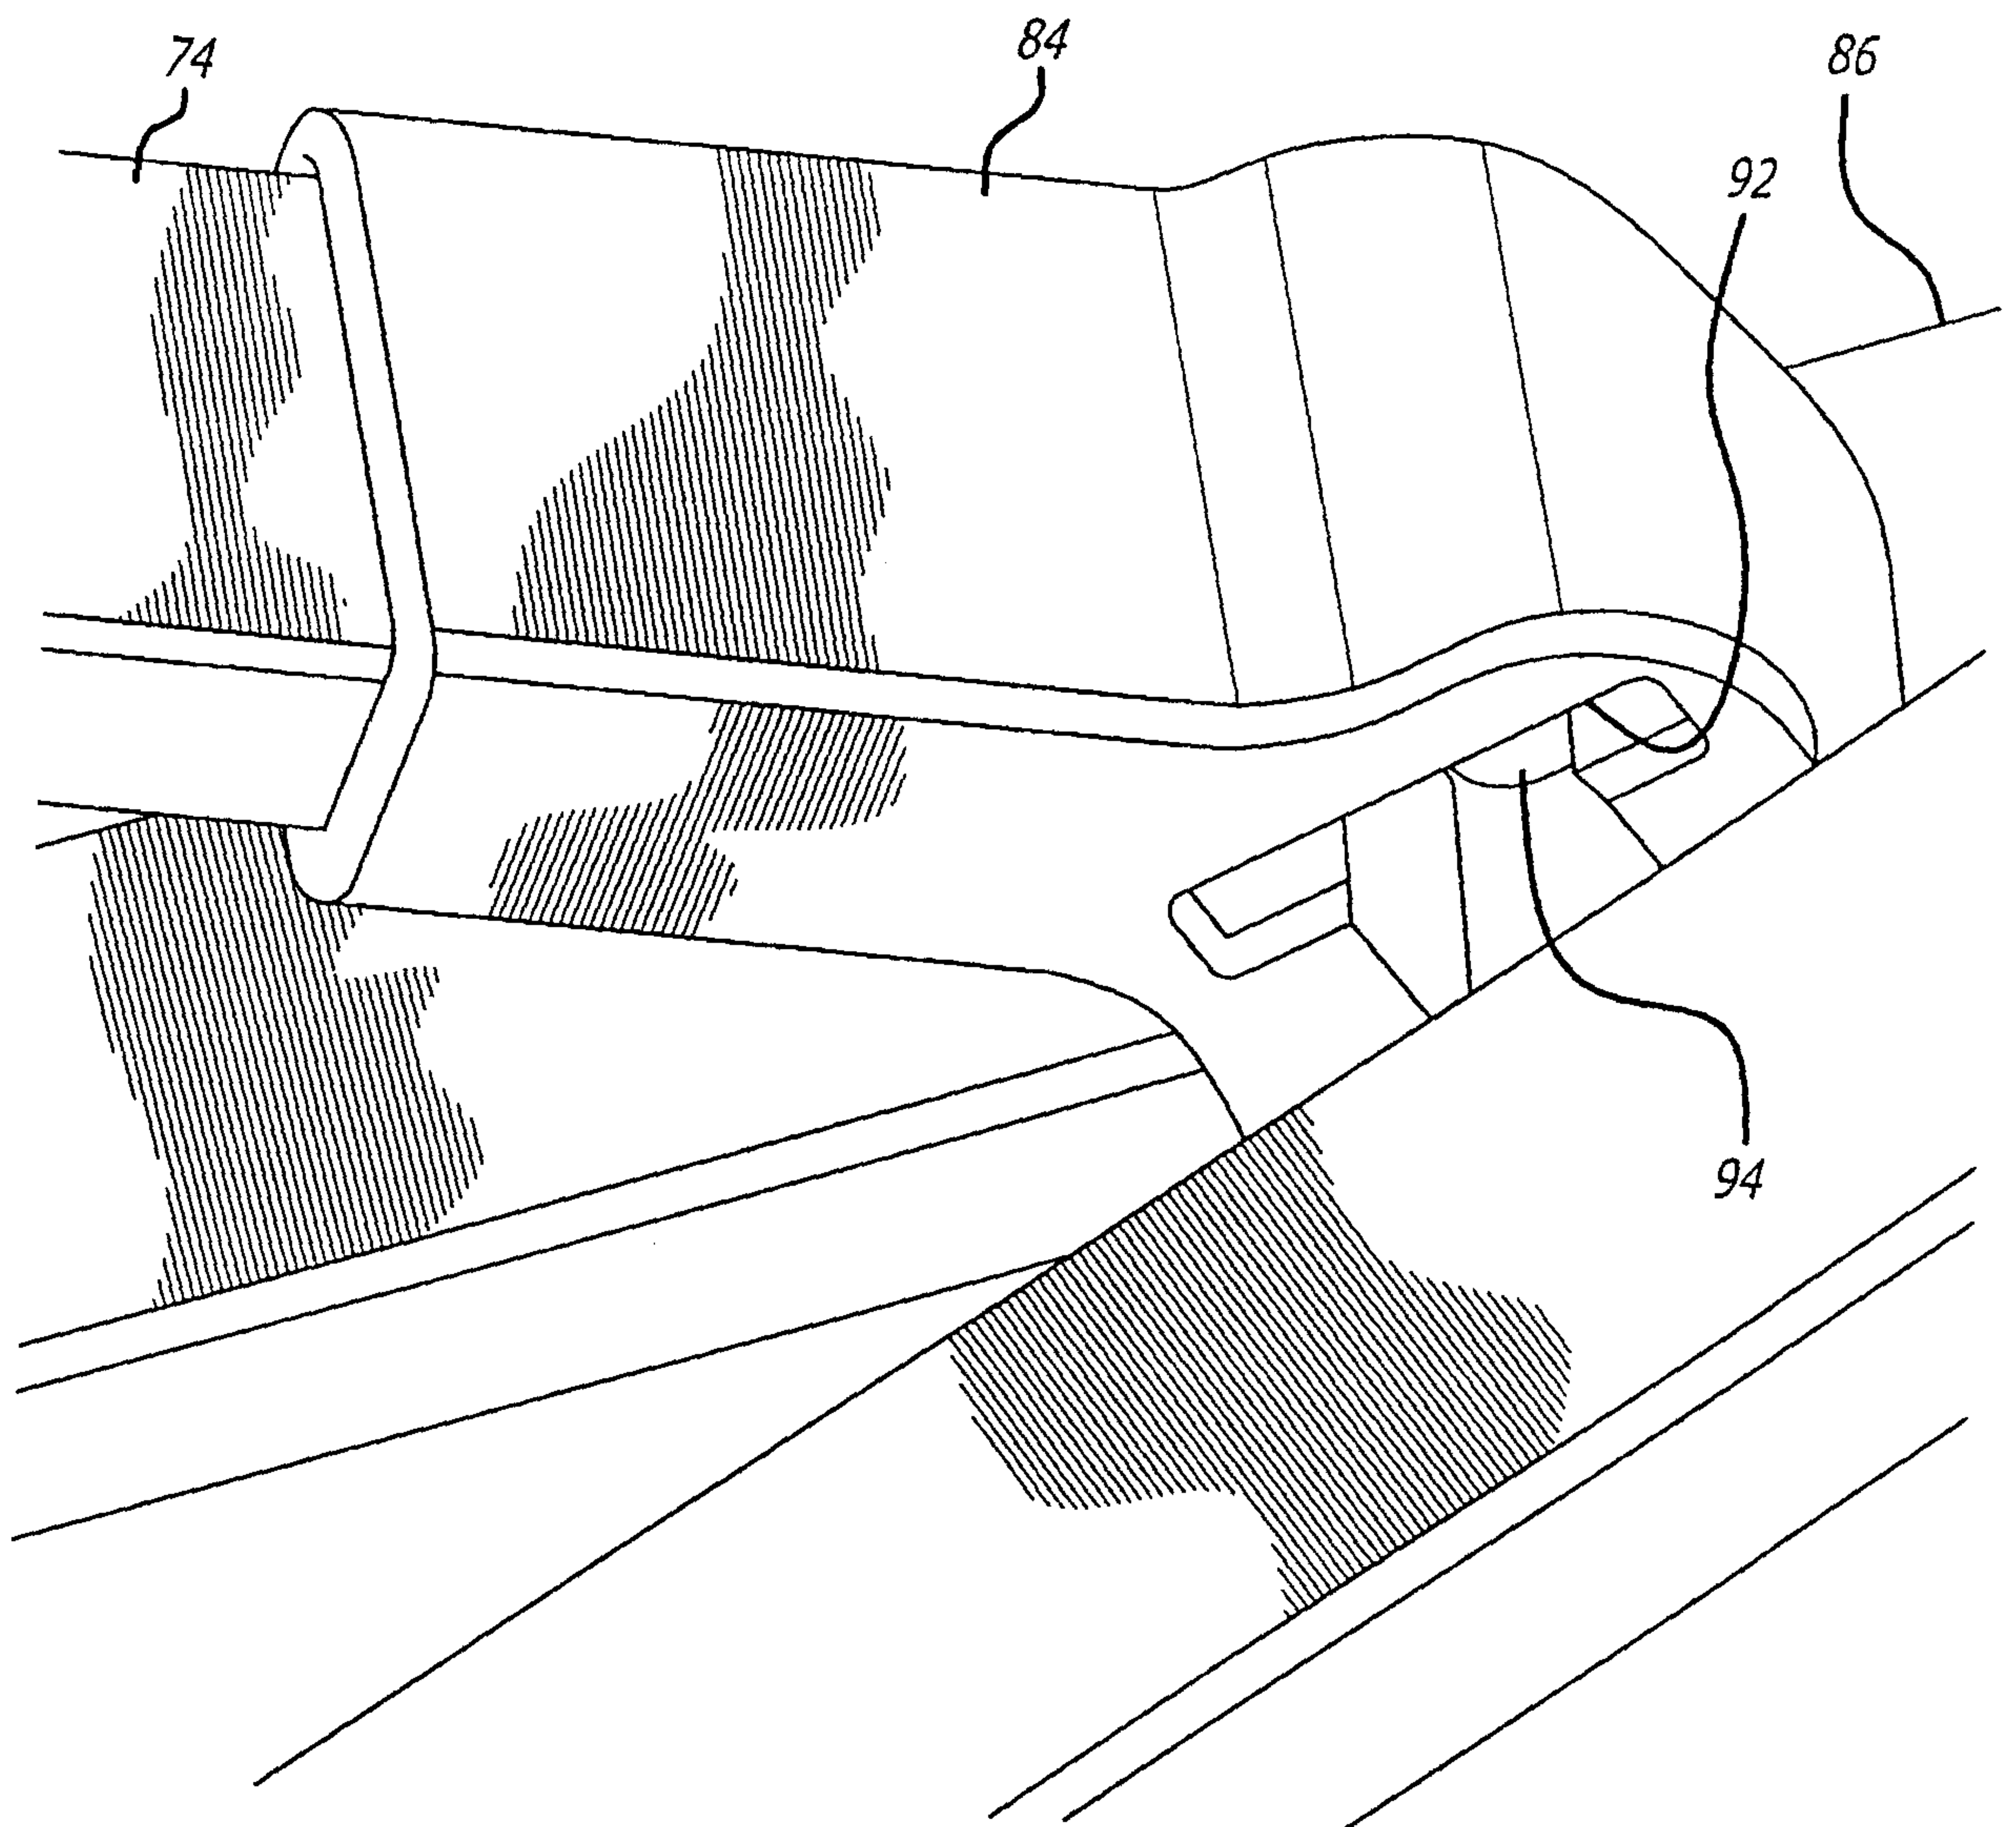


FIG. 8



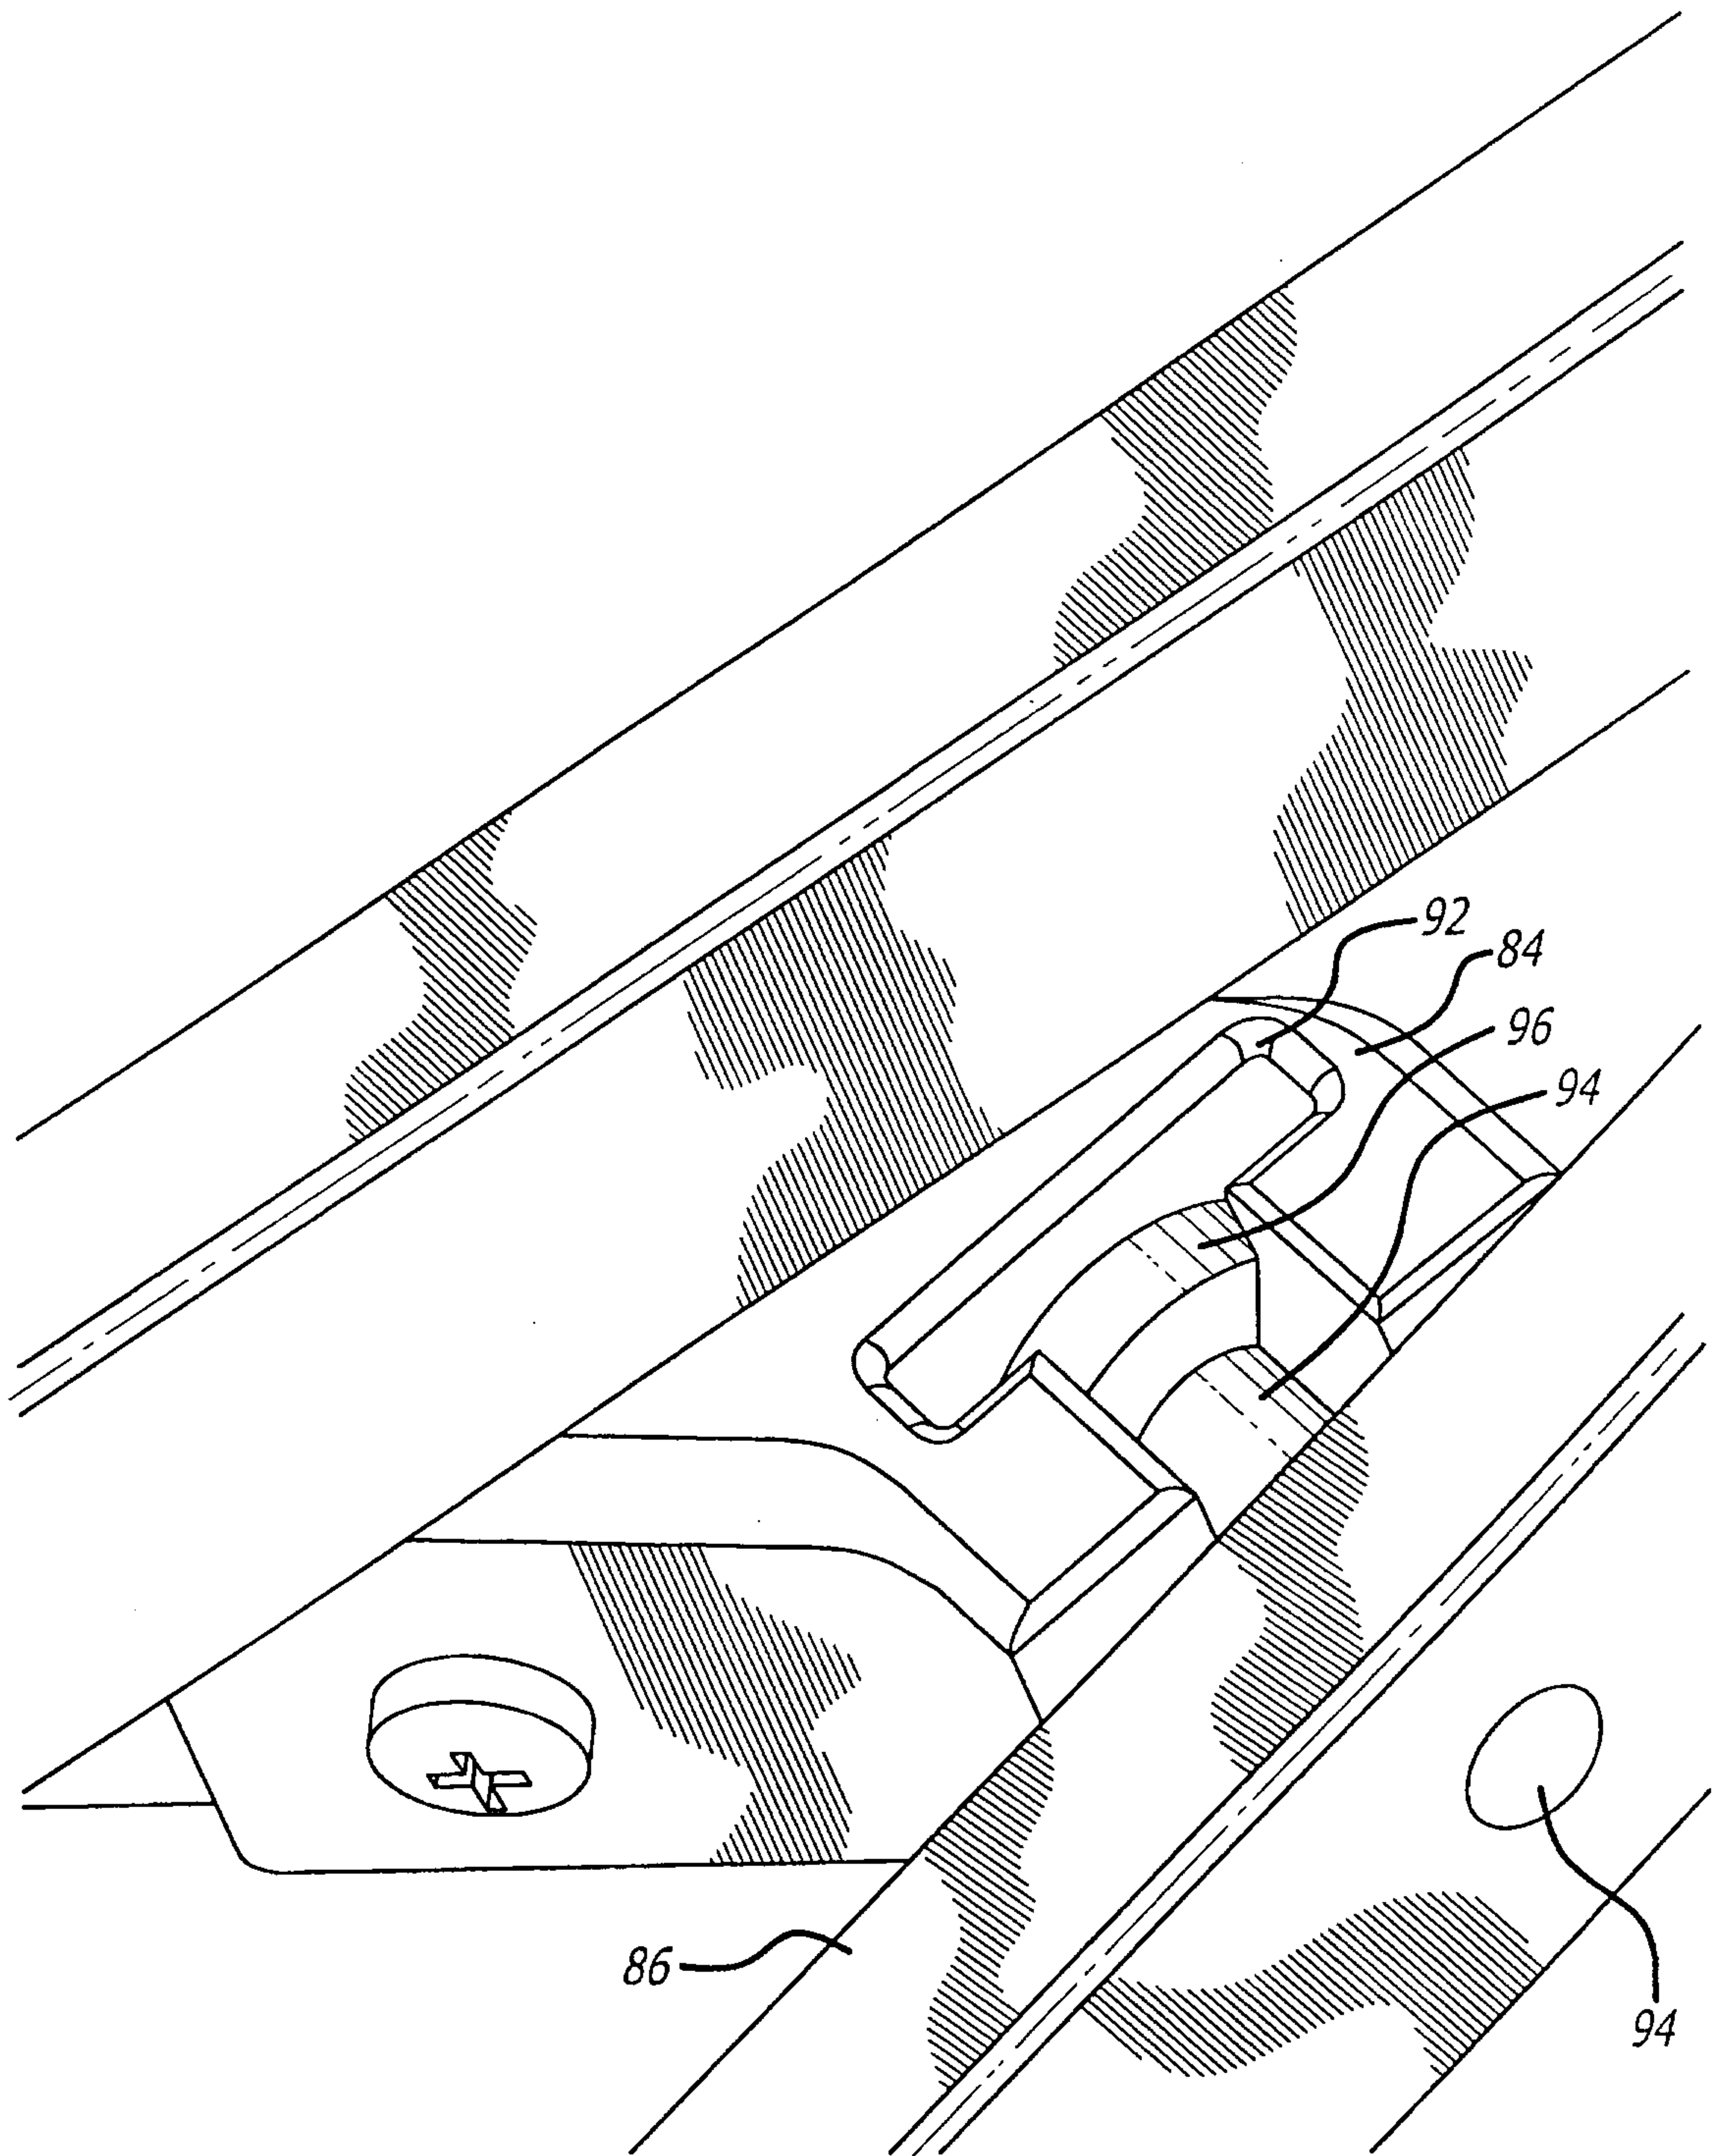


FIG. 9



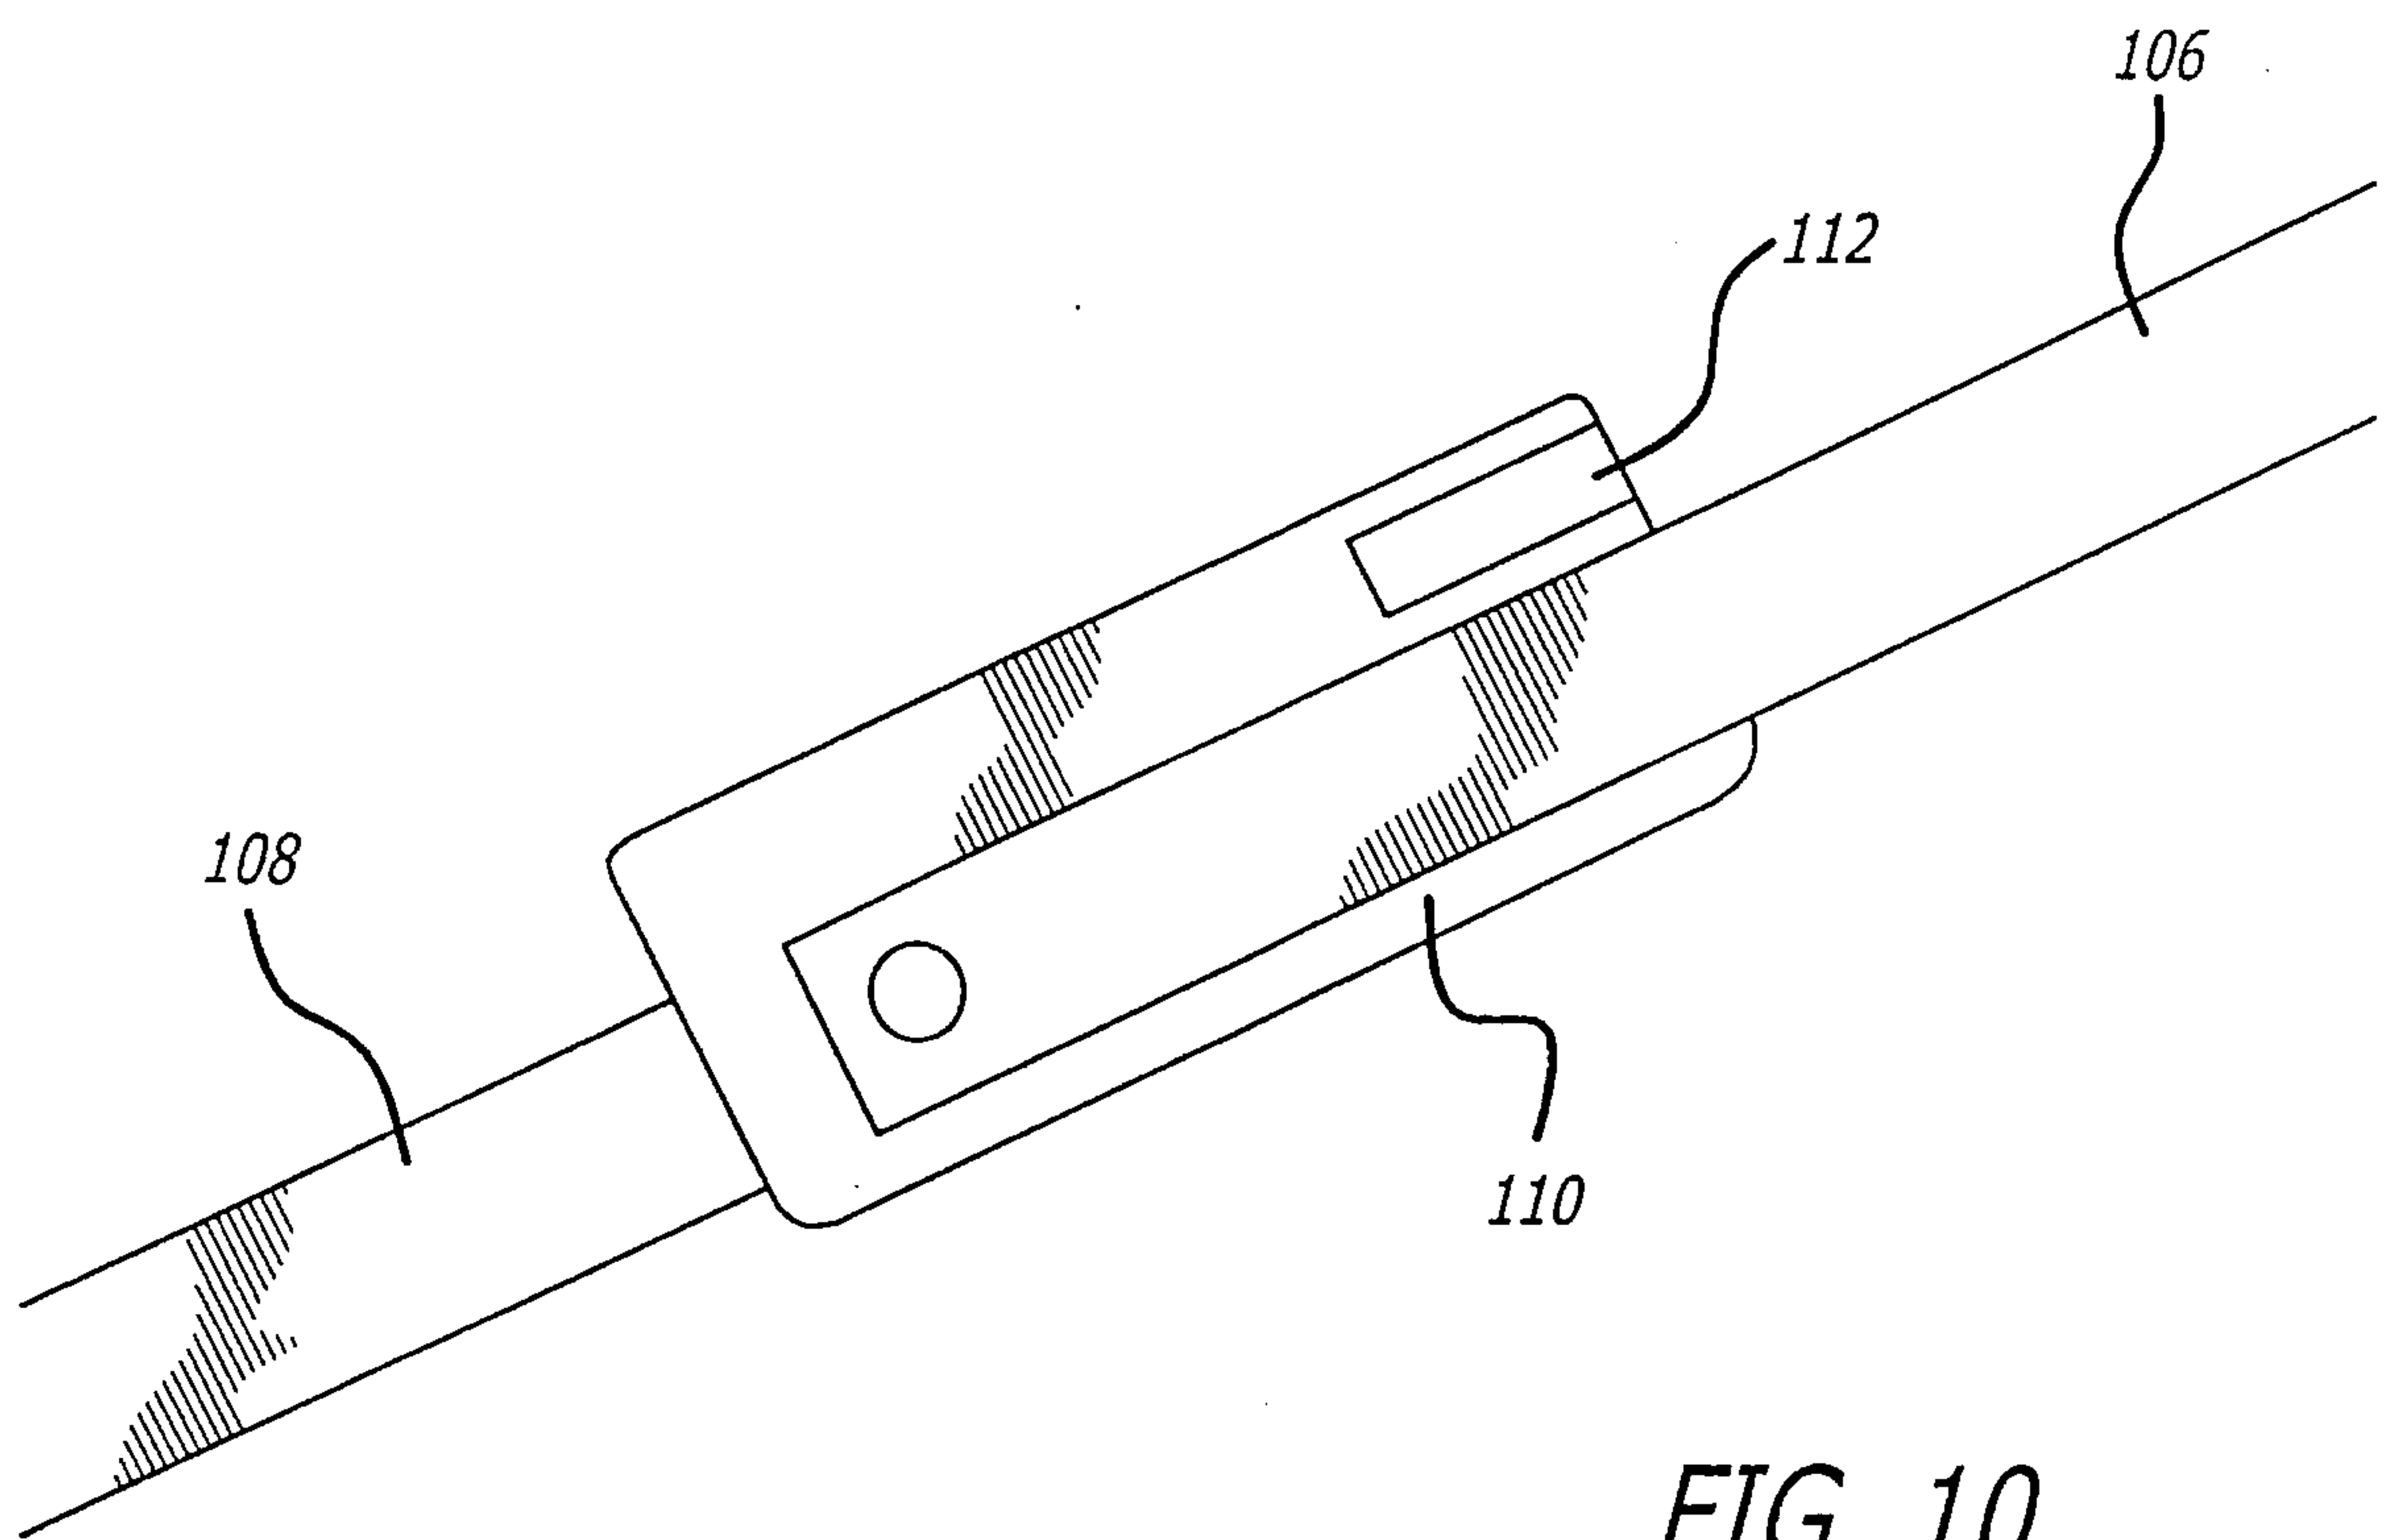
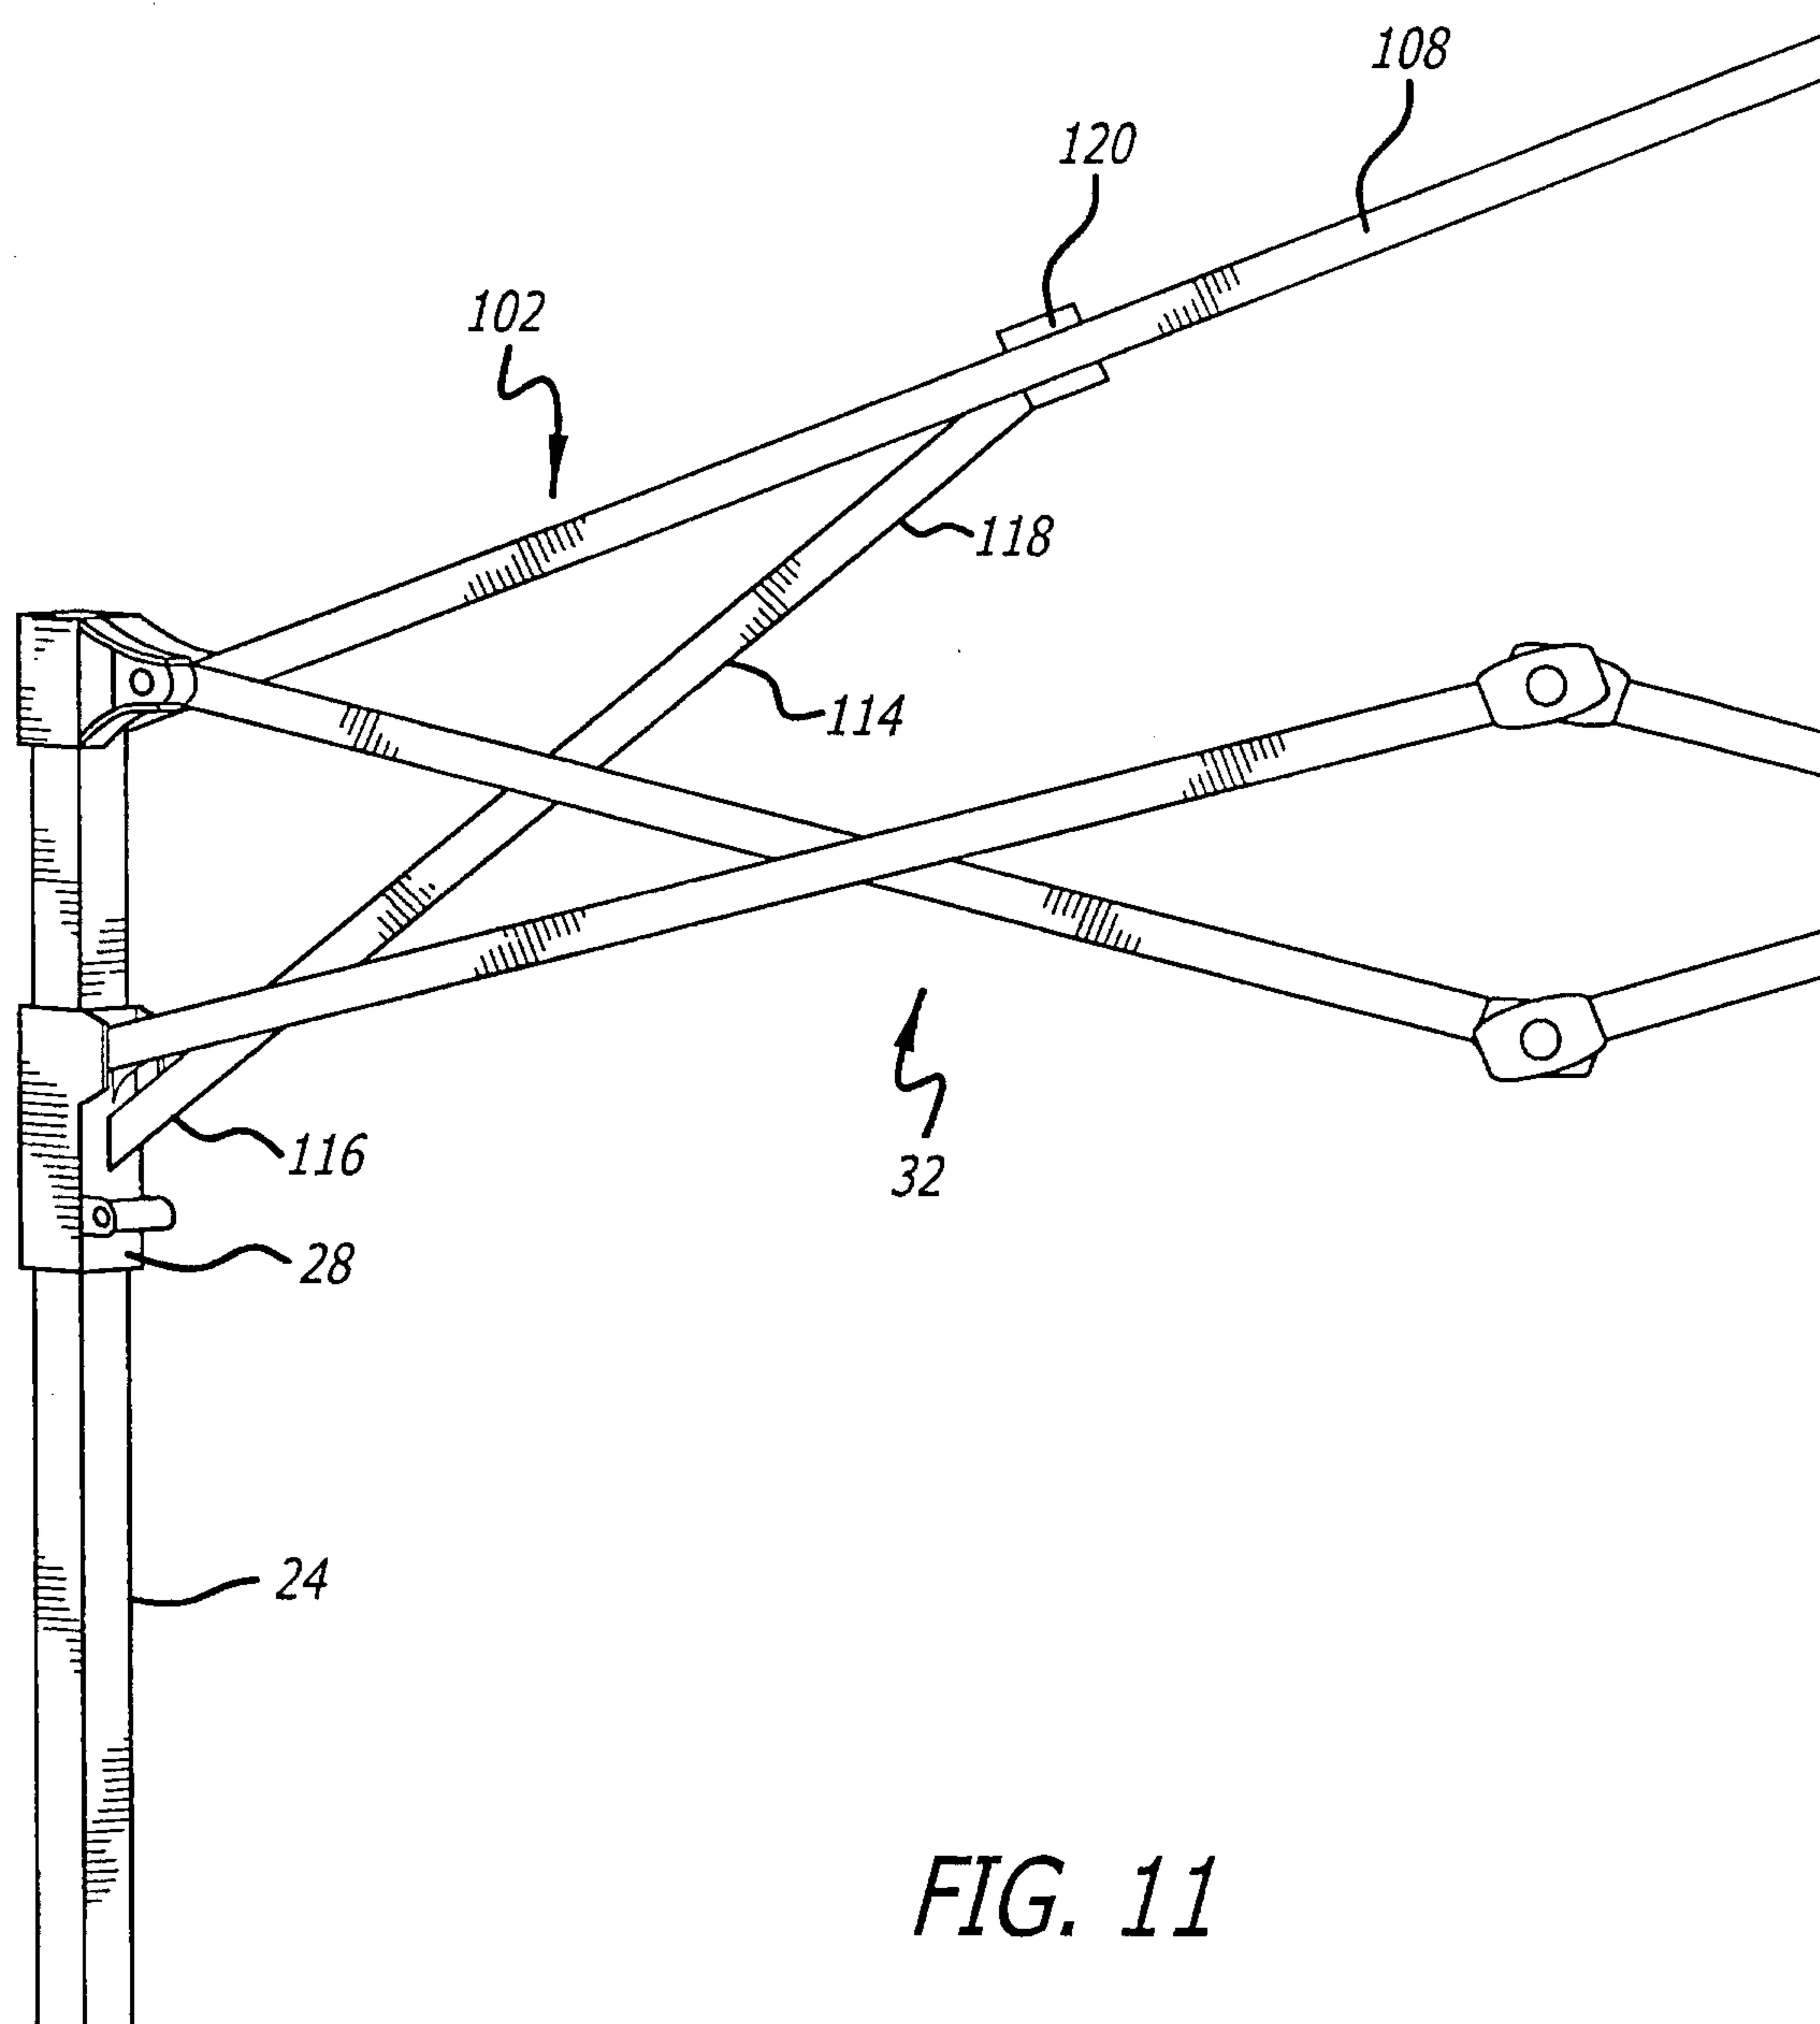


FIG. 10







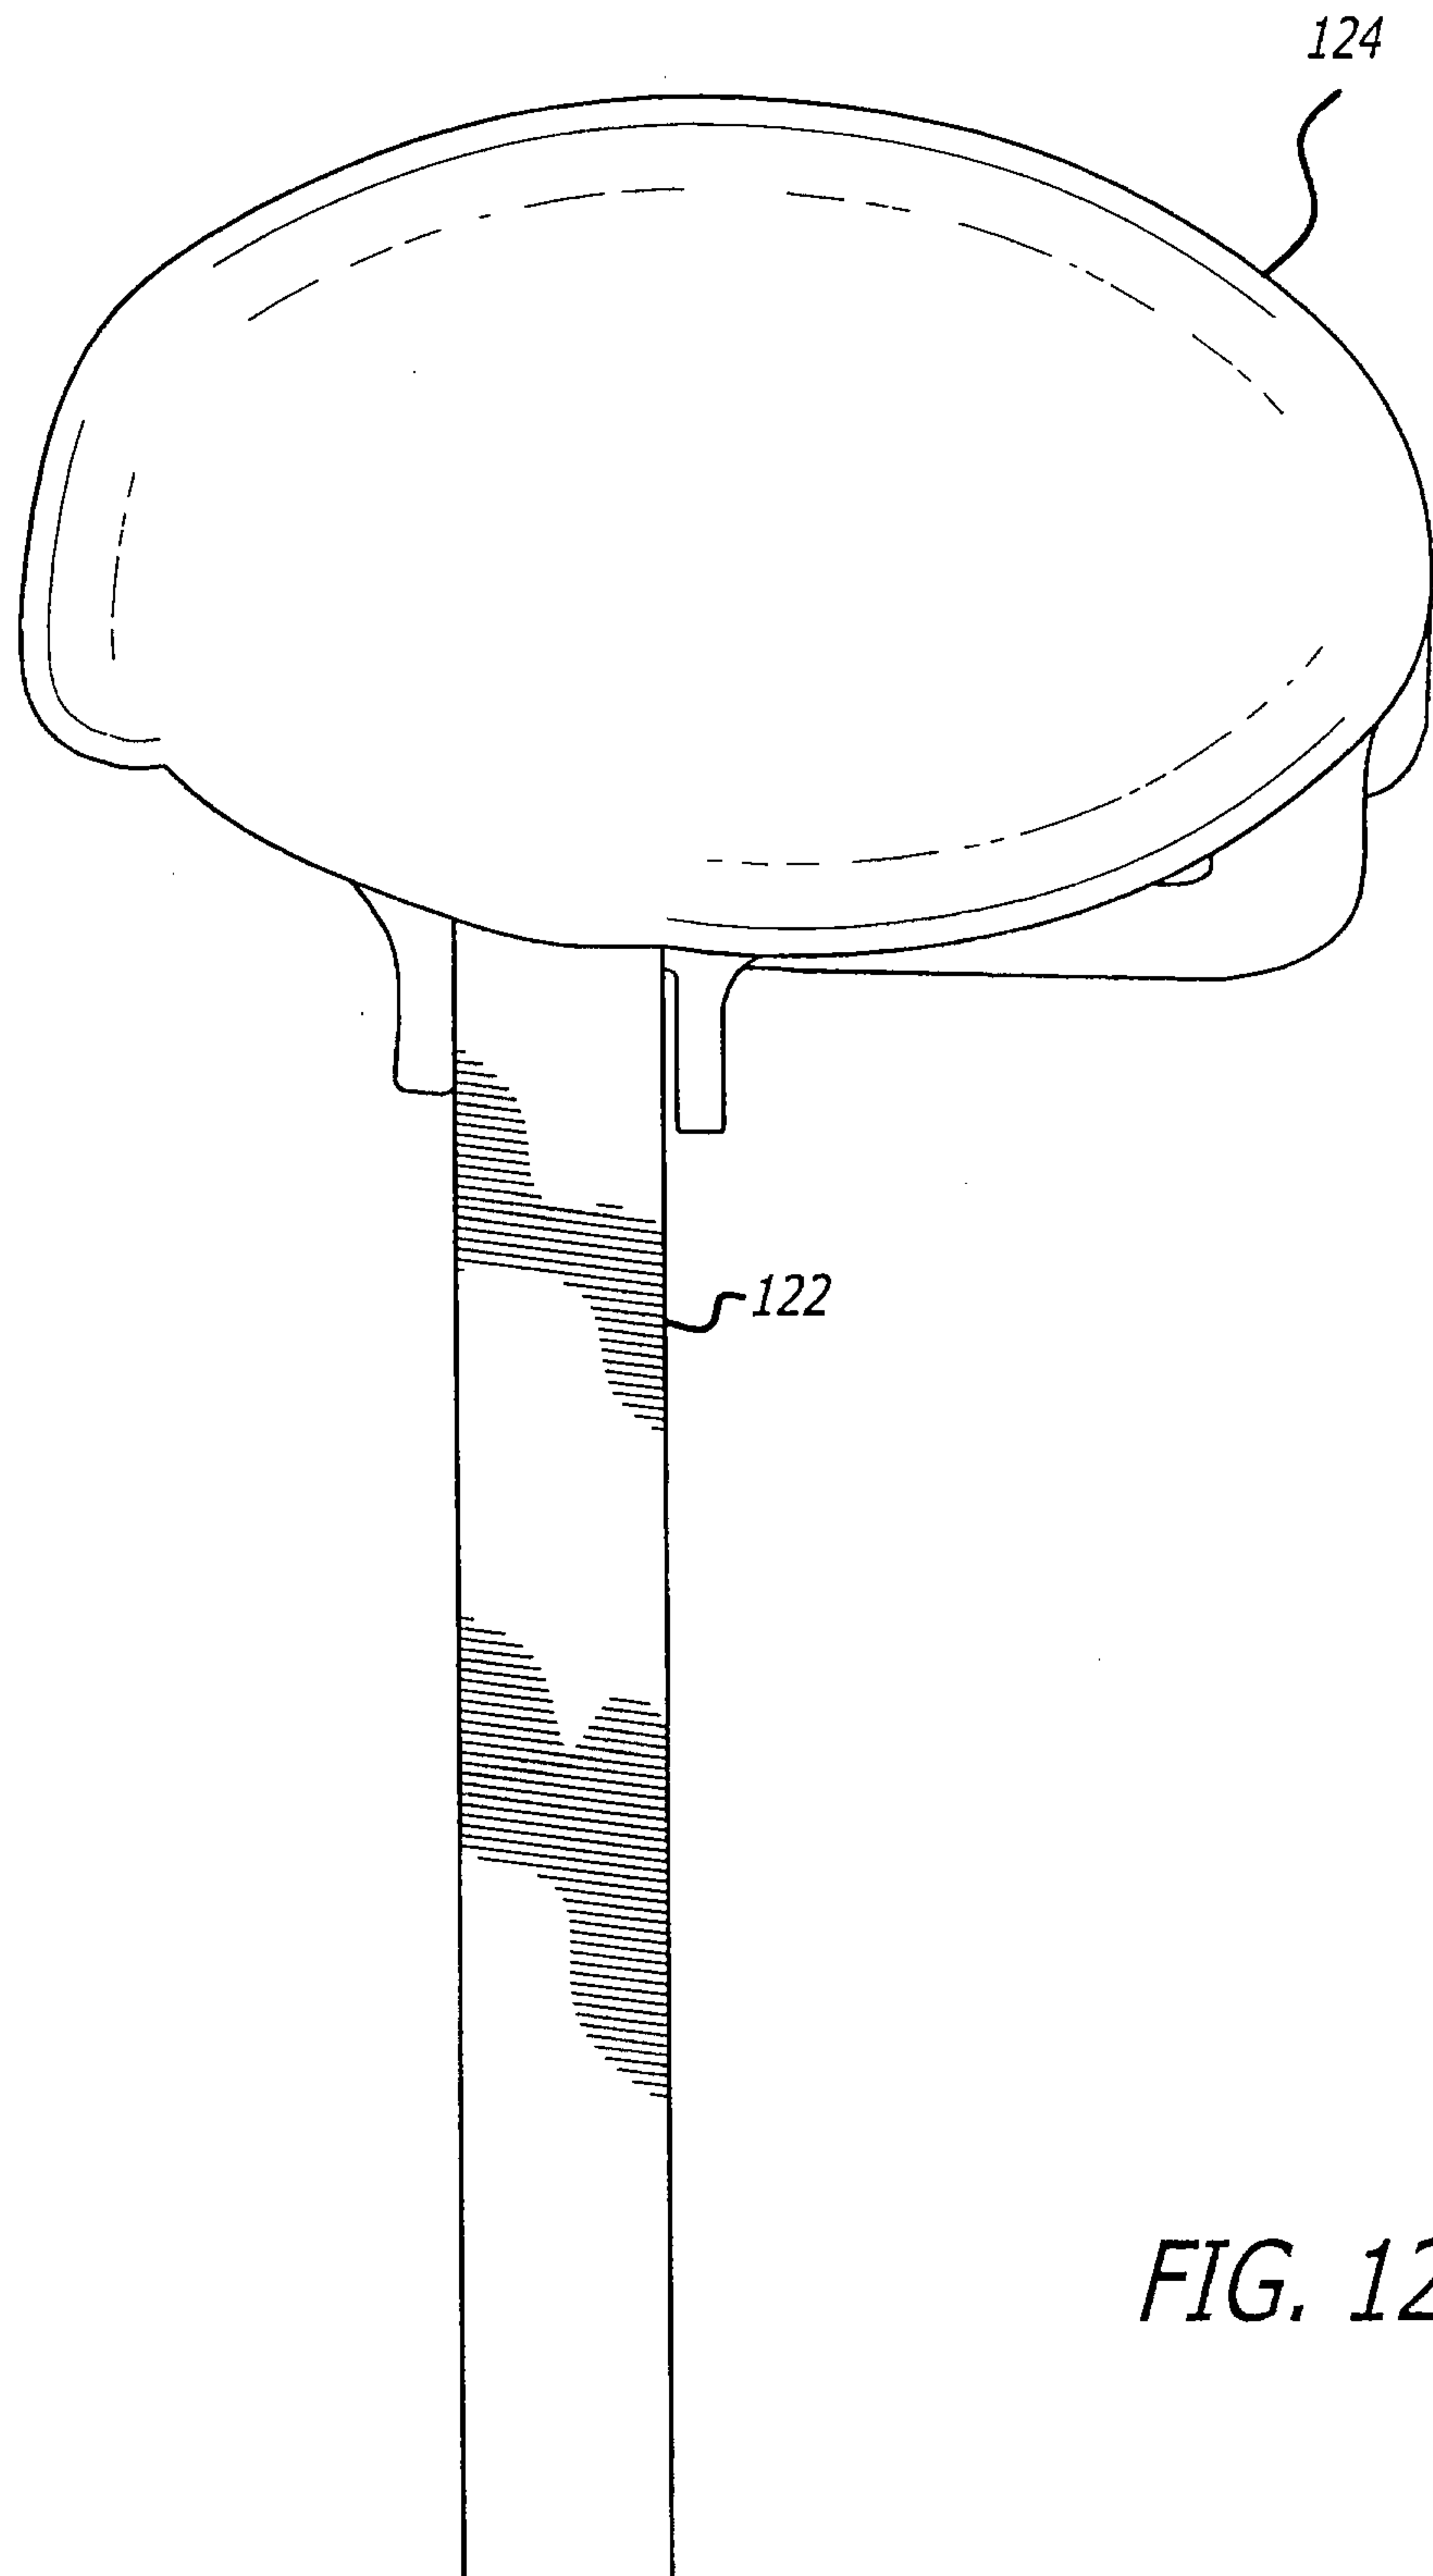


FIG. 12



