



(43) International Publication Date
31 August 2017 (31.08.2017)

(51) International Patent Classification:

H04N 1/60 (2006.01) *F21V 9/10* (2006.01)
F21V 9/04 (2006.01) *H04N 9/73* (2006.01)
F21V 9/06 (2006.01)

(21) International Application Number:

PCT/US2017/019543

(22) International Filing Date:

25 February 2017 (25.02.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/300,794 27 February 2016 (27.02.2016) US
15/441,614 24 February 2017 (24.02.2017) US

(71) Applicant: **FOCAL SHARP, INC.** [US/US]; 529 South Broadway, Suite 4050, Los Angeles, CA 90013 (US).

(72) Inventor: **SHIH, Kuang-Tsu**; 4f., 4-3, Aly.2, Ln. 242, Sec. 2, Zhongshan Rd., New Taipei City 235 (TW).

(74) Agents: **KESSELEN, Mark, P.** et al.; Lowenstein Sandler LLP, 65 Livingston Avenue, Roseland, NJ 07068 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR COLOR-PRESERVING SPECTRUM RESHAPE

FIG. 1

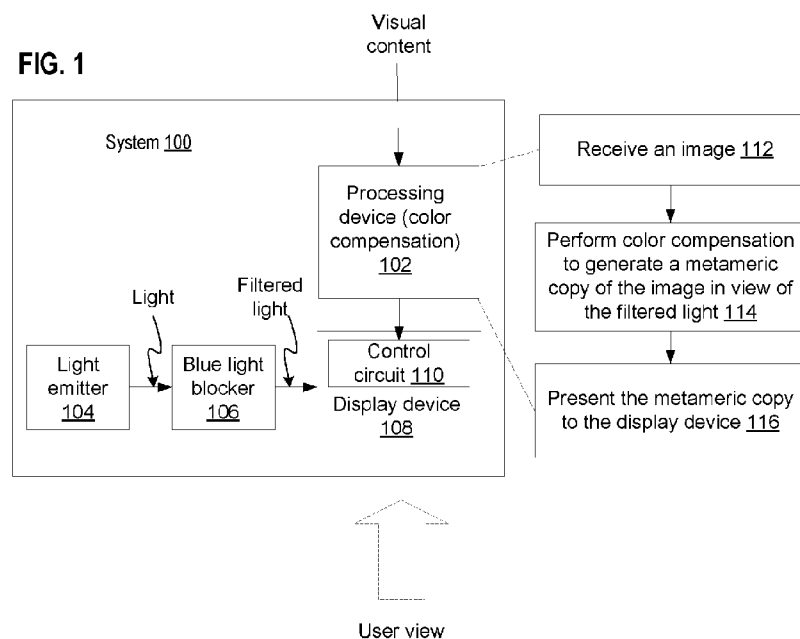

(57) Abstract: A system include an light emitter to generate a primary light, a filter to filter the primary light to substantially remove a spectrum energy in a wavelength band, a display device to present visual content using the filtered primary light, and a processing device to receive a visual content, calculate, in view of the filtered primary light, a metamer of the visual content, and provide, to the display device, the metamer of the visual content to display in view of the filtered light.

METHOD AND APPARATUS FOR COLOR-PRESERVING SPECTRUM RESHAPE

RELATED APPLICATION

[001] The present application claims priority from U.S. Provisional Patent Application No. 62/300,794, filed February 27, 2016, the content of which is incorporated by reference in its entirety herein.

TECHNICAL FIELD

[002] This disclosure relates to display devices and, in particular, to methods and apparatus to reduce the amount of harmful blue light while preserving the color fidelity of the display devices.

BACKGROUND

[003] A plethora of health issues may occur when human eyes are exposed to blue light for an extended period of time. For example, long absorption of blue light around the wavelength of 482 nm at night by the light sensitive cells called “intrinsically photosensitive retinal ganglion cells” (ipRGCs) on human retina can cause harmful changes to the human circadian clock. The harmful effects may include insomnia and low sleep quality. Blue light at the high energy wavelengths (380-420 nm) can cause other types of health issues as well. Although simply applying a blue light blocker to a display device can reduce the harmful blue light, the blue light blocker adversely generates unpleasant yellowish and/or pinkish effects on the display. The degradation of image quality is undesirable for commercial products such as, for example, TVs, smartphones, and computers.

SUMMARY

[004] The following is a simplified summary of the disclosure in order to provide a basic understanding of some aspects of the disclosure. This summary is not an extensive overview of the disclosure. It is intended to neither identify key or critical elements of the disclosure, nor delineate any scope of the particular implementations of the disclosure or any scope of the claims. Its sole purpose is to present some concepts of the disclosure in a simplified form as a prelude to the more detailed description that is presented later.

[005] Implementations of the disclosure may include a system including an light emitter to generate a primary light, a filter to filter the primary light to substantially remove a spectrum energy in a wavelength band, a display device to present visual content using the filtered primary light, and a processing device to receive a visual content, calculate, in view of the filtered primary light, a metamer of the visual content, and provide, to the display device, the metamer of the visual content to display in view of the filtered light.

[006] Implementations of the present disclosure may include a method including receiving, by a processing device, a visual content to be displayed on a display device, filtering a primary light, emitted from a light source associated with the display device, to substantially remove a spectrum energy in a wavelength band, calculating, in view of the filtered primary light, a metamer of the visual content, and providing , to the display device, the metamer of the visual content to display in view of the filtered light.

[007] Implementations of the disclosure may include a machine-readable non-transitory storage medium storing instructions which, when executed, cause a processing device to perform operations including receiving, by the processing device, a visual content to be displayed on a display device, wherein a primary light associated with the display device is filtered to substantially remove a spectrum energy in a wavelength band, calculating, in view of the filtered primary light, a metamer of the visual content, and providing, to the display device, the metamer of the visual content to display in view of the filtered light.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present disclosure is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings.

[0009] The patent or application file contains at least one drawing executed in color. Copies of this patent or patent application publication with color drawing(s) will be provided by the Office upon request and payment of the necessary fee.

[0010] **FIG. 1** illustrates a system according to an implementation of the present disclosure.

[0011] **FIG. 2** illustrates the spectral transmittance profile of a resulting blue light blocker according to an implementation of the present disclosure.

[0012] **FIG. 3** illustrates a flow diagram of a method to perform color compensation according to an implementation of the present disclosure.

[0013] **FIGS. 4A – 4C** illustrate the effects of blue light blocker and color compensation according to an implementation of the present disclosure.

[0014] **FIGS. 5A-5B** illustrate the spectrum energy for blue color areas according to an implementation of the present disclosure.

[0015] **FIG. 6** illustrates a flow diagram of a method to perform color-preserving spectrum reshaping according to an implementation of the disclosure.

[0016] **FIG. 7** is a block diagram illustrating an exemplary computer system, according to some implementations of the disclosure.

DETAILED DESCRIPTION

[0017] To correct the above-noted and other deficiencies of existing systems, implementations of the present disclosure provide systems and methods that reduce the spectrum energy of the harmful blue light while preserving the overall color fidelity of a visual content (e.g., image or video) presented on a display device. Implementations of the present disclosure include a combination of blue light blocking filter (referred to as blue light blocker) that may remove the spectrum energy within a selected wavelength band (e.g., the blue light band) and a color compensation processor to correct color distortions. It should be understood that implementations of the disclosure can be applied to any targeted wavelength bands including those other than the blue light band. The blue light blocker is applied to a light source of the display device while the color compensation is applied to the pixel values of the visual content. The combination of the blue light blocker and the color compensation may result in displaying a metamer of the input visual content on the display device, where the metamer is perceived by an average human observer substantially identical as the input visual content but with substantially reduced harmful blue light spectrum energy.

[0018] In this disclosure, a display device is a visual output device including suitable types of control circuits and display panels to present colored visual content, where the display panels include, but not limited to, liquid crystal display (LCD) panels, light-emitting diode display (LED) panels, and organic light-emitting diode display (OLED) panels. These display panels can be used in any suitable types of apparatus including, but not limited to, television sets (TVs), computer monitors, mobile phone (e.g., smart phone) screens, head-mounted displays, large format screens (e.g., movie screens), and medical device monitors. The display device can present two-dimensional visual content on a flat (or slightly curved) display panels or three-dimensional visual content in a virtual reality environment.

[0019] **FIG. 1** illustrates a system 100 according to an implementation of the present disclosure. System 100 can be suitable hardware devices including such as, for example, television sets (TVs), computer monitors, mobile phone (e.g., smart phone) screens, head-mounted displays, large format screens (e.g., movie screens), and medical device monitors. As shown in **FIG. 1**, system 100 may include a processing device 102,

a light emitter 104, a blue light blocker 106, and a display device 108. In one implementation, display device 108 may further include control circuit 110 to drive one or more display panels.

[0020] Processing device 102 can be a general-purpose processor such as, for example, a central processing unit (CPU) or a graphic processing unit (GPU) that can be programmed to perform the color compensation. Alternatively, processing device 102 can be an application-specific integrated circuits (ASICs) implementing the color compensation. In one implementation, processing device 102 may receive visual content (e.g., images or videos) stored in a memory (not shown) in system 100. In another implementation, processing device 102 may receive visual content from a content source external to system 100. The visual content may be represented by an array of pixel values defined according to an image representation format. For example, an image can be represented by a two-dimensional array of pixels, and a video can be represented by a stack of two-dimensional arrays of pixels. Each pixel value may include a red color intensity value (R), a green color intensity value (G), and a blue color intensity value (B) in the RGB format.

[0021] Light emitter 104 may include hardware components to generate three primary color light sources (referred to as the primaries) including a red light source (r), a green light source (g), and a blue light source (b). Control circuit 110 may modulate the intensities of different light sources based on the pixel values of the visual content to generate the visual display on the display panel in display device 108. In one implementation (e.g., LCDs), light emitter 104 may be a light source generator separate from display device 108. In another implementation (e.g., OLEDs), light emitter 104 may be an integral part of display device 108 (e.g., as a layer in the OLED panel). In some implementations, the primaries associated with display device 108 are designed according to a fixed protocol. Thus, the blue primary light source cannot be changed. A blue light blocker 106, therefore, may be used to reduce the spectrum energy of blue light in targeted wavelength bands.

[0022] Blue light blocker 106 can be a hardware filter that substantially removes the spectrum energy in one or more targeted wavelength bands, where a wavelength band can be in the blue light wavelength section. Blue light blocker 106 may perform the

filtering at light emitter 104, on the light path between light emitter 104 and display device 108, or at the receiver (e.g., the viewer).

[0023] For example, light blocker 106 can be a logic circuit or a coating material (e.g., a semiconductor material that can selectively block a wavelength band) in light emitter 104 to directly remove the blue light spectrum energy in the emitted primaries. In another example, light blocker 106 can be a glass coated with chemical agents to selectively filter out the spectrum energy in the targeted blue light wavelength bands. The blue light blocker 106 in the form of coated glass can be placed in the light path between light emitter 104 and display device 108. In yet another example, the blue light blocker 106 can be part of a head-mounted device (e.g., a pair of wearable glasses coated with filtering agents).

[0024] Blue light blocker 106 may filter the primary light sources generated from light emitter 104 to produce filtered primary light sources. Without color compensation, the display of the visual content in view of the filtered primary light sources is distorted with the unpleasant yellowish and/or pinkish effects. To compensate the effects due to the blue light blocker 106, processing device may perform color compensation to the input visual content and display the color-compensated visual content on display device 108. To perform the color compensation, processing device 102 may, at 112, receive the visual content from a memory or from an external content source. Processing device 102 may, at 114, perform color compensation to generate a metamer of the input visual content in view of the filtered light. Processing device 102 may, at 116, present the metamer of the visual content to display device 108. Thus, the displayed visual content generated by system 100 may be a metamer of the input visual content that induces minimum harmful perceptual response (e.g., ipRGC response) from human observers.

[0025] Following sections include exemplary implementations of the blue light blocker and color compensation.

Blue Light Blocker

[0026] Display device 108 may be associated with a display gamut volume which includes all the colors that the display device 108 can reproduce. When the blue light blocker is applied to the primary light sources, the number of colors can be reproduced by

display device 108 may reduce, thus resulting in a smaller display gamut volume. Implementation of the present disclosures include a blue light blocker that is designed to minimize both the spectrum energy in the blue light wavelength band and the reduction of the display gamut volume. In particular, the blue light blocker is to minimize a weighted sum of the spectrum energy in the blue light wavelength band and maximize the display gamut volume.

[0027] Given the RGB values (R , G , B) of a pixel, the emission spectrum $d(\lambda)$ of the pixel can be described as

$$d(\lambda) = t_R(R)r(\lambda) + t_G(G)g(\lambda) + t_B(B)b(\lambda), \quad (1)$$

where $t_R(\cdot)$, $t_G(\cdot)$, and $t_B(\cdot)$ denote the luminance transfer functions of the display for R , G , and B channels, respectively, and $r(\lambda)$, $g(\lambda)$, and $b(\lambda)$ are the spectra of the three corresponding display primaries. In some implementations, $t_R(\cdot)$, $t_G(\cdot)$, and $t_B(\cdot)$ can be modeled as gamma functions. After applying a blue light blocker with spectral transmittance function $F(\lambda)$ to the primaries, the emission spectrum is $F(\lambda)d(\lambda)$. The colors that an average human observer can perceive can be represented in an XYZ space (X , Y , Z). Using color matching functions ($x(\lambda)$, $y(\lambda)$, $z(\lambda)$), the RGB values of a pixel may be converted into XYZ values as follows:

$$\begin{bmatrix} X \\ Y \\ Z \end{bmatrix} = \begin{bmatrix} \langle Fd, x \rangle \\ \langle Fd, y \rangle \\ \langle Fd, z \rangle \end{bmatrix} = \begin{bmatrix} \langle Fr, x \rangle & \langle Fg, x \rangle & \langle Fb, x \rangle \\ \langle Fr, y \rangle & \langle Fg, y \rangle & \langle Fb, y \rangle \\ \langle Fr, z \rangle & \langle Fg, z \rangle & \langle Fb, z \rangle \end{bmatrix} \begin{bmatrix} t_R(R) \\ t_G(G) \\ t_B(B) \end{bmatrix} = H_F \begin{bmatrix} R_L \\ G_L \\ B_L \end{bmatrix}, \quad (2)$$

where $\langle \cdot, \cdot \rangle$ is the inner product of two functions within a targeted wavelength band (e.g., the visible light wavelength range of 400 nm – 700 nm), (R_L, G_L, B_L) denotes the linearized RGB values (which are computed using the luminance transfer functions ($t_R(\cdot)$, $t_G(\cdot)$, $t_B(\cdot)$)), and H_F denotes the transfer matrix from the linearized RGB value space to the XYZ value space. The subscript F indicates that the transfer matrix is determined by the spectral transmittance function $F(\lambda)$ of the blue light blocker. The display gamut D is the set of all displayable XYZ values, i.e., those XYZ values corresponding to all linearized RGB values within the RGB space range. The display gamut volume can be determined by

$$\|D\| = \det(H_F), \quad (3)$$

where $\det(\cdot)$ is the determinant operator.

[0028] With respect to a spectral sensitivity profile $m(\lambda)$ of retina cells (e.g., ipRGC), the response I induced by $F(\lambda)d(\lambda)$ of the blue light blocker can be represented by

$$I = \langle Fd, m \rangle = v_F (R_L \quad G_L \quad B_L) \quad (4)$$

where, assuming that the expected values of R_L , G_L , B_L are the same, v_F represents perceived spectrum energy of the light. The blue light blocker function $F(\lambda)$ can be designed by solving the following optimization problem

$$\arg \min_{F(\lambda)} \left(-(\det(H_F))^2 + w_I \|v_F\|_2^6 \right), \text{ subject to: } 0 \leq F(\lambda) \leq 1, \forall \lambda \in [fb_{lo}, fb_{hi}], \quad (5)$$

where w_I is a weight parameter, $\|\cdot\|_2$ is the L2 norm, fb_{lo} is the lower wavelength bound of the blue light blocker, and fb_{hi} is the higher wavelength bound of the blue light blocker. In one implementation, the lower bound is approximately 400 nm, and the higher bound is approximately 700 nm, where the lower and higher bounds approximately match the wavelength range of visible light. Thus, the blue light blocker can be designed to maximize the display gamut volume while minimizing the blue light spectrum energy perceived by ipRGC. The larger display gamut volume as a result of solving the optimization problem can provide more colors for the color compensation to choose and help restore the color fidelity of the display after the filtering primaries by blue light blocker 106.

[0029] The optimization problem as shown in Equation (5) can be solved using a suitable optimization solver such as, for example a gradient descent approach. For example, $F(\lambda)$ can be represented by uniform samples $F_1, F_2, \dots, F_n$ within the band of $[fb_{lo}, fb_{hi}]$. These samples $F_1, F_2, \dots, F_n$ can be derived by solving the optimization problem using the gradient descent method.

[0030] **FIG. 2** illustrates the spectral transmittance profile 200 of a resulting blue light blocker according to an implementation of the present disclosure. The blue light blocker, as shown in **FIG. 2**, includes a stop band 202 to remove spectrum energy from approximately 450 nm to 525 nm. The stop band 202 may effectively remove blue light to which the ipRGC is sensitive. Once the spectrum distribution of the blue light blocker is determined, a hardware light filter can be manufactured with substantially the same spectrum distribution.

[0031] In addition to the stop band designed to block blue light generating responses on ipRGC, the blue light blocker can be designed to block other bands of wavelengths. For example, the blue light blocker can have a stop band to remove the spectrum energy in the ultraviolet wavelength range or other color wavelength range. In another implementation, the blue light blocker can have multiple stop bands that may remove spectrum energy from multiple wavelength ranges.

Color Compensation

[0032] Blue light blocker, when applied alone without color compensation, may produce unpleasant visual effects. Implementations of present disclosure apply color compensation to the pixel values, producing a metamer of the input visual content that can be displayed, in view of the filtered primary light sources, on display device 108 with sufficient color fidelity. In one implementation, the color compensation may include determining whether a pixel value falls within the display gamut volume. Responsive to determining that the pixel value falls within the display gamut volume, the XYZ value of the pixel is preserved. Responsive to determining that the pixel value is outside the display gamut volume, the hue and saturation value of the pixel are preserved while compressing the lightness value of the pixel.

[0033] **FIG. 3** illustrates a flow diagram of a method 300 to perform color compensation according to an implementation of the present disclosure. The method may be performed by processing logic that comprises hardware (e.g., circuitry, dedicated logic, programmable logic, microcode, etc.), software (e.g., instructions run on a processing device to perform hardware simulation), or a combination thereof.

[0034] For simplicity of explanation, the methods of this disclosure are depicted and described as a series of acts. However, acts in accordance with this disclosure can occur in various orders and/or concurrently, and with other acts not presented and described herein. Furthermore, not all illustrated acts may be required to implement the methods in accordance with the disclosed subject matter. In addition, those skilled in the art will understand and appreciate that the methods could alternatively be represented as a series of interrelated states via a state diagram or events. Additionally, it should be appreciated that the methods disclosed in this specification are capable of being stored on

an article of manufacture to facilitate transporting and transferring such methods to computing devices. The term “article of manufacture,” as used herein, is intended to encompass a computer program accessible from any computer-readable device or storage media. In one implementation, the methods may be performed by processing device 102 as shown in **FIG. 1**.

[0035] Referring to **FIG. 1**, at 302, processing device 102 may first calculate the linearized RGB values from the RGB values for pixels of an input content using the luminance transfer functions as:

$$(R_{o,L}, G_{o,L}, B_{o,L}) = (t_R(R_o), t_G(G_o), t_B(B_o)), \quad (6)$$

where (R_o, G_o, B_o) are the original RGB values, $(R_{o,L}, G_{o,L}, B_{o,L})$ are the linearized RGB values, and $(t_R(\cdot), t_G(\cdot), t_B(\cdot))$ are the luminance transfer functions. To generate the metamer of the original visual content, the eventual compensated RGB values $(R_{c,L}, G_{c,L}, B_{c,L})$, when shown on display device 108 using blue light blocker 106, should be identical or substantially identical to the original pixel. In practice, however, after applying a forward transformation using the transfer matrix without the blue light blocker and then applying an inverse transformation using the transfer matrix with the blue light blocker to the linearized RGB values, the resulting RGB value can be out of the RGB value range (e.g., $[0, 1]$), indicating that a matching XYZ values may not exist due to the limited display gamut volume. These out-of-gamut pixels cannot be displayed on display device 108.

[0036] Implementations of the present disclosure may identify an in-gamut match for the out-of-gamut pixel. The in-gamut matching pixel may have identical hue value and saturation value as the out-of-gamut pixel, but a compressed lightness value. The in-gamut matching pixel may be used to replace the corresponding out-of-gamut pixel. To this end, at 304, processing device may further calculate the CIELAB color space representation of a pixel. The CIELAB color space representation includes the perceptual attributes (L, a, b) from which lightness value (e.g., using L), hue value (e.g., using a and b), and saturation value (e.g., using a and b) can be derived. The LAB values (L_o, a_o, b_o) are obtained by

$$[L_o \ a_o \ b_o]^T = \wedge(H[R_{o,L} \ G_{o,L} \ B_{o,L}]^T), \quad (7)$$

where Λ is the transformation matrix between the XYZ space to the CIELAB space, and H represents the transfer matrix from the RGB space to the XYZ space without using the blue light blocker 106.

[0037] At 306, processing device 102 may calculate a scaling factor (K) map which is a two-dimensional array with the same size as the pixel array. Each data point in the scaling factor map is a scaling factor (K) that is to be applied to the lightness value (L) of the corresponding pixel. The scaling factor (K) and the compensated RGB values can be calculated as:

$$\arg \max_K K, \text{subject to: } \begin{cases} K \leq 1 \\ R_{c,L}, G_{c,L}, B_{c,L} \leq 1, \end{cases} \quad (8)$$

$$\text{where, } [R_{c,L} \ G_{c,L} \ B_{c,L}]^T = H_F^{-1} \Lambda^{-1} ([KL_o \ a_o \ b_o]^T). \quad (9)$$

Processing device 102 may apply the scaling factor K to each pixel as shown in Equation (9). The application of the scaling factor (K) ensures that the compensated RGB values ($R_{c,L}$, $G_{c,L}$, $B_{c,L}$) are in the display gamut volume of display device 108.

[0038] In one implementation, the application of the scaling factor (K) directly to the lightness may result in degradation of details in the displayed visual content. To improve the display quality, at 310, processing device 102 may optionally apply an edge preserving filter or a low-pass filter to the scaling factor (K) map to generate a second scaling factor (K') map. At 312, processing device 102 may apply the second scaling factor (K') to the lightness value in each pixel, resulting in a metamer of the visual content input. After scaling, processing device 102 may convert the scaled CIELAB values ($K'L_o, a_o, b_o$) back to the linearized RGB values and then RGB values using the luminance transfer functions ($t_R(\cdot)$, $t_G(\cdot)$, $t_B(\cdot)$).

[0039] One aspect of the color compensation in this disclosure is that the color compensation does not shift the “white point” of the display device. A “white point” of a display device is the color that serves to define the white color. Since the color compensation as described in the disclosure maintains the hue of pixels, the “white point” of the display device is also preserved. An invariant “white point” after color compensation may help prevent the occurrence of the unpleasant color-shifting problem.

Experiment Results

[0040] **FIGS. 4A – 4C** illustrate the effects of blue light blocker and color compensation according to an implementation of the present disclosure. **FIG. 4A** illustrates an original image; **FIG. 4B** illustrates the effect of applying the blue light blocker alone to the original image; **FIG. 4C** illustrates the effect of applying both the blue light blocker and the color compensation to the original image. As shown in **FIG. 4B**, the application of blue light blocker may produce the unpleasant yellowish/pinkish effects on the display. As shown in **FIG. 4C**, the combination of blue light blocker and color compensation as described in this disclosure may produce a display with color fidelity of the original image.

[0041] **FIGS. 5A-5B** illustrate the spectrum energy for blue color areas according to an implementation of the present disclosure. As shown in **FIGS. 5A-5B**, the blue area B in **FIG. 5B** has almost no power in the sensitive band for ipRGC. In contrast, the blue area A in **FIG. 5A** has significant power in the sensitive band for ipRGC. Thus, the combination of the blue light blocker and the color compensation may help substantially eliminate the spectrum energy of in targeted wavelength bands while preserving the color fidelity of the visual display.

[0042] **FIG. 6** illustrates a flow diagram of a method 600 to perform color-preserving spectrum reshaping according to an implementation of the disclosure.

[0043] At 602, the processing device may receive, by the processing device, a visual content to be displayed on a display device, wherein a primary light associated with the display device is filtered to substantially remove a spectrum energy in a wavelength band.

[0044] At 604, the processing device may calculate, in view of the filtered primary light, a metamer of the visual content.

[0045] At 606, the processing device may provide, to the display device, the metamer of the visual content to display in view of the filtered light.

[0046] **FIG. 7** illustrates a diagrammatic representation of a machine in the exemplary form of a computer system 700 within which a set of instructions, for causing the machine to perform any one or more of the methodologies discussed herein, may be executed. In alternative implementations, the machine may be connected (e.g.,

networked) to other machines in a LAN, an intranet, an extranet, or the Internet. The machine may operate in the capacity of a server or a client machine in client-server network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The machine may be a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a cellular telephone, a web appliance, a server, a network router, switch or bridge, or any machine capable of executing a set of instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein.

[0047] The exemplary computer system 700 includes a processing device (processor) 702, a main memory 704 (e.g., read-only memory (ROM), flash memory, dynamic random access memory (DRAM) such as synchronous DRAM (SDRAM) or Rambus DRAM (RDRAM), etc.), a static memory 706 (e.g., flash memory, static random access memory (SRAM), etc.), and a data storage device 718, which communicate with each other via a bus 708.

[0048] Processor 702 represents one or more general-purpose processing devices such as a microprocessor, central processing unit, or the like. More particularly, the processor 702 may be a complex instruction set computing (CISC) microprocessor, reduced instruction set computing (RISC) microprocessor, very long instruction word (VLIW) microprocessor, or a processor implementing other instruction sets or processors implementing a combination of instruction sets. The processor 702 may also be one or more special-purpose processing devices such as an application specific integrated circuit (ASIC), a field programmable gate array (FPGA), a digital signal processor (DSP), network processor, or the like. The processor 702 is configured to execute instructions 726 for performing the operations and steps discussed herein.

[0049] The computer system 700 may further include a network interface device 722. The computer system 700 also may include a video display unit 710 (e.g., a liquid crystal display (LCD), a cathode ray tube (CRT), or a touch screen), an alphanumeric

input device 712 (e.g., a keyboard), a cursor control device 714 (e.g., a mouse), and a signal generation device 720 (e.g., a speaker).

[0050] The data storage device 718 may include a computer-readable storage medium 724 on which is stored one or more sets of instructions 726 (e.g., software) embodying any one or more of the methodologies or functions described herein (e.g., instructions of the annotation subsystem 112). The instructions 726 may also reside, completely or at least partially, within the main memory 704 and/or within the processor 702 during execution thereof by the computer system 700, the main memory 704 and the processor 702 also constituting computer-readable storage media. The instructions 726 may further be transmitted or received over a network 774 via the network interface device 722.

[0051] While the computer-readable storage medium 724 is shown in an exemplary implementation to be a single medium, the term “computer-readable storage medium” should be taken to include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions. The term “computer-readable storage medium” shall also be taken to include any medium that is capable of storing, encoding or carrying a set of instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies of the present disclosure. The term “computer-readable storage medium” shall accordingly be taken to include, but not be limited to, solid-state memories, optical media, and magnetic media.

[0052] In the foregoing description, numerous details are set forth. It will be apparent, however, to one of ordinary skill in the art having the benefit of this disclosure, that the present disclosure may be practiced without these specific details. In some instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring the present disclosure.

[0053] Some portions of the detailed description have been presented in terms of algorithms and symbolic representations of operations on data bits within a computer memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a

self-consistent sequence of steps leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

[0054] It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussion, it is appreciated that throughout the description, discussions utilizing terms such as "calculating", "applying", "determining", "identifying," "providing" or the like, refer to the actions and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (e.g., electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

[0055] The disclosure also relates to an apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may include a general purpose computer selectively activated or reconfigured by a computer program stored in the computer. Such a computer program may be stored in a computer readable storage medium, such as, but not limited to, any type of disk including floppy disks, optical disks, CD-ROMs, and magnetic-optical disks, read-only memories (ROMs), random access memories (RAMs), EPROMs, EEPROMs, magnetic or optical cards, or any type of media suitable for storing electronic instructions.

[0056] The words "example" or "exemplary" are used herein to mean serving as an example, instance, or illustration. Any aspect or design described herein as "example" or "exemplary" is not necessarily to be construed as preferred or advantageous over other aspects or designs. Rather, use of the words "example" or "exemplary" is intended to present concepts in a concrete fashion. As used in this application, the term "or" is intended to mean an inclusive "or" rather than an exclusive "or". That is, unless specified otherwise, or clear from context, "X includes A or B" is intended to mean any

of the natural inclusive permutations. That is, if X includes A; X includes B; or X includes both A and B, then “X includes A or B” is satisfied under any of the foregoing instances. In addition, the articles “a” and “an” as used in this application and the appended claims should generally be construed to mean “one or more” unless specified otherwise or clear from context to be directed to a singular form. Moreover, use of the term “an embodiment” or “one embodiment” or “an implementation” or “one implementation” throughout is not intended to mean the same embodiment or implementation unless described as such.

[0057] Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment. Thus, the appearances of the phrase “in one embodiment” or “in an embodiment” in various places throughout this specification are not necessarily all referring to the same embodiment. In addition, the term “or” is intended to mean an inclusive “or” rather than an exclusive “or.”

[0058] It is to be understood that the above description is intended to be illustrative, and not restrictive. Many other implementations will be apparent to those of skill in the art upon reading and understanding the above description. The scope of the disclosure should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

CLAIMS

What is claimed is:

1. A system, comprising:
 - an light emitter to generate a primary light;
 - a filter to filter the primary light to substantially remove a spectrum energy in a wavelength band;
 - a display device to present visual content using the filtered primary light; and
 - a processing device to:
 - receive a visual content;
 - calculate, in view of the filtered primary light, a metamer of the visual content; and
 - provide, to the display device, the metamer of the visual content to display in view of the filtered light.
2. The system of claim 1, wherein the filter is to substantially the spectrum energy in a wavelength band between 400 nanometer (nm) and 700 nm.
3. The system of claim 1, wherein the display device comprises at least one of a liquid crystal display (LCD) panel, a light-emitting diode display (LED) panel, or an organic light-emitting diode display (OLED) panel.
4. The system of claim 1, wherein the filter is to substantially remove the spectrum energy in the wavelength band and maximize a display gamut volume associated with the display device in view of the filtered primary light.
5. The system of claim 4, wherein to calculate the metamer, the processing device is further to:
 - determine, in view of the filtered primary light, whether a first pixel of the visual content is within the display gamut volume;

responsive to determining that the first pixel is outside the display gamut volume, identify a second pixel within the display gamut volume, wherein the second pixel comprises an identical hue value and an identical saturation value as the first pixel but a scaled lightness value of the first pixel; and
replace the first pixel with the second pixel.

6. The system of claim 5, wherein to calculate the metamer, the processing device is further to:

apply one of an edge-preserving filter or a low-pass filter to a scale factor map comprising a plurality of scale factors to generate a second scale factor; and
use the second scale factor to scale a lightness value of the first pixel.

7. The system of claim 1, wherein calculation of the metamer preserves a white point of the display device.

8. The system of claim 1, wherein the filter is further to substantially remove the spectrum energy in a second wavelength band.

9. A method comprising:

receiving, by a processing device, a visual content to be displayed on a display device;

filtering a primary light, emitted from a light source associated with the display device, to substantially remove a spectrum energy in a wavelength band;

calculating, in view of the filtered primary light, a metamer of the visual content;
and

providing, to the display device, the metamer of the visual content to display in view of the filtered light.

10. The method of claim 9, wherein the filtering is to substantially the spectrum energy in a wavelength band between 400 nanometer (nm) and 700 nm.

11. The method of claim 9, wherein the display device comprises at least one of a liquid crystal display (LCD) panel, a light-emitting diode display (LED) panel, or an organic light-emitting diode display (OLED) panel.
12. The method of claim 9, wherein the filtering is to substantially remove the spectrum energy in the wavelength band and maximize a display gamut volume associated with the display device in view of the filtered primary light.
13. The method of claim 12, wherein the calculating the metamer further comprises:
 - determining, in view of the filtered primary light, whether a first pixel of the visual content is within the display gamut volume;
 - responsive to determining that the first pixel is outside the display gamut volume, identifying a second pixel within the display gamut volume, wherein the second pixel comprises an identical hue value and an identical saturation value as the first pixel but a scaled lightness value of the first pixel; and
 - replacing the first pixel with the second pixel.
14. The method of claim 13, the calculating the metamer further comprises:
 - applying one of an edge-preserving filter or a low-pass filter to a scale factor map comprising a plurality of scale factors to generate a second scale factor; and
 - using the second scale factor to scale a lightness value of the first pixel.
15. The method of claim 9, wherein calculation of the metamer preserves a white point of the display device.
16. A non-transitory machine-readable storage medium storing instructions which, when executed, cause a processing device to perform operations comprising:
 - receiving, by the processing device, a visual content to be displayed on a display device, wherein a primary light associated with the display device is filtered to substantially remove a spectrum energy in a wavelength band;

calculating, in view of the filtered primary light, a metamer of the visual content;
and

providing, to the display device, the metamer of the visual content to display in
view of the filtered light.

17. The non-transitory machine-readable storage medium of claim 16, wherein the
primary light is filtered to substantially the spectrum energy in a wavelength band
between 400 nanometer (nm) and 700 nm.

18. The non-transitory machine-readable storage medium of claim 16, wherein the
display device comprises at least one of a liquid crystal display (LCD) panel, a light-
emitting diode display (LED) panel, or an organic light-emitting diode display (OLED)
panel.


19. The non-transitory machine-readable storage medium of claim 16, wherein the
primary light is filtered to substantially remove the spectrum energy in the wavelength
band and maximize a display gamut volume associated with the display device in view of
the filtered primary light.

20. The non-transitory machine-readable storage medium of claim 19, wherein the
calculating the metamer further comprises:

determining, in view of the filtered primary light, whether a first pixel of the
visual content is within the display gamut volume;

responsive to determining that the first pixel is outside the display gamut volume,
identifying a second pixel within the display gamut volume, wherein the second pixel
comprises an identical hue value and an identical saturation value as the first pixel but a
scaled lightness value of the first pixel; and

replacing the first pixel with the second pixel.

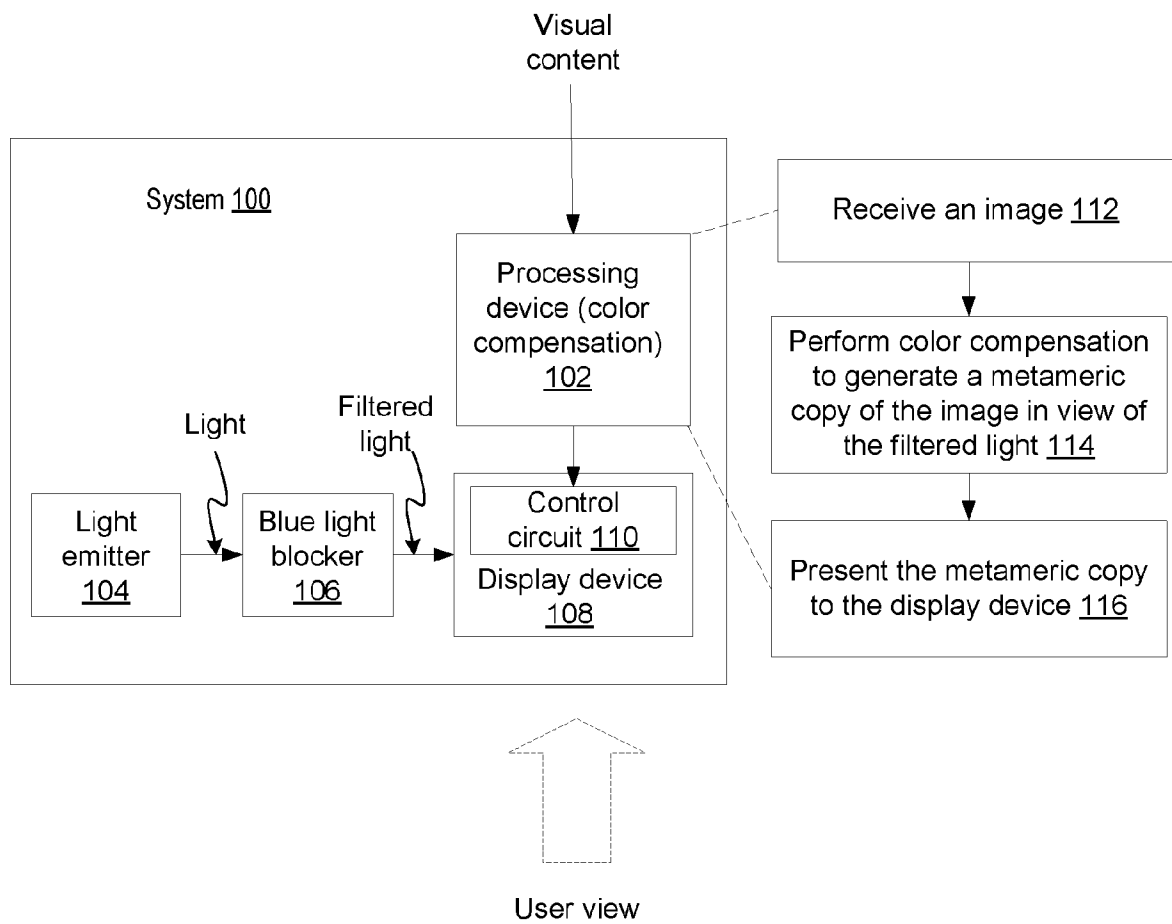**FIG. 1**

200

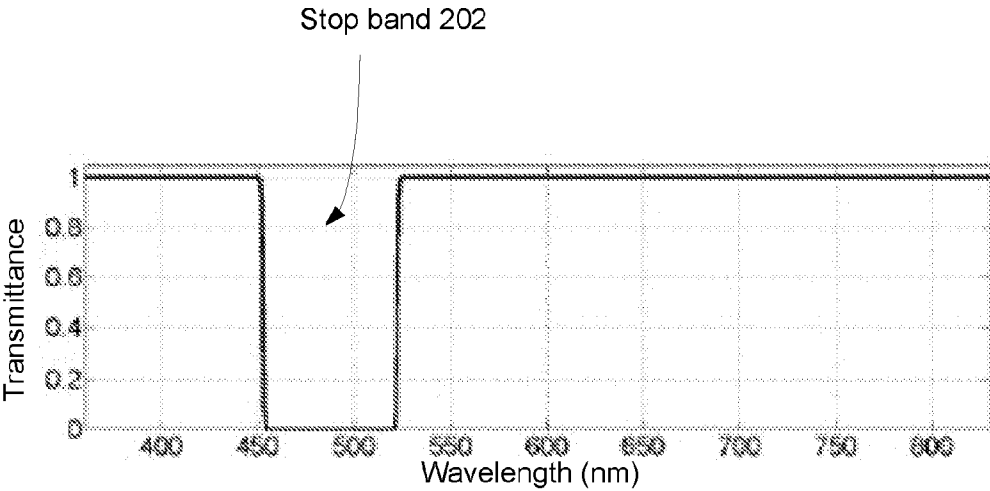


FIG. 2

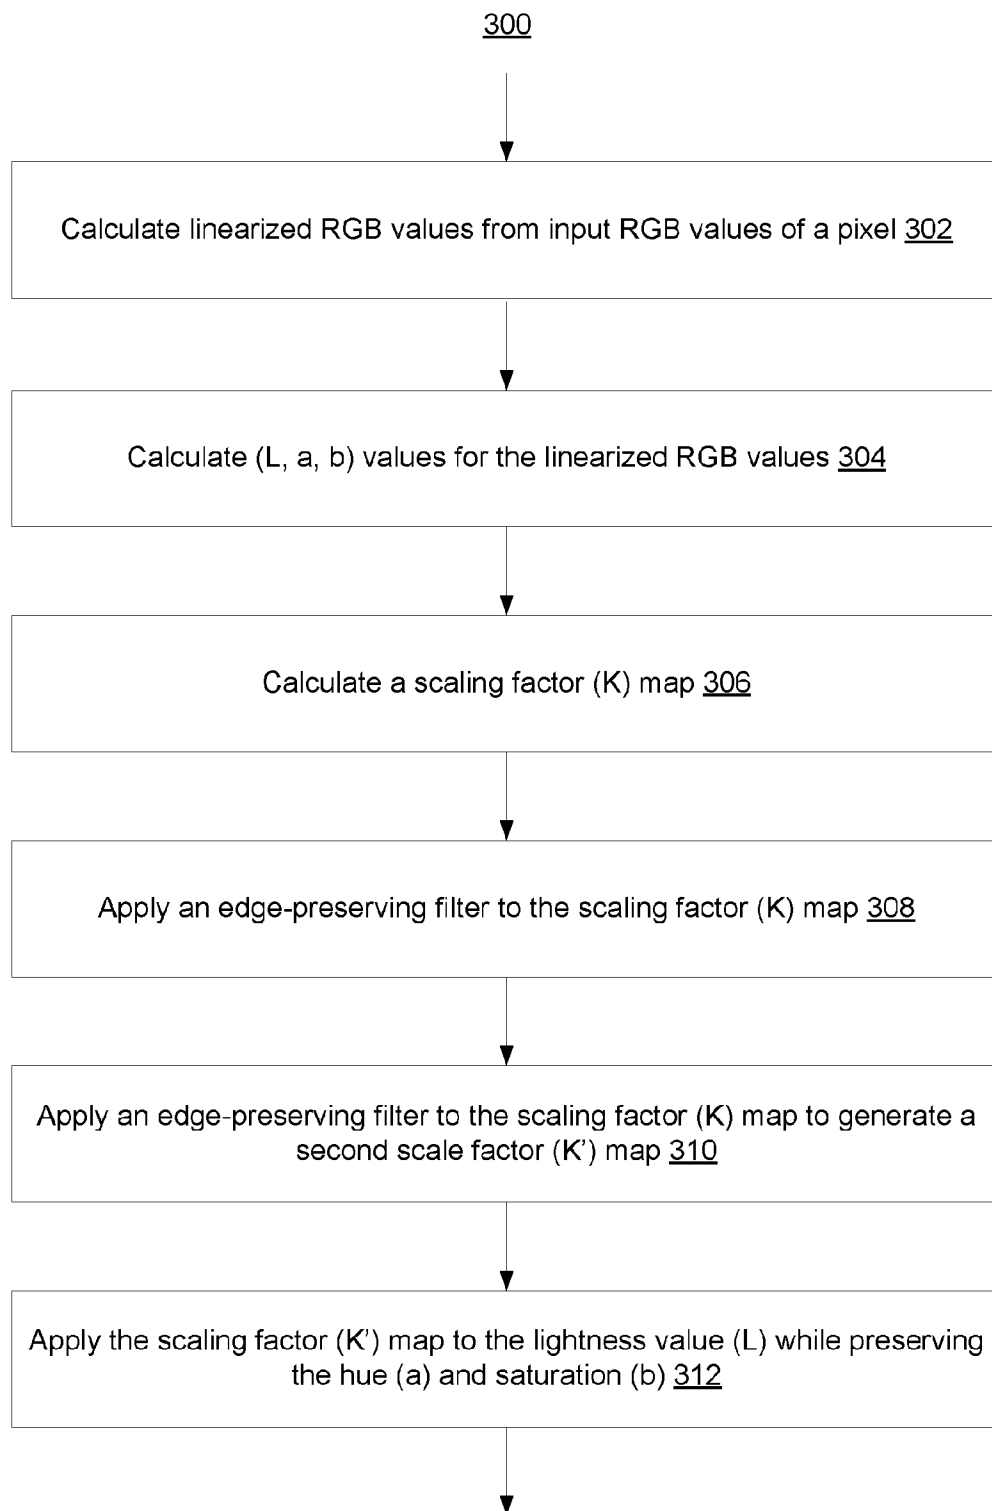


FIG. 3



FIG. 4A



FIG. 4B



FIG. 4C

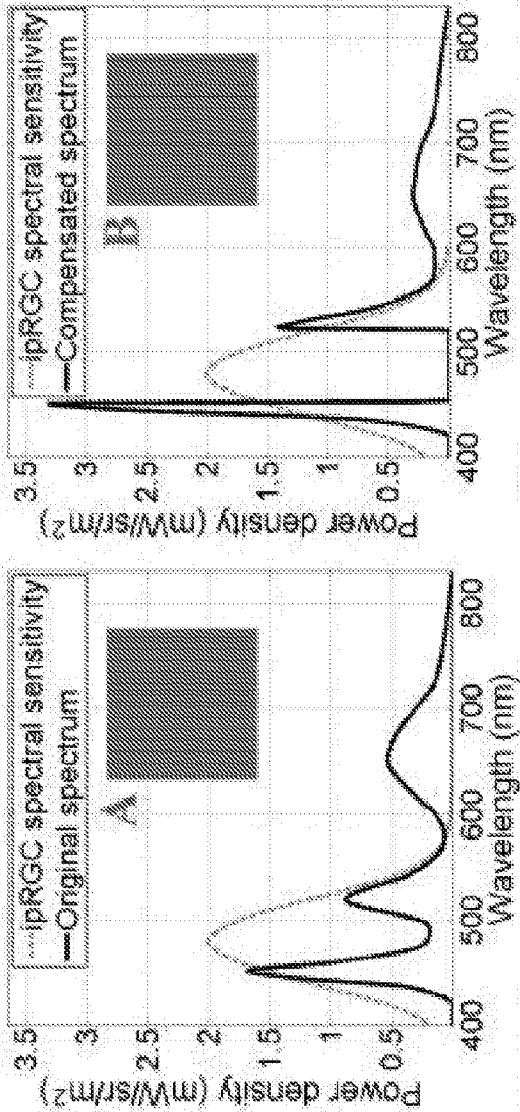


FIG. 5B

FIG. 5A

600

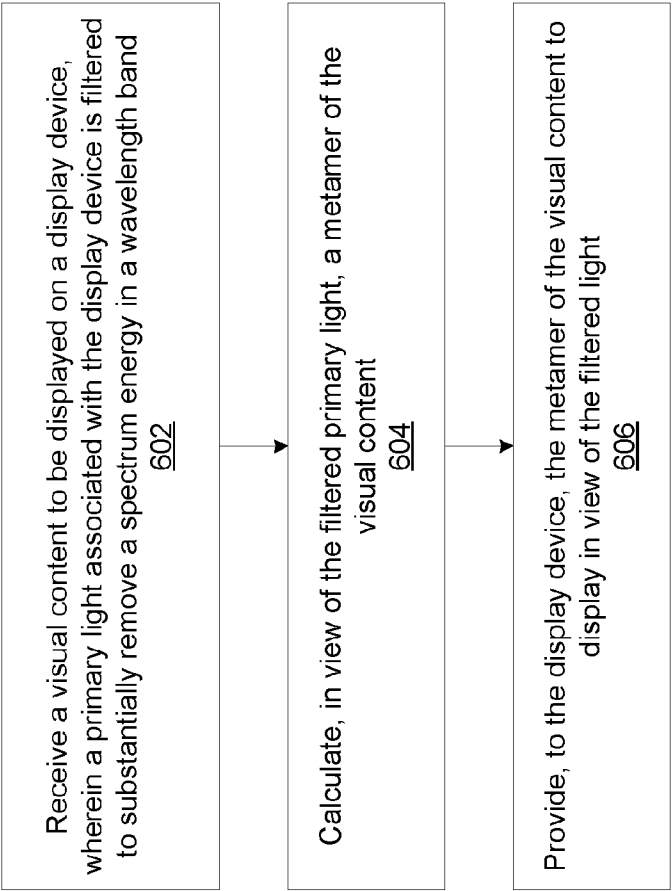
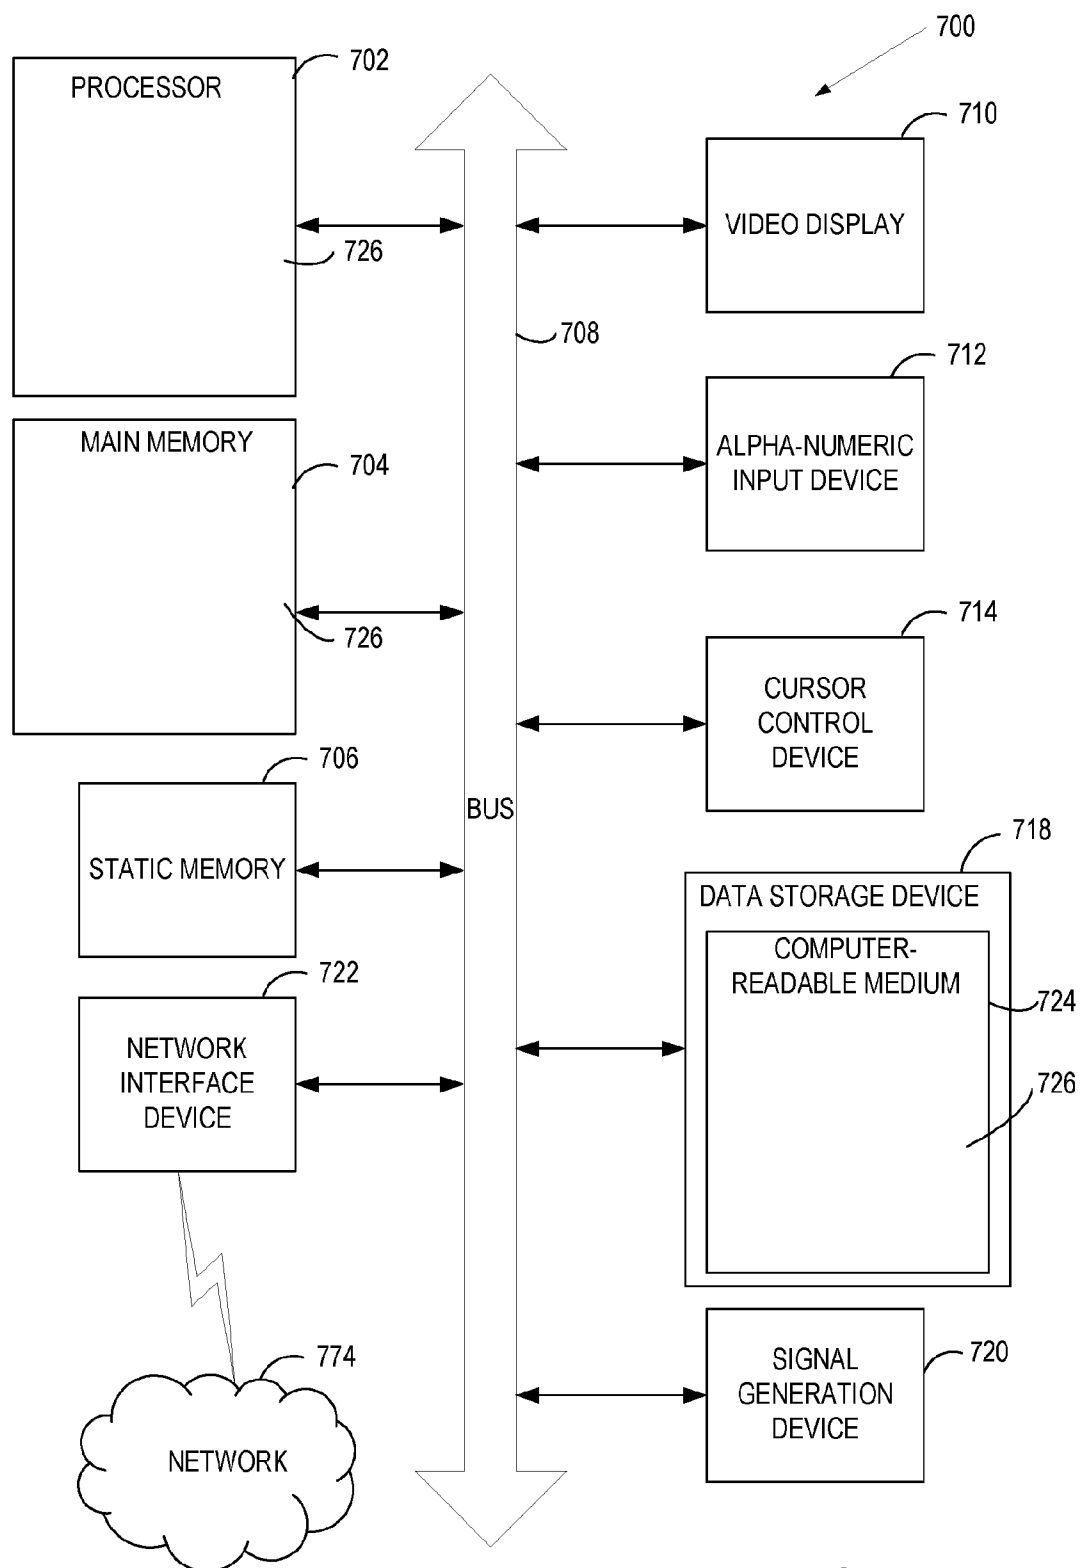


FIG. 6

**FIGURE 7**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US17/19543

A. CLASSIFICATION OF SUBJECT MATTER

IPC - H04N 1/60; F21V 9/04, 9/06, 9/10; H04N 9/73 (2017.01)

CPC - H04N 1/6058, 1/6002, 1/6005, 1/6008, 1/6019, 9/73; F21V 9/04, 9/06, 9/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/0350492 A1 (IMAX CORPORATION) 03 December 2015; figures 8B, 9A, 13; paragraphs [0067], [0068], [0079], [0101]; claim 20.	1-4, 7-12, 15-19
Y		5-6, 13-14, 20
Y	EP 1 536 627 B1 (XEROX CORPORATION) 01 June 2005; paragraphs [0102], [0104].	5-6, 13-14, 20
A	US 2012/0069551 A1 (BUES, M. et al.) 22 March 2012; entire document	1-20

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 2017 (25.04.2017)

Date of mailing of the international search report

16 MAY 2017

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774