




(86) Date de dépôt PCT/PCT Filing Date: 2005/09/16
 (87) Date publication PCT/PCT Publication Date: 2006/04/27
 (45) Date de délivrance/Issue Date: 2010/06/01
 (85) Entrée phase nationale/National Entry: 2006/11/21
 (86) N° demande PCT/PCT Application No.: EP 2005/009956
 (87) N° publication PCT/PCT Publication No.: 2006/042596
 (30) Priorité/Priority: 2004/10/18 (DE10 2004 050 702.3)

(51) Cl.Int./Int.Cl. *B22D 41/30* (2006.01)
 (72) Inventeurs/Inventors:
 EHRENGRUBER, REINHARD, CH;
 HOFFMANN, CARL, DE;
 SHERRIFF, ROBERT, AT
 (73) Propriétaire/Owner:
 REFRACTORY INTELLECTUAL PROPERTY GMBH &
 CO. KG, AT
 (74) Agent: BLAKE, CASSELS & GRAYDON LLP

(54) Titre : PLAQUE COULISSANTE
 (54) Title: SLIDING PLATE

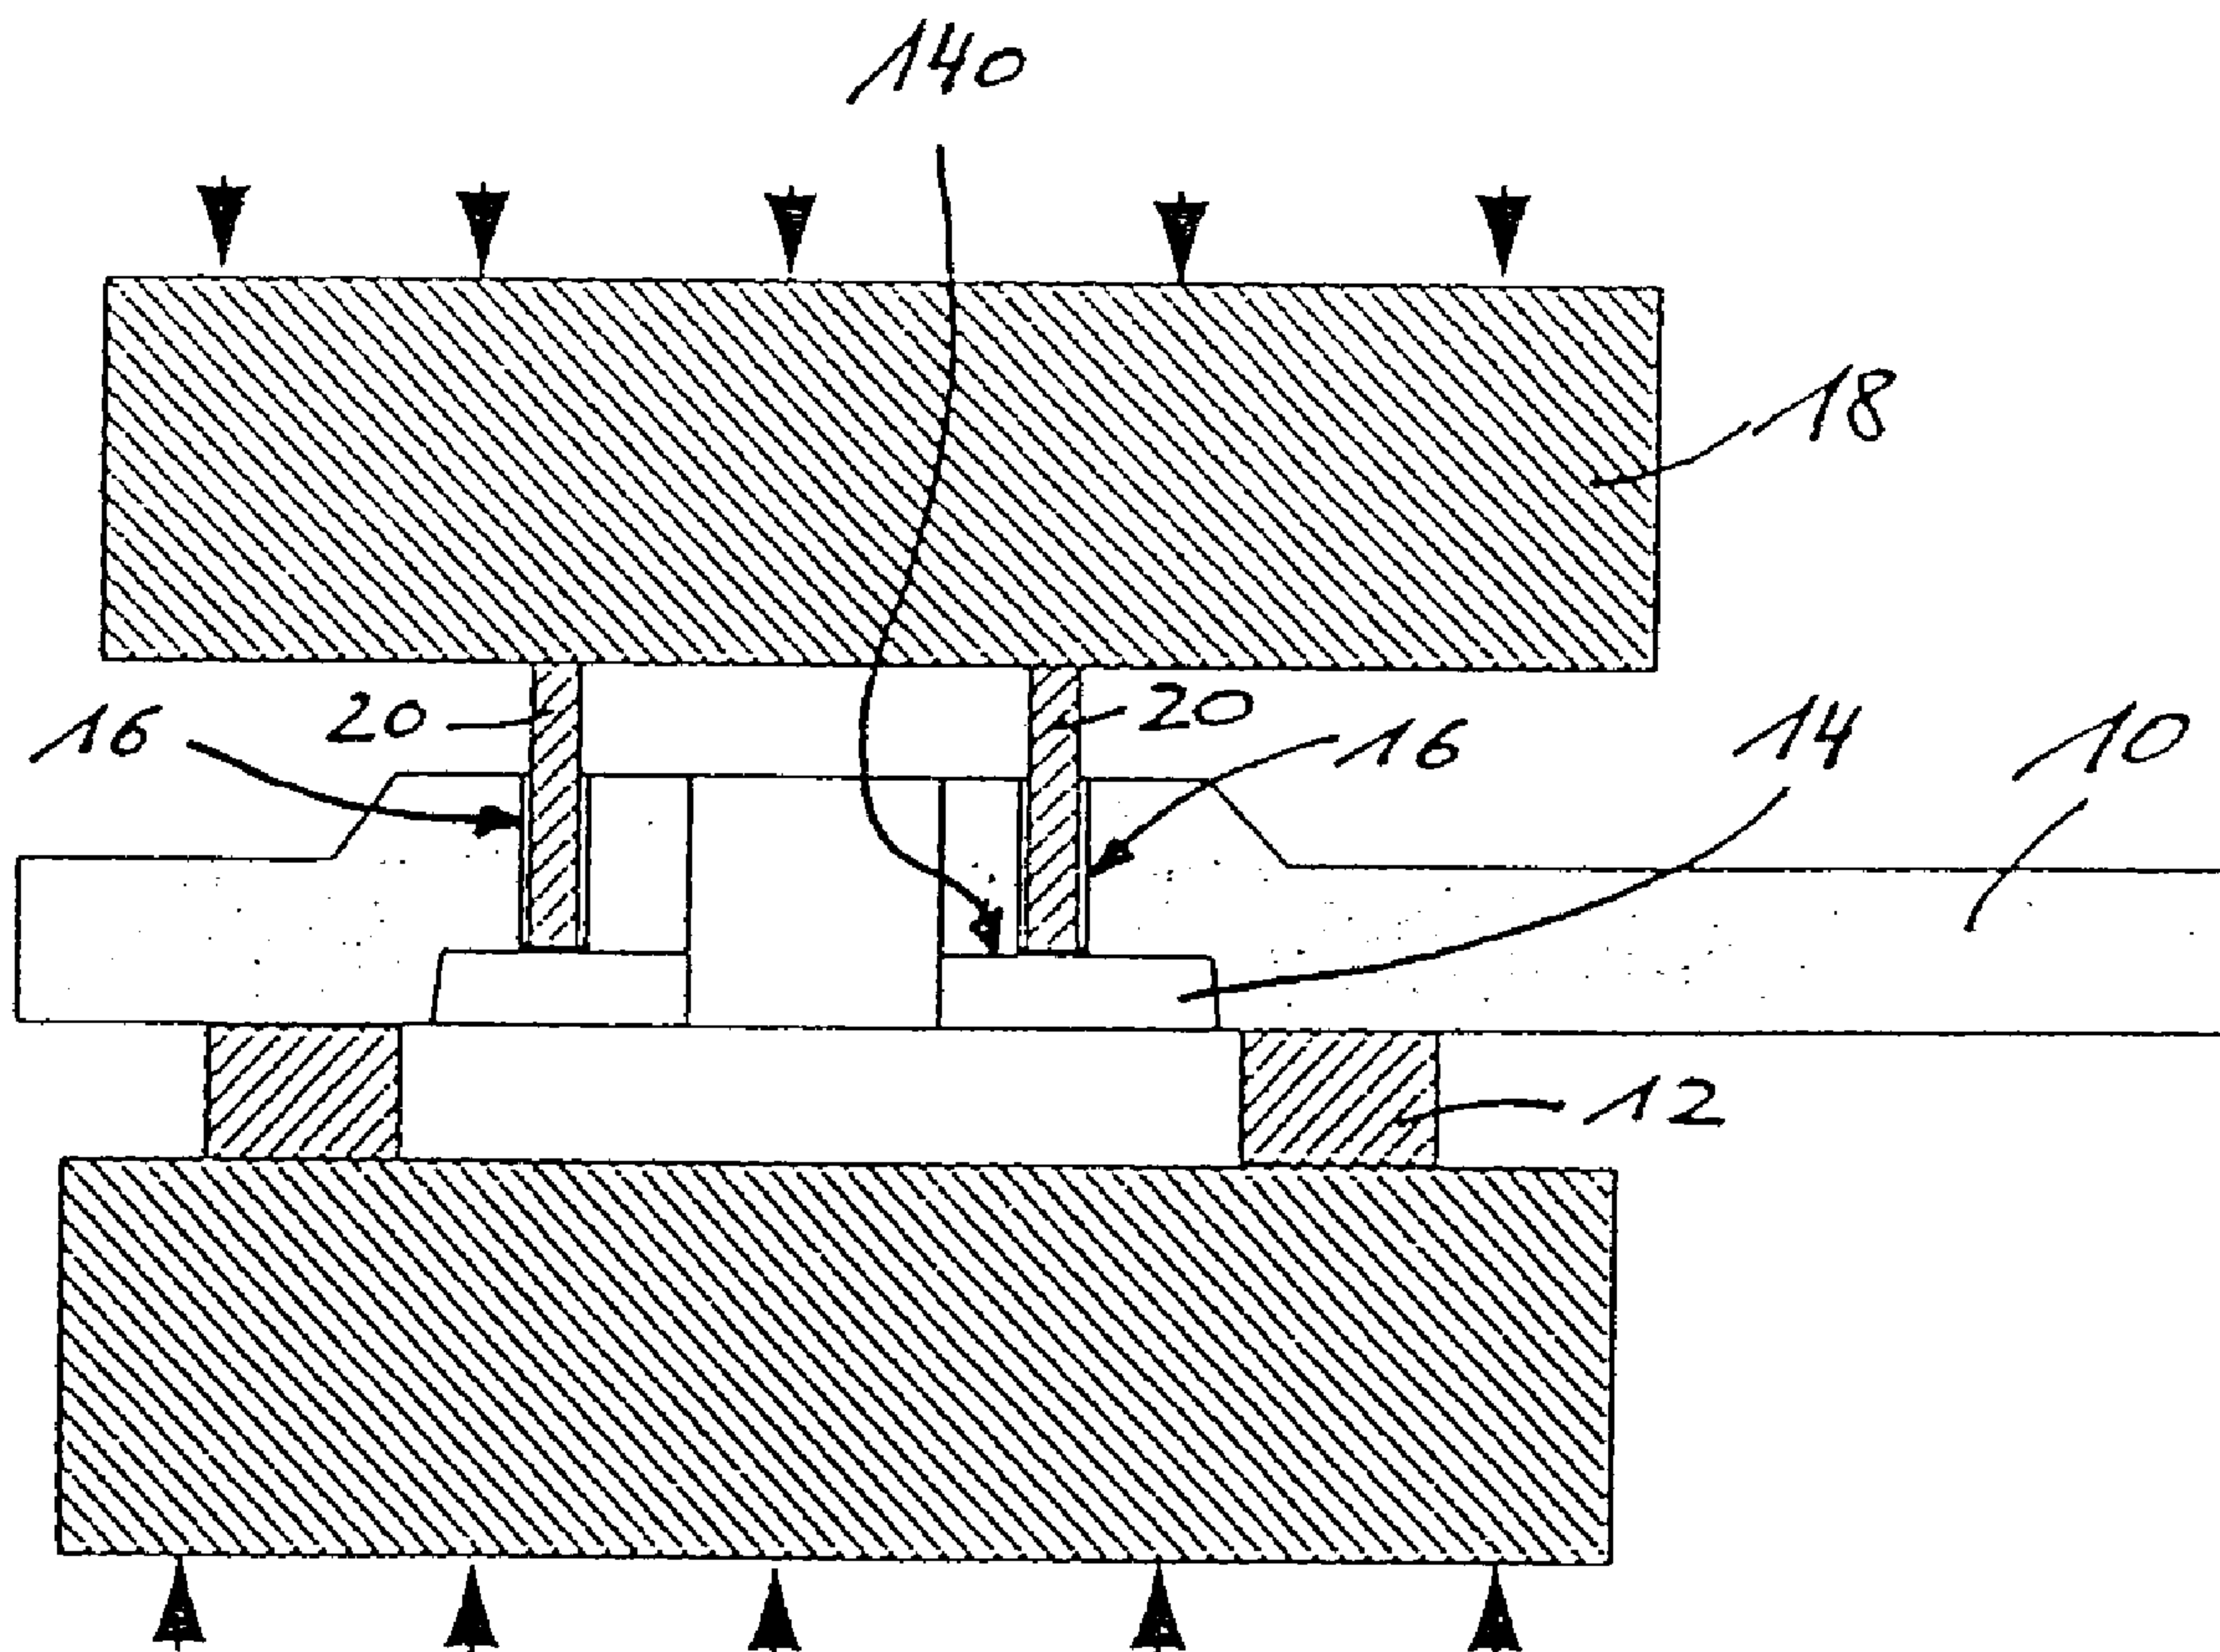

(57) Abrégé/Abstract:
 The invention relates to a sliding plate for a valve closure on metallurgical melt containers.

- 9 -

“Sliding Plate”

Abstract

The invention relates to a sliding plate for a valve closure on metallurgical melt containers.

Sliding Plate

Specification

The invention relates to a sliding plate for a sliding gate of a metallurgical melting vessel.

Sliding plates, which includes plates for linear operating valves as well as for rotary valves, have been used for decades for regulating the discharge of metallurgical melting vessels, e.g., ladles or so-called tundishes.

Such sliding valve (valve systems) comprises, e.g., two plates, a stationary plate and a movable plate. Both plates have at least one flowthrough opening for an associated metallic melt, whereby the opening runs vertically to the main surfaces of the plates. The plates can move relative to one another so that corresponding openings of the plates can be arranged offset, partially overlapping or flush with each other in order to adjust the mass of the melt being guided through or to interrupt the melt flow.

Sliding gate systems with more than two plates are also known.

The wall area, in particular, of the flowthrough openings experiences wear in the course of use. In order to improve the resistance to wear (but also for purposes of repair), it is known to arrange an annular insert of an especially wear-resistant material around the passage opening in the base body of the plate. The "connection" of the insert to the surrounding refractory material of the base plate is problematic.

DE 100 06 939 C1 teaches mortaring the annular insert into a corresponding recess of the base body of the plate. This requires preparing the base plate in an appropriate mechanical manner, e.g., by boring. This causes additional costs. Furthermore, only rotationally symmetric inserts can be used.

- 2 -

DE 100 06 939 C1 also cites the possibility of pressing the annular insert by common pressing with the surrounding fire-resistant matrix material. In this embodiment, e.g., a prefabricated insert is placed into a press mold and surrounded by mass that is subsequently intended to form the base body. The mass is subsequently pressed. This process can be used in principle with any insert designs and is simple to carry out. However, it has the disadvantage that the insert and the surrounding base plate detach from one another after removal from the press and a small gap is produced between the insert and the base plate. Therefore, the insert may detach from the surrounding base body or even fall out when the sliding plate is used in a sliding valve.

A frequently employed process comprises casting of a fire-resistant hydraulic mass (a concrete) around a prefabricated insert body. Almost any insert geometries can also be used in this manner. However, when heated the hydraulic bond of the matrix material of the base body loses at least part of its strength. A strong ceramic bond is not produced until at temperatures distinctly above 1000°C. The term "strength hole", usually around 900°C, is used in this connection. During the use of the sliding plate a sharp temperature gradient forms between the area of the passage opening and the edge of the plate. In the area of the passage opening the fire-resistant (refractory) material assumes approximately the temperature of the liquid steel (e.g., 1600°C). The temperature is distinctly lower on the edge of the plate. Thus, there are obligatorily areas within the plate that are heated only up to the "strength hole" (approximately 900°C). The wear of these plates is correspondingly high.

Starting from this state of the art, it is an object of the invention to provide a sliding plate for a sliding valve of a metallurgical melting vessel which sliding plate comprises a wear-resistant insert in the area of the passage opening for the metallic melt whereby the sliding plate should be easily manufactured and provide a constant high strength (wear resistance) over its entire volume.

In order to solve this object the invention starts from the cited state of the art in which the insert is fixed in situ in the base body during pressing of a fire-resistant matrix material for the base body, which material surrounds the insert. As far as the insert is described below as "annular", this can be "exactly annular", resulting in a circular shape of the outer circumferential area of the insert. The term also includes shapes in which the insert is shaped in the axial direction of its opening between opposing front surfaces in a stepped manner on its outside, that

- 3 -

is, with different outside diameters, or is shaped with a conical circumferential surface. "Annular" also includes asymmetrical circumferential shapes and an off-center arrangement of the opening. To this extent "annular" only means that the insert comprises an opening for transporting the metallic melt through it.

However, as described, a space (distance) is formed between the insert and the base body during removal, usually in the form of an annular gap between the circumferential surface of the insert and the corresponding surface of the base body, which space at least partially prevents a non-positive connection between the two. This space (gap) can also be a multipart gap.

The invention solves this problem in that the space present between the insert and the base body is filled with an impregnation agent that non-positively (directly) connects the base body to the insert.

In its most general embodiment the invention relates to a sliding plate for a sliding valve of a metallurgical melting vessel with the following features:

- a) The sliding plate comprises a base body (2) made of a refractory ceramic material,
- b) The base body (2) comprises at least one passage opening running vertically to main surfaces of base body (2),
- c) The base body (2) surrounds an annular insert (1) made of a refractory ceramic material,
- d) The insert (1) surrounds the passage opening at least in an area of one main surface of the base body (2) completely and is aligned with this main surface,
- e) A space (3) present between insert (1) and base body (2) is filled with an impregnation agent that non-positively connects base body (2) and insert (1).

The cited sections between the insert and the base body, in which no direct connection exists between the two parts, are generally very small and have a width of customarily $< 100\mu\text{m}$, frequently $< 10\mu\text{m}$. Such a narrow space (gap) can obviously not be filled with a mortar or the like. However, the use of a (liquid) impregnation agent makes it possible to fill this hollow space (these hollow spaces), and thus to connect the two parts to one another.

- 4 -

The space can be filled with a carbon-containing impregnation agent. Such an impregnation agent can be, e.g., a substance from the group: coal-tar pitch, petroleum pitch, phenolic resin.

If the sliding plate is impregnated (soaked) after the removal from the press with such a substance and if the plate is subsequently tempered at temperatures between 200 and 700°C, the impregnation agent cokes and solidifies, whereby it creates the desired non-positive direct connection between the annular insert and the surrounding base body. The gap or gaps between the two components are therefore connected by a continuous layer of carbon.

The impregnation can be limited to the cited transitional area between the insert and the base body. However, it is also possible to select the impregnation area to be greater, up to the impregnation of the entire plate.

The impregnation has the additional advantage that the tightness of the plate is increased in the entire impregnated area and its sliding properties are improved.

The impregnation can be optimized if the insert as well as the material of the base body have an open porosity between 5 and 20% by volume before the impregnation. As a rule, the open porosity of the base body will be greater than that of the insert since the insert is already used as a preformed, usually pre-pressed part.

The material selection as well as the pressing technique can be selected in such a manner that the space between the insert and the base body to be filled has a width $\leq 70 \mu\text{m}$, e.g., between 20 and 70 μm . This can also be adjusted, e.g., by the selection of the granulation for the insert and for the base body.

Whereas the insert is generally used as a pre-pressed part the base body can also be manufactured by casting technology should the occasion arise. In this instance the gap is generally somewhat larger so that the width of the space (gap) between the insert and the base plate prior to the impregnation and after any drying of the plate can also be greater than the cited 100 μm .

For the rest, the features described in the state of the art regarding selection of material can also be transferred to the sliding plate in accordance with the invention. Thus, the insert

- 5 -

generally has a greater wear resistance than the base body does. Thus, more economical material qualities can be used for the base body, which lowers the total price of the sliding plate.

The insert and the base body are customarily formed from different fire-resistant ceramic materials.

A suitable material for the insert is a substance based on ZrO_2 . Materials based on, e.g., Al_2O_3 can be used for the base body.

Although the sliding plate can be manufactured with different process techniques, as explained above, a process proved to be advantageous in which a pre-pressed, annular insert made of a refractory ceramic material is integrated in a pressing procedure in a base body made of a refractory ceramic material, removed from the mold and the sliding plate formed in this manner is subsequently impregnated in the transition area between the insert and the base body with an impregnation agent and tempered.

Such a process was tested in the following test:

A calcined annular insert made of a zirconium oxide stabilized with MgO was placed in a press mold. The insert was subsequently surrounded with a press mass based on alumina in such an amount that the press mass (for forming the base body) extends past the front surface of the insert to such an extent that after the subsequent pressing procedure the upper front surface of the base body is in alignment with the upper front surface of the insert.

After the removal of the sliding plate pressed in this manner it was impregnated along a few millimeters on both sides of the transition area between the insert and the base body with liquid coal-tar pitch and subsequently tempered at 500°C.

As attached figure 1 shows, an approximately 5µm-wide layer 3 of coked coal-tar pitch can be microscopically detected in the sharp transition region between insert 1 and base body 2.

This filling layer establishes a non-positive connection between the insert and the casing (base body). Thus, the insert is securely and reliably fixed relative to the base body. In a subsequent practice test the sliding plate could be tested together with a valve plate of the

- 6 -

same construction in order to form a sliding gate system. 6 batches of steel were cast without the insert losing its non-positive connection in the base body.

The improved anchoring of the insert in a sliding plate was checked in the following test, as is shown in figure 2:

Plate 10 is placed on an annular ring 12, whereby the insert 14 is not resting on top of the ring. Insert 14 has an outer diameter of 130 mm, an inner diameter of the bore of 80 mm and is 15 mm thick. The plate is bored from above at six positions 16, located at uniform angular intervals on an imaginary circle, down to surface 14o of insert 14k. Die 18 with six corresponding pressure cylinders 20 is now introduced into the bores. The force was measured at which insert 14 is destroyed or breaks out of plate 10.

This measurement involved 5 tests on a sliding plate (E) designed in accordance with the invention and tempered at 500°C and 5 tests on a sliding plate with the same construction without impregnation (S) and the average value for each plate was determined.

A value of 2 ± 1 kN was determined for S and for E a value of 18 ± 3 kN.

The insert can extend over the entire height of the sliding plate (vertically to the main surfaces). However, it is also possible to step the outside diameter of the insert ring in accordance with a corresponding stepping of the surrounding base body. In this manner an additional mechanical reliability is created, so that the ring rests securely on a corresponding collar of the base plate and can not loosen in the direction of flow of the metallic melt.

CLAIMS:

1. Slide plate for a slide valve closure on a metallurgical melting vessel, having the following features:
 - a) the slide plate has a basic body (2) composed of a refractory ceramic material,
 - b) the basic body (2) has at least one through aperture, which extends perpendicularly relative to main surfaces of the basic body (2),
 - c) the basic body (2) surrounds an annular insert (1) composed of a refractory ceramic material,
 - d) the basic body (2) and the insert (1) are pressed jointly,
 - e) the insert (1) fully surrounds the through aperture at least in the region of one main surface of the basic body (2) and is in alignment with this main surface,
 - f) a space (3) in the form of an annular gap between a circumferential face of the insert and a corresponding face of the basic body, present between the insert (1) and the basic body (2) is filled with an impregnation medium which non-positively connects the basic body (2) and the insert (1) following tempering of the slide plate at between 200° and 700°.
2. The slide plate according to Claim 1, the space (3) of which is filled with an impregnation medium containing carbon.
3. The slide plate according to Claim 1, the space (3) of which is filled with an impregnation medium from the group: coal-tar pitch, petroleum pitch, phenolic resin.
4. The slide plate according to Claim 1, the space (3) of which is in the form of a gap having a width of $< 100 \mu\text{m}$.
5. The slide plate according to Claim 1, the insert (1) of which has a greater wear resistance than the basic body (2).

- 8 -

6. The slide plate according to Claim 1, wherein the insert (1) and the basic body (2) are composed of different refractory ceramic materials.
7. The slide plate according to Claim 1, the insert (1) of which is composed of a ZrO_2 -base material.
8. The slide plate according to Claim 1, the basic body (2) of which is composed of an Al_2O_3 -based material.
9. A method for producing a slide plate according to Claim 1, wherein a prepressed, annular insert composed of a refractory ceramic material is integrated in a pressing process in a basic body composed of a refractory ceramic material, demoulded, and the thus formed slide plate is then impregnated with an impregnation medium in the transition region between the insert and the basic body, and tempered.

Application number / numéro de demande: 2567598

Figures: 1

Pages: _____

Unscannable item(s)

received with this application:


To inquire if you can order a copy of the unscannable items, please visit the
CIPO WebSite at [HTTP://CIPO.GC.CA](http://CIPO.GC.CA)

Item(s) ne pouvant être balayés

Documents reçus avec cette demande ne pouvant être balayés.

Pour vous renseigner si vous pouvez commander une copie des items ne
pouvant être balayés, veuillez visiter le site web de l'OPIC au [HTTP://CIPO.GC.CA](http://CIPO.GC.CA)

FIG. 2

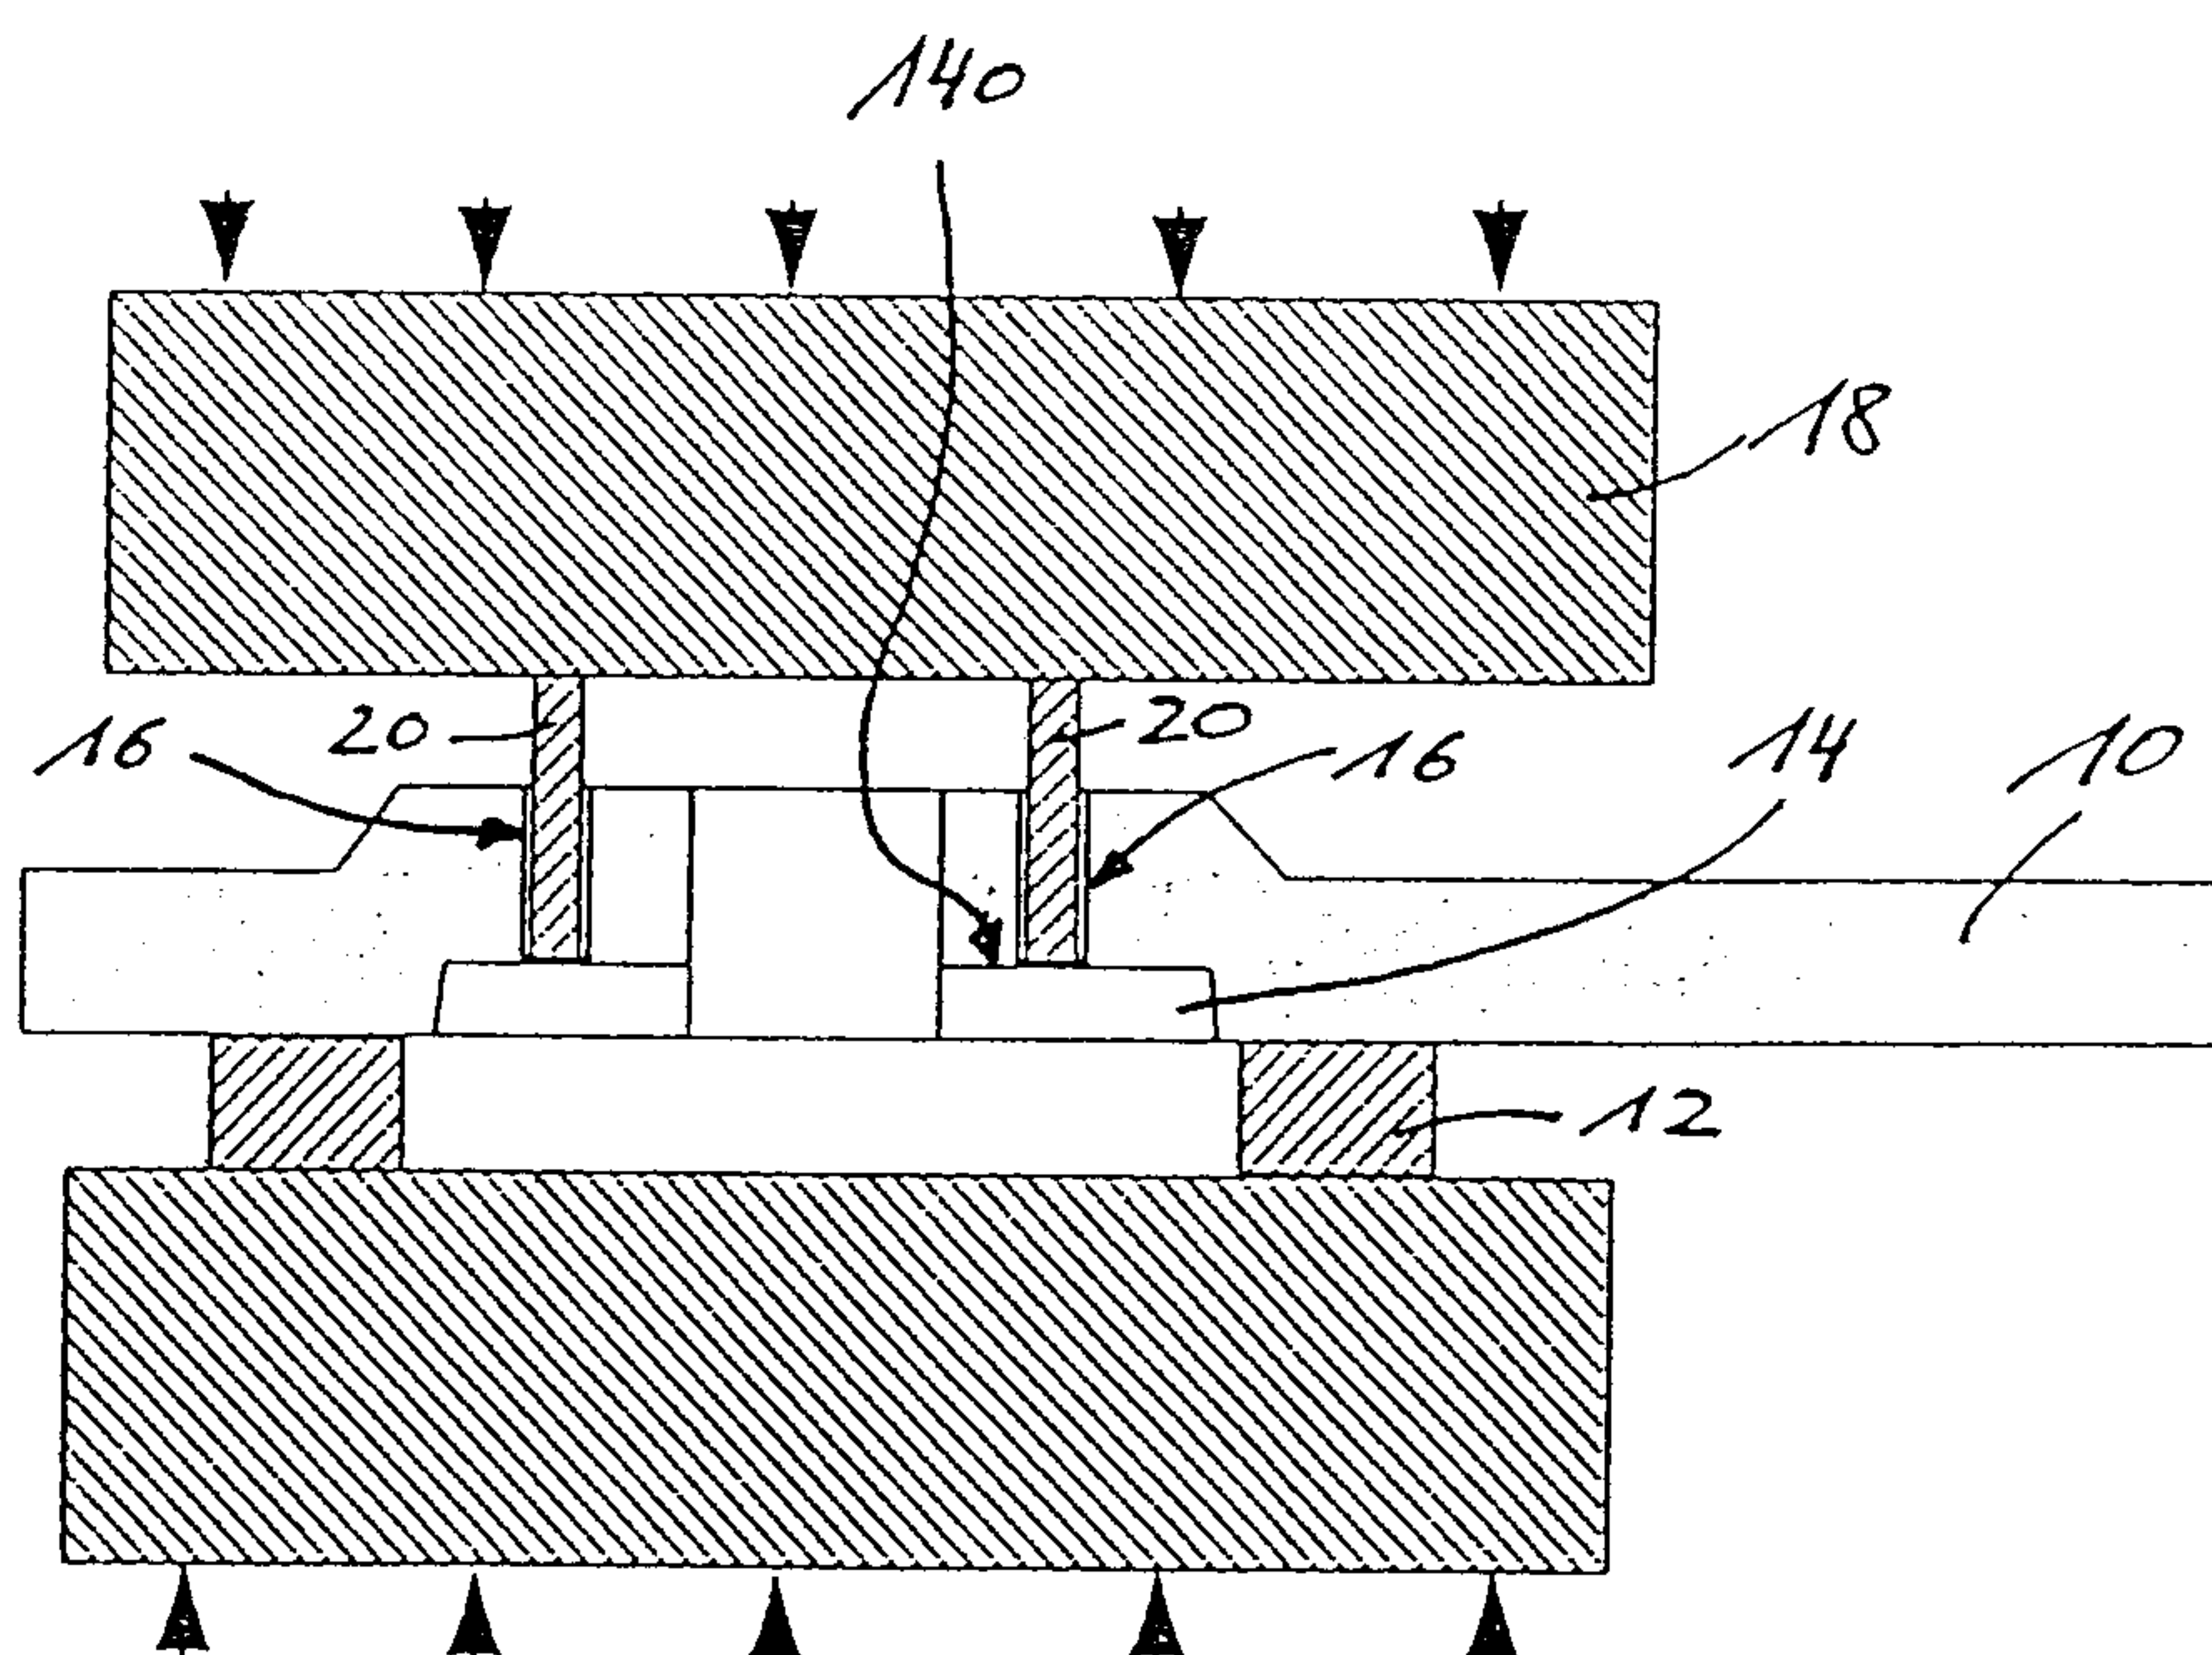

140

