

(51) International Patent Classification:
A47F 1/00 (2006.01)(21) International Application Number:
PCT/US2009/067537(22) International Filing Date:
10 December 2009 (10.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/347,075 31 December 2008 (31.12.2008) US
12/623,468 23 November 2009 (23.11.2009) US

(71) Applicant (for all designated States except US): FRITO-LAY NORTH AMERICA, INC. [US/US]; 7701 Legacy Drive, Plano, TX 75024-4099 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ALLISON, Chris [US/US]; 12004 Promrose Lane, Frisco, TX 75035 (US). CHOKSHI, Kuntesh, R. [US/US]; 8037 Spring Peaks Drive, Plano, TX 75025 (US). FOSHA, Allen [US/US]; 7827 Palisades Drive, Frisco, TX 75034 (US).

(74) Agent: CAHOON, Colin, P.; CARSTENS & CAHOON, LLP, P.O. Box 802334, Dallas, TX 75380 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR MONITORING INVENTORY

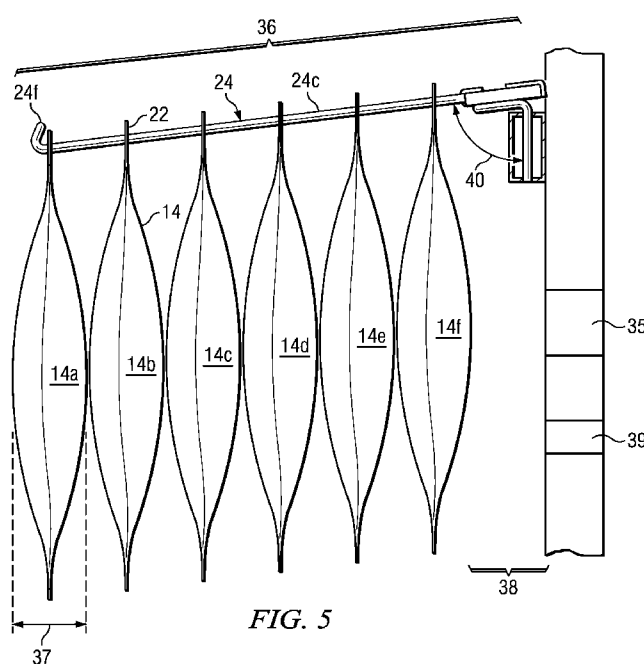


FIG. 5

(57) Abstract: A method for monitoring inventory on a shelf and apparatus for accomplishing the same. The invention describes a method for determining the number of packages on a shelf or hanger. The number of packages on a shelf or hanger are determined by detecting the presence of a package on the shelf and adding all detections together to determine the number of product on a shelf. In another embodiment, the product is identified by an identifying device such as an SKU reader. Thus, the quantity and type of product located on a shelf or hanger is known. Such information allows a store to know the type and quantity of packages needed to restock a specific shelf. In another embodiment, the number of packages on a shelf or hanger are determined by measuring the distance from the back end of a shelf to the package closest to the shelf with a sensor, ascertaining the thickness of the product, and by calculating the amount of space occupied on a shelf or hanger and consequently the number of packages on a shelf.



— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

METHOD AND APPARATUS FOR MONITORING INVENTORY

BACKGROUND OF THE INVENTION

TECHNICAL FIELD

[0001] The present invention relates to a method and apparatus for monitoring product inventory.

DESCRIPTION OF RELATED ART

[0002] Food products and other products are typically sold via shelves or hangers. The product is arranged so that the consumer can easily see and remove the desired package or good. Maintaining product inventory in stock typically requires a person to physically check the store shelves or hangers to maintain inventory and display appearance, which can create inefficiencies by way of repeated trips to monitor and/or restock inventory and of the potential for presenting the consumer with empty or nearly empty shelves. Increasing the efficiency of these trips by knowing which products need to be replenished and when would decrease the number of trips necessary to restock a retail store. Furthermore, currently the restocking personnel must carry excess product quantities and varieties as it is never known how much of each product variety will be needed to replenish a specific retail store or a specific shelf in a retail store.

[0003] Consequently, it is desirable to have an inventory monitoring system which provides real time accounting of the product on each shelf. Furthermore, it is desirable that the monitoring system be capable of identifying the type of product on the shelf so that both the product type and quantity of product on a shelf can be known. Finally, it is desirable that the monitoring system be cost effective to maximize the return on investment and profit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will be best understood by reference to the following detailed description of illustrative embodiments when read in conjunction with the accompanying drawings, wherein:

[0005] Figure 1 is a perspective view of a gravity feed hanging system.

[0006] Figure 2-4 are perspective views, in series, of the removal of the product and the operation of the gravity feed system of Figure 1.

[0007] Figure 5 is a side profile view of one embodiment utilizing a sensor and a bar code scanner.

[0008] Figure 6 is a back profile view of one embodiment utilizing a camera.

[0009] Figure 7 is a side profile view of one embodiment utilizing a flat shelf.

[0010] Figure 8 is a side profile view of one embodiment utilizing a hanger shelf.

DETAILED DESCRIPTION

[0011] Several embodiments of Applicants' invention will now be described with reference to the drawings. Unless otherwise noted, like elements will be identified by identical numbers throughout all figures.

[0012] Generally, this invention relates to a method and apparatus for monitoring inventory on a shelf in real time. Specifically, this invention may be utilized on a self-adjusting shelf. As used herein a "self-adjusting shelf" refers to any shelf or hanger which automatically moves the product to the front of the shelf or hanger. The self-adjusting shelf, just as other shelves, comprises a top, a bottom, a front end, and a back end. In addition, the self-adjusting shelf comprises at least one product support. As used herein "product support" refers to the shelf upon which product sits, the hangers from which product hangs, and any other device which supports product.

[0013] In many embodiments the product support lies approximately perpendicular to the vertical orientation of the self-adjusting shelf. Further, the self-adjusting shelf comprises a means for moving the product to the front of the shelf. In some embodiments gravity provides the means for moving the product, and accordingly, no moving parts are necessary. In other embodiments a rotating screw, a spring, or other such means provides the necessary force to move the product to the front of the shelf.

[0014] One example of a self-adjusting shelf is a spring loaded shelf which, upon removal of a first product exerts force upon the second product so that the second product assumes the previous position of the first product. Likewise, a rotating screw or other such means provides the force necessary to move the product. These means are typically utilized to position product in a vending machine.

[0015] Another example is an inclined plane shelf whereby the shelves are slanted such that when one product is removed, gravity forces the second product to replace the removed product. Such shelves are typically used, for example, to dispense soda cans whereby once the force opposing the downward force of gravity is removed, i.e. the first can, the second can is pulled via gravity to replace the removed can. These inclined planes may additionally have dividers which create separate lanes.

[0016] Another type of self-adjusting shelf, for which this invention is ideally suited, is a gravity feed hanger. An example of a gravity feed hanger is depicted in U.S. Application Serial Number 11/832,346 which is fully incorporated herein by reference.

[0017] Figure 1 is a perspective front view of a gravity feed system according to one embodiment of the present disclosure. The gravity feed system 10 includes a display apparatus 12, upon and from which a multitude of packages 14 may be displayed and dispensed, respectively. The packages 14 are supported by multiple gravity feed hanger assemblies 16, which are in turn supported by crossbeams 18. The hangers 24 are attached to the hanger assemblies 16. Thus, in the depicted gravity feed system 10, the hangers 24 are the product supports. In one embodiment the gravity feed system 10 comprises at least one product support having sufficient capacity for a plurality of packages. In one embodiment the product support has sufficient capacity for at least five packages.

[0018] Although the packages 14 depicted in the Figures includes average-sized flex-bags, which are most commonly suited to the marketing of snack foods, the self-adjusted shelf of the instant invention can be used to store and dispense other items packaged in bags, boxes, traditional pillow pouches, packages which stand upright or other similar containers.

[0019] As shown in Figure 1, in one embodiment, the packages 14 engage the gravity feed hanger assembly 16 via a slot 20 formed in the package tab 22 (as shown in Figure 3).

In other embodiments, this engagement can be obtained through the use of a non-integral tab added to the packages 14 prior to placement of the packages 14 on the gravity feed hanger assembly 16. In still further embodiments, the packages 14 may comprise an integral or attached hook for engaging the gravity feed hanger assembly 16.

[0020] Figures 2-4 are perspective views, in series, of the removal of the product and the operation of the gravity feed system of Figure 1. As seen in Figure 2, the hanger 24 is supported at an angle 40, as measured from the vertical. This angle 40 may be adjusted due to frictional forces exerted by the hanger 24 and the packages 14a-14f, and those skilled in the art armed with the instant disclosure will be able to determine the desirable angles. In one embodiment the hanger 24 is sloped at an angle 40 less than about 90°. Due to this downward angle, the weight of the packages 14 tends to pull the packages 14 down the length of the hanger 24, absent sufficient friction between the package tab 22 and the hanger 24 to prevent slippage. In some embodiments, the hanger 24 may be powder-coated or otherwise treated with a friction-reducing product so as to facilitate the movement of the packages 14 along the hanger 24.

[0021] Despite the force exerted on the package 14 by its own weight, the lip 24f prevents the uncontrolled dispensing of packages 14 by halting the progress of the foremost item of packages 14 at the dispensing end 24b of the hanger 24. The lip 24f, in one embodiment, is long enough to set at an angle sufficient to prevent the hanging stock 14 from being propelled off of the end of the hanger 24 by the force of its own weight, in combination with the cumulative weight of any of the packages 14 that may be trailing behind it.

[0022] Controlled dispensing of the package 14 is performed by the manual removal of the foremost package 14a. In the embodiment illustrated in Figures 2-4, a foremost item 14a must be manipulated by the individual removing it so that it is pulled both outward and upward, clearing the lip 24f. As the item 14a vacates its position at the bottom of the hanger

24, the second package 14b, no longer impeded by the obstructing leading package 14a, is urged by its own weight to the end of the hanger 24 and is halted by the lip 24f. Thus, what was previously the second package now becomes the leading package. The remaining packages 14c-14f similarly move down the hanger 24, until each of the packages 14c-14f is halted by the item in front of it, so that the length of the hanger 24 nearest the loading end 24a is vacated. As the remaining packages 14b-f are similarly removed from the hanger 24, the space between the package 14f and the latch 26 increases until, finally, the last package 14f is removed and the hanger 24 is emptied.

[0023] As the gravity feed hanger system has been described, the apparatus and method of the instant invention will be described in reference to a gravity feed hanger system. It should be noted that while the invention is described in reference to a gravity feed hanger, the invention is not so limited as the invention may be suitably used in any self-adjusting shelf.

[0024] Figure 5 is a side profile view of one embodiment utilizing a sensor and a Stock Keeping Unit (SKU) reader. As previously described, the gravity feed hanger system 10 employs gravity to allow the package 14 to fall to the lip of the hanger 24f. Put differently, gravity forces the packages 14 to achieve the greatest possible distance away from the back end of the gravity feed hanger system 10. The front end, as used herein, refers to the face of the shelf wherefrom product is retrieved. The back end of the shelf, as used herein, refers to the side of the shelf opposing the front end. Thus, the back end of the shelf is the end furthest from the consumer retrieving product from the front end. Referring back to Figure 5, if the distance between the last product 14f (the product closest to the back wall of the gravity feed system 10) and the back end of the shelf is known, the total length 36 of the hanger 24 is known, and the thickness of the package 14 is known, then the number of packages 14 on the hanger 24 can be calculated.

[0025] The distance from the back of the shelf to the last product 14f can be measured by a multitude of methods. One method ideally suited for the instant invention is utilizing a sensor 35, as shown in Figure 5. Figure 5 also shows the total length 36 of the hanger 24, the thickness 37 of one package 14, and the gap distance 38 defined as the distance between the sensor 35 and the last package 14f. In some embodiments, the total length 36 of the hanger 24 is greater than about 400mm. In other embodiments, the initial gap distance 38 is less than about 100mm. The sensor, which is discussed in detail below, measures the gap distance 38. If the leading package 14a (the package farthest away from the back wall of the gravity feed system 10) is removed, the second leading package 14b is pulled downward via gravity and the second leading package 14b then becomes the leading package. The remaining packages 14c-14e and the last package 14f are likewise pulled downward via gravity and also slide down the hanger 14. The sensor 35 now reads a greater distance which corresponds approximately to the sum of the initial gap distance 38 and the thickness of the leading package 14a. Based on the new gap distance 38, the number of packages 14 on the hanger 24 can be calculated by methods known in the art. In Figure 5, if the leading package 14a is removed, the sensor 35 will measure the new gap distance 38, and the resulting calculation will show five packages remaining on the hanger. Those skilled in the art will appreciate that depending on the sensor selected the sensor may need to be calibrated to obtain accurate and consistent package counts.

[0026] There are a variety of sensors which may be successfully employed to measure distance. A sensor, as used herein, refers to any device which determines a distance and converts it into a signal which can be read by an observer or by an instrument. Thus, suitable sensors include, but are not limited to, electronic sensors which electronically measure a distance, optical imaging sensors, lasers, and ultrasonic sensors. Suitable sensors may utilize any method known in the art for measuring and determining a distance. For example, the

sensors may use the time of flight method or a method whereby the focal length of a lens is adjusted to determine distance. Thus, in one embodiment the sensor is a camera capable of determining a distance.

[0027] Furthermore, both digital and analog sensors may be suitably utilized. In one embodiment, Applicants have found DT-10, a photo-electric analog sensor made by SICK AG of Waldkirch, Germany to be suitable. In other embodiments, Applicants have found PZ-M73, a photo-electric digital sensor made by Keyence Corporation of America of Woodcliff, New Jersey to be suitable.

[0028] The sensor preferred for a given embodiment is highly dependent upon a multitude of factors including cost, distance, material type, geometry of the package, accuracy needed, etc. Those skilled in the art armed with the disclosure of the instant invention will be able to select an optimum sensor for a given embodiment. For example, in one test for one embodiment, it was determined that in general ultra-sonic sensors yield great accuracy but only for distances over 150mm. As the gap distance in many embodiments is less than about 150mm, certain ultra-sonic sensors are unsuitable for the instant invention. Other sensors such as laser sensors are suitable but are traditionally more expensive than the photo-electric sensors. All relevant factors must be weighed and considered when selecting the optimum sensor.

[0029] The strength and accuracy needed for a sensor, one factor to consider when selecting an appropriate sensor, is dependent on a variety of factors including the total length of the hanger 24 or shelf employed. For example, in one embodiment, the sensor may need only to read distances as far as the total length of the hanger. In some embodiments sensors may need to be able to measure distances much smaller than the total length of the hanger, for example, distances that correlate to the initial gap distance. Those skilled in the art will be able to determine which sensors are suitable for the ranges desired.

[0030] The package material also affects the type of sensor selected. An appropriate sensor can be selected for virtually any material including, but not limited to, metallic films, matte films, cardboard, plastic, paper, and other composite films. These different materials pose varying problems which must be addressed in the sensor selection. For example, the metallic films are more reflective than matte films; however, Applicants have found the aforementioned SICK DT-10 photo-electric sensor to be well suited for both matte film and metallic film packages.

[0031] The package 14 geometry also affects the type of sensor selected. For example, thinner packages require a more accurate sensor than what would be needed for use with thicker packages. Applicants believe that those skilled in the art, armed with the disclosure of the instant invention, will be able to select an appropriate sensor for their particular embodiment.

[0032] The same factors which affect the sensor selection also affect the sensor positioning. For example, if the package is rectangular then the sensor placement along the length of the package has little effect on the measurement. However, it has been found that in some package geometries, specifically, standard flex packages which often do not have a uniform cross section or thickness, a more accurate gap measurement results if the sensor is aligned with the thickest part of the package. To that end, in some embodiments it is preferable that the pitch of the sensor 35 match the angle 40 of the hanger. Accordingly, in some embodiments it is preferable that the sensor 35 be adjustable both in pitch and lateral placement so that optimal placement may be achieved. Put differently, in some embodiments the sensor 35 is positioned so that it may be raised or lowered vertically, moved horizontally, and angled at a pitch to obtain more accurate measurements. As depicted, the sensor 35 is located flush with the display apparatus 12. However, the sensor 35 can be located in a variety of positions including atop the display apparatus 12 or atop or flush with the cross

beam 18. Further, in some embodiments an adjustable mount is provided which supports the sensor 35 in the desired location behind the package 14. The location of the sensor is not critical to the operation of the instant invention, and those skilled in the art armed with the instant disclosure will appreciate that varying placement of the sensor may alter the necessary calibration.

[0033] In another embodiment a single sensor is employed to measure the distance for at least two hangers 24. In one such embodiment, the sensor 35 is positioned on a track whereby it may travel horizontally, vertically, diagonally, or a combination of all three to act as a sensor for at least two hangers. Those skilled in the art will appreciate the different methods of positioning a sensor 35 to achieve the desired result of measuring the distances associated with at least two hangers with one sensor.

[0034] In some embodiments the sensors have additional capabilities aside from the ability to measure distances. For example, in one embodiment the sensors comprise a “tracking ability.” A sensor with such an ability communicates information regarding the measured distance as well as its physical location, for example, within a store. For example, the sensors can be in communication with a wireless card or antennae which can use a variety of methods, such as triangulation, to determine its location. Additionally, the sensor can be equipped with Global Positioning System (GPS) technology or other equivalent technology known in the art. It should be noted that the tracking ability, and the necessary technology, is not limited to being located on the sensor. The shelf or product support, as well as the harvesting device or Stock Keeping Unit reader, both discussed below herein, can all comprise the tracking ability and the necessary technology. For example, rather than the sensor being connected to GPS technology, the shelf itself is attached to the GPS technology. The ability to track a shelf’s location, within a store, for example, allows the retailer to strategically position certain products throughout a store and along a shelf. Those skilled in

the art armed with the instant disclosure will appreciate the various means for providing the sensor with a tracking ability.

[0035] Regarding the determination of the product type and ultimately package thickness, there are a variety of methods to ascertain the thickness of the package 14. In one embodiment the thicknesses of packages with similar products is averaged to determine a standard assumed thickness for that specific package. This standard thickness is then imputed into a computer in communication with the sensors and is stored. As used herein “communication” includes physical communication via wires as well as wireless communication both directly and through intervening devices. Thus, once the data from the sensor 35 is received, the computer ascertains the thickness of the specific package 14 from a database for example, and can then calculate the number of packages 14 remaining on the corresponding hanger. Thus, the retail store and whoever else has access to the data will know exactly how much product is needed to replenish a specific hanger.

[0036] In another embodiment the apparatus comprises the ability to identify the product and package type. This gives the apparatus the ability to determine, for example, the package thickness for a given package without the need for manually imputing a known or averaged product thickness to correspond to a specific shelf. This has a benefit in that a specific product is not limited to a specific shelf. Accordingly, a product which comprises a certain package thickness can be removed from a hanger and replaced with a product comprising a different package thickness and the apparatus will automatically recognize the new product and its associated new thickness. In one embodiment the average thicknesses for all products is entered into a computer or other like device, and the computer utilizes the identified package and its stored associated average thickness to calculate the number of packages on a shelf.

[0037] In one embodiment the product is identified by its Stock Keeping Unit (SKU) identifier. Packages generally have unique SKU's which identify the type of product, an example of which is a bar code. Another example of an SKU is a "colored dot" scheme typically employed to identify the color scheme on a package. Unique selection and orientation of these colored dots provides a unique SKU. Finally, a unique image or set of characters located on a package also serves as an SKU.

[0038] In one embodiment the apparatus further comprises an SKU reader. An SKU reader refers to any device which can scan or otherwise recognize an SKU. Thus, an SKU reader includes, but is not limited to, a bar code scanner, and a camera.

[0039] The location of an SKU reader 39 in one embodiment is illustrated in Figure 5. As with the sensors previously addressed, there are a variety of factors which affect the selection of an appropriate SKU reader. Regarding range, a preferred SKU reader 39 should have the ability to read at distances as far as the length 36 of the hanger 24 or further and as near as the gap distance 38. Furthermore, as with the sensors, the package material and geometry also affects the selection of the SKU reader. Applicants believe that those skilled in the art armed with the instant disclosure will be able to select an appropriate SKU reader to employ in a given embodiment.

[0040] As with the sensors, the location of the SKU reader is one factor which must be considered. The product SKU can be located in a variety of places on a package. Accordingly, the SKU reader is located to allow the reader to correctly read the SKU. In a preferred embodiment, the SKU reader is horizontally and vertically adjustable relative to the shelf to allow for more accurate positioning. Thus if a new package which has an SKU on the bottom-left of the package is replaced with a package which has an SKU on the bottom-right, the reader can be adjusted laterally to read the SKU on the new package. Further, in one embodiment the pitch of the SKU reader is adjustable to allow the SKU reader to follow

the angle 40 of the product supports. Finally, in one embodiment the SKU reader is moveable along the shelf so that one SKU reader has the ability to read the SKU associated with packages located on two or more different hangers or shelves.

[0041] The apparatus in Figure 5 has the ability to measure the distance between the sensor 35 and the last package 14f. Furthermore, the SKU reader 39 can recognize the last package 14f and accordingly ascertain its thickness, for example, by retrieving the thickness from a database. With this information, the computer or other like device can calculate the number of packages on the hanger as well as identify the type of product in each package.

[0042] Another method for identifying a package or product type, and thus ascertaining the package thickness is utilizing Optical Character Recognition (OCR). OCR is a process in which software reads text and/or characters in an image. The software is trained to identify and recognize varying text and/or characters and can accordingly categorize and differentiate between varying packages. OCR software combined with hardware such as a camera mounted so as to capture an image of the package yields a method for identifying the package and product type.

[0043] Figure 6 is a back profile view of one embodiment utilizing a camera. In the embodiment shown, the camera is mounted on the back of the shelf so that it faces the backside of the packages. As with the sensor and the SKU reader, both previously described, the camera 41 can be mounted on the display apparatus, the crossbeam, or a separate mounting apparatus. Further, in some embodiments the camera 41 can be advantageously located in front of the shelf so that the front image of the package is captured. In the embodiment shown the camera 41 is positioned to be able to capture SKU's 43a-d from four adjacent packages. Figure 6 illustrates four possible SKU's including a bar code 34a, a unique image 43b, a unique colored dot scheme 43c, and a unique character set 43d. Thus, the camera, in conjunction with the OCR software can recognize from its SKU 43d that the

top left package comprises a certain product and has a specific thickness. In one embodiment, the software matches the image of the SKU 43d with an image stored on a database. Simultaneously, the camera 41 can identify the product type and thickness of the top right package by its SKU 43a. Although the camera 41 depicted in Figure 6 is positioned to be able to recognize four packages, in other embodiments it may be desirable to only recognize one or two packages. Thus, utilizing the OCR method allows the apparatus to distinguish between two brands of snack food, for example, sitting adjacent on a shelf. The ability to identify a package with OCR, which results in ascertaining the thickness of the identified product, coupled with the measured distance allows the number of packages on a shelf or hanger to be calculated.

[0044] As discussed previously, a camera can be utilized as a sensor to determine a distance. Further, as discussed above, a camera in conjunction with OCR technology can be used to recognize a product's SKU and accordingly a product type. Thus, in one embodiment a single device measures the distance from a sensor and a package closest to a back end of the shelf and ascertains the thickness of the package by identifying the package SKU.

[0045] In one embodiment, once the data is measured and collected from the sensor and/or the SKU reader or any other identifying or counting means, it is then harvested into a harvesting device. As used herein "data" refers to any information which may be retrieved from the shelf including, for example, number and type of products on the hanger, number and type of products on the entire shelf and in the entire store, location of each product, the date and time each product was removed from the shelf, etc. In one embodiment the harvesting device, which harvests data from at least one sensor, comprises a Programmable Logic Control (PLC). Harvesting devices, in some embodiments have the ability to harvest as well as utilize the data, by, for example, performing calculations. Thus, in some embodiments the harvesting devices calculate the desired output, specifically the number and

perhaps type of packages on a shelf as well as their location, from the collected data. Those skilled in the art armed with the instant disclosure will appreciate various methods and devices which can be used to calculate the desired output from the collected and/or imputed data.

[0046] The data can be transferred via Ethernet cables, or alternatively, the data can be transferred wirelessly through a wireless network. In another embodiment the data is harvested in a personal computer, and in another embodiment the data is harvested in a smart phone. Those skilled in the art will appreciate the different harvesting devices which can be utilized to achieve the desired goal. Each of these devices allows data to be compiled, stored, and transferred to other devices such as a handheld device. Thus, a stocker can retrieve the data from the harvesting device via a smart phone and know which and how much of each product must be restocked.

[0047] In another embodiment, once data is collected by the harvesting device, the data is triangulated with other data to produce more accurate data. For example, even if the amount and type of product located on a shelf is known, that data may not always adequately predict the amount and type of product located within a store. This difference can arise when a consumer removes a package from one shelf, decides they do not want to purchase the product and places the package elsewhere in the store. If the store were relying solely on data collected from the shelves then that data could indicate that the store has less product than it actually does. However, the harvesting device or other devices downstream of the harvesting device can be triangulated with other data such as data retrieved from the point of sale register. The point of sale data can indicate that the package removed from the shelf has not yet been purchased. Thus, in the above scenario, the data collected from the harvesting device is merged with the data collected at the point of sale register to determine an accurate inventory. Another example of data which may be triangulated or reconciled is data

compiled from the store receiving end. Retail stores typically receive and inventory product in a receiving end of the store before stocking the product. Additionally, damaged and/or expired product is occasionally returned to the manufacturer from such a receiving end. Thus, an accurate amount of inventory in a store can be determined by reconciling the data received from the receiving end, which can include both incoming and outgoing product, the data received from the point of sale, as well as the data received from the apparatus of the instant invention. Those skilled in the art armed with the instant disclosure will appreciate other types of data to triangulate as well as the method of triangulating the data.

[0048] The sensors and harvesting devices generally require power to operate. Thus, in one embodiment the sensors and/or the harvesting devices are connected to an electrical outlet. In another embodiment, the sensors and/or the harvesting devices are connected to a remote power source such as a battery or solar device, which can operate without being connected to an electrical outlet. Those skilled in the art armed with the instant disclosure will appreciate other such remote power sources which can be utilized in conjunction with the instant invention. Using such a remote power source allows the shelves to be easily repositioned without need for the shelf to be located in close proximity to an electrical outlet.

[0049] Thus, in one embodiment a method for monitoring inventory is disclosed using a self-adjusting shelf which has at least one product support having sufficient capacity for a plurality of packages and having at least one package, wherein the distance from a sensor located on the shelf and the package closest to the back end of the shelf is measured, the thickness of the package closest to the back end of the shelf is ascertained, and the number of packages remaining on the shelf is calculated. In one embodiment, the apparatus for storing a monitoring inventory includes a self-adjusting shelf with at least one product support, and at least one sensor which can measure distances.

[0050] While the invention has been discussed in reference to a self-adjusting shelf, the invention is also applicable to other types of shelves including a manual shelf. As used herein a manual shelf refers to a shelf which is not self-adjusting. Thus, a consumer must manually remove product, and unlike a self-adjusting shelf, the product is not automatically positioned on the shelf. One example of such a shelf includes a hanging shelf in which the hangers are not declined. When a consumer removes a product, the remaining product does not automatically adjust and reposition itself on the shelf. A typical vending machine is another illustration of a manual shelf that comprises hangers from which the product hangs. Another example is a flat shelf upon which product is placed.

[0051] Figure 7 is a side profile view of one embodiment utilizing a flat shelf. In a flat shelf the product sits upon the product support 44. Figure 7 depicts a detector 35 located behind the last package 14f. As will be demonstrated below, however, the detector 35 can be located in a variety of places including below, atop, aside, or in front of the package.

[0052] The detector 35 can comprise any type of sensor previously discussed. As used herein a detector refers to a device which detects the presence of an object. The detector may be analog or digital. The detectors may utilize infrared light, sound, or other methods known in the art to detect the presence of an object. The detector chosen for an embodiment will depend upon the material of the package, the distance between the detector and the package, the amount of light on the shelf, as well as other factors. Those skilled in the art will be able to determine the optimum detector for a given embodiment.

[0053] In one embodiment the detector 35 detects the presence of a package located on a product support. In the figure, the detector 35 will thereby return an “ON” signal to the harvesting device indicating that a package is located on the product support 44. If the first package in line 14a is removed, the detector 35 will still read the last package 14f and will return “ON” signal to the harvesting device indicating that a package is located on the

product support 44. Likewise, if the last package in line 14f is removed, the detector will detect the presence of the next closest package 14e. When all packages are removed, the detector 35 will not detect a package and will return an “OFF” signal to the harvesting device indicating that the product support 44 does not have any packages. In one such embodiment, the detector can detect distances for the entire length of the product support. In one embodiment, the detector 35 has a range of at least 380mm.

[0054] In one embodiment, the detector is utilized in a self-adjusting shelf as previously discussed. For example, referring to Figure 5, the sensor 35 will comprise a detector 35 which functions as discussed above. Put differently, the detector 35 detects the presence of the last package 14f on the shelf.

[0055] Referring back to Figure 7, in another embodiment, the detector 35 is laterally adjustable relative to the shelf so that one detector 35 can detect the presence of packages 14a-f on multiple product supports 44. Accordingly, in one embodiment a single detector can detect the presence or absence of product on each product support and each shelf. In such an embodiment, a detector will monitor the product on one product support and then move to monitor the product on a different product support. This information is then relayed to a harvesting device, as discussed above, indicating when a product support or shelf is empty and needs restocking. The method and apparatus described can be used in a variety of manual shelves including flat, hanger, etc.

[0056] Figure 8 is a side profile view of one embodiment utilizing a hanger shelf. In this embodiment, detectors 35a-f are located below each package so that the number of packages on a product support can be ascertained. In one embodiment, the detectors 35a-f are spaced apart according to the thickness 37 of the package. Accordingly, if a thicker package is on the shelf, the space between adjacent detectors 35a-f is adjustable to account for the increased thickness 37 of the package.

[0057] Those skilled in the art will understand how to position the detectors in the shelf. As depicted the detectors are stored on a rod 45 located below the package, but the detectors 35a-f can be located in a variety of places. In other embodiments the detectors are located above or to the side of the packages.

[0058] Referring to Figure 8, a detector 35a will detect the presence of the package 14a above it. As depicted all six packages are present and will be detected by the detectors 35a-f. The detectors 35a-f will then report that six packages are on the product support 24 by adding the positive responses from each detector 35a-f. Thus, the number of packages on each product support 24 is ascertained by detecting the presence of each package on each product support 24. If the first package 14a is removed, the first detector 35a will not detect a package. Thus, the detectors 35a-f will collectively report that five packages are on the product support 24. Those skilled in the art will appreciate that different detectors and configurations may be implemented in detecting the presence of a package and ascertaining the number of packages on a shelf.

[0059] In one embodiment there is one detector for every package on the product support 24. Thus, a product support 24 which has six packages will have six detectors. In other embodiments, however, there are fewer detectors than packages. For example, Figure 8 illustrates six packages 14a-14f and six detectors 35a-f. However, in one embodiment fewer than six detectors are utilized. In one embodiment only a select number of detectors are utilized in either the outer region or interior region of the shelf. If detectors are only located on the outer region, the first three detectors 35a-c would be located under the first three packages 14a-c. There would not be any detectors under the remaining packages 14d-f. The reason for this is that consumers often take the first package in a shelf. When this happens, the shelf would indicate that the first package has been taken and needs restocking. While this embodiment does not track every package, the assumption is that the shelf would be

restocked before the remaining three packages 14d-f are selected by the consumer. In other embodiments the detectors may only be placed near the last package 14f. In still other embodiments the detector is only placed so as to detect packages in the center of the product support.

[0060] In another embodiment the detector is adjustable relative to the product support. The detector may be adjustable along the length of the product support so that one detector may detect the presence of one or more packages on one product support. In such an embodiment, the number of packages on a product support is ascertained by moving the detector along the product support. In such an embodiment, the detector is trained to move a specified distance and detect packages. In one embodiment the specified distance is proportional to the thickness of a package. As an example, referring to Figure 8, the first sensor 35a will move along the rod 45 at a specified distance 37 to detect the presence of multiple packages above it. In this manner, the number of packages on a product support is ascertained by adding the number of packages detected on that product support.

[0061] In yet another embodiment, the detector may be adjusted angularly. Thus, the detector may detect the presence of a package at one location and then aim and detect the presence of a package at a different location. In such an embodiment, the detector can be positioned aside the package, above the package, below the package, and any other place whereby the detector can detect multiple packages at one time. For example, referring to Figure 8, the second sensor 35b detects the presence of the second package 14b and is then aimed to detect the presence of the first 14a and third 14c package. Those skilled in the art will understand that in some embodiments the detector is adjustable angularly and relative to the product support.

[0062] In another embodiment, a camera is utilized to detect the presence of the packages and/or ascertain the number of packages on a product support. As previously

discussed, a camera in conjunction with OCR technology can detect the presence of a package. For example, a camera can be mounted so as to obtain a perspective view of the packages 14a-f on the shelf 24. In one embodiment, edge detection software allows the user to compute the number of packages on a shelf.

[0063] As with the shelf-adjusting shelf, the embodiment of the manual shelf optionally comprises the ability to identify the product type of the package via an identifying device. This may accomplished in any of the ways previously discussed, including using a product SKU, and/or OCR software and hardware. Further, a single device can be used to detect the presence of the package and identify the product type of the package. As depicted in Figures 7 and 8, the SKU reader 39 is located behind the product 14f on the shelf 24, but the SKU reader can be positioned in a variety of locations.

[0064] The identifying device can utilize the same methods previously discussed to identify and/or ascertain the number of products. For example, as discussed the identifying device can utilize edge detection software and hardware to identify and/or ascertain the number of products. As another example, software and hardware which stores an image of a product, obtain an image of a product, and reconcile the stored and obtained package to yield the distance, the product type, the number of packages, etc. One such method compares the number of pixels in the stored and obtained image to obtain the desired information. Those skilled in the art will understand other software and hardware which can accomplish the described goals.

[0065] In one embodiment the identifying device can be adjusted laterally relative to the shelf such that one identifying device is capable of identifying packages located on two or more product supports. Likewise, in one embodiment the identifying device can be adjusted relative to the product support so that one identifying device is capable of identifying packages located along the product support. Thus, one product support can hold multiple

flavors or brands of product and the identifying device can keep track of this non-homogenous inventory.

[0066] The instant invention allows for more efficient and effective restocking and inventory monitoring. Aside from increased efficiencies, such real time data has other benefits as well. For example, the manufacturer will instantly know the consumer preferences for a variety of flavor possibilities. Furthermore, the manufacturer will be able to track the shelf date, or the time which specific package 14 has been on the shelf. For example, if the number of products on a shelf remains unchanged for three months, then the manufacturer knows the product has been sitting on the shelf for three months as well. Such information would inform the manufacturer that perhaps that product is not selling well, or perhaps that there is too much shelf space dedicated to that product and that another product should take its shelf place. Such information is undoubtedly beneficial to the manufacturer for a multitude of reasons.

[0067] Furthermore, while the invention has been described with regard to a retail store, the invention is not so limited. For example, the apparatus and method of the instant invention can be used in a warehouse to monitor inventory. Further, the instant invention can be applied to industrial applications for monitoring inventory manufacturing parts. Taken further, as the instant invention can provide real time data, an apparatus of the instant invention can be integrated into a manufacturing process wherein subsequent steps of a manufacturing process cannot begin until it is verified that the prior step utilized all the required parts. As an example, before a final manufactured product is painted or shipped, the method and apparatus of the instant invention can verify by monitoring inventory that all the necessary parts have been used, and thus the necessary manufacturing steps have been completed. This can result in increased efficiency and increased product quality.

[0068] While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

CLAIMS:

What is claimed is:

1. A method for monitoring inventory on a shelf, said shelf comprising at least one product support comprising capacity for a plurality of packages and comprising at least one package, said method comprising:
detecting the presence of said at least one package on said at least one product
5 support with at least one detector.
2. The method of claim 1 further comprises identifying the product type.
3. The method of claim 2 wherein said identifying step comprises reading a package Stock Keeping Unit.
4. The method of claim 2 wherein a single device detects the presence of said at least one package and identifies the product type.
5. The method of claim 1 further comprising relaying data collected by said detector to a harvesting device.
6. The method of claim 5 wherein said harvesting device is in communication with a network.
7. The method of claim 5 wherein both of said at least one detector and said harvesting device are in communication via a wireless network.

8. The method of claim 1 wherein said detecting is accomplished by utilizing Optical Character Recognition software and hardware.
9. The method of claim 8 wherein said hardware comprises a camera.
10. The method of claim 2 wherein said detecting and said identifying is accomplished by utilizing Optical Character Recognition software and hardware.
11. The method of claim 1 further comprising ascertaining the number of packages on each product support by detecting the presence of each package on each product support.
12. The method of claim 11 wherein said ascertaining comprises moving at least one detector along said product support.
13. The method of claim 1 wherein said detecting comprises moving at least one of said at least one detector laterally relative to said shelf such that one detector detects packages located on two or more product supports.
14. The method of claim 1 wherein said detecting is accomplished on a manual shelf.
15. The method of claim 1 wherein said detecting is accomplished on a self-adjusting shelf.

16. The method of claim 1 wherein said detecting comprises utilizing a digital sensor.

17. An apparatus for storing and monitoring inventory comprising:
- a shelf comprising at least one product support, wherein said product support is capable of supporting a plurality of packages; and
- at least one detector located on said shelf, wherein said detector is capable of detecting packages.
18. The apparatus of claim 17 wherein said shelf comprises a plurality of product supports.
19. The apparatus of claim 18 wherein each of said product supports comprises at least one detector.
20. The apparatus of claim 17 wherein said apparatus comprise a tracking ability.
21. The apparatus of claim 17 wherein said detector is in communication with a harvesting device.
22. The apparatus of claim 21 wherein said detector and said harvesting device are in communication via a wireless network.
23. The apparatus of claim 21 wherein said harvesting device harvests data relating to shelf location.
24. The apparatus of claim 15 further comprising an identifying device.

25. The apparatus of claim 24 wherein said identifying device comprises at least one Stock Keeper Unit reader.
26. The apparatus of claim 24 wherein said shelf comprises at least two product supports, and further wherein at least one of said at least one identifying device is capable of moving laterally relative to said shelf such that one identifying device is capable of identifying packages located on two or more product supports.
27. The apparatus of claim 24 wherein said identifying device comprises Optical Character Recognition software and hardware.
28. The apparatus of claim 17 wherein said shelf comprises at least two product supports, and further wherein at least one of said at least one detector is capable of moving laterally relative to said shelf such that one detector is capable of detecting packages located on two or more product supports.
29. The apparatus of claim 17 wherein said detector is capable of moving along said product support.
30. The apparatus of claim 17 wherein said shelf is a manual shelf.
31. The apparatus of claim 17 wherein said shelf is a self-adjusting shelf.
32. The apparatus of claim 17 wherein said detector is a digital sensor.

33. A method for monitoring inventory on a self-adjusting shelf, said shelf comprising at least one product support comprising capacity for a plurality of packages and comprising at least one package, said method comprising:

5 measuring the distance from a sensor and a package closest to a back end of said shelf;

 ascertaining the thickness of said package; and

 calculating the number of packages on said shelf.

34. The method of claim 33 wherein said ascertaining comprises imputing the thickness into a computer in communication with said sensor.

35. The method of claim 33 wherein said ascertaining comprises identifying the product type.

36. The method of claim 35 wherein said identifying comprises reading a package Stock Keeping Unit.

37. The method of claim 35 wherein a single device measures said distance and identifies the product type.

38. The method of claim 35 wherein said Stock Keeping Unit comprises a bar code.

39. The method of claim 33 further comprising relaying data collected by said measuring and ascertaining to a harvesting device.

40. The method of claim 39 wherein said harvesting device is a Programmable Logic Controller.
41. The method of claim 39 wherein said harvesting device is a personal computer.
42. The method of claim 39 wherein said harvesting device is in communication with a network.
43. The method of claim 39 wherein both of said sensor and said harvesting device are in communication via a wireless network.
44. The method of claim 33 wherein said ascertaining is accomplished by utilizing Optical Character Recognition software and hardware.
45. The method of claim 44 wherein said hardware comprises a camera.
46. The method of claim 33 wherein said packages are pillow pouch bags.
47. The method of claim 33 wherein said self-adjusting shelf is a gravity feed system.

48. An apparatus for storing and monitoring inventory comprising:

a self-adjusting shelf comprising at least one product support, wherein said product support is capable of supporting a plurality of packages; and

at least one sensor located on said shelf, wherein said sensor is capable of measuring distances.

5

49. The apparatus of claim 48 wherein said self-adjusting shelf comprises a plurality of product supports.

50. The apparatus of claim 48 wherein said self-adjusting shelf comprises a gravity feed hanger system.

51. The apparatus of claim 50 wherein said gravity feed hanger system comprises at least one hanger, said hanger being sloped at an angle less than 90°.

52. The apparatus of claim 50 wherein said gravity feed hanger system comprises a plurality of hangers and wherein each of said plurality of hangers comprises a sensor.

53. The apparatus of claim 48 wherein said apparatus comprise a tracking ability.

54. The apparatus of claim 48 wherein said sensor is in communication with a harvesting device.


55. The apparatus of claim 54 wherein said sensor and said harvesting device are in communication via a wireless network.
56. The apparatus of claim 54 wherein said harvesting device harvests data relating to shelf location.
57. The apparatus of claim 48 wherein said sensor has an adjustable pitch.
58. The apparatus of claim 48 wherein said sensor is adjustable laterally relative to said shelf.
59. The apparatus of claim 48 wherein said shelf comprises at least two product supports, and further wherein at least one of said at least one sensor is capable of moving laterally relative to said shelf such that one sensor is capable of measuring distances associated with two or more product supports.
60. The apparatus of claim 48 further comprising means of identifying a product type.
61. The apparatus of claim 60 wherein said means of identifying a package type comprises at least one Stock Keeper Unit reader.

62. The apparatus of claim 61 wherein said shelf comprises at least two product supports, and further wherein at least one of said at least one Stock Keeper Unit reader is capable of moving laterally relative to said shelf such that one Stock Keeper Unit reader is capable of reading a Stock Keeper Unit associated with packages located on
5 two or more product supports.

63. The apparatus of claim 60 wherein said means of identifying a package comprises Optical Character Recognition software and hardware.

64. The apparatus of claim 60 wherein a single device is capable of measuring distances and identifying a package.

65. The apparatus of claim 48 further comprising a remote power source.

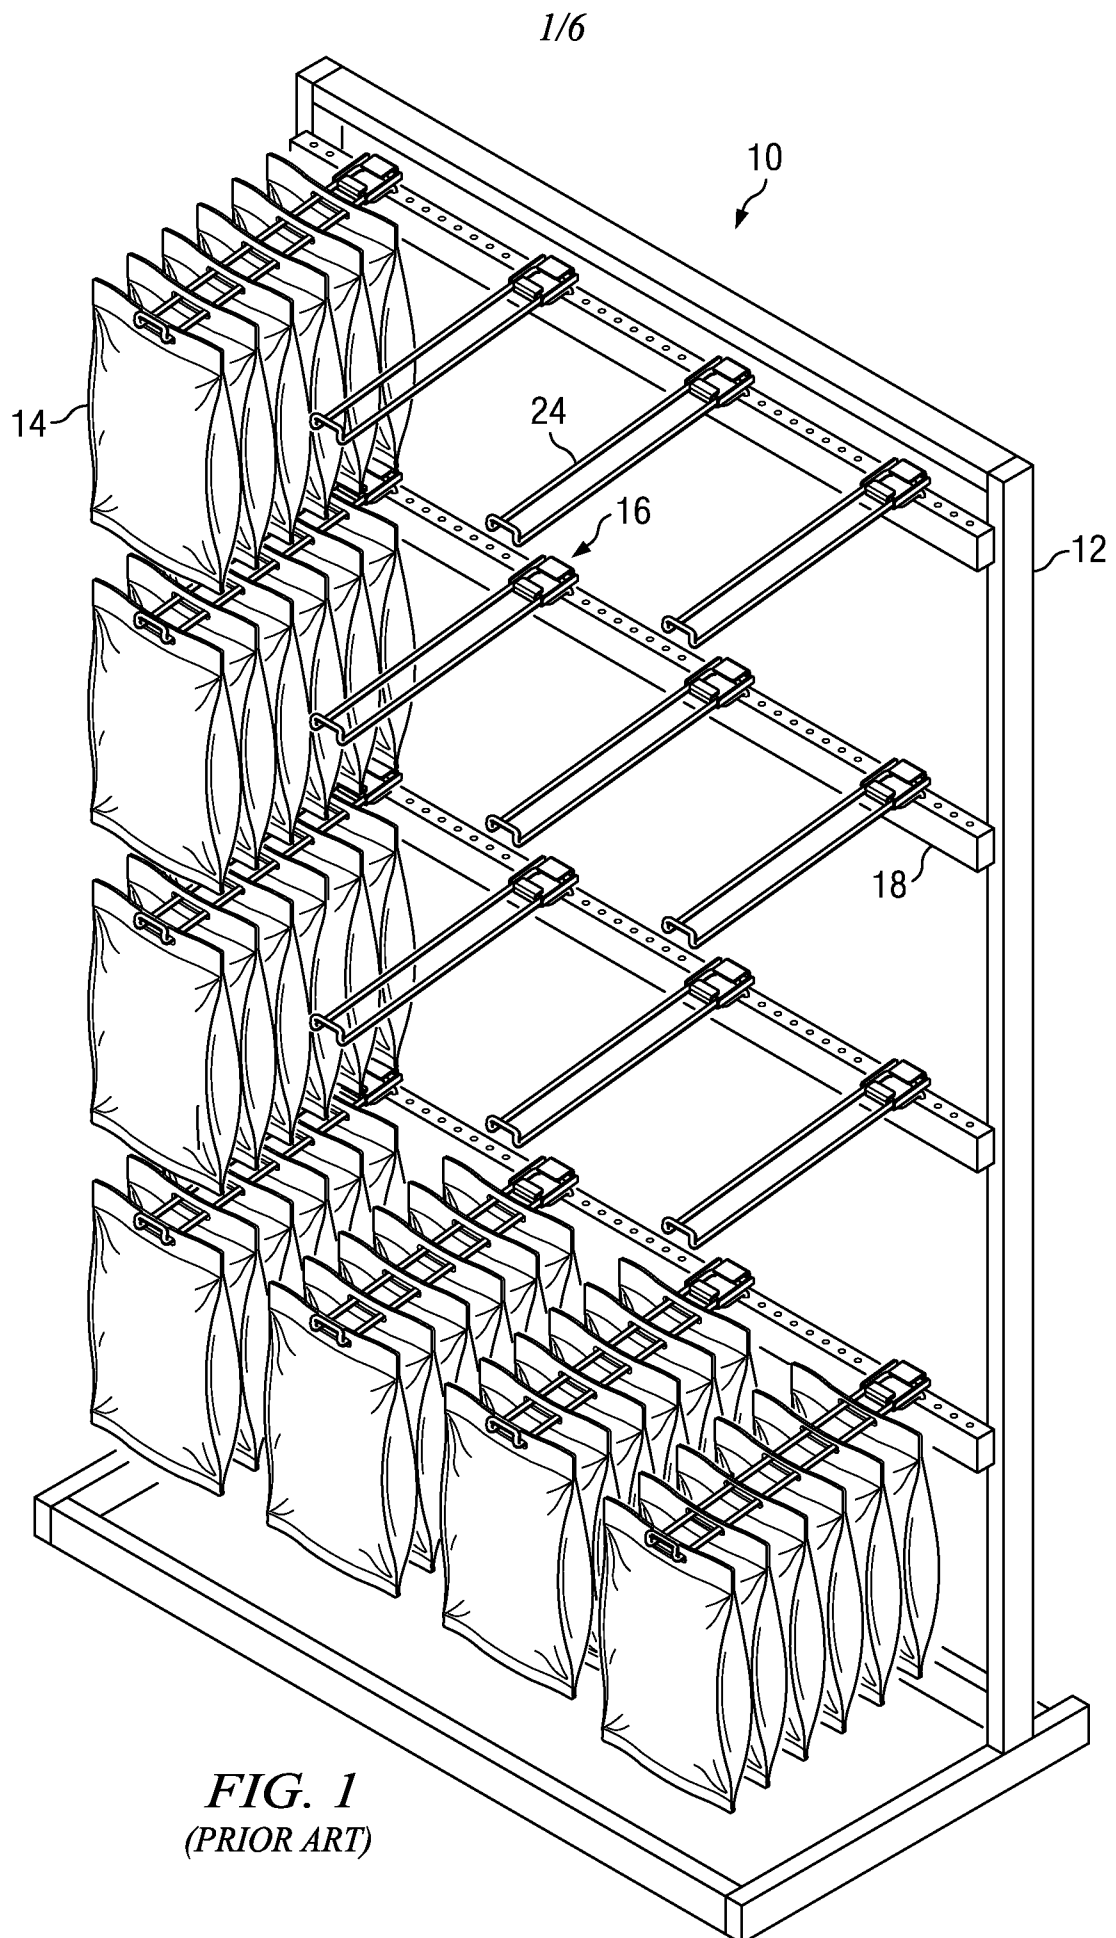

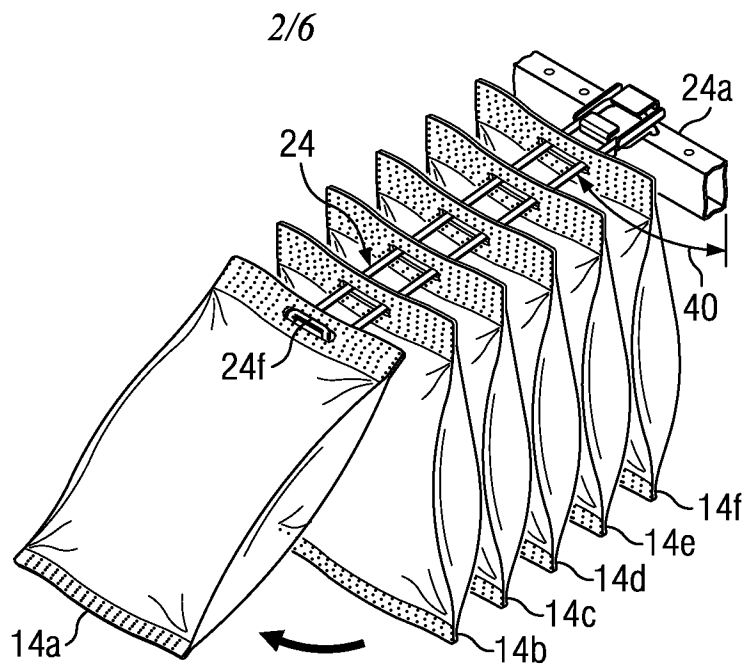


FIG. 2
(PRIOR ART)

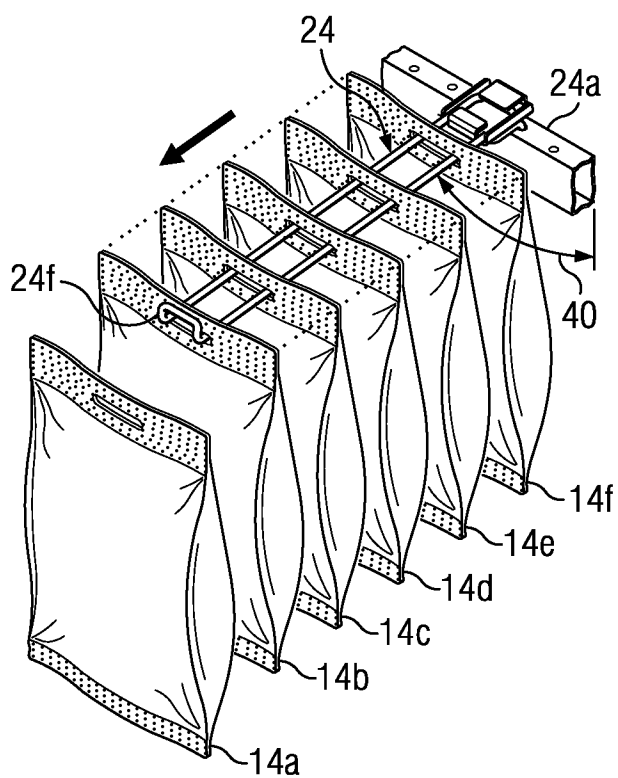


FIG. 3
(PRIOR ART)

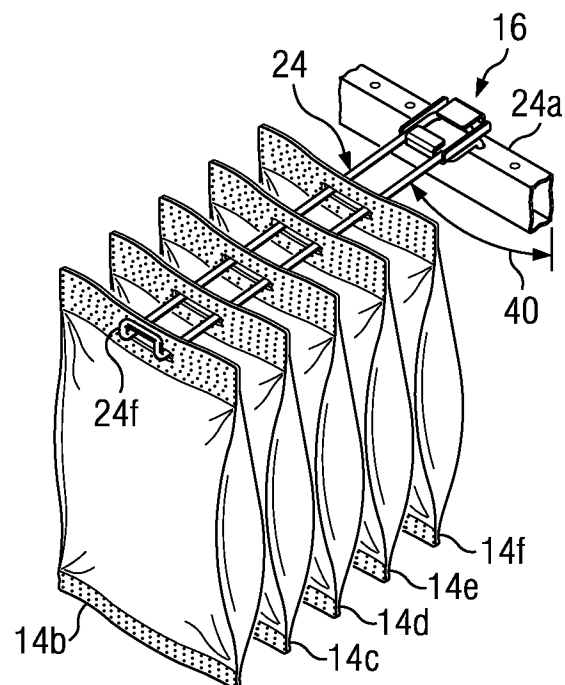
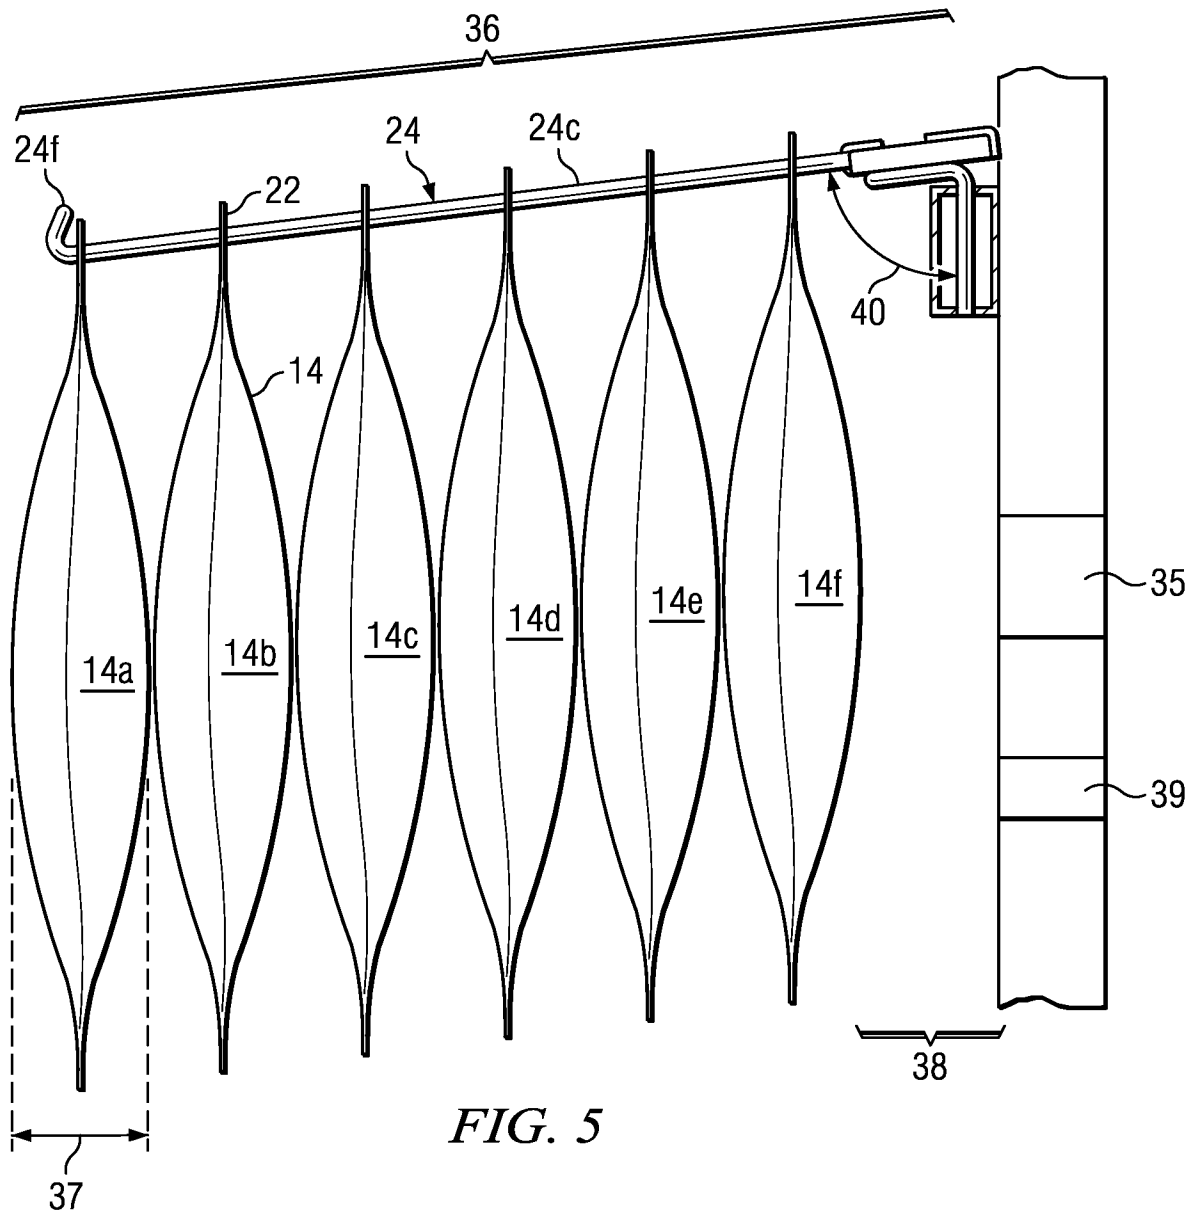


FIG. 4
(PRIOR ART)





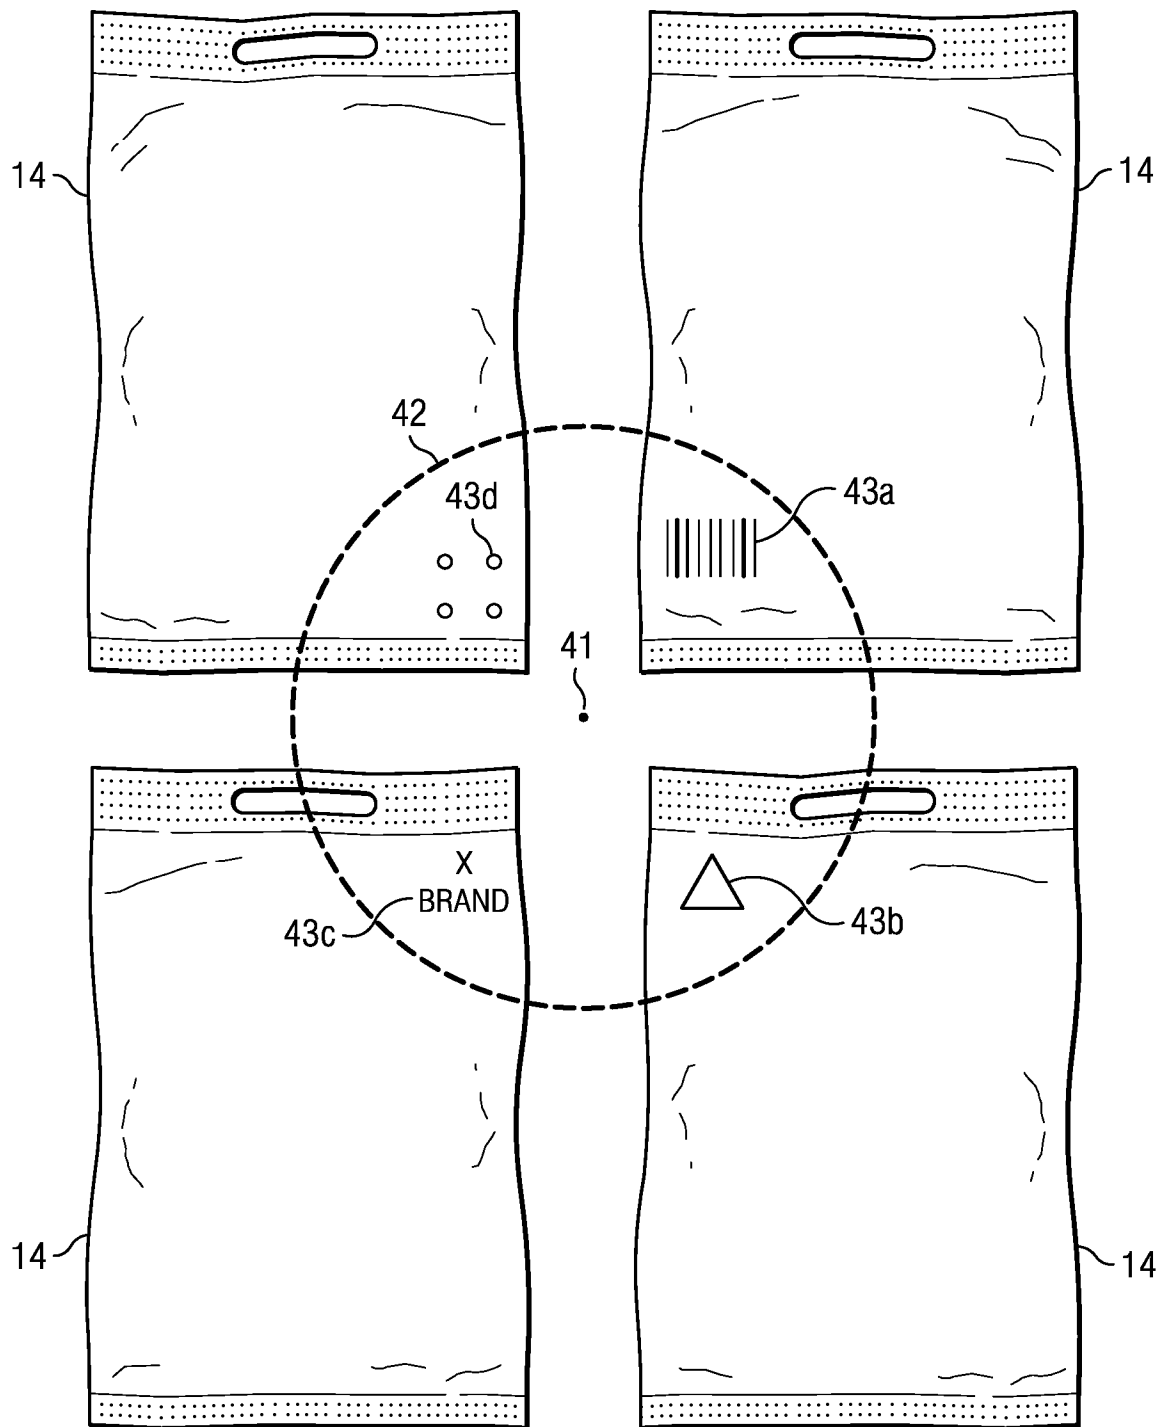


FIG. 6

5/6

*FIG. 7*

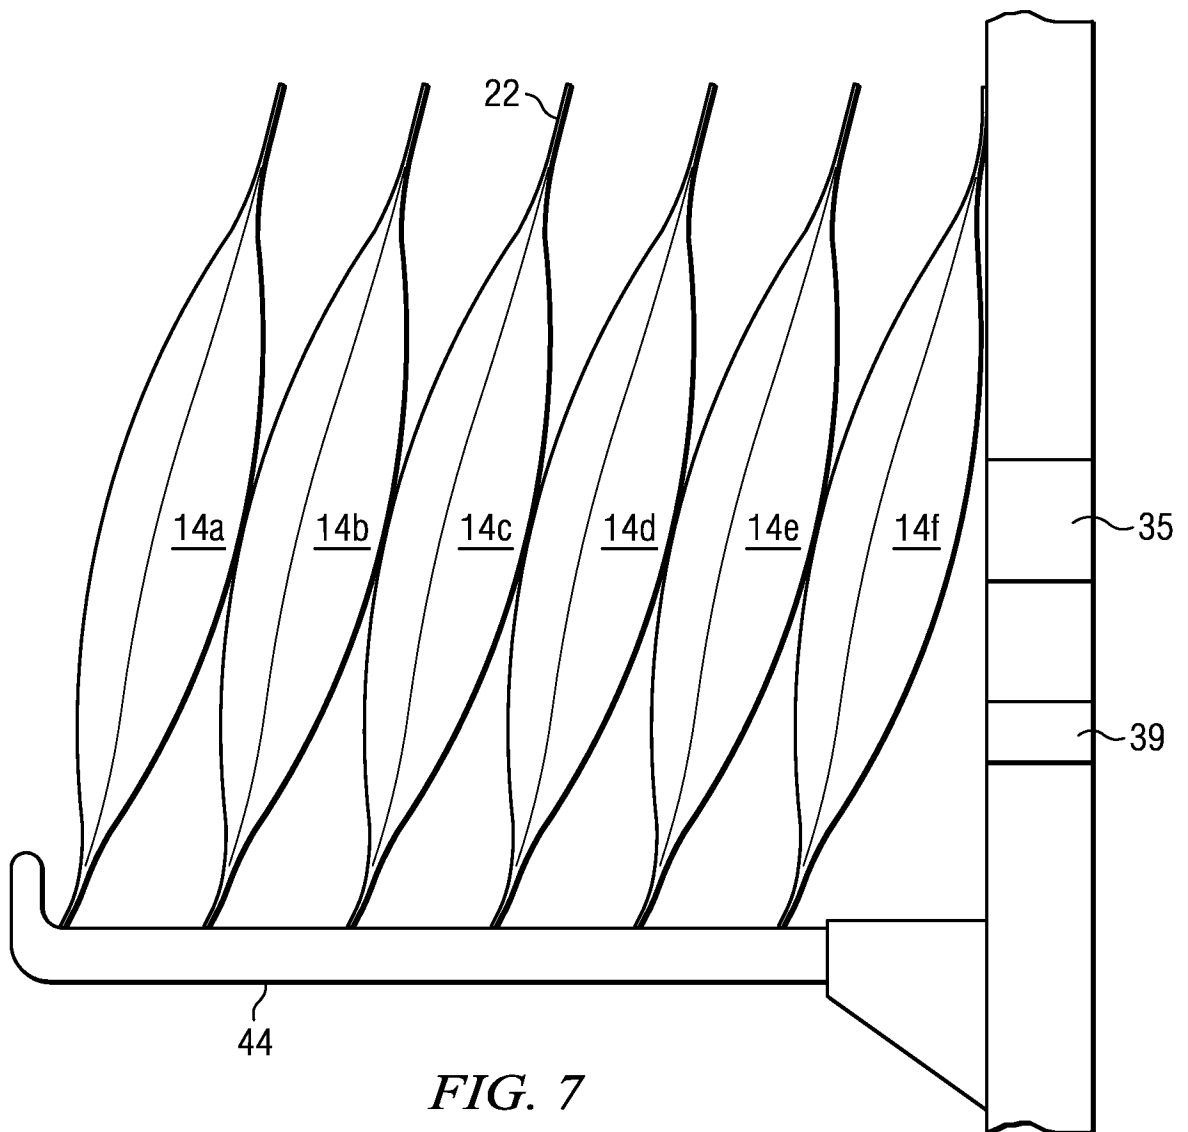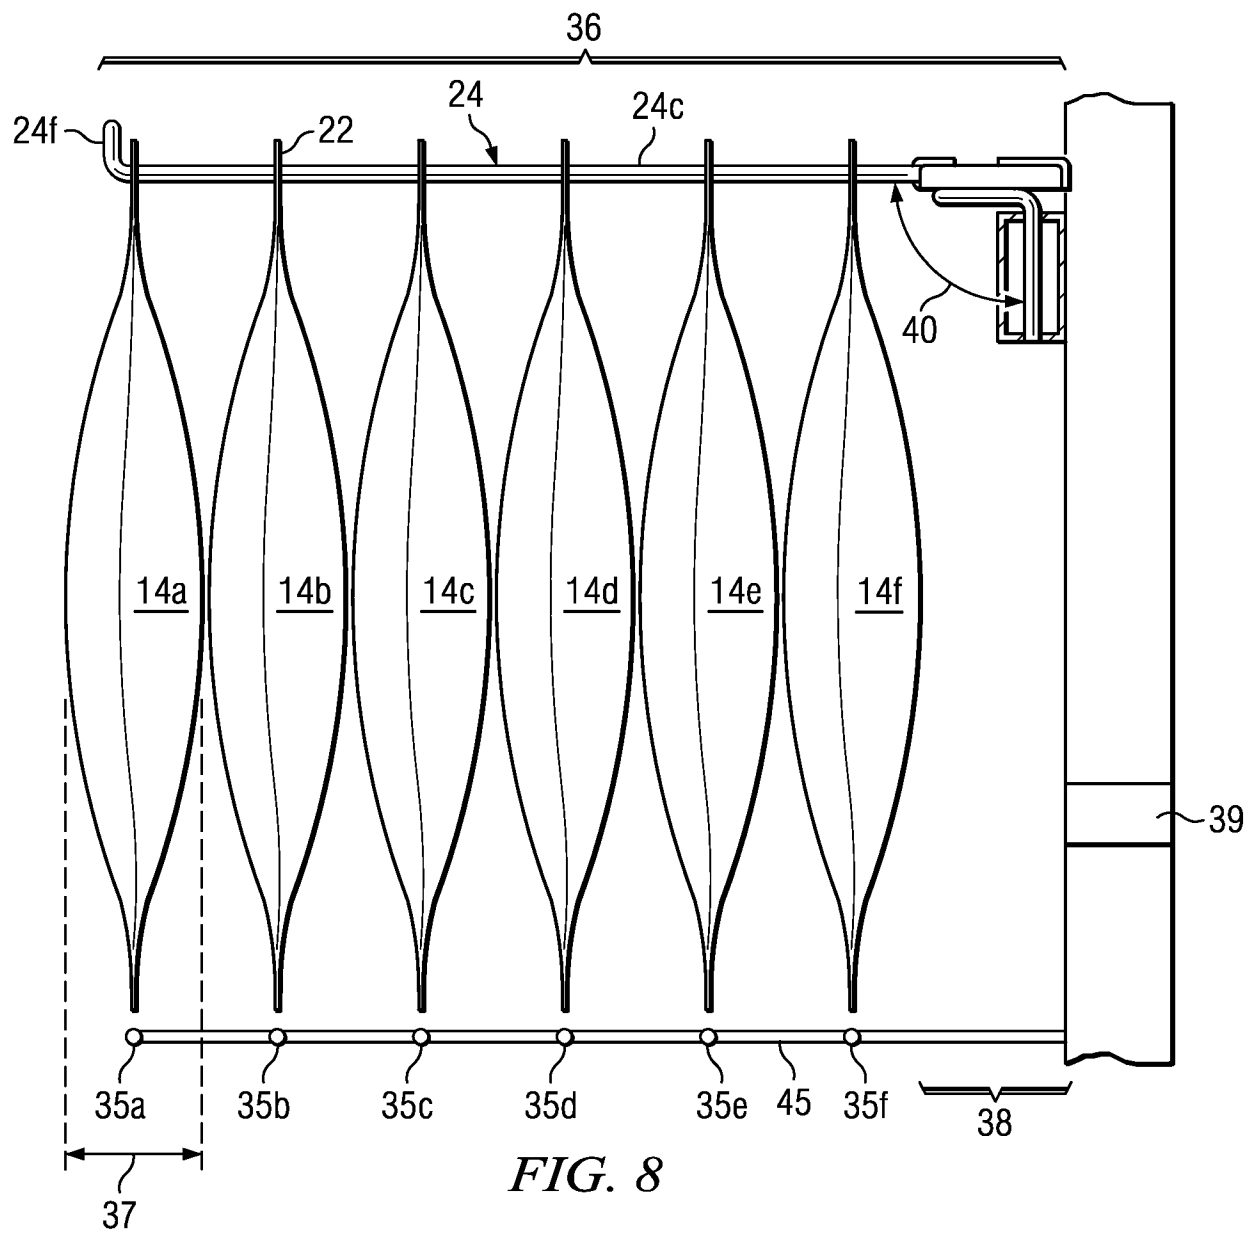

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/067537

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A47F 1/00 (2010.01)

USPC - 700/225

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A47F 1/00 (2010.01)

USPC - 340/5.9, 5.92; 700/213, 214, 215, 217, 218, 225, 231, 236, 244; 705/28

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

USPTO EAST System (US, USPG-PUB, EPO, DERWENT), Google Patents

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,349,244 B1 (BARDIN et al) 19 February 2002 (19.02.2002) entire document	1-2, 4-7, 11, 14-24, 30-32
X ----- Y	US 2003/0030539 A1 (MCGARRY et al) 13 February 2003 (13.02.2003) entire document	1-3, 11, 17, 24-25 ----- 8-10, 12, 13, 26-29, 36, 38, 46, 61-62
X ----- Y	US 2005/0168345 A1 (SWAFFORD JR et al) 04 August 2005 (04.08.2005) entire document	33-35, 37, 39, 41-43, 47-49, 53-56, 58, 60, 64-65 ----- 36, 38, 40, 44-46, 50-52, 57, 59, 61-63
Y	US 4,509,123 A (VEREEN) 02 April 1985 (02.04.1985) entire document	8-10, 27, 44, 45, 63
Y	US 2003/0138129 A1 (OLSON et al) 24 July 2003 (24.07.2003) entire document	9, 45
Y	US 2006/0267730 A1 (STEINKE et al) 30 November 2006 (30.11.2006) entire document	12, 13, 26, 28, 29, 57, 59, 62
Y	US 2004/0158353 A1 (POTEREK et al) 12 August 2004 (12.08.2004) entire document	40
Y	US 5,439,120 A (BROZAK) 08 August 1995 (08.08.1995) entire document	50-52

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 April 2010

Date of mailing of the international search report

13 APR 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2009/067537

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2009/067537

Continuation of Box III.

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I, claims 1-32, drawn to a method and apparatus for monitoring inventory on a shelf.

Group II, claims 33-65, drawn to a method and apparatus for monitoring inventory on a self adjusting shelf.

The inventions listed as Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical feature of the Group I invention: a detector which detects packages on a shelf as claimed therein is not present in the invention of Group II. The special technical feature of the Group II invention: a self adjusting shelf and measuring the distances between a sensor and a package as claimed therein is not present in the invention of Groups I.

Groups I and II lack unity of invention because even though the inventions of these groups require the technical feature of a shelf, inventory monitoring and a sensor which is capable of detecting packages, this technical feature is not a special technical feature as it does not make a contribution over the prior art in view of US 6,349,244 B1 (BARDIN et al) abstract.

Since none of the special technical features of the Group I or II inventions are found in more than one of the inventions, unity of invention is lacking.