June 14, 1955 N. B. MEARS 2,710,591

MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Filed April 19, 1951 5 Sheets-Sheet 1

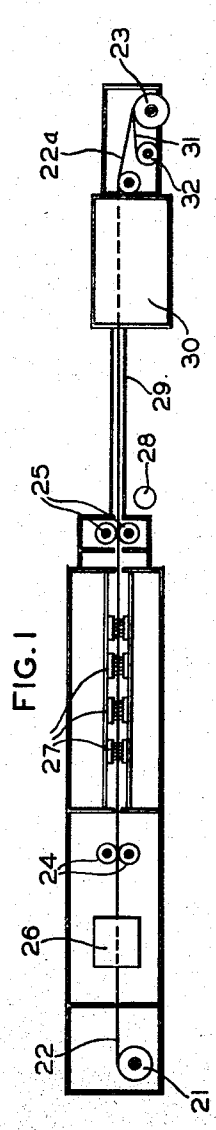



FIG. 1

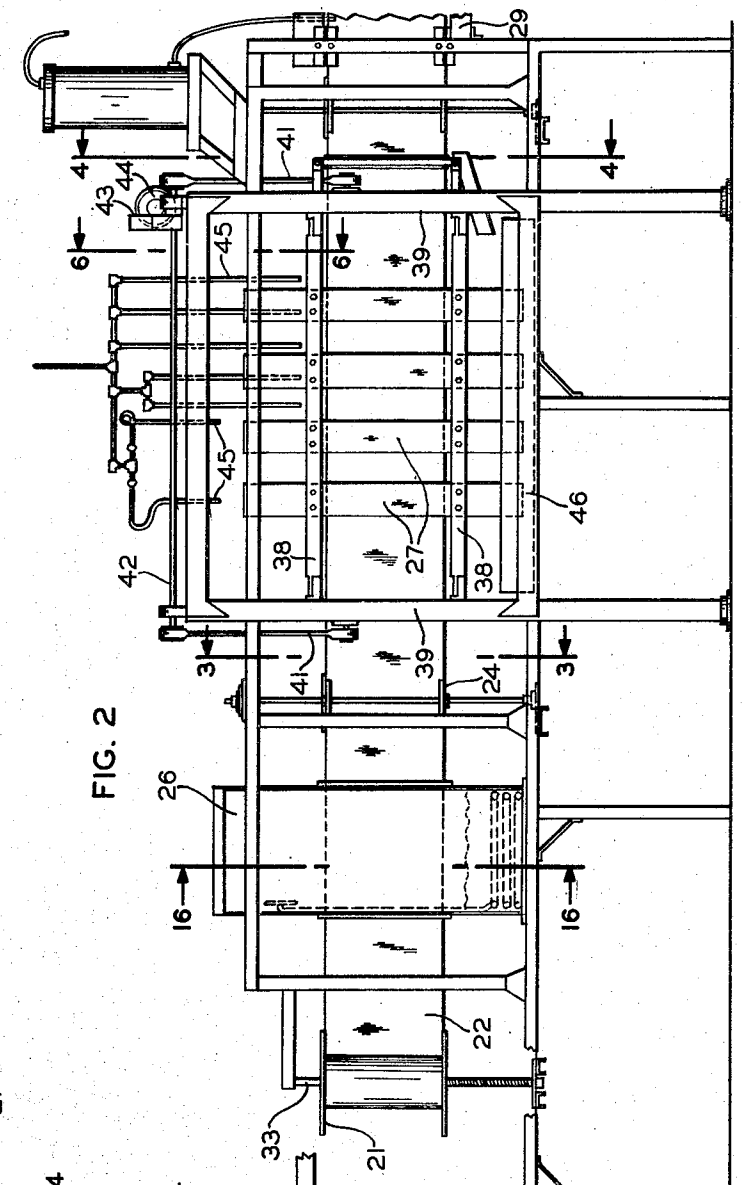



FIG. 2

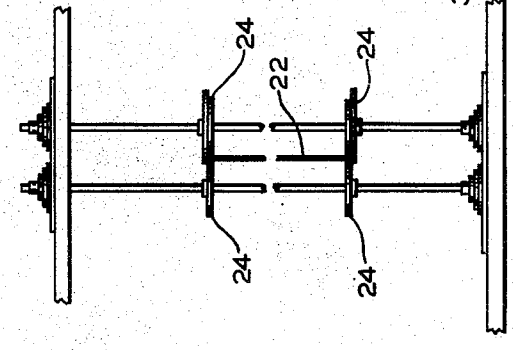



FIG. 3

INVENTOR

NORMAN B. MEARS

BY John E. Stryker

ATTORNEY

June 14, 1955 N. B. MEARS 2,710,591

MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Filed April 19, 1951 5 Sheets-Sheet 2

FIG. 8

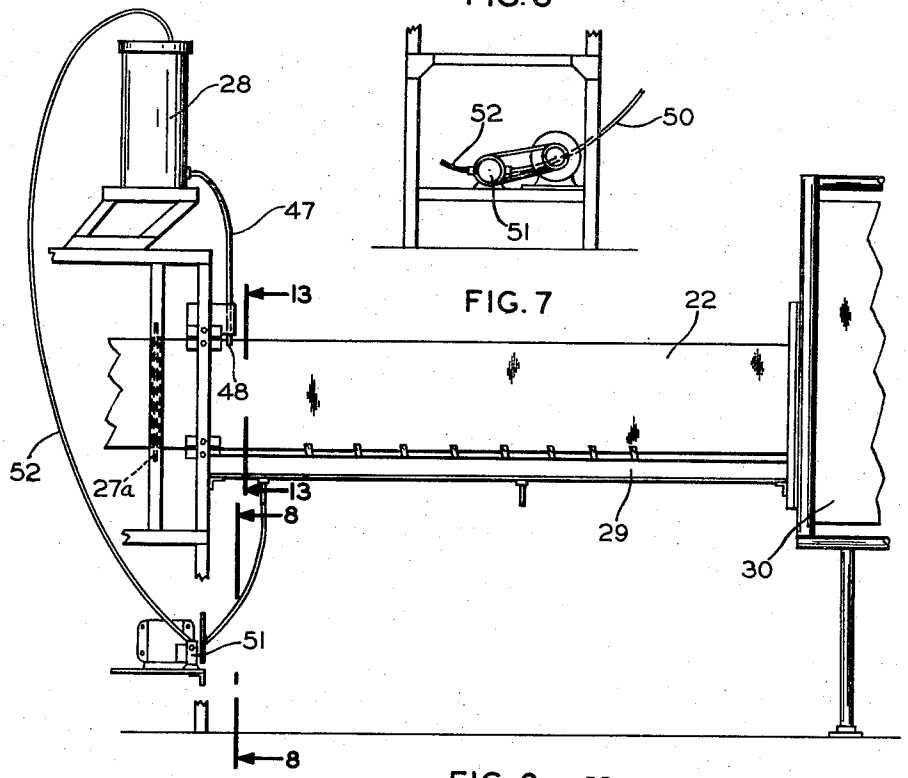



FIG. 7




FIG. 9

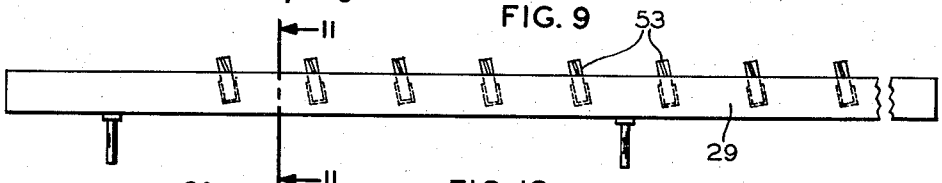
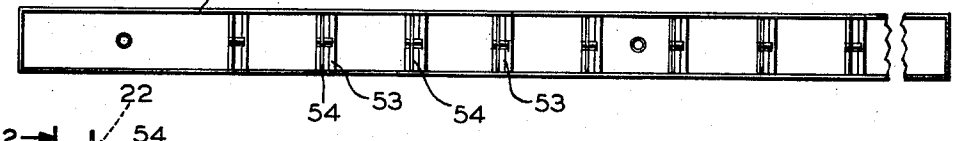



FIG. 10








FIG. 11





FIG. 12

INVENTOR

NORMAN B. MEARS

BY John E. Stryker

ATTORNEY

June 14, 1955 N. B. MEARS 2,710,591

MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Filed April 19, 1951 5 Sheets-Sheet 3

FIG. 4

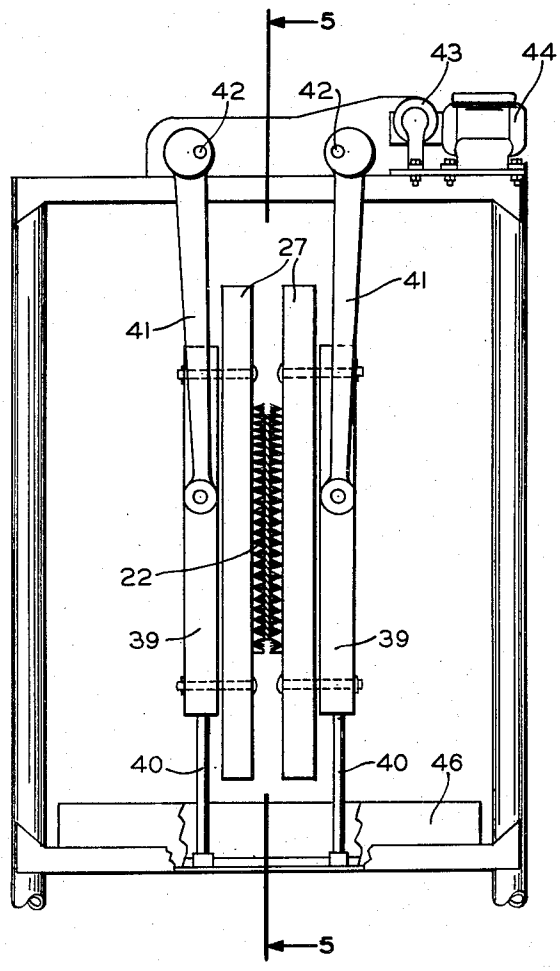



FIG. 5


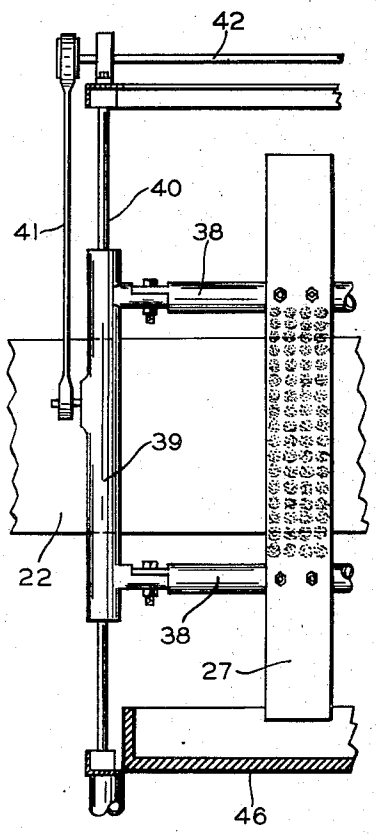



FIG. 6

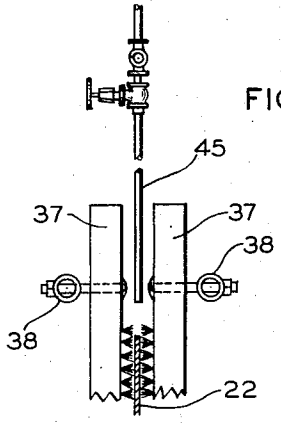


INVENTOR

NORMAN B. MEARS

BY John E. Strykes


ATTORNEY

June 14, 1955 N. B. MEARS 2,710,591

MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Filed April 19, 1951 5 Sheets-Sheet 4

FIG. 17

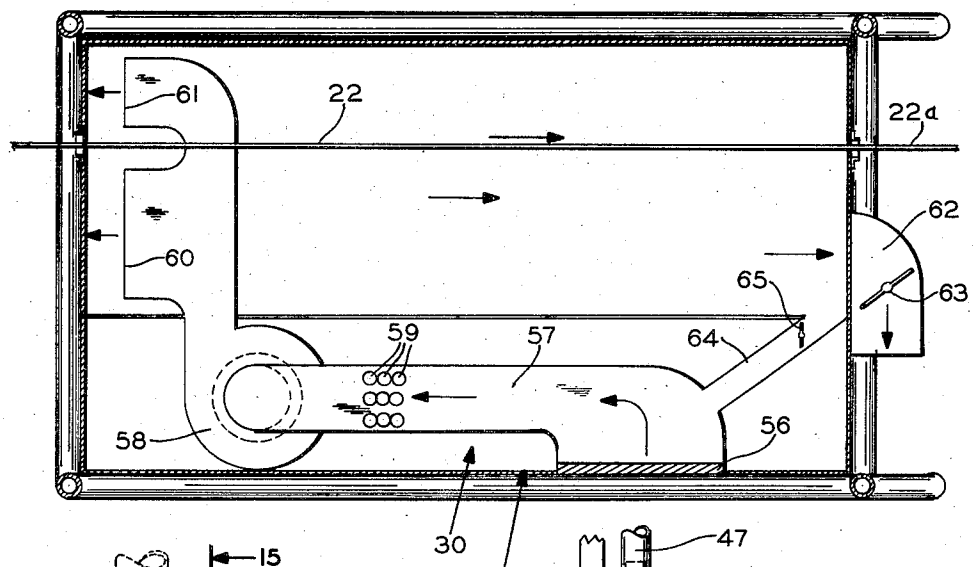

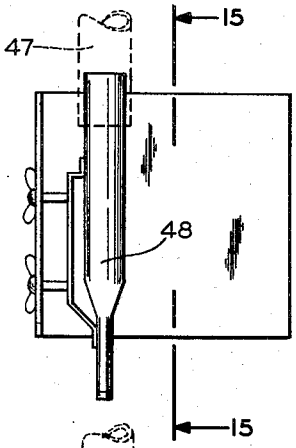




FIG. 14

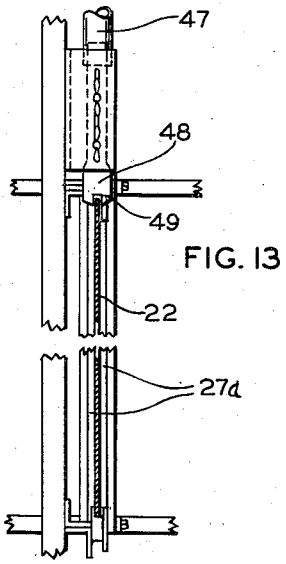
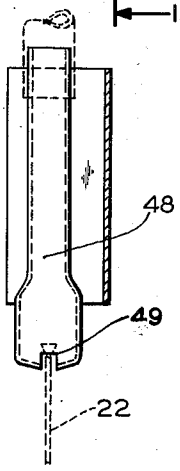



FIG. 13

FIG. 15



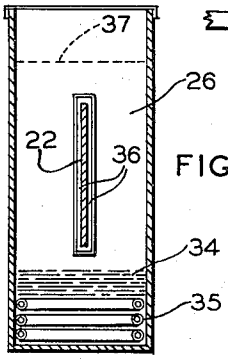




FIG. 16

INVENTOR

NORMAN B. MEARS

BY John E. Whyte

ATTORNEY

June 14, 1955 N. B. MEARS 2,710,591

MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Filed April 19, 1951 5 Sheets-Sheet 5

FIG. 18

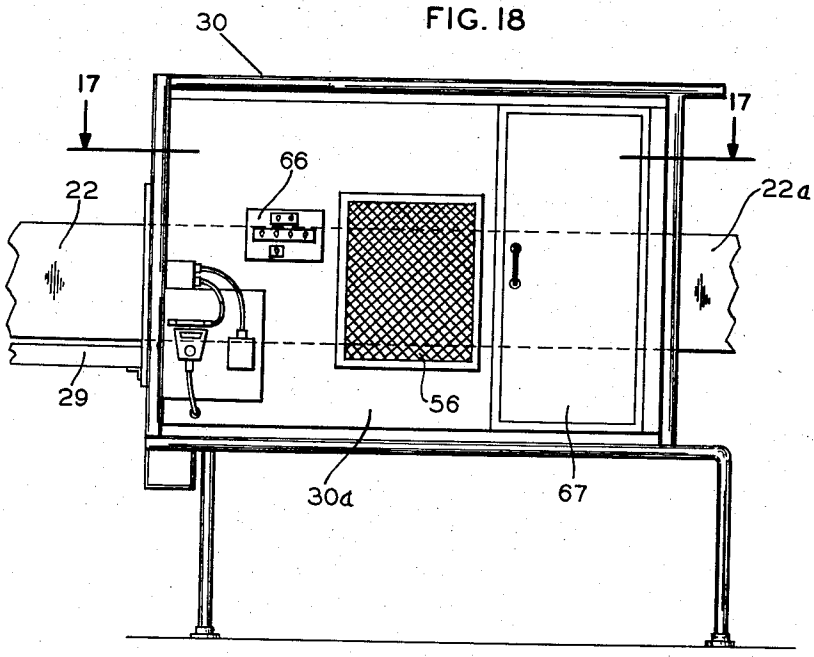



FIG. 19


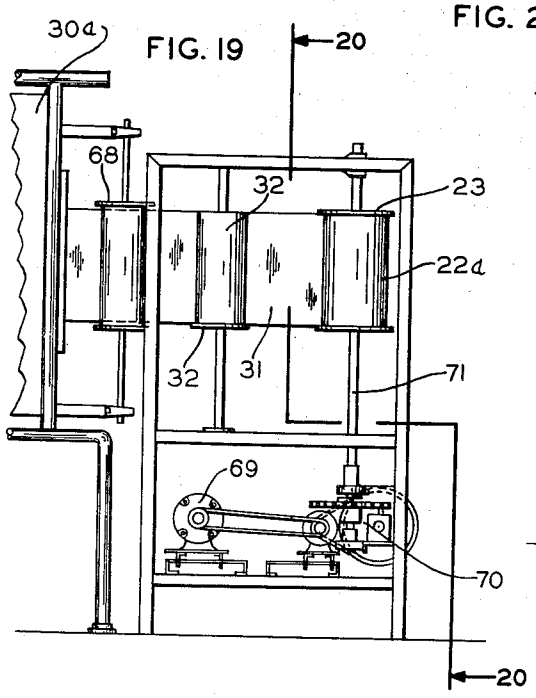



FIG. 20

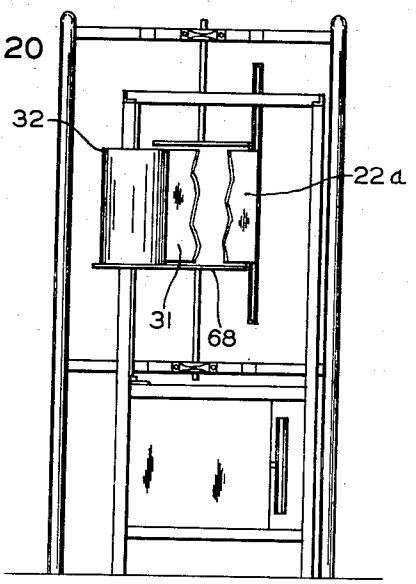


INVENTOR

NORMAN B. MEARS

BY John E. Stryker

ATTORNEY

United States Patent Office

2,710,591

Patented June 14, 1955



2,710,591

# MACHINE FOR PRODUCING LIGHT-SENSITIVE COATINGS ON METAL WEBS

Norman B. Mears, West St. Paul, Minn., assignor to Buckbee-Mears Company, St. Paul, Minn., a corporation of Minnesota

Application April 19, 1951, Serial No. 221,904

6 Claims. (Cl. 118—68)

In the manufacture of various articles of precision from thin metal blanks, sheets or webs requiring photographic reproduction of a pattern or design on the work, a large amount of hand work and time has heretofore been required in the preparation, coating and drying of the work preparatory to the photo-printing of the required design on the sensitized surface or surfaces. The present invention relates to an improved machine and method for performing such preliminary operations, including the coating and drying of the work.

It is an object of my invention to provide a machine which operates automatically to prepare the surfaces of thin metal webs and apply a uniform light-sensitive coating thereto whereby the cost of the coated product is reduced and a uniform, continuous coating of high quality is obtained.

A particular object is to provide a machine of the class described which is adapted to receive the web to be coated from a spool or reel and to move the web continuously along a determined path in such position as to expose one or both faces of the web for treatment in combination with devices positioned along the path of travel of the web for cleaning and scrubbing both faces or a selected face thereof and to form fine toothed surfaces thereon, then coating such surface or surfaces with a liquid light-sensitive material, then drying the coating material and finally winding the coated, dry web on a spool or reel from which it may be readily withdrawn for further treatment.

A further object is to provide an improved method for uniformly coating a thin, flexible metal web with a light sensitive material while moving the web continuously along a determined path and in a vertical plane, the method including the steps of delivering the coating in a liquid state to the upper edge of the web so that the liquid is caused to flow over both faces or a selected surface of the web, allowing the excess coating material to drain from the lower edge while removing accumulations of the coating from the lower longitudinal margin and thereafter drying the coating.

Among the articles of manufacture which may be improved and reduced in cost by the use of the present invention are apertured masks for television tubes, fine screens for mechanical separation of solid particles, reticles for fire control and sighting instruments and other articles requiring precise location of minute perforations in thin metal blanks. For such articles the metal web or sheet is less than .02 inch thick and is usually within the range .001 to .006 inch thick. Pure metals, e. g., copper, silver, nickle or tin are best suited for accurately controlled etching treatment and the web should be of uniform thickness. Thin webs of this character are difficult to handle because of their malleability, flexibility and general tendency to become locally deformed as by wrinkles, creases and other indentations which destroy the accuracy and utility of the product. By the present invention such detrimental deformations are eliminated and important economies



in the quality production of coated webs of any required width are obtained.

Referring to the accompanying drawings which illustrate my improved machine and method by way of example and not for the purpose of limitation:

Figure 1 is a diagrammatic plan view of the machine;

Fig. 2 is a side elevational view showing the portions of the machine extending from the feed roll to the coating mechanism and including the cleansing and scouring mechanism;

Fig. 3 is a fragmentary cross sectional view taken on the line 3—3 of Fig. 2;

Fig. 4 is a fragmentary cross sectional view taken on the line 4—4 of Fig. 2;

Fig. 5 is a fragmentary section taken on the line 5—5 of Fig. 4;

Fig. 6 is a fragmentary section taken on the line 6—6 of Fig. 2;

Fig. 7 is a side elevational view showing the coating mechanism;

Fig. 8 is a fragmentary cross sectional view taken approximately on the line 8—8 of Fig. 7;

Figs. 9 and 10 are side elevational and plan views respectively of the drain trough and associated devices for removing the excess coating;

Fig. 11 is a cross section taken on the line 11—11 of Fig. 9;

Fig. 12 is a fragmentary section taken on the line 12—12 of Fig. 11;

Fig. 13 is a section taken approximately on the line 13—13 of Fig. 7;

Fig. 14 is a detail side elevational view showing the nozzle for delivering the coating liquid to the web and the support therefor;

Fig. 15 is a section taken on the line 15—15 of Fig. 14;

Fig. 16 is a cross section taken through the degreasing chamber approximately on the line 16—16 of Fig. 2;

Fig. 17 is a diagrammatic horizontal sectional view through the drier taken on the line 17—17 of Fig. 18;

Figure 18 is a side elevational view of the drier;

Fig. 19 is a side elevational view showing the power-driven reel at the delivery end of the machine and associated mechanism, and

Fig. 20 is a cross sectional view taken approximately on the line 20—20 of Fig. 19.

Referring to the diagrammatic illustration of the machine and method shown in Fig. 1, the numeral 21 indicates a reel or spool from which a metal web 22 to be coated is continuously drawn. This web preferably extends in a vertical plane from the reel 21 to a power-driven reel 23 at the opposite end of the machine so that the longitudinal edges of the web extend horizontally, one above the other. Between the reels 21 and 23 the web 22 is supported in its upright position between pairs of rollers 24 and 25 which grip and confine the upper and lower margins of the web, leaving both faces thereof exposed for treatment. At it is withdrawn from the reel 21, the web 22 is first given a degreasing treatment in a chamber 26. This chamber may contain a gas such as trichlorethylene which reacts with any grease or oil that may be carried by the surface of the web to facilitate the subsequent thorough cleansing of the surfaces or the degreasing agent may be applied in the form of a spray or by brushing it on the surfaces to be cleansed.

After passing out of the degreasing chamber 26, the web 22 is supported by pairs of the rollers 24 and then passes through a cleansing section of the machine wherein pairs of brushes 27 are operated in engagement with opposite faces of the web while water and a suitable detergent and a fine abrasive material are applied to the

web. After thorough scouring and rinsing in the cleansing section of the machine the web passes to and through a coating and drainage section wherein a suitable light sensitive coating material is caused to flow over the faces of the web from a reservoir **28** and the excess liquid is recovered in a trough **29** extending along the lower edge of the web. From the coating section the web passes through a drier **30** in which filtered and heated air is directed over the coated surfaces to be dried. Finally the coated and dried web **22***a* passes to a reel **23** upon which it is wound, together with a protective web of paper **31** which is drawn from a roll **32** so that a continuous web of paper is interposed between successive convolutions of the web **22***a* on the reel **23**.

*Degreasing*

As shown in Fig. 2, the reel **21** is mounted on a vertical spindle **33** having suitable bearings in the frame of the machine. The degreasing chamber **26** (Figs. 2 and 16) may comprise a tank containing a liquid **34** such as trichlorethylene which may be applied in any suitable manner to the surfaces of the metal, e. g., by brushing, spraying, or as a gas. Since the degreasing agent boils at 180° F. to form a heavy gas it may be heated by a heating coil **35** in the bottom of the tank. The web **22** to be coated enters and leaves the chamber **26** through suitable vertically elongated slots therein and the slots are sealed by flexible members **36** engaging opposite faces of the web **22** in order to prevent the escape of the toxic gas.

*Cleansing*

From the degreaser the web **22** passes between pairs of the brushes **27** which are supported on pairs of horizontally extending bars **38**, as best shown in Figs. 2, 4, 5 and 6. The bars **38** are supported for vertical reciprocating movement, being connected at each end to vertically elongated slide members **39**, each slidable along a vertical guide rod **40**. Each of the members **39** is operatively connected to an arm **41** having an eccentric connection with a horizontal drive shaft **42**. A pair of the shafts **42** extend along the top of the supporting frame and are operatively connected through suitable speed reducing mechanism in a housing **43** to an electric motor **44**. Thus when the machine is in operation the motor **44** through its connections with the brushes **27**, causes these brushes to be given reciprocating movement with the bristles of the brushes at opposite faces of the web **22** in contact therewith.

Water is supplied and caused to flow downward between each pair of brushes and over the surfaces of the web **22** from a series of pipes **45**. A detergent, preferably including a fine abrasive material, is also supplied to the web between certain of the brushes **27** toward the receiving end of the cleansing section and clear wash water is then supplied as a spray to the web and brushes near the delivery end of this section. As a result of the treatment in the cleansing section of the machine, the web **22** is thoroughly cleaned and given a fine grained burr surface best suited to the adherence of the light sensitive coating subsequently applied in the machine. The used washing fluid, detergent and abrasive material flows from the lower edge of the web **22** and lower ends of the brushes **27** into a pan **46** and thence to waste. Soft rubber wipers or squeegees **27***a* (Figs. 7 and 13) are arranged to remove excess wash water from the web **22** as it passes to the coating section.

*Coating*

Referring particularly to Figs. 7–15 inclusive, a suitable cold top or hot top enamel, e. g., a glue top enamel, in liquid state is fed from the overhead tank **28** through a tube **47** to a nozzle **48** disposed to discharge a stream of the liquid upon the upper edge of the web **22** as the latter is advanced at a predetermined rate of speed. As best shown in Figs. 14 and 15, the nozzle **48** is formed with an aperture **49** at its lower end adapted to receive the upper margin of the web **22** and to direct the coating liquid over both faces of the web. The coating fluid is thus caused to cover both faces of the web and the excess drains from the lower edge into the elongated trough **29**. Accumulations of the liquid in this trough are withdrawn through a tube **50** and are returned by a motor-driven pump **51** (Figs. 7 and 8) and tube **52** to the tank **28**.

Spaced along the trough **29** are a plurality of wiping devices **53** in the nature of squeegees which engage both faces of the lower margin of the web **22** to positively remove the excess of the liquid which tends to adhere and accumulate along the lower margin. As shown in detail in Figs. 11 and 12, each of the wiping devices **53** is provided with a flexible elastic blade **54**, preferably constructed from rubber or rubber-like material, and formed with a vertical slot **55** extending to the upper edge of the blade to receive the lower margin of the web **22**. As the lower margin of the web moves along in the slots **55**, accumulations of the coating material are positively removed by the several blades **54** from which the excess liquid passes by gravity into the trough **29**. The blocks supporting the blades **54** are readily removable from U-shaped holders **53***a* fixed on the side walls of the trough **29**.

Any of a number of commercially available or suitable light sensitive enamels may be employed as the coating material. For example, a hot top solution of glue and ammonium bichromate has been used with excellent results. When dry it forms a sufficiently durable coating and is sufficiently stable to permit storage of the rolls of coated metal for periods of a number of weeks when it is convenient or desirable to defer the photo-printing for such periods.

*Drying*

When the web **22** reaches the delivery end of the coating section, the light sensitive coating is in a tacky, non-fluid condition ready for drying and the web passes into the drying chamber indicated generally by the numeral **30**. Since details of the dryer are not claimed herein, they are merely illustrated diagrammatically. As best shown in Figs. 17 and 18, the dryer has a generally rectangular casing **30***a* which is formed with an inlet opening for air covered by a suitable filter **56** through which the air is drawn into a conduit **57** within the casing. This conduit extends to the intake of a power-driven centrifugal fan **58** and the air is heated by a multiplicity of electrical heating elements **59** located in the conduit **57**. The heated air is blown from outlets **60** and **61** located at one end of the heating chamber so that the air is caused to pass along opposite surfaces of the web **22** during its passage through the chamber. From the opposite end of the drying chamber the air may be discharged through a conduit **62** to atmosphere under control of a damper **63** and a portion of the air may be returned to the conduit **57** through a branch conduit **54** under control of a damper **65**. Suitable controls for the fan motor and heating elements are indicated at **66**, on the exterior of the dryer, which is also provided with an instrument indicating the temperature within the heating chamber and an access door **67**. Upon emerging from the drying chamber the light-sensitive coating on the web **22***a* is sufficiently hard and dry to permit the winding of the web on the reel **23**.

*Winding mechanism*

As shown in Figs. 19 and 20, the web **22***a*, as it emerges from the dryer **30**, passes partly around a guide roller **68** and thence to the periphery of the reel **23**. This reel is continuously rotated at a predetermined controlled speed through suitable connections with an electric motor **69**, including speed reducing mechanism **70** and a friction drive connection with a vertical shaft **71** on which the

reel 23 is fixed. In order to protect the sensitized surfaces of the coated web, the web 31 of paper or other suitable material is continuously drawn from a roll 32 and is wound between convolutions of the web 22*a* on the reel 23.

In order to obtain the desired smooth uniform coating on the web it is important to allow time for the excess liquid coating to drain from the web surfaces, with the aid of the wiper devices 53, and also time for the light-sensitive material remaining on the web to become tacky and non-fluid before the web passes into the dryer 30 where the accelerated, final stage of drying takes place. The time required for the preliminary drying at room temperature is, of course, dependent upon the liquid solvent content of the coating material and the room temperature and humidity. The rate of travel of the web is adjusted to compensate for the atmospheric conditions and liquid content of the coating material and so that the required preliminary drying will take place during the travel of any given point on the web from the coating nozzle 48 to the drying chamber 30. It has been found that in the production of television masks for which webs of widths within the range 6 inches to 30 inches and where a hot top enamel such as that hereinbefore described is employed, a suitable rate of travel of the web is between one foot and two feet per minute and that the drainage and preliminary drying at room temperature should be continued for a period of from 3 to 6 minutes, depending on atmospheric conditions.

Sufficient tension to retain the web in its vertical position and out of contact with the adjacent machine parts as it passes along the coating and drying sections of the machine is created by the friction or drag of the scrubbing and cleansing devices and by the turning of the feed reel 21 on its support. Care is thus taken to avoid contact with the coated surfaces of the web until after they have been thoroughly dried.

Having described my invention, what I claim as new and desire to protect by Letters Patent is:

1. A machine of the class described comprising, means for supporting a metal web with a face exposed for treatment, said supporting means engaging the web solely along its longitudinal margins, power-actuated means for moving said web while so supported along a determined path, means for cleansing said face of the web while in motion along said path, means for delivering to an upper marginal zone only of the cleansed web a stream of liquid light-sensitive material whereby coating of said face of the web is effected by gravity flow of said material crosswise of the movement of the web along said path and means for drying said coating during the movement of the web along said path.

2. A machine of the class described comprising, means for supporting in a substantially vertical plane a web to be coated, said means defining a path along which said web may be moved, a power-actuated brush engaging a surface of said web, means for applying a cleansing liquid to said surface, means for delivering to the upper margin of the cleansed surface of said web a liquid, light-sensitive material, a trough extending along and below the lower edge of said web to receive the excess of said liquid material, a wiper engaging a relatively narrow lower marginal portion of said web for positively removing adhering coating material therefrom, means for drying the coated surface of said web and means for winding the coated and dried web on a reel while moving the web along said path.

3. A machine of the class described comprising, pairs of rollers disposed to support in a substantially vertical plane a web to be coated, said rollers defining a path along which said web may be moved, power-actuated brushes engaging opposite faces of the web carried by said rollers, means for applying a cleansing liquid to the surfaces of said web, means for delivering to the upper margins of the cleansed surfaces of said web a liquid light-sensitive material, a trough extending along and below the lower edge of said web to receive the excess of said liquid material, means carried by said trough and engaging a narrow marginal portion of said web for positively removing adhering coating material, means for drying the coated surface of said web and means for winding the coated and dried web on a reel while moving the web continuously along said path.

4. A machine of the class described comprising, means for guiding a web to be coated in a substantially vertical plane along a determined path, means disposed along said path for cleansing a face of the web, means for delivering to an upper marginal zone only of the cleansed web a liquid light-sensitive material whereby coating of said face of the web by free gravity flow of said material crosswise of the direction of movement of the web along said path is effected, means for drying the coated web and power-actuated means for moving the web along said path.

5. A machine of the class described comprising, means for supporting in a substantially vertical plane a web to be coated, said means defining a path along which said web may be moved, means disposed along said path for cleansing a face of the web, means for delivering to an upper marginal zone only of the cleansed web a liquid light-sensitive material whereby coating of said face by gravity flow of said material crosswise of the movement of the web along said path is effected, a wiper engaging a relatively narrow lower marginal portion of the web for positively removing adhering coating material therefrom, means for drying the coated web and a power-actuated means for moving the web along said path.

6. A machine of the class described comprising, means for guiding a web to be coated in a substantially vertical plane, said means defining a path along which said web may be moved and making contact with the margins only of the web, means for delivering to marginal zones extending along the upper edge only of the web during its movement along said path a liquid light-sensitive material whereby coating of both faces of the web by gravity flow of said material crosswise of the movement of the web along said path is effected, means for drying the coated web during its movement along said path, a power-actuated reel disposed to receive and wind the coated and dried web thereon and means for maintaining the web under tension and all portions between its margins out of contact with the machine during the coating and drying of the web.

**References Cited** in the file of this patent

UNITED STATES PATENTS

| | | |
|---|---|---|
| 1,597,099 | Mitchell | Aug. 24, 1926 |
| 2,235,978 | Braucher | Mar. 25, 1941 |
| 2,242,416 | Campbell | May 20, 1941 |
| 2,279,686 | Kerlin | Apr. 14, 1942 |
| 2,376,371 | Lowe et al. | May 22, 1945 |
| 2,469,123 | Martin | May 3, 1949 |
| 2,476,240 | Famulener | July 12, 1949 |