




(11) (21) (C) **2,221,932**
(86) 1996/05/17
(87) 1996/11/28
(45) 2001/03/27

(72) ARTHUR, John Willins, GB
(73) RACAL-MESL LIMITED, GB
(51) Int.Cl.⁶ H01P 5/00, H01P 1/20
(30) 1995/05/22 (9510829.6) GB
(54) **COUPLEUR HAUTE FREQUENCE**
(54) **RADIO FREQUENCY COUPLER**

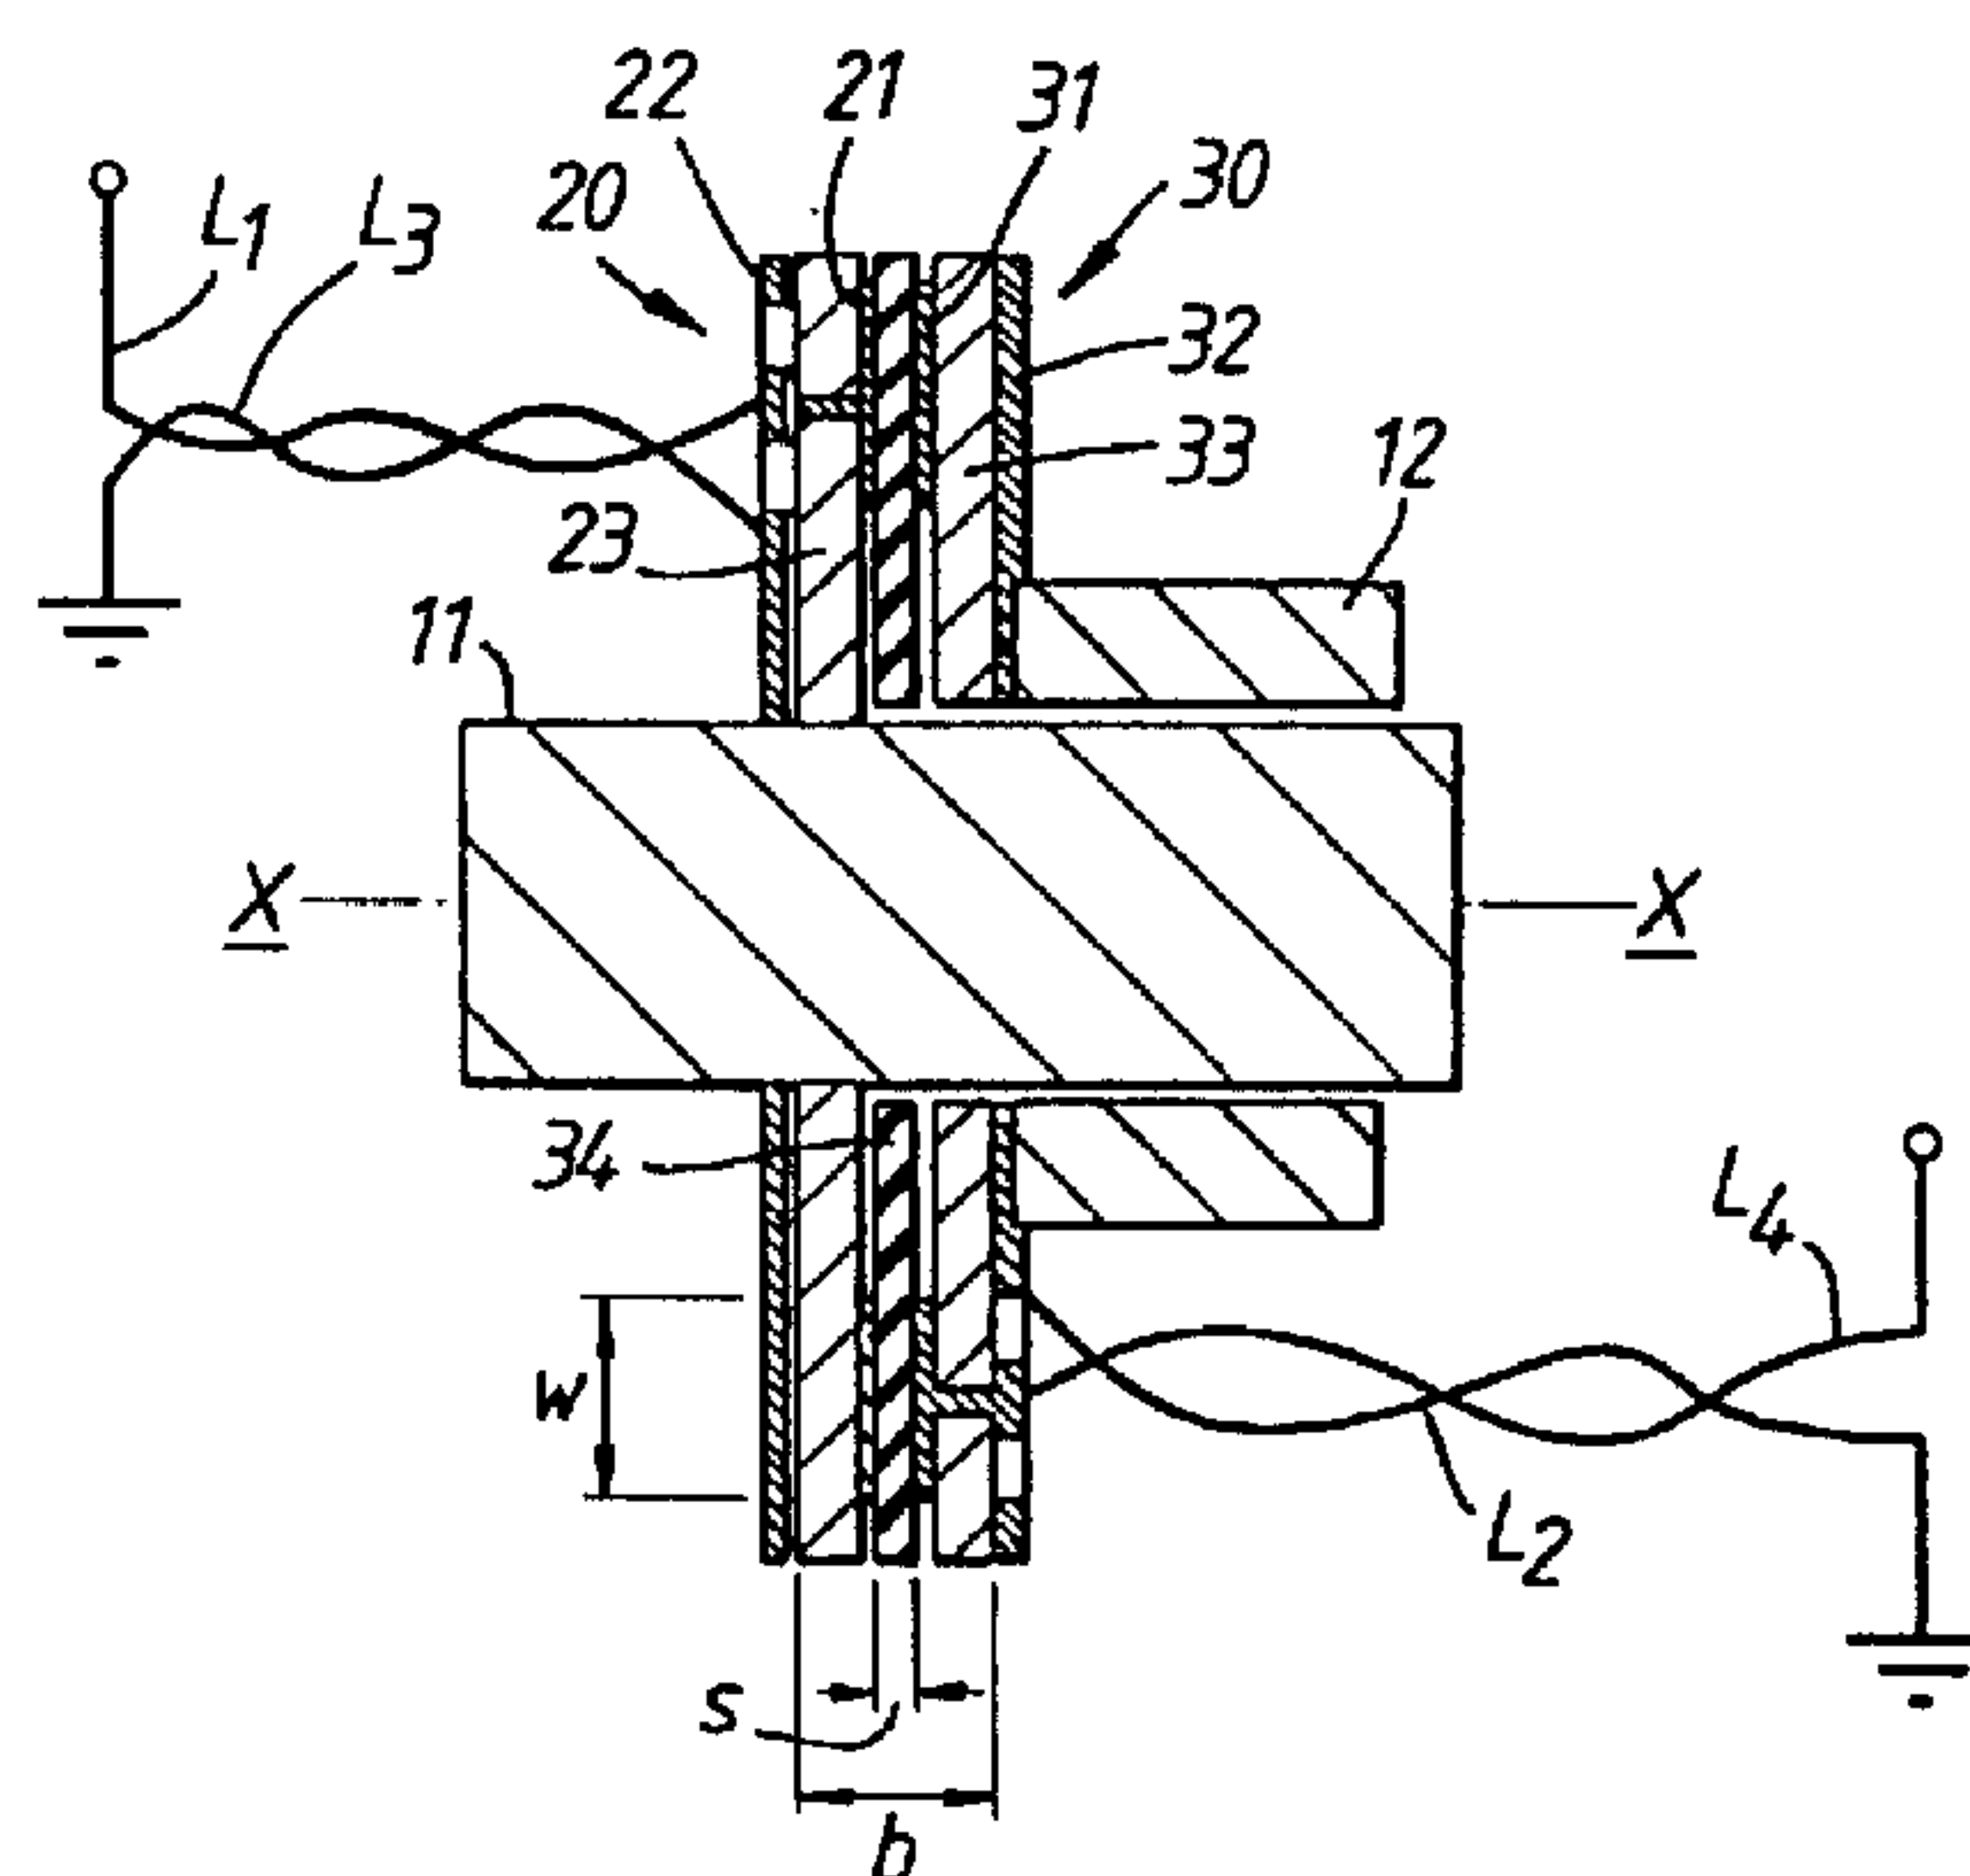


(57) Un coupleur haute fréquence (H.F.) comprend une première piste électroconductrice (21) pourvue d'une paire de terminaisons et d'une seconde piste électroconductrice (31) pourvue également d'une paire de terminaisons. Selon un mode de réalisation (figure 1), les première et seconde pistes (21, 31) sont courbes, la première (21) étant montée sur une carte (23) de circuit fixée à un arbre rotatif (11) et la seconde (31) étant montée sur une carte (33) de circuit supportée par un palier coaxial par rapport auquel l'arbre peut tourner. Les deux pistes (21, 31) se trouvent dans une relation de chevauchement radial. Selon un autre mode de réalisation (figure 2), les deux pistes (21, 31) sont montées sur des manchons coaxiaux. Le coupleur haute fréquence est utilisé pour faire passer une énergie haute fréquence d'un premier circuit fixé à l'arbre à un second circuit par rapport auquel l'arbre tourne. L'invention se rapporte également à un filtre coupe-fréquences accordable.

(57) A radio frequency (RF) coupler comprises a first electrically conductive track (21) having a pair of terminations and a second electrically conductive track (31) having a pair of terminations. In one embodiment (Figure 1), the first and second tracks (21, 31) are arcuate, the first track (21) being mounted on a circuit board (23) fixed to a rotary shaft (11) and the second track (31) being mounted on a circuit board (33) supported on a coaxial bearing relative to which the shaft rotates. The two tracks (21, 31) are in radially-overlapping relationship. In another embodiment (Figure 2), the two tracks (21', 31') are mounted on coaxial sleeves. The RF coupler is used to transfer RF power from a first circuit on the shaft to a second circuit relative to which the shaft can rotate. Also described is a tunable notch filter.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H01P 1/06, 1/20	A1	(11) International Publication Number: WO 96/37921 (43) International Publication Date: 28 November 1996 (28.11.96)
(21) International Application Number: PCT/GB96/01193 (22) International Filing Date: 17 May 1996 (17.05.96) (30) Priority Data: 9510829.6 22 May 1995 (22.05.95) GB (71) Applicant (for all designated States except US): RACAL-MESL LIMITED [GB/GB]; Lochend Industrial Estate, Newbridge, Edinburgh EH28 8LP (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): ARTHUR, John, Willins [GB/GB]; 85 Hillview Road, Corstorphine, Edinburgh EH12 8QE (GB). (74) Agent: MATHISEN MACARA & CO.; The Coach House, 6/8 Swakeleys Road, Ickenham, Uxbridge, Middlesex UB10 8BZ (GB).		(81) Designated States: AU, CA, CZ, GB, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: RADIO FREQUENCY COUPLER (57) Abstract A radio frequency (RF) coupler comprises a first electrically conductive track (21) having a pair of terminations and a second electrically conductive track (31) having a pair of terminations. In one embodiment (Figure 1), the first and second tracks (21, 31) are arcuate, the first track (21) being mounted on a circuit board (23) fixed to a rotary shaft (11) and the second track (31) being mounted on a circuit board (33) supported on a coaxial bearing relative to which the shaft rotates. The two tracks (21, 31) are in radially-overlapping relationship. In another embodiment (Figure 2), the two tracks (21', 31') are mounted on coaxial sleeves. The RF coupler is used to transfer RF power from a first circuit on the shaft to a second circuit relative to which the shaft can rotate. Also described is a tunable notch filter.		

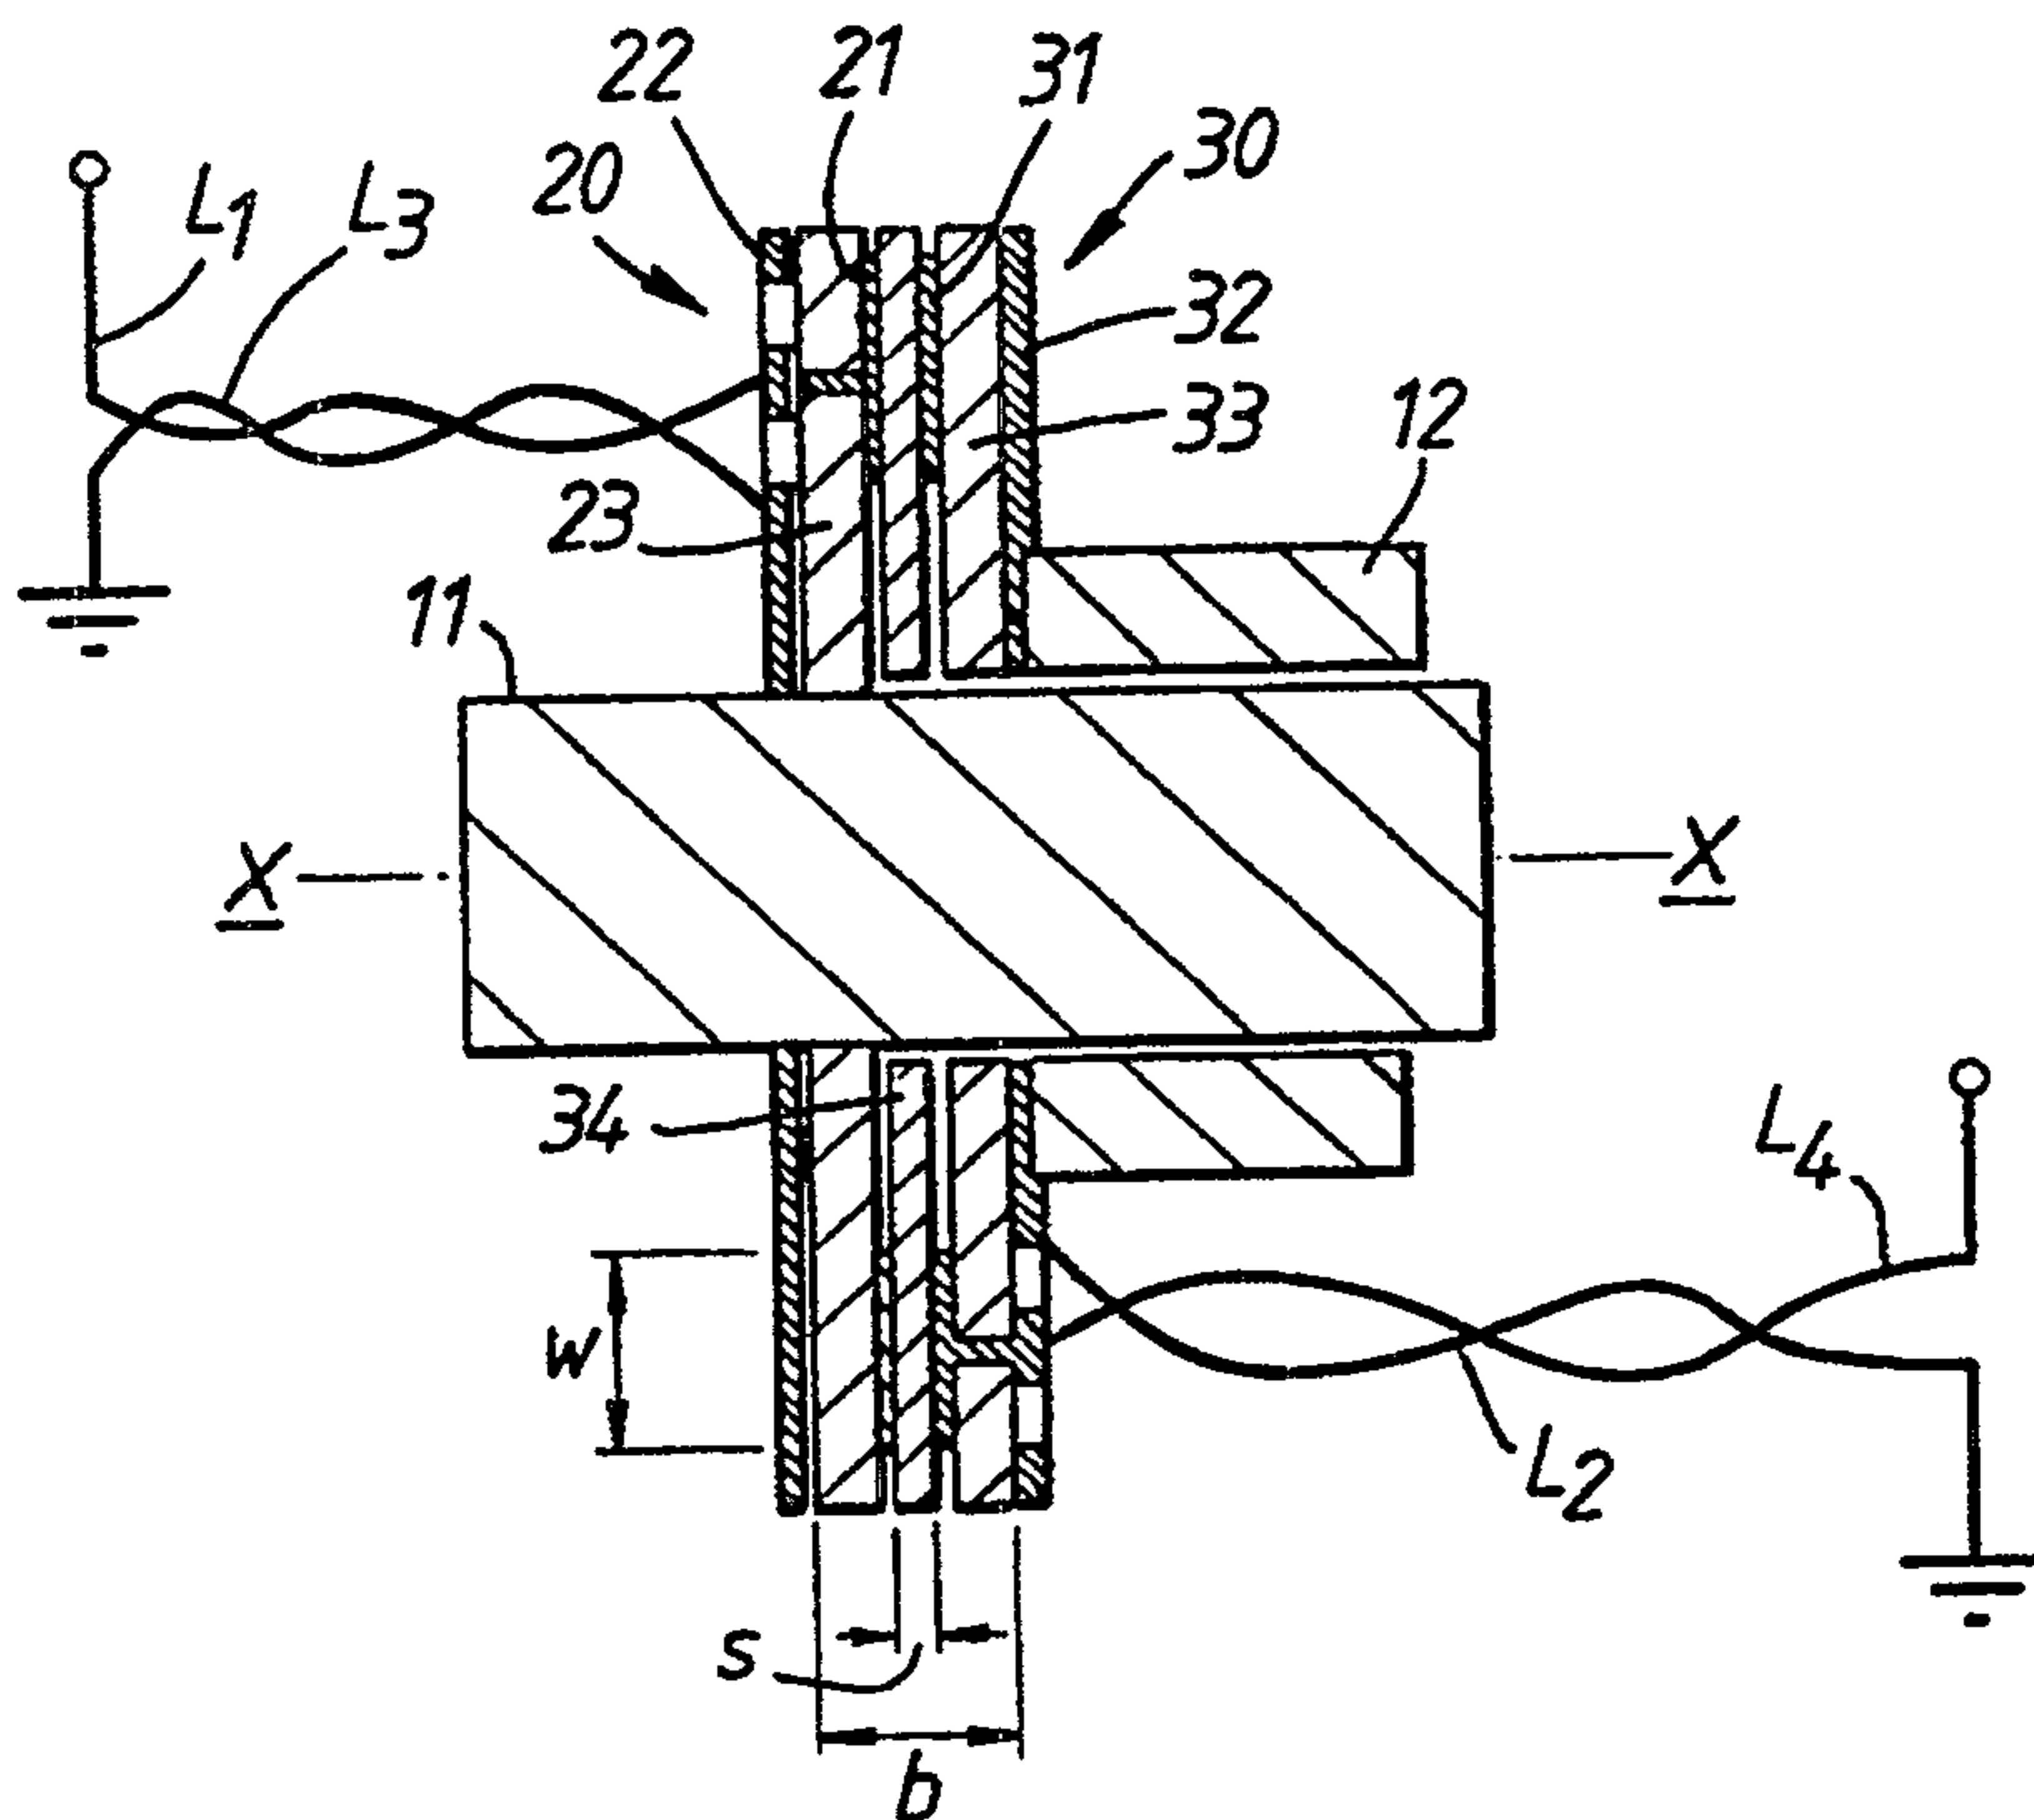

RADIO FREQUENCY COUPLER**BACKGROUND OF THE INVENTION**

This invention relates to a radio frequency (RF) coupler and the invention relates particularly, though not exclusively, to an RF coupler for transferring RF power between a first circuit on a rotary shaft and a second circuit relative to which the shaft can rotate.

The invention also relates to a tunable notch filter.

International patent application no. PCT/GB91/00328 discloses an apparatus for measuring dynamic torque in a rotatable shaft. The apparatus comprises a surface acoustic wave (SAW) transducer mounted on the shaft, and requires coupling means for the efficient transfer of RF power between the transducer and processing circuitry which does not rotate with the shaft.

SUMMARY OF THE INVENTION

According to one aspect of the invention there is provided a radio frequency (RF) coupler for transferring RF power between a first circuit on a rotary shaft having a rotation axis and a second circuit relative to which the shaft can rotate, the RF coupler comprising, a first RF transmission line arranged to rotate with said rotary shaft about said rotation axis and for connection to said first circuit, and a second RF transmission line relative to which said first RF transmission line can rotate and for connection to said second circuit, wherein said first and second RF transmission lines comprise first and second electrically conductive tracks arranged coaxially around said rotation axis in substantial, mutually overlapping relationship to provide RF coupling between the first and second RF transmission lines, each said electrically conductive track having a gap defining a pair of ports in the track, one said port being connectable to a respective said circuit and another said port being connected to a termination for reflecting RF power.

According to another aspect of the invention there is provided a radio frequency (RF) coupler comprising a first RF transmission line mounted on a rotary shaft having a rotation axis and a second RF transmission line relative to which the first RF transmission line can rotate, wherein the first and second RF transmission lines comprise first and second electrically conductive tracks arranged coaxially around said rotation axis in substantial overlapping relationship, each said track having a gap defining a pair of ports in the track, one of said ports being connected to a termination for reflecting RF power and each said track having a periodic undulation around the rotation axis, the undulation being formed by an integer number n of segments each subtending an angle

$$\Delta = \frac{360^\circ}{n}$$

at the rotation axis, and said gap is formed in one of the segments thereof.

According to a yet further aspect of the invention there is provided a notch filter tunable to a desired frequency within a predetermined RF frequency band, the notch filter comprising,

a first RF transmission line and a second RF transmission line, wherein said first and second RF transmission lines respectively comprise first and second electrically conductive tracks arranged coaxially around a rotation axis in substantial mutually overlapping relationship to provide RE coupling between the first and second RF transmission lines,

each said electrically conductive track having a gap defining a pair of ports in the track, one of said ports being connectable to an input or an output of the notch filter and another of said ports being connected to a termination for reflecting RF power and said first and second electrically conductive tracks being capable of relative rotation about said rotation axis to tune the notch filter to the desired frequency.

The first and second electrically conductive tracks may comprise continuous electrically conductive layers or films formed by any suitable deposition technique such as screen printing or electrodeposition. Alternatively the tracks may be turned or wire wound.

DESCRIPTION OF THE DRAWINGS

Embodiments according to the invention are now described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a longitudinal sectional view through one embodiment of an RF coupler according to the invention;

Figure 2 shows a longitudinal sectional view through another embodiment of an RF coupler according to the invention;

Figure 3 shows a simplified representation of the RF couplers shown in Figures 1 and 2;

Figure 4 is a schematic representation of the transmission lines 20, 30 shown in Figure 3;

Figure 5 is a consolidated representation of the transmission lines shown in Figure 4;

Figure 6 shows the coupler response for a 3dB coupler having a line length $\theta = \frac{\pi}{2}$;

Figure 7 shows the coupler response for a 3dB coupler having a reduced line length;

Figure 8 shows the coupler response for a 4dB coupler having a reduced line length,

Figure 9 shows an alternative form of track for use in a rotary coupler in accordance with the invention,

Figures 10(a) to 10(c) illustrate different modulation line shapes obtained using tracks of the form shown in Figure 9,

Figures 11a and 11b show nulls in the coupler response for two different values of rotation angle, and

Figure 12 shows a tunable notch filter.

DESCRIPTION OF PREFERRED EMBODIMENTS

Figures 1 and 2 show two alternative embodiments of an RF coupler according to the invention.

In each embodiment, the RF coupler is required to transfer RF power between a first RF circuit (not shown in the drawings) mounted on a rotary shaft 11 and a second RF circuit (also not shown) relative to which the shaft 11 can rotate.

The RF coupler comprises two coupled transmission lines 20, 30. Line 20 is mounted on the rotary shaft 11 for rotation therewith, whereas line 30 is mounted on a fixed coaxial bearing 12.

In the embodiment of Figure 1, each transmission line 20, 30 comprises an arcuate, electrically-conductive track 21, 31 and a ground plane 22, 32 which are provided on opposite sides of an annular circuit board 23, 33. One of the circuit boards, 23 is fixed to the rotary shaft 11 and the other circuit board 33 is fixed to the bearing 12. The circuit boards 23, 33 are assembled so that the tracks 21, 31 and the ground planes 22, 32 lie in mutually parallel planes, orthogonal to the rotation axis x-x of shaft 11, with the tracks 21, 31 facing inwardly. The tracks are separated by a dielectric spacer 34. Alternatively the tracks may be separated by an air space.

Each track 21, 31 is in the form of an annulus and has a narrow gap defining a discontinuity in the annulus. The gaps are not shown in Figure 1, but are best illustrated in the schematic representation of transmission lines 20, 30 shown in Figure 3, where the gaps are referenced G_1 and G_2 respectively.

The opposite ends of track 21 form a pair of terminations in the track and define ports P_1 and P_3 in the first transmission line 20. Likewise, the opposite ends of track 31 form a pair of terminations in the track and define ports P_2 , P_4 in the second transmission line 30.

In this embodiment, ports P_1 and P_4 are connected to the first and second RF circuits via lines L_1 and L_4 respectively, -----

whereas ports P_2 and P_3 are both connected to a short circuit via the ground planes 22, 32 and lines L_2 , L_3 . Alternatively, ports P_2 and P_3 could be open circuit.

The tracks 21, 31 have the same radial dimensions, and they are arranged coaxially on the rotation axis x-x of shaft 11. Accordingly, the tracks remain in substantial, radially-overlapping relationship over a complete revolution of the shaft.

The coupling between the transmission lines 20, 30 depends, inter alia, upon such factors as the radial width w , axial spacing s and the degree of overlap between the respective tracks 21, 31.

The embodiment shown in Figure 2 has a different geometry. In this case, the rotary shaft 11 and the fixed, coaxial bearing 12 have closely-fitting, cylindrical, dielectric sleeves 35, 36. One electrically conductive track 21' is provided on the outer surface of sleeve 35 and another electrically conductive track 31' is provided on the inner surface of sleeve 36, and the tracks 21', 31' are separated by a cylindrical dielectric spacer 37 or, alternatively, by an air space.

Tracks 21', 31' are in the form of coaxial cylinders. However, as in the embodiment of Figure 1, each track has a narrow gap creating a discontinuity in the cylinder wall and forming a pair of terminations in the track. Again, the opposite ends of track 21' define ports P_1 and P_3 in transmission line 20 and the opposite ends of track 31' define ports P_2 and P_4 in transmission line 30.

The tracks 21', 31' have the same axial width w and are aligned in the axial direction. Accordingly, they will remain in substantial, axially-overlapping relationship throughout a complete revolution of the rotary shaft 11.

In this embodiment, ground planes are provided by the outer surface 23' of shaft 11 and the inner surface 33' of bearing 12, and these components are themselves connected to a short circuit.

From an operational standpoint, the embodiments described with reference to Figures 1 and 2 are the same. However, the embodiment described with reference to Figure 1 is preferred if there is radial play between the rotary shaft 11 and the coaxial bearing 12, whereas the embodiment described with reference to Figure 2 is preferred if there is axial play between these components.

An analysis based on the theory of coupled transmission lines suggests that the coupler response may vary as shaft 11 rotates, and it is of course desirable that such variation be made as small as is possible.

Figure 3 shows a simplified representation of the RF couplers described with reference to Figures 1 and 2. As already explained, each transmission line 20, 30 has a narrow gap G_1, G_2 forming a pair of terminations. In Figure 3, the gaps G_1, G_2 are shown to subtend an angle Ψ at the rotation axis $x-x$. The magnitude of Ψ will, of course, vary as shaft 11 rotates.

The analysis which follows takes account of RF power reflected at the interfaces presented by the terminations.

Figure 4 is a highly schematic representation of the transmission lines 20,30 shown in Figure 3. In this representation, each transmission line 20,30 has been separated into two distinct sections; namely, a section I within the included angle ψ and a section II associated with the excluded angle, $(360^\circ - \psi)$.

These sections I and II have respective line lengths ϕ and $\theta - \phi$.

Here, θ is the line length, expressed in radians, corresponding to the total length l of each transmission line 20,30 and is defined by the expression

$$\theta = \frac{2\pi}{\lambda} l \quad (1)$$

where λ is the wavelength of RF radiation propagating in the coupler.

Similarly, ϕ is the line length, again expressed in radians, corresponding to the section of transmission line within the included angle ψ , whereas $\theta - \phi$ is the line length associated with the excluded angle $(360^\circ - \psi)$. By way of illustration, if $\theta = \frac{\pi}{2}$ and $\psi = 180^\circ$, then ϕ and $\theta - \phi$ are both $\frac{\pi}{4}$.

Referring again to Figure 4, $\tau(\phi)$ and $\tau(\theta - \phi)$ are coefficients representing transmitted RF power in the respective sections

I,II of transmission line, whereas $\rho(\phi)$ and $\rho(\theta-\phi)$ are coefficients representing reflected power in these sections of transmission line.

The values of these coefficients depend on the rotation angle ψ and affect the coupling between the two transmission lines 20,30.

Figure 5 is a consolidated representation of the transmission lines 20,30 derived from Figure 4, and shows coefficients corresponding to the resultant RF power transferred between different pairs of ports.

From this representation it can be determined that the coefficient S_{41} , representing RF power transferred between ports P_1 and P_4 , is given by the expression

$$S_{41} = 2(\rho(\phi)t(\theta-\phi) + t(\phi)\rho(\theta-\phi)) \cdot (t(\phi)t(\theta-\phi) + \rho(\phi)\rho(\theta-\phi)) \quad (2)$$

Expressed generally,

$$\rho(\alpha) = \frac{\rho(1 - e^{-j2\theta})}{(1 - \rho^2 e^{-j2\theta})} \quad (3)$$

and

$$t(\alpha) = \frac{(1 - \rho^2)e^{-j2\theta}}{1 - \rho^2 e^{-j2\theta}} \quad (4)$$

where $\alpha = \phi$ or $\theta - \phi$,

$e^{-j\theta}$ is the propagation phase factor for the transmission

lines, and

ρ is the reflection coefficient corresponding to the characteristic impedance Z_{oe} of the coupled transmission lines, given by the expression

$$\rho = \frac{Z_{oe} - Z_o}{Z_{oe} + Z_o} \quad (5)$$

where Z_o is the system characteristic impedance (assumed to be 50Ω , although other values of characteristic impedance could be used).

It can be shown that the RF couplers described with reference to Figures 1 and 2 both have a characteristic impedance Z_{oe} given by the expression

$$Z_{oe} = \frac{188.3}{\sqrt{\epsilon}} \left(\frac{\frac{w}{b}}{1 - \frac{s}{b}} + k + 0.4413 \right)^{-1} \quad (6)$$

where ϵ is the dielectric constant,

w, b and s having the meanings assigned to them in the drawings, and

$$k = \frac{1}{\pi} \left[\ln \left(\frac{b}{b-s} \right) + \left(\frac{s}{b-s} \right) \ln \left(\frac{b}{s} \right) \right] \quad (7)$$

By combining equations (2)-(7) above, the transfer coefficient (S_{41}), and so the coupler response, can be determined for a complete revolution of the rotary shaft 11, i.e. for values of ψ in the range from 0° to 360° .

By way of illustration, these determinations have been made using parameters based on a standard 3dB hybrid coupler having fixed transmission lines, which requires that $\theta = \frac{\pi}{2}$ and $|r(\theta)| = |\rho(\theta)|$. By equating equations (3) and (4), and applying equation (5), it can be seen that the requirement that $|r(\theta)| = |\rho(\theta)|$ leads to a reflection coefficient ρ of 0.414, corresponding to a characteristic impedance Z_{oc} of 120.7Ω (assuming $Z_0 = 50\Omega$).

Figure 6 shows the resultant coupler response. This shows that when $\psi = 0^\circ, 360^\circ$ i.e. the terminations are aligned, the coupler is effectively lossless. However, as ψ increases the coupling between the transmission lines becomes progressively worse and the response falls, dropping to a minimum value of -4dB when $\psi = 180^\circ$.

Surprisingly, it is found that the coupler response can be significantly improved if the line length θ is reduced from the standard value, $\frac{\pi}{2}$. In fact, for a 3dB coupler the optimum line length is found to be only 62% of the standard value. Figure 7 shows the improved coupler response, which is never less than -0.16dB. Due to the periodic nature of the frequency response of couplers in general, longer line lengths, periodic in π , could alternatively be used. Therefore, in general the optimum line length will differ significantly from $(n + \frac{1}{2})\pi$, where n is an integer.

It will, of course, be appreciated that in an alternative implementation of the present invention, the RF coupler may have transmission lines that are more or less tightly coupled

than is the case in a 3dB coupler.

Less tightly coupled transmission lines may be more appropriate where manufacturing tolerances do not permit a very narrow spacing s between the transmission line tracks. In the case of a 4dB coupler, the optimum line length is found to be 93% of the standard value, $\frac{\pi}{2}$. As shown in Figure 8, this coupler still has a useful response which is never less than 0.37dB.

In general, couplers having loosely coupled transmission lines have smaller characteristic impedances Z_{oc} . However, for values of $Z_{oc} \leq 97.7\Omega$ optimisation of the line length θ to a value different from the standard value, $\frac{\pi}{2}$ is not possible, because the latter value always gives the optimum result. Nevertheless, for a coupler having a characteristic impedance of $Z_{oc} = 97.7\Omega$ the variation of coupler response with rotation angle ψ is still only 0.47 dB.

In the embodiment of Figure 1, each track 21,31 is in the form of an annulus. In a different embodiment, shown in Figure 9, each track is constellated being made up of an integer number n of identical segments, where each segment subtends an angle $\Delta = \frac{360^\circ}{n}$.

The two tracks are identical so that if the rotation angle $\psi = 0^\circ$ or is an integer number of Δ (i.e. $\psi = k\Delta$) they will be in perfect overlapping relationship, giving the optimum coupling. As the rotation angle ψ changes from this value, the extent of overlap is reduced and the coupling between the tracks

decreases, the coupling being a minimum when the rotation angle ψ is a half integer multiple of Δ (i.e. $\psi = (k + \frac{1}{2})\Delta$).

With this arrangement, the coupler response will be modulated at a frequency of n cycles for each revolution of the rotary shaft 11, and so provides a measure of the rotation angle ψ .

The line shape of the modulation depends upon the shape of the segments in the tracks. Figure 10a shows the modulation line shape derived using triangular segments of the form shown in Figure 9, Figure 10b shows the comparatively smooth modulation line shape obtained using relatively shallow triangular segments, and Figure 10c shows the line shape obtained using segments having a castellated, i.e. square or rectangular profile, and in this case the phase as well as the amplitude is modulated.

In another embodiment, two sets of tracks 21,31 are provided, one track in each set being mounted on the rotary shaft 11 and the other track in each set being mounted on the fixed bearing 12. The input to, and the output from the coupler are connected to tracks which are either both mounted on the rotary shaft 11 or both mounted on the fixed bearing, and the remaining tracks are electrically interconnected. With this arrangement RF power is transferred from the input to the output via the electrically interconnected tracks.

In one implementation of this embodiment, the tracks 21,31 in one of the sets are constellated, as already described, whereas the tracks in the other set are annular, as described with reference to Figure 1. As described with reference to

Figures 9 and 10, the coupler has a modulated output giving a measure of the rotation angle of rotary shaft. However, in this implementation, the input and the output are both either on the rotary shaft 11 or on the fixed bearing 12, and this may be advantageous in some applications.

In another implementation of the embodiment, both sets of tracks are constellated. The sets of tracks are identical, except that the tracks in one set are slightly offset about the rotation axis x-x of shaft 11 with respect to the tracks in the other set. With this arrangement, the coupler output consists of two modulated signals each of a form shown in Figures 10(a) to 10(c). Provided the angular offset between the two sets of tracks is not equal to $\frac{\Delta}{2}$, the relative phases of the modulated signals give an indication of the sense of shaft rotation, the optimum angular offset being $\frac{\Delta}{4}$.

It has been found that the coupler response exhibits a sharp notch over a range of values of line length θ and rotation angle ψ , and the null is particularly prominent when the coupling is relatively tight. As the rotation angle ψ is varied from a minimum value $\psi_{\min}$ to a maximum value $\psi_{\max}$, so the null is observed to shift continuously from a maximum value $\theta_{\max}$ to a minimum value $\theta_{\min}$. Figures 11a and 11b illustrate how the position of the notch shifts from a high value θ_1 to a lower value θ_2 as the rotation angle ψ changes from 90° to 180° , for a coupler having a characteristic impedance Z_{oc} of 180Ω . In general, it has been observed that while $\psi_{\min} > 0^\circ$, $\psi_{\max} = 180^\circ$.

Since the value of θ is proportional to frequency, it is possible, in an alternative application, to use the coupler as a notch filter which can be tuned over a frequency band defined by upper and lower limits, $\theta_{\max}$ and $\theta_{\min}$, simply by varying the rotation angle ψ .

A notch filter based on the embodiments of Figures 1 and 2 has the drawback that the input to and the output from the filter must rotate with respect to each other, and for some applications this may be impractical.

Figure 12 shows another embodiment of the tuned notch filter in which input and output terminals I,O of the filter are not required to rotate with respect to each other.

In this embodiment, the filter comprises four circuit boards C_1 - C_4 , each having an annular, electrically-conductive track 41,42,43,44 of the form described hereinbefore - as before each track has a pair of terminations.

Circuit boards C_1, C_4 are fixed together in spaced-apart relationship by a bushing 45 and an associated fastener 46. Circuit boards C_2, C_3 , which are positioned between circuit boards C_1, C_4 , are also fixed together and are rotatable with respect to boards C_1, C_4 , about an axis Y-Y. Circuit boards C_1, C_2 are separated by a dielectric spacer 47 and circuit boards C_3, C_4 are separated by a dielectric spacer 48.

The circuit boards are arranged coaxially, in parallel so that the respective pairs of tracks 41,42; 43,44 are in radially-overlapping relationship. Tracks 42,43 on boards

C_2 , C_3 are electrically interconnected. The input and output terminals I, O are both provided on the same circuit board C_1 , with the input terminal I being connected to track 41 and the output terminal O being connected to track 44 via a link 49.

If the tracks 41, 42, 43, 44 are all the same length, and the terminations in the tracks are aligned, the filter response will exhibit a single, relatively sharp notch (as shown in Figures 11a and 11b) which can be tuned to a desired frequency by rotating the interconnected circuit boards C_2 , C_3 relative to the circuit boards C_1 , C_4 . If, on the other hand, the respective pairs of tracks 41, 42; 43, 44 have different lengths and/or the terminations in tracks 42, 43 and/or 41, 44 are offset with respect to each other, the filter response will exhibit two distinct notches, or a single, but relatively wide notch if the differences in track length and/or the extent of the offset are slight.

A similar arrangement based on multiple coaxial, cylindrical tracks of the form shown in Figure 2, is also envisaged.

In the foregoing embodiments, the terminations are formed by gaps in the electrically conductive tracks. Alternatively, continuous, unbroken tracks may be used. In this case, a single connection made to each track forms a common termination in the track such that the pairs of ports P_1 , P_3 ; P_2 , P_4 are also common.

It will be appreciated from the foregoing that the described RF coupler is highly versatile. In one application, the RF coupler can be used to transfer RF power between fixed and-----

rotating circuits, and to provide optimum coupling at all angles of rotation. In other applications, the coupler can be used to provide a measure of angular rotation and in yet further applications the coupler provides a tunable notch filter having fixed or relatively rotatable input and output terminals.

CLAIMS

1. A radio frequency (RF) coupler for transferring RF power between a first circuit on a rotary shaft having a rotation axis and a second circuit relative to which the shaft can rotate, the RF coupler comprising, a first RF transmission line arranged to rotate with said rotary shaft about said rotation axis and for connection to said first circuit, and a second RF transmission line relative to which said first RF transmission line can rotate and for connection to said second circuit, wherein said first and second RF transmission lines comprise first and second electrically conductive tracks arranged coaxially around said rotation axis in substantial, mutually overlapping relationship to provide RE coupling between the first and second RF transmission lines, each said electrically conductive track having a gap defining a pair of ports in the track, one said port being connectable to a respective said circuit and another said port being connected to a termination for reflecting RF power.

2. A coupler as claimed in claim 1 wherein said first and second tracks are supported in substantially parallel planes orthogonal to the rotation axis of the rotary shaft and are in radially-overlapping relationship.

3. A coupler as claimed in claim 2 wherein said first and second tracks are substantially annular.

4. A coupler as claimed in claim 2 wherein each said track has a substantially periodic undulation around said rotation axis, the undulation being formed by an integer number n of segments each subtending an angle

$$\Delta = \frac{360^\circ}{n}$$
 at the rotation axis and wherein said gap is formed in one of said segments.

5. A coupler as claimed in claim 2 wherein said first track is mounted on a first circuit board fixed to the rotary shaft and said second track is mounted on a second circuit board relative to which said first circuit board can rotate.

6. A coupler as claimed in claim 5 wherein said first RF transmission line comprises a first ground plane provided on one side of said first circuit board and said first track provided on the opposite side of said first circuit board, and said second RF transmission line comprises a second ground plane provided on one side of said second circuit board and said second track provided on the opposite side of said second circuit board.
7. A coupler as claimed in claim 2 wherein said first and second tracks are separated by a dielectric spacer.
8. A coupler as claimed in claim 1 wherein said first and second tracks are arranged in axially-overlapping relationship.
9. A coupler as claimed in claim 8 wherein said first and second tracks are substantially cylindrical.
10. A coupler as claimed in claim 8 comprising a first dielectric cylindrical sleeve fixed to said rotary shaft and a second dielectric cylindrical sleeve arranged coaxially around the first sleeve and relative to which the first sleeve can rotate, said first and second tracks being respectively provided on the outer and inner surfaces of the first and second sleeves.
11. A coupler as claimed in claim 8 wherein said first and second tracks are separated by a cylindrical dielectric spacer.
12. A coupler as claimed in claim 1 wherein said first and second tracks have a line length θ which differs from $(n + 1/2)\pi$, where n is 0, 1, 2, 3
13. A coupler as claimed in claim 12 wherein said first and second RF transmission lines are configured as a 3dB coupler.
14. A coupler as claimed in claim 12 wherein said line length is $0.62 \pi/2$.
15. A notch filter tunable to a desired frequency within a predetermined RF frequency band, the notch filter comprising,

a first RF transmission line and a second RF transmission line, wherein said first and second RF transmission lines respectively comprise first and second electrically conductive tracks arranged coaxially around a rotation axis in substantial mutually overlapping relationship to provide RE coupling between the first and second RF transmission lines,

each said electrically conductive track having a gap defining a pair of ports in the track, one of said ports being connectable to an input or an output of the notch filter and another of said ports being connected to a termination for reflecting RF power and said first and second electrically conductive tracks being capable of relative rotation about said rotation axis to tune the notch filter to the desired frequency.

16. A notch filter as claimed in claim 15 wherein said first and second tracks are supported in substantially parallel planes orthogonal to said rotation axis and are in radially-overlapping relationship.

17. A notch filter as claimed in claim 16 wherein said first and second tracks are substantially annular.

18. A notch filter as claimed in claim 16 wherein the first track is mounted on a first circuit board and said second track is mounted on a second circuit board which can rotate with respect to the first circuit board.

19. A notch filter as claimed in claim 18 wherein said first RF transmission line comprises a first ground plane provided on one side of said first circuit board and said first track provided on the opposite side of said first circuit board, and said second RF transmission line comprises a second ground plane provided on one side of said second circuit board and said second track provided on the opposite side of said second circuit board.

20. A notch filter as claimed in claim 16 wherein said first and second tracks are separated by a dielectric spacer.

21. A notch filter as claimed in claim 15 wherein said first and second tracks are arranged in axially-overlapping relationship.

22. A notch filter as claimed in claim 21 wherein said first and second tracks are substantially cylindrical.

23. A notch filter as claimed in claim 22 wherein said first and second tracks are respectively provided on the outer and inner surfaces of first and second coaxial dielectric sleeves.

24. A notch filter as claimed in claim 22 wherein the first and second tracks are separated by a cylindrical dielectric spacer.

25. A notch filter as claimed in claim 15 wherein said first RF transmission line includes two said electrically-conductive tracks, said second RF transmission line includes two said electrically-conductive tracks said tracks being arranged coaxially around said rotation axis so that the tracks of said first RF transmission line are in substantial radially-overlapping relationship with the tracks of the second RE transmission line to provide RF coupling between the first and second RF transmission lines, and wherein the tracks of one of said first and second RF transmission lines are electrically and mechanically interconnected and are rotatable about said rotation axis with respect to the tracks of another of said first and second RF transmission lines whereby to tune the filter to the desired frequency, and the input to and the output from the filter are connected to respective tracks of said another of the RF transmission lines.

26. A notch filter as claimed in claim 25 wherein said tracks are provided on different circuit boards and the input and output terminals for the filter are both provided on the same circuit board.

27. A notch filter as claimed in claim 26 wherein the gaps in the tracks of the second RF transmission line are aligned with respect to each other.

28. A notch filter as claimed in claim 26 wherein the gaps in the tracks of said first RF transmission line or in the tracks of said second RF transmission line are offset with respect to each other.

29. A notch filter as claimed in claim 26 wherein the tracks all have the same length.



30. A notch filter as claimed in claim 26 wherein respective tracks of the first and second RF transmission lines have different lengths.

31. A radio frequency (RF) coupler comprising a first RF transmission line mounted on a rotary shaft having a rotation axis and a second RF transmission line relative to which the first RF transmission line can rotate, wherein the first and second RF transmission lines comprise first and second electrically conductive tracks arranged coaxially around said rotation axis in substantial overlapping relationship, each said track having a gap defining a pair of ports in the track, one of said ports being connected to a termination for reflecting RF power and each said track having a periodic undulation around the rotation axis, the undulation being formed by an integer number n of segments each subtending an angle

$$\Delta = \frac{360^\circ}{n}$$

at the rotation axis, and said gap is formed in one of the segments thereof.

32. A coupler as claimed in claim 31 wherein said first RF transmission line includes two said electrically conductive tracks, said second RF transmission line includes two said electrically conductive tracks, said tracks being arranged coaxially around said rotation axis so that the tracks of the first RF transmission line are in substantial radially-overlapping relationship with the tracks of the second RF transmission line to provide RF coupling between the first and second RF transmission lines, wherein one or both of said tracks of the first and second RF transmission lines have said periodic undulation, the tracks of one of said first and second RF transmission lines are electrically interconnected and the tracks of another of said first and second RF transmission lines are respectively connected to the coupler input and the coupler output.

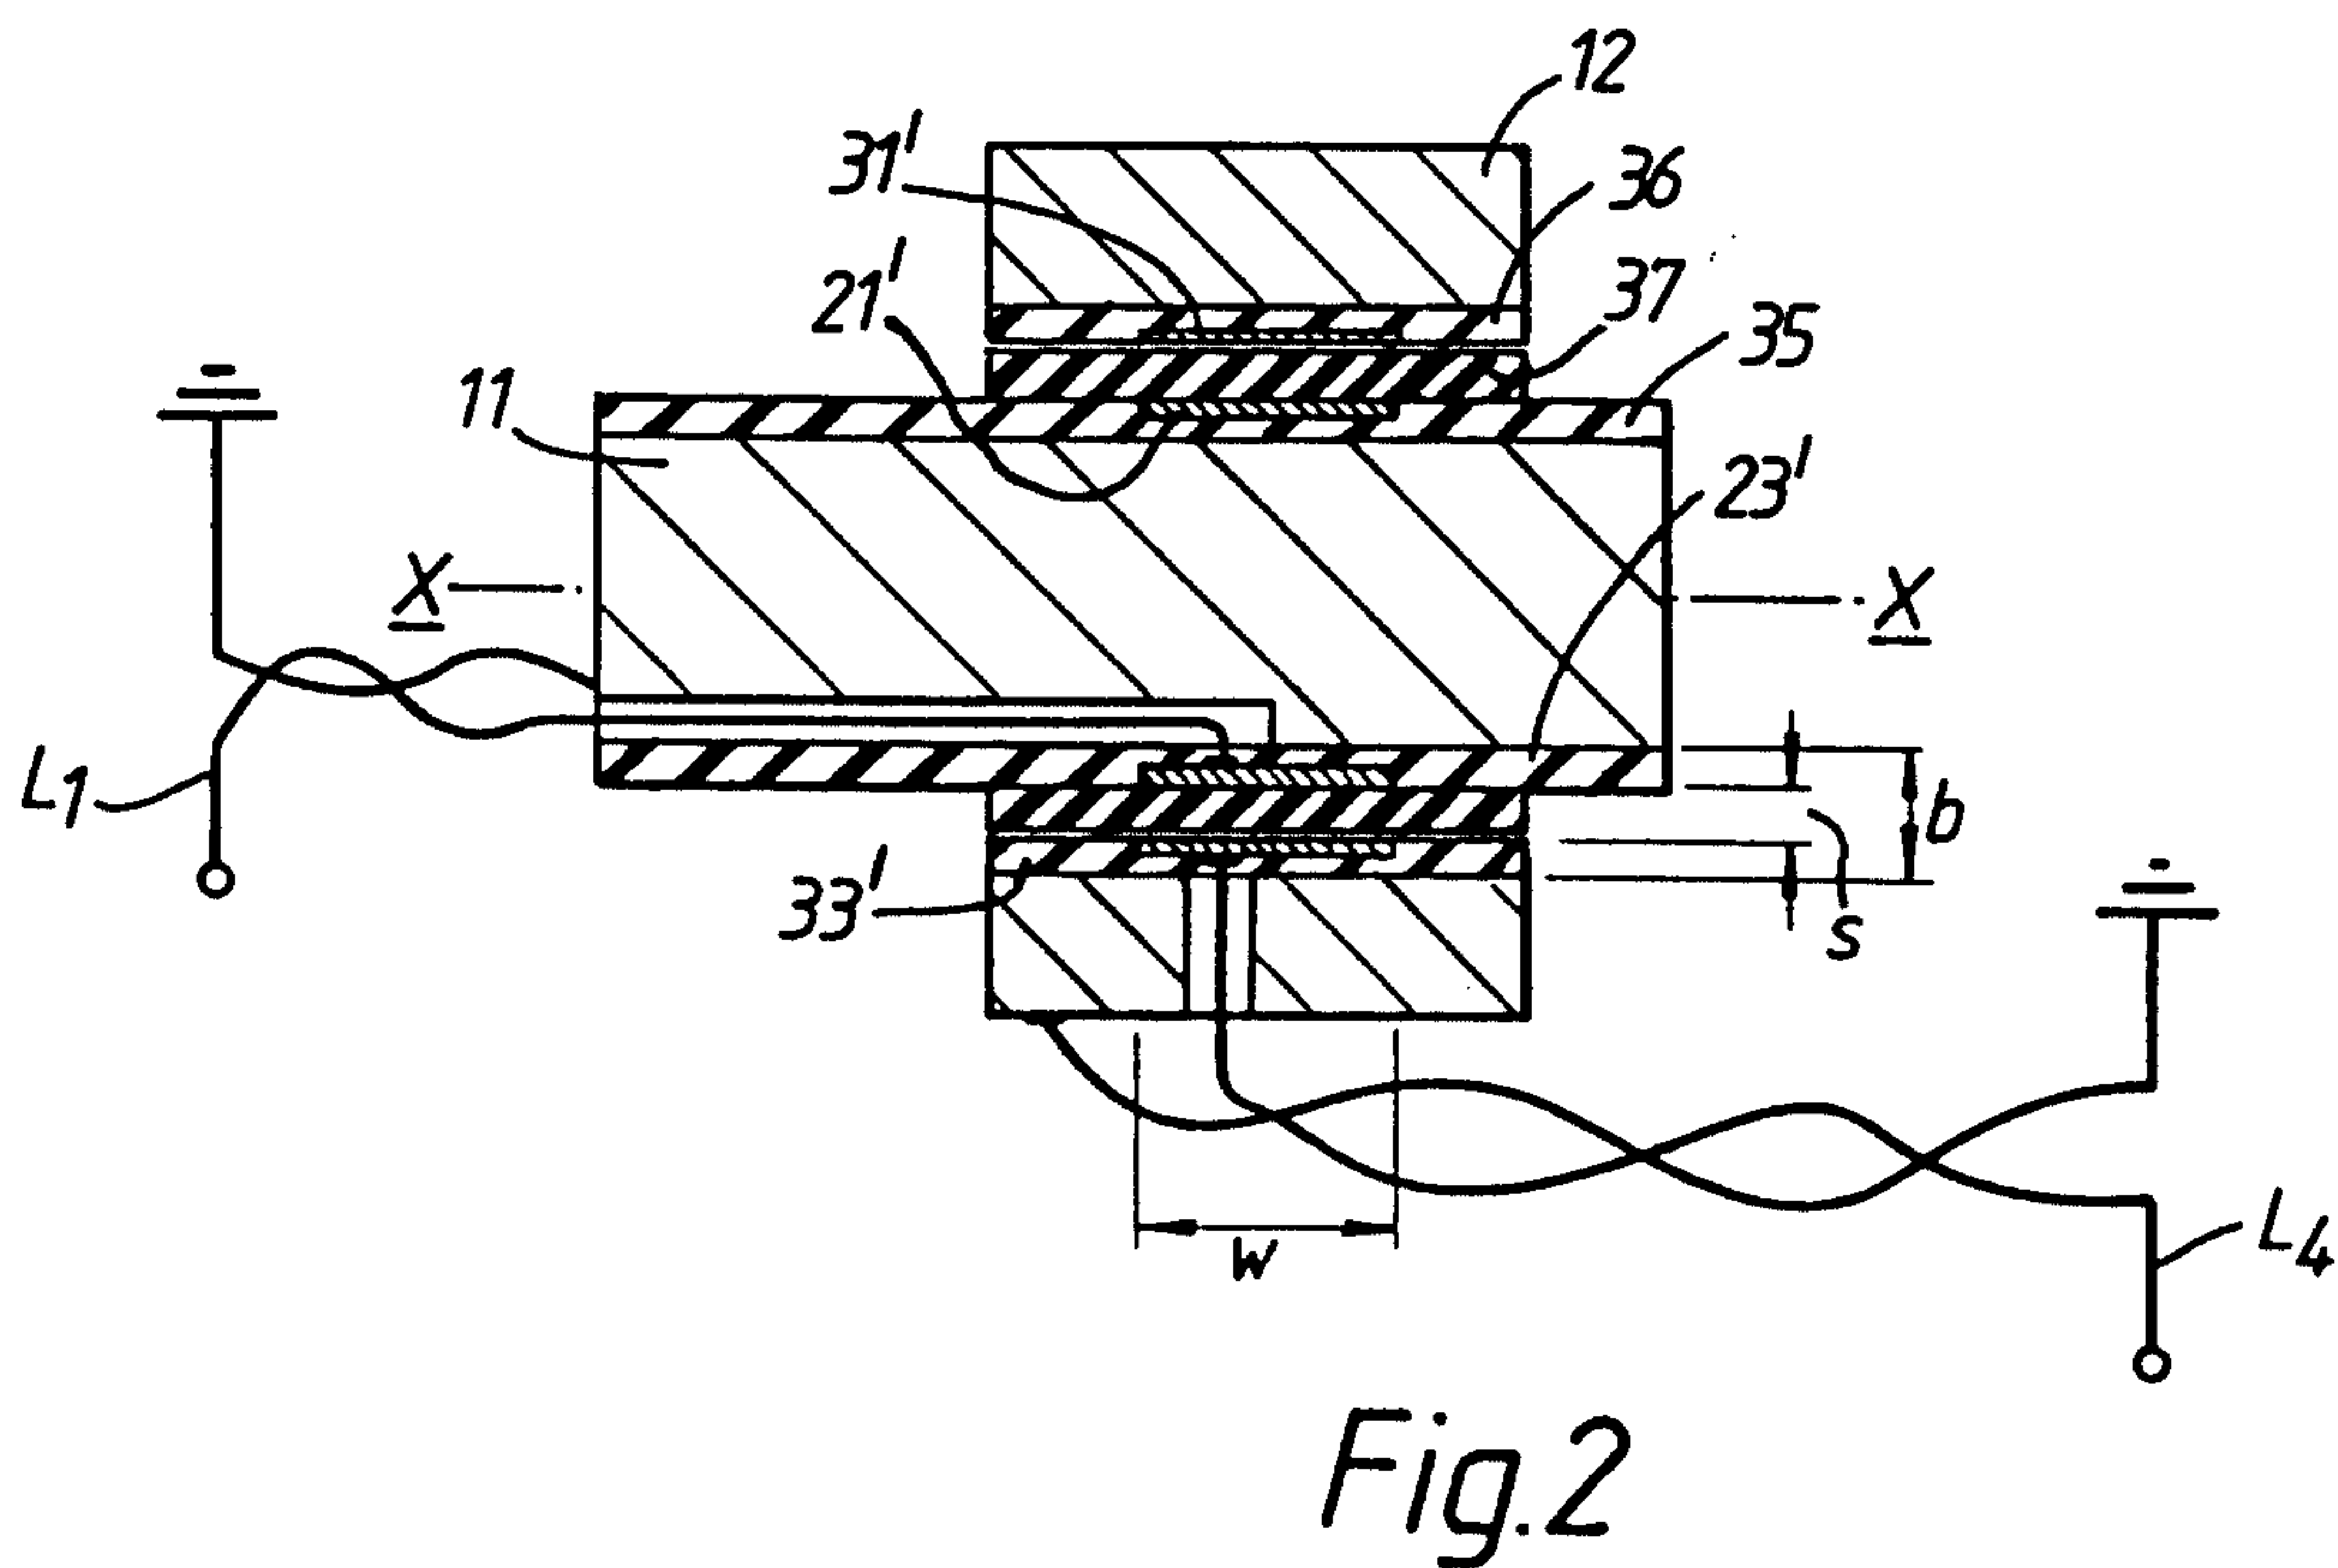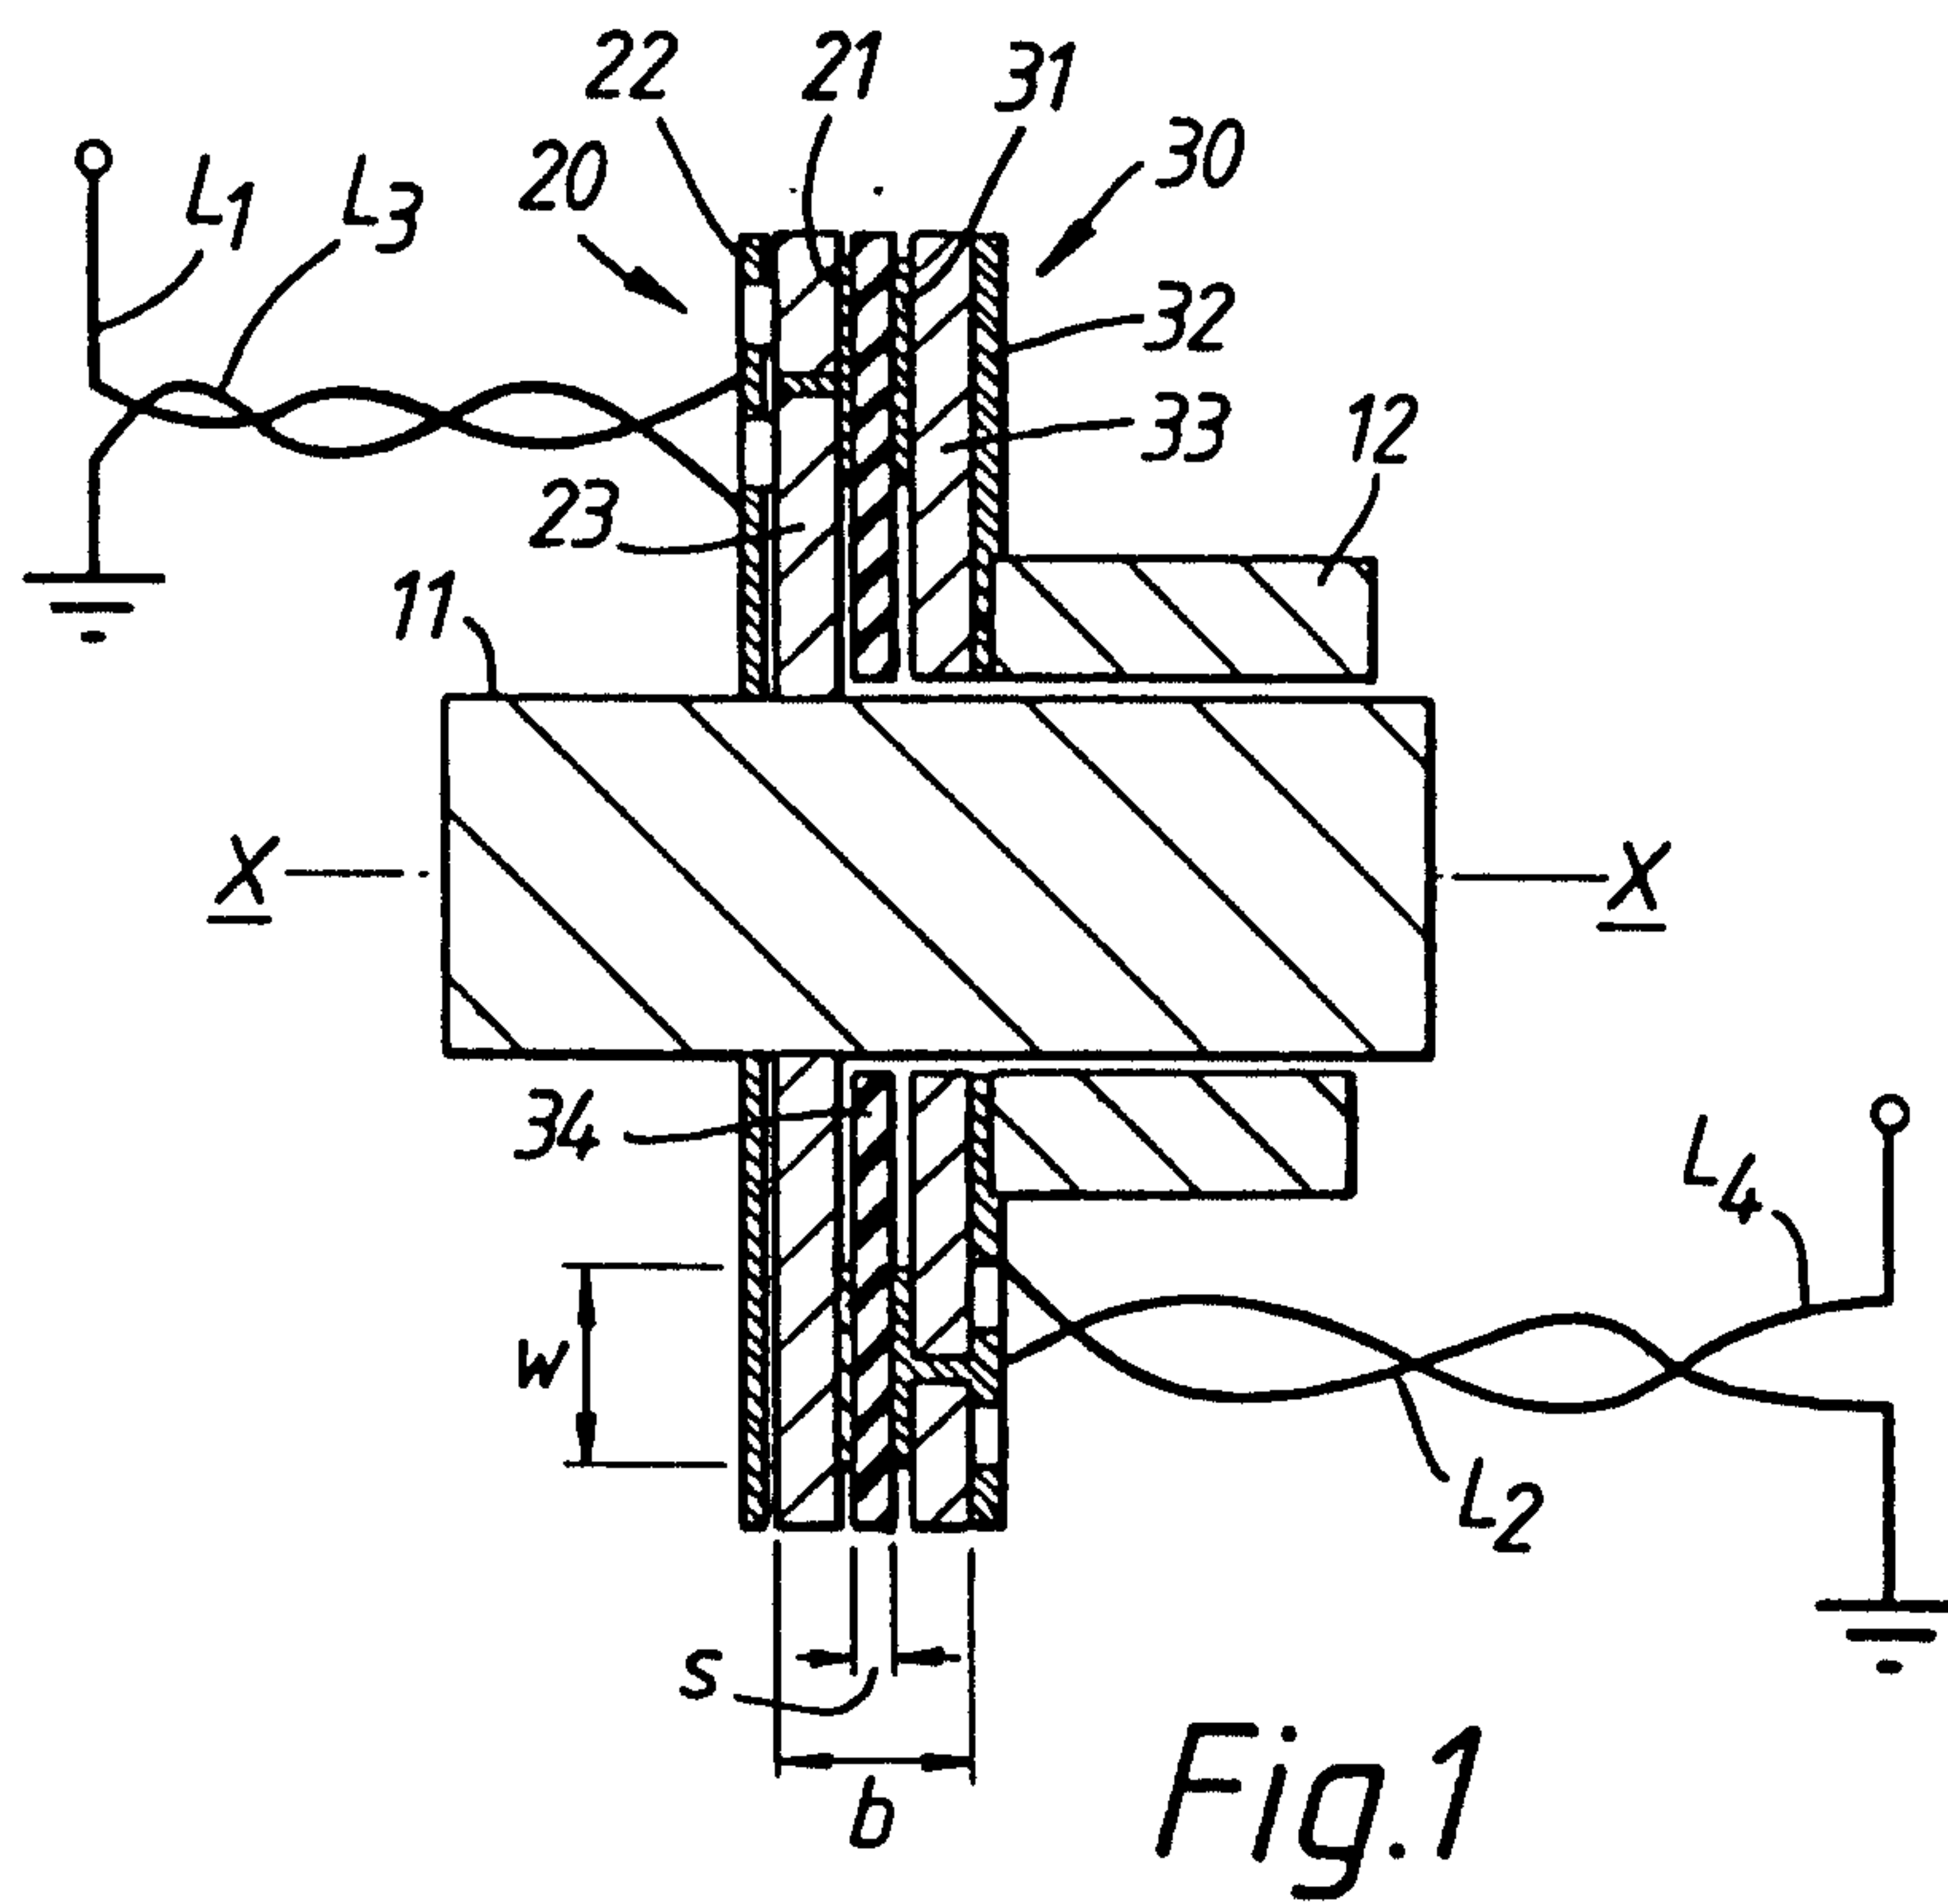

2/5

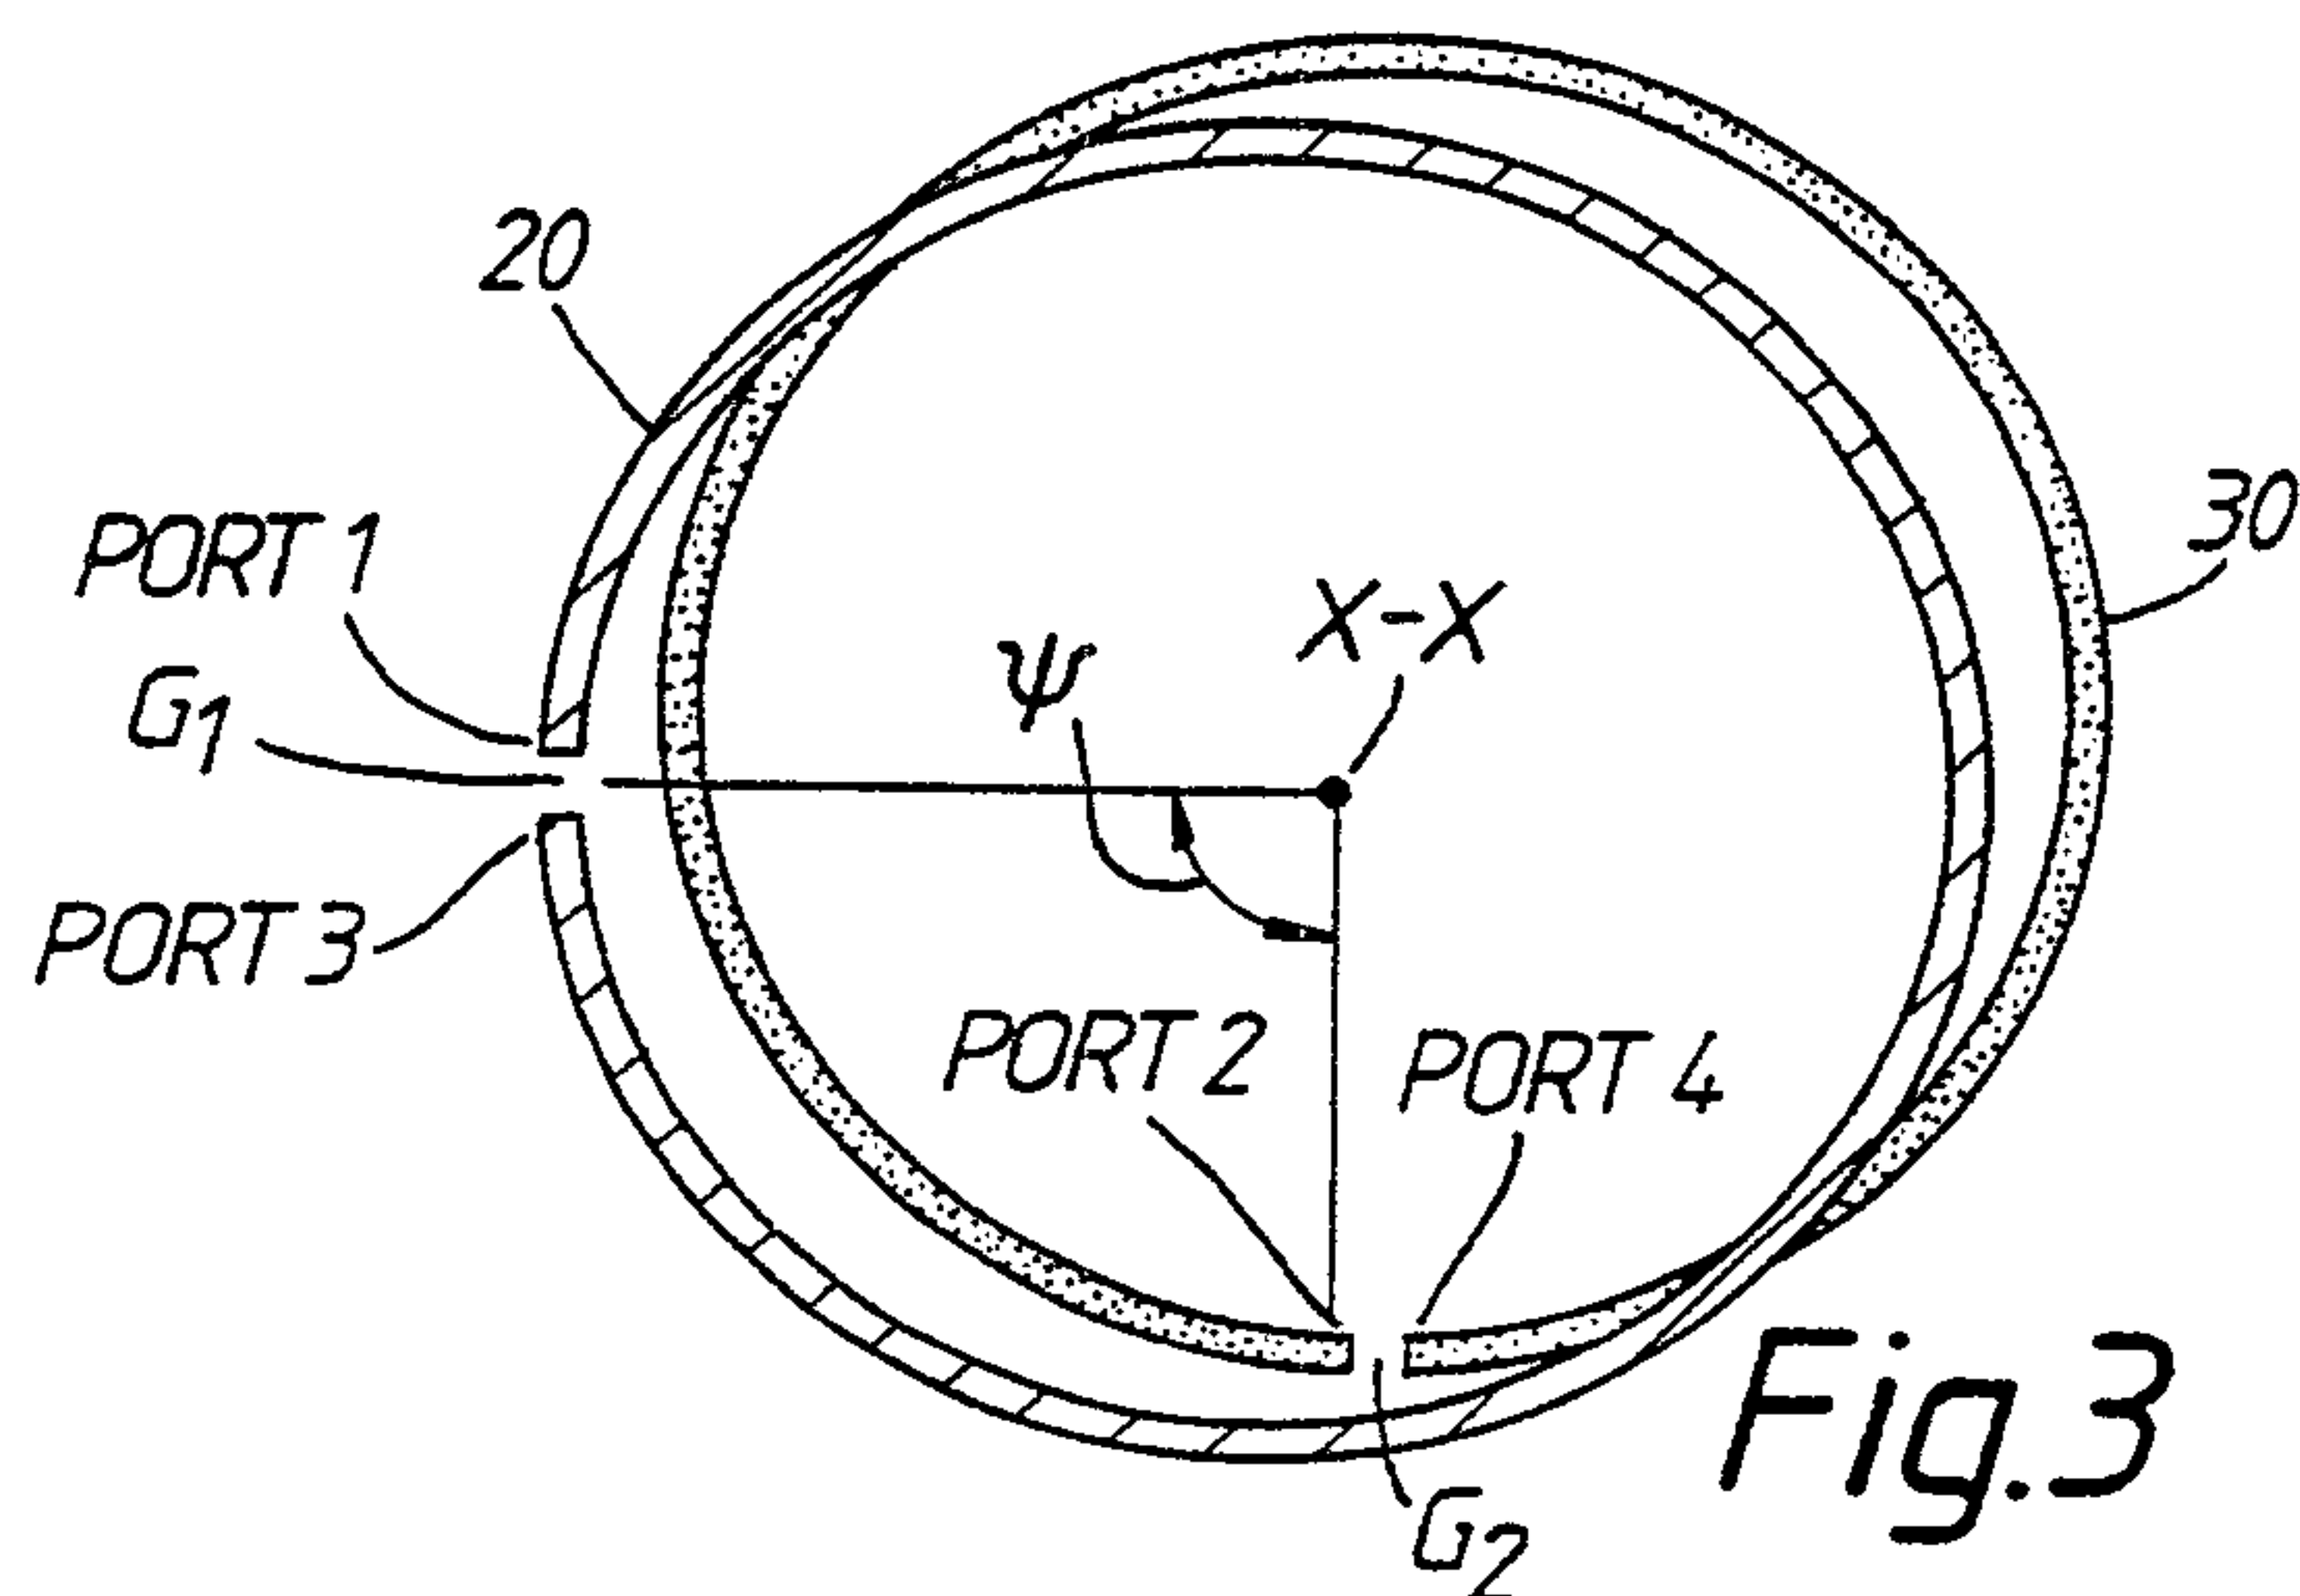


Fig.3

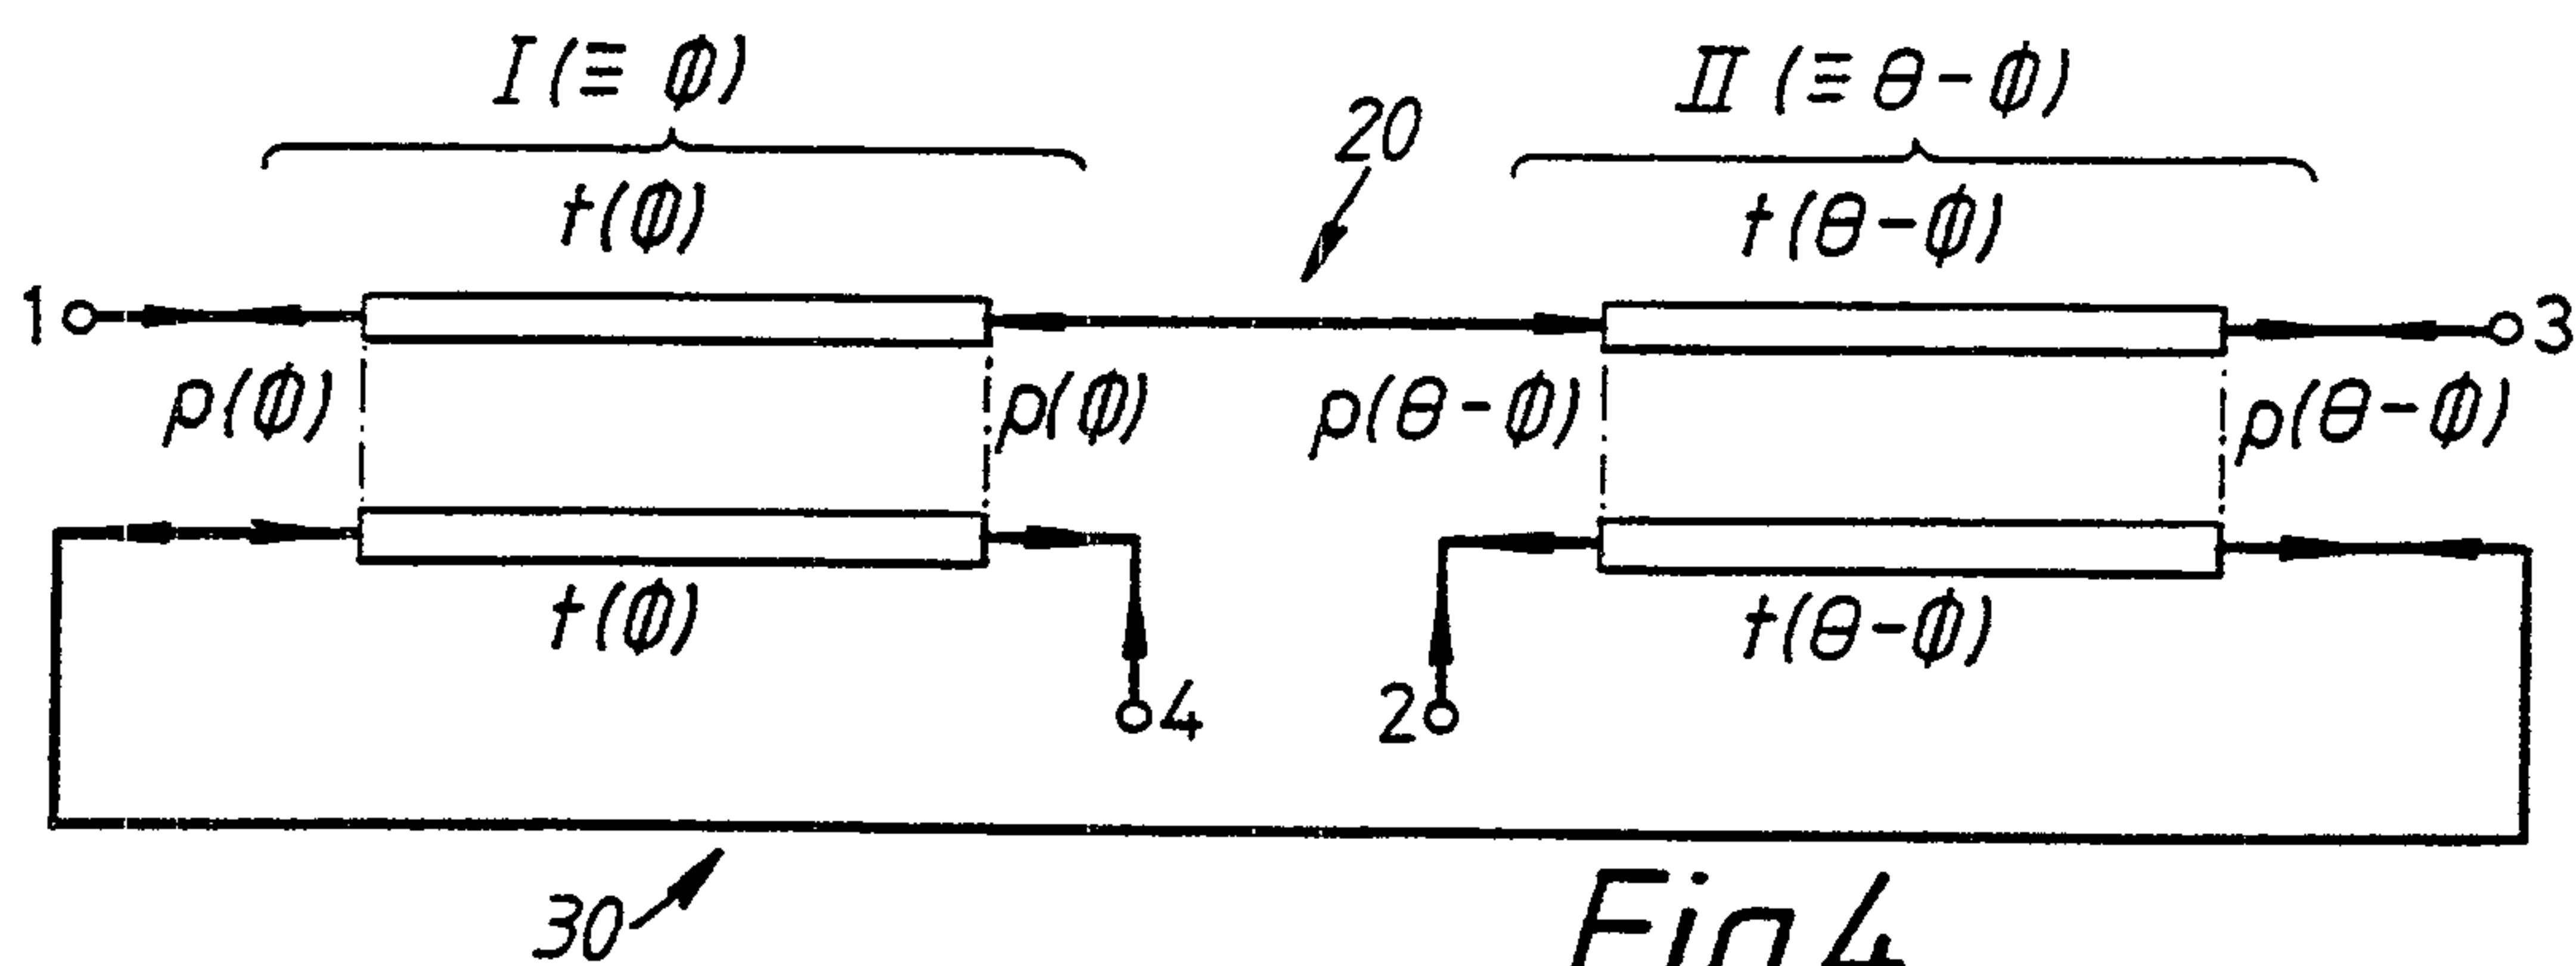


Fig.4




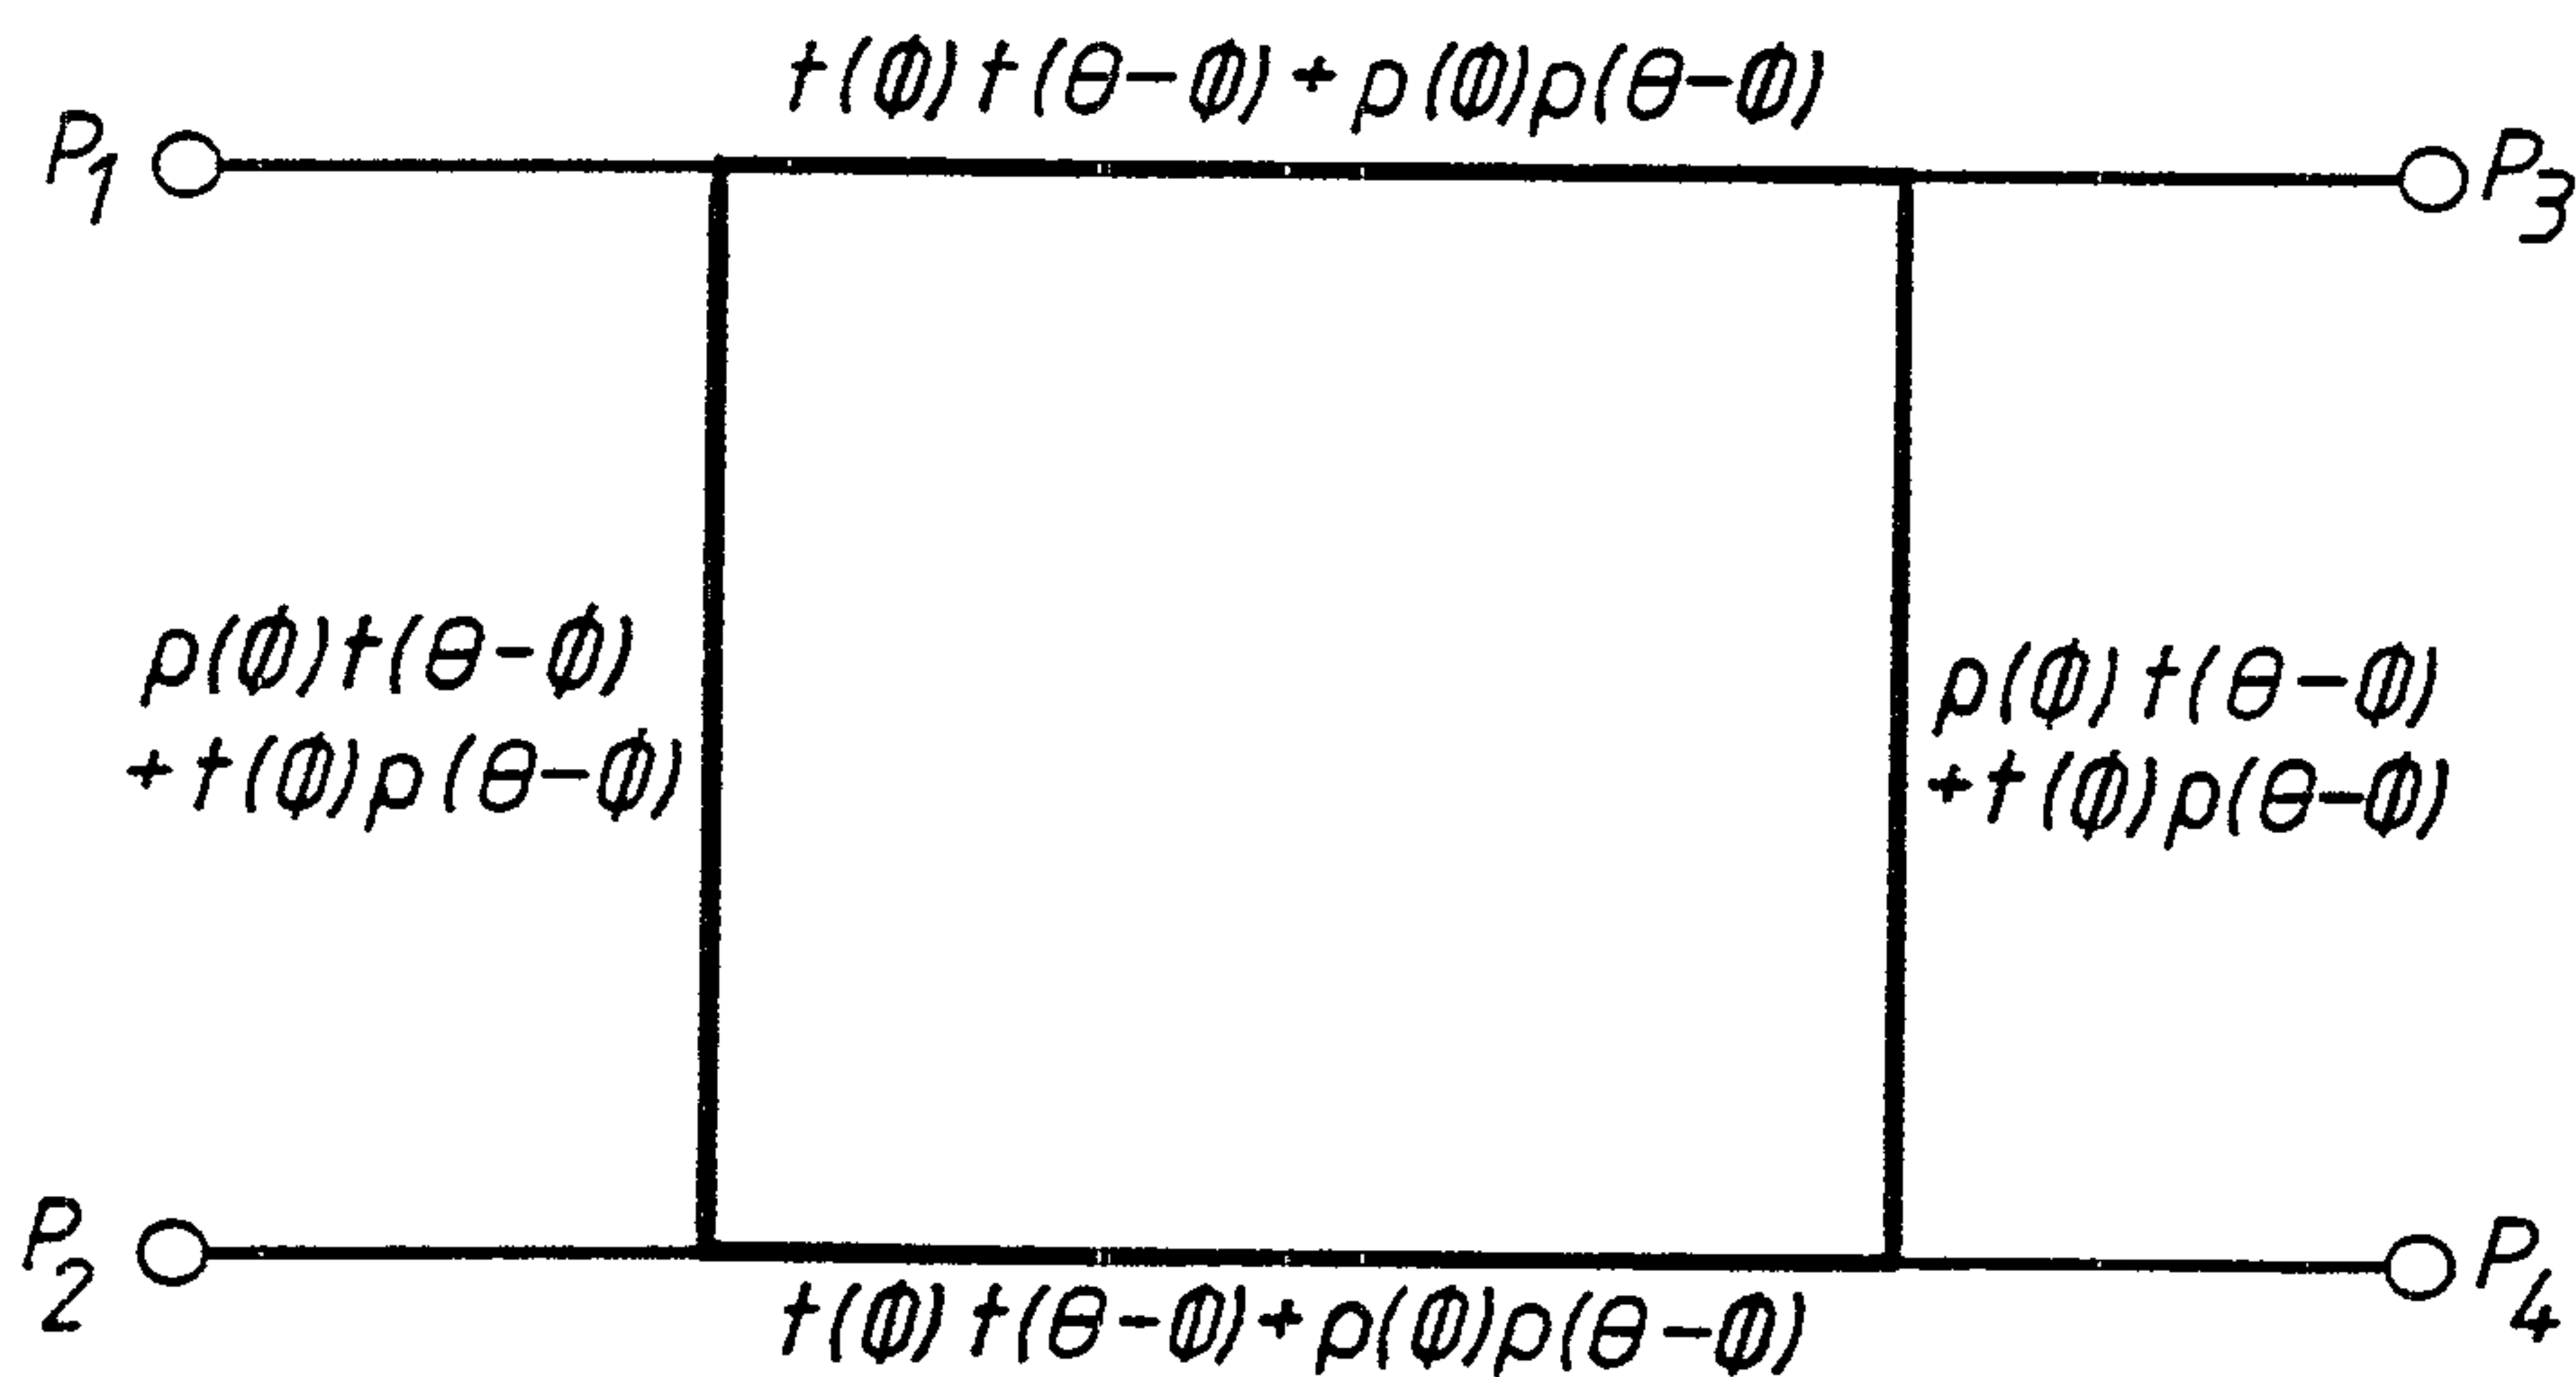


Fig.5

3/5

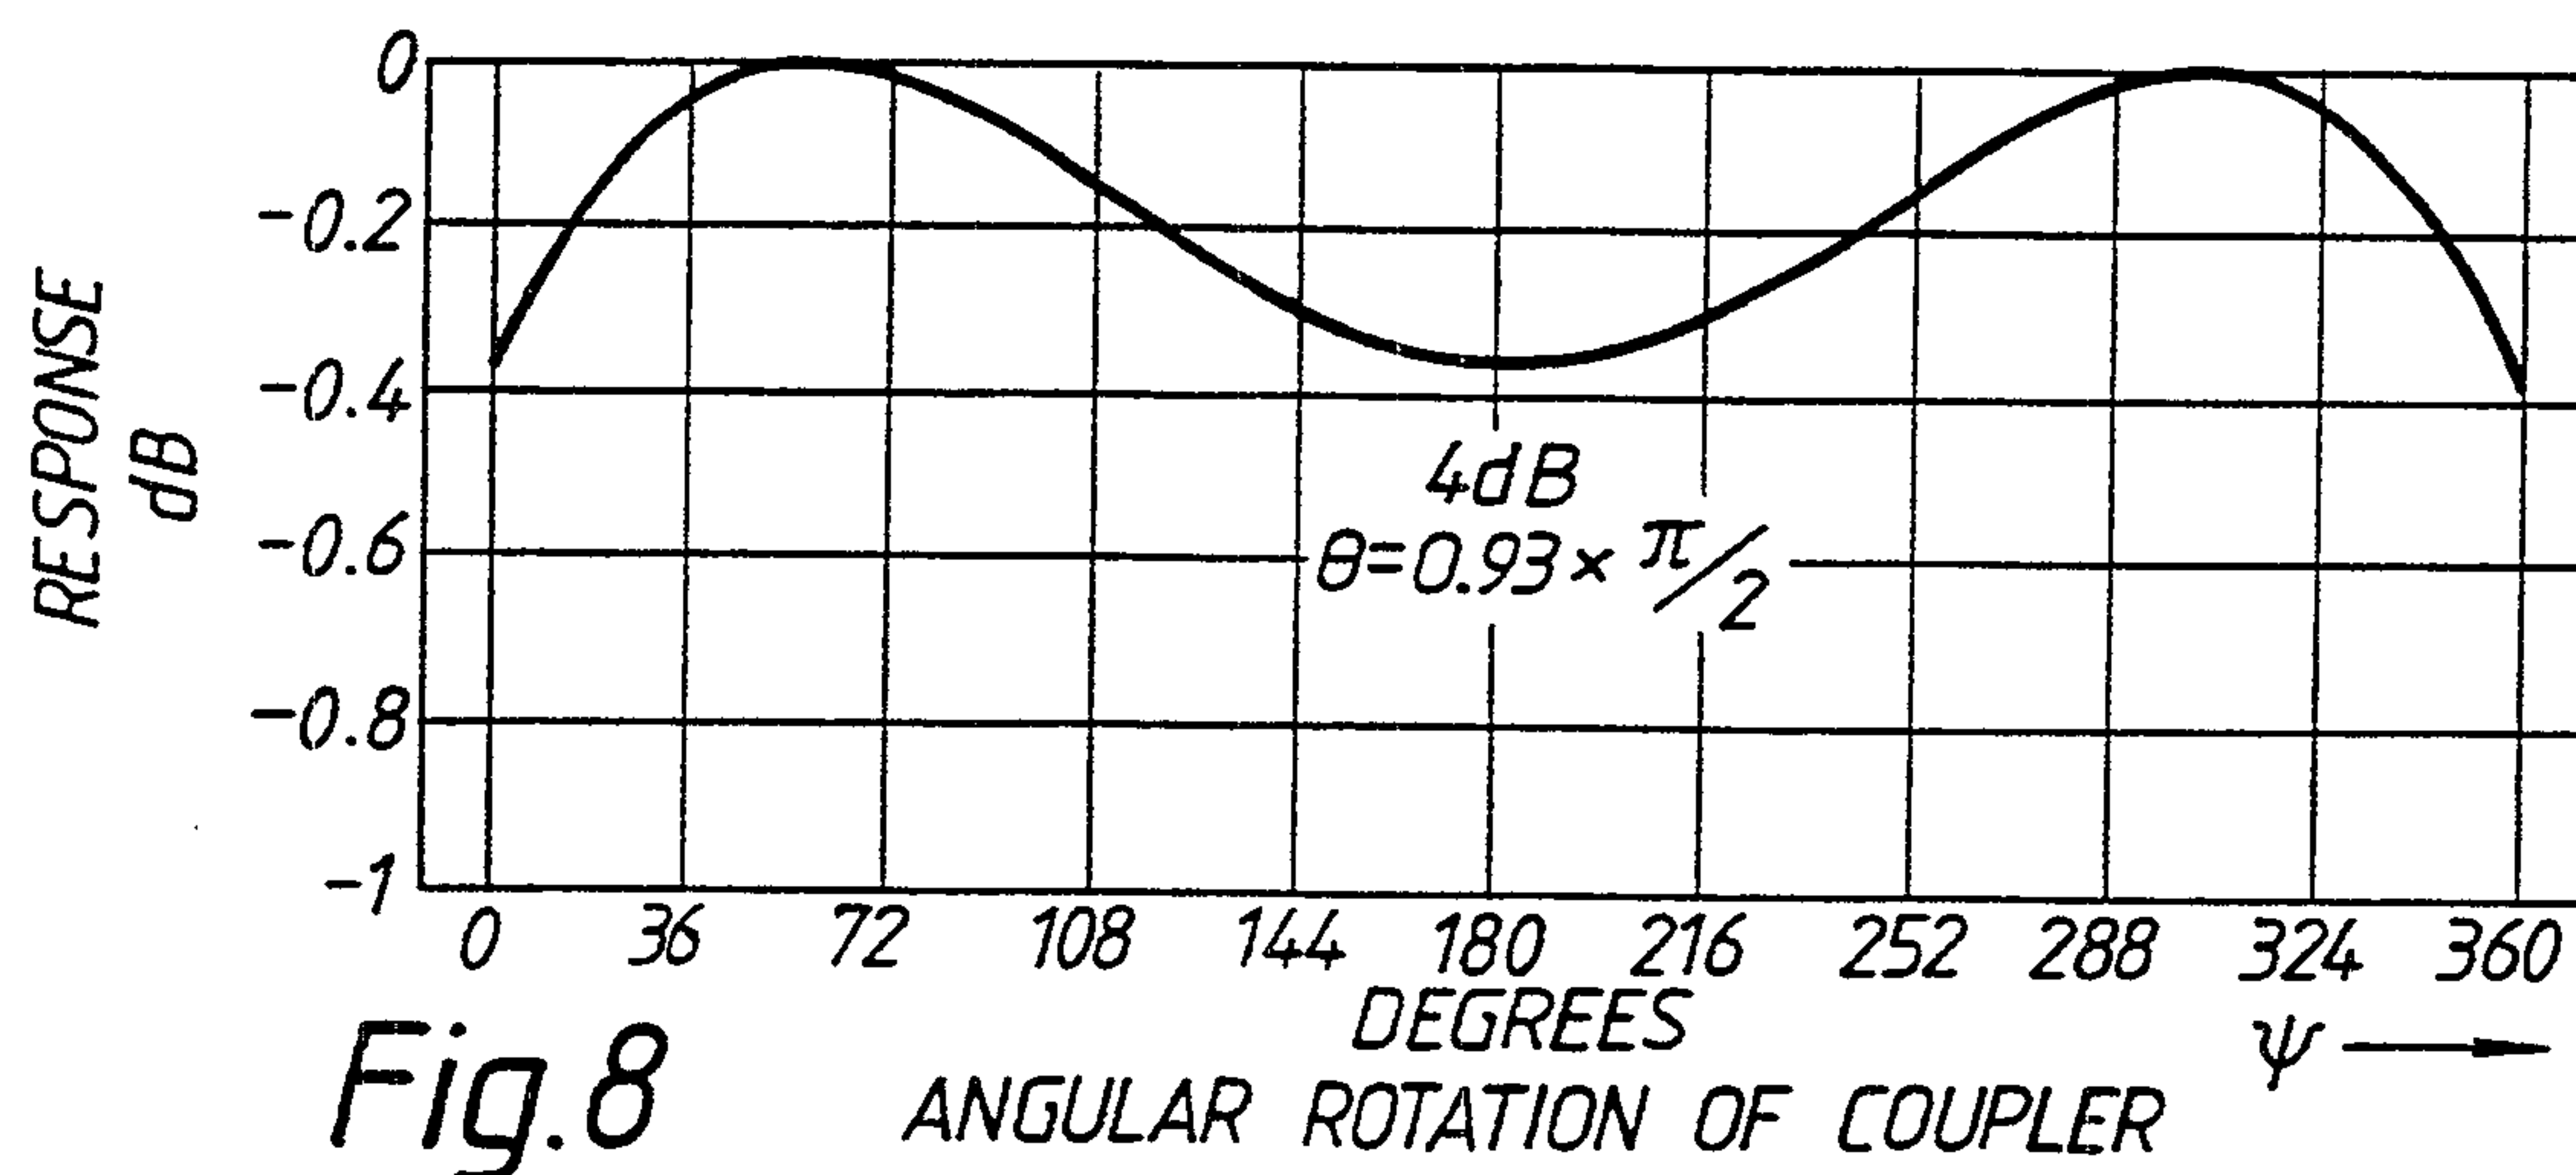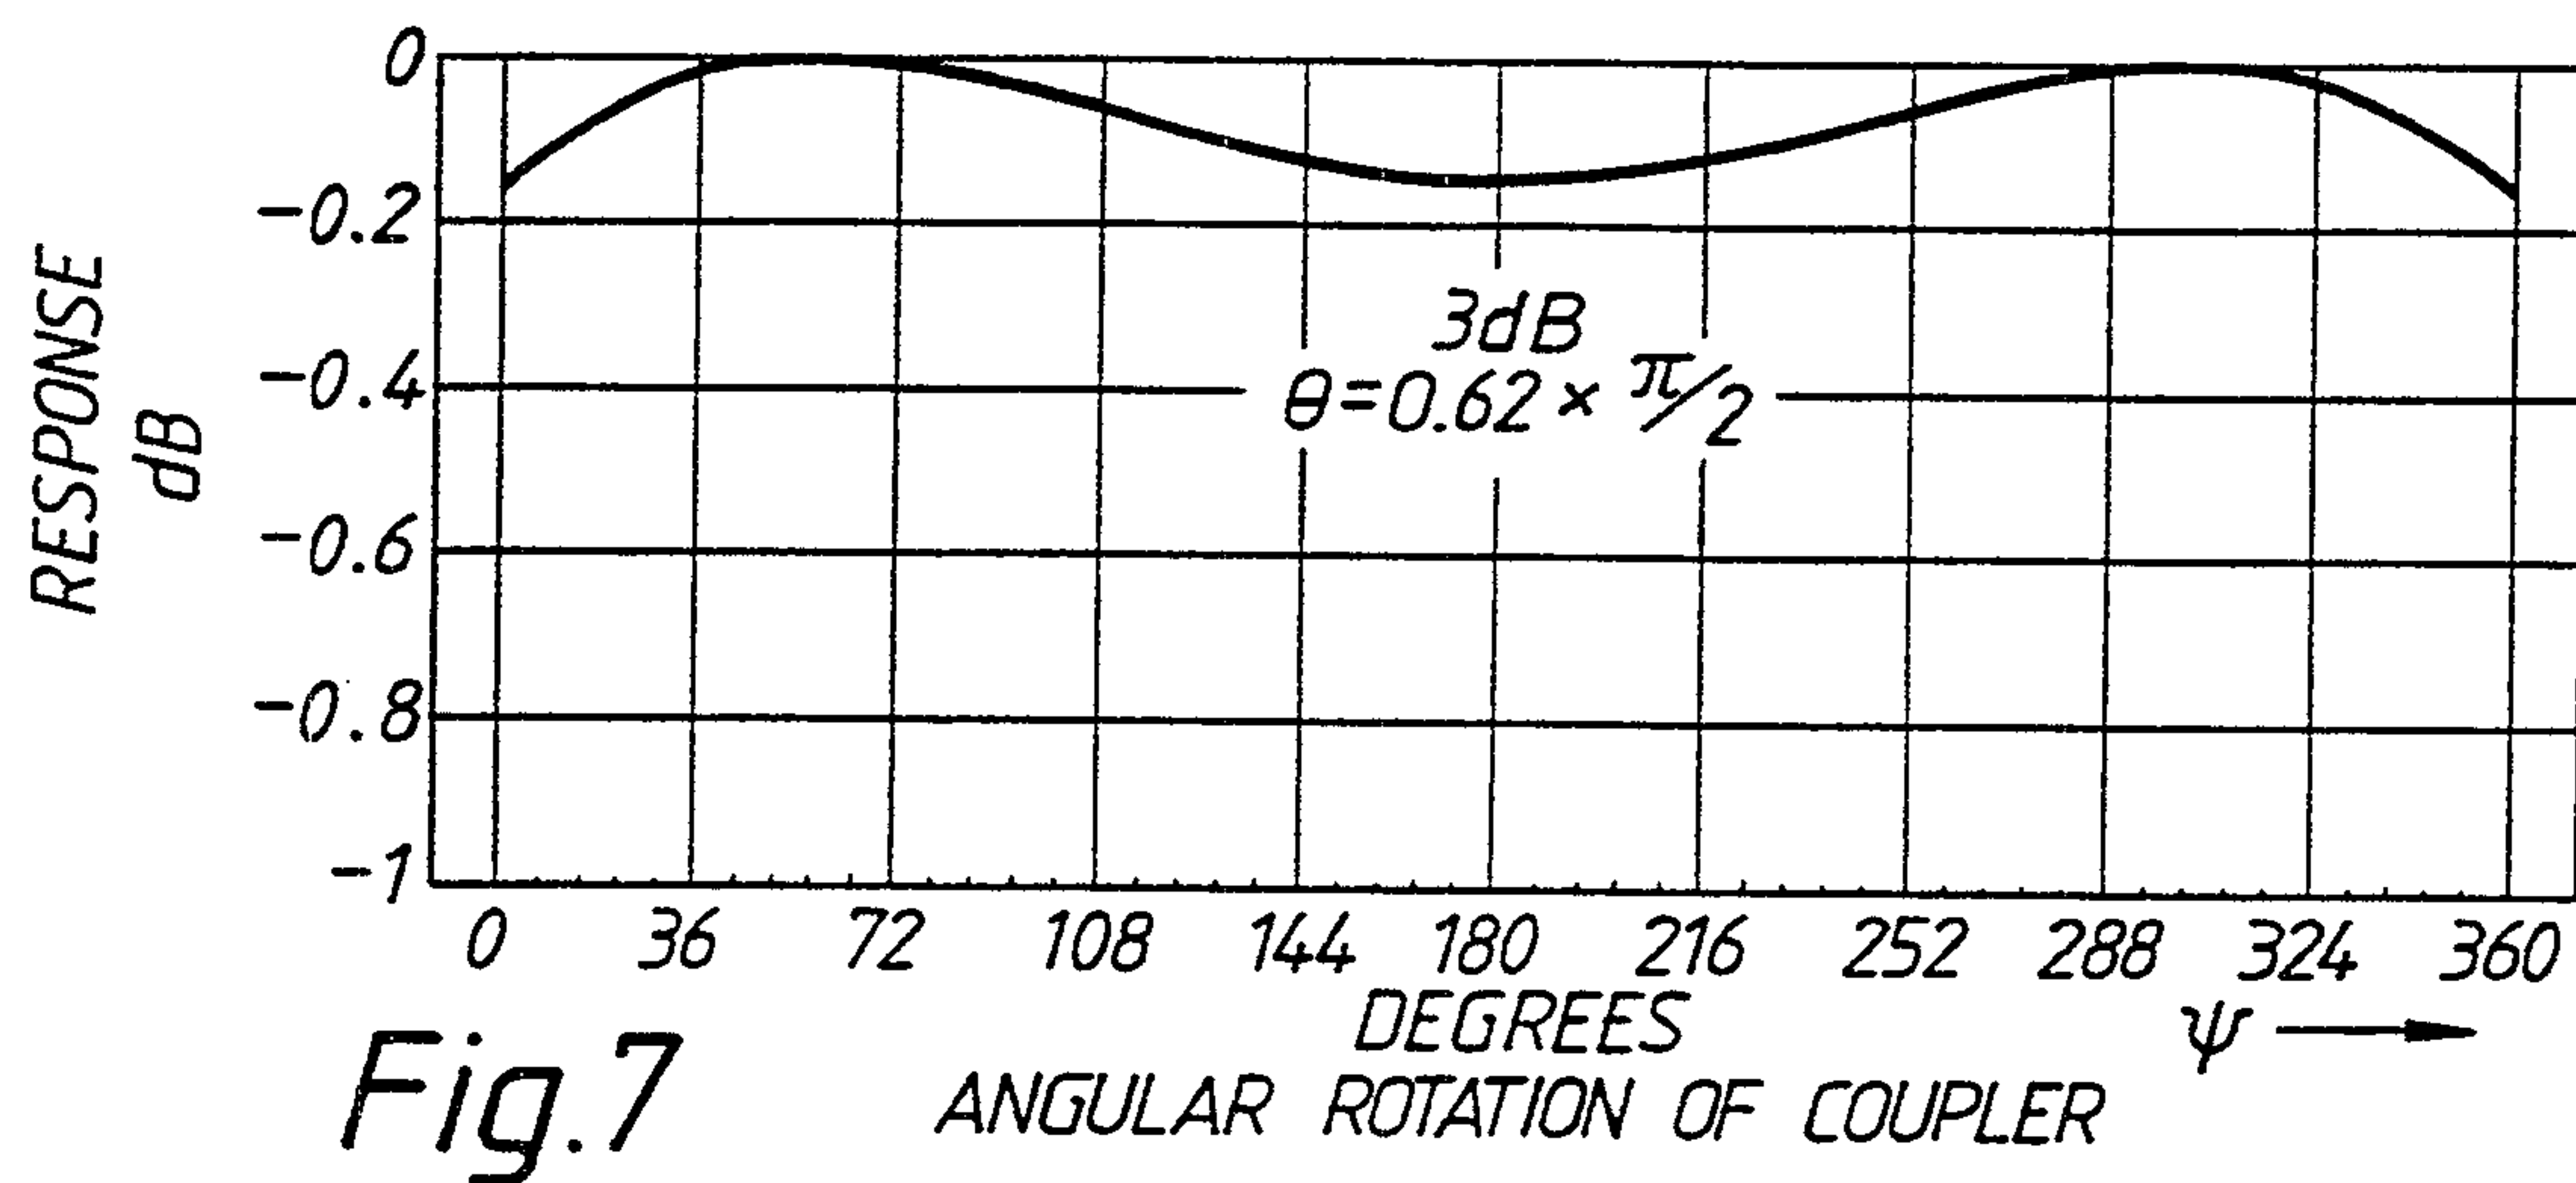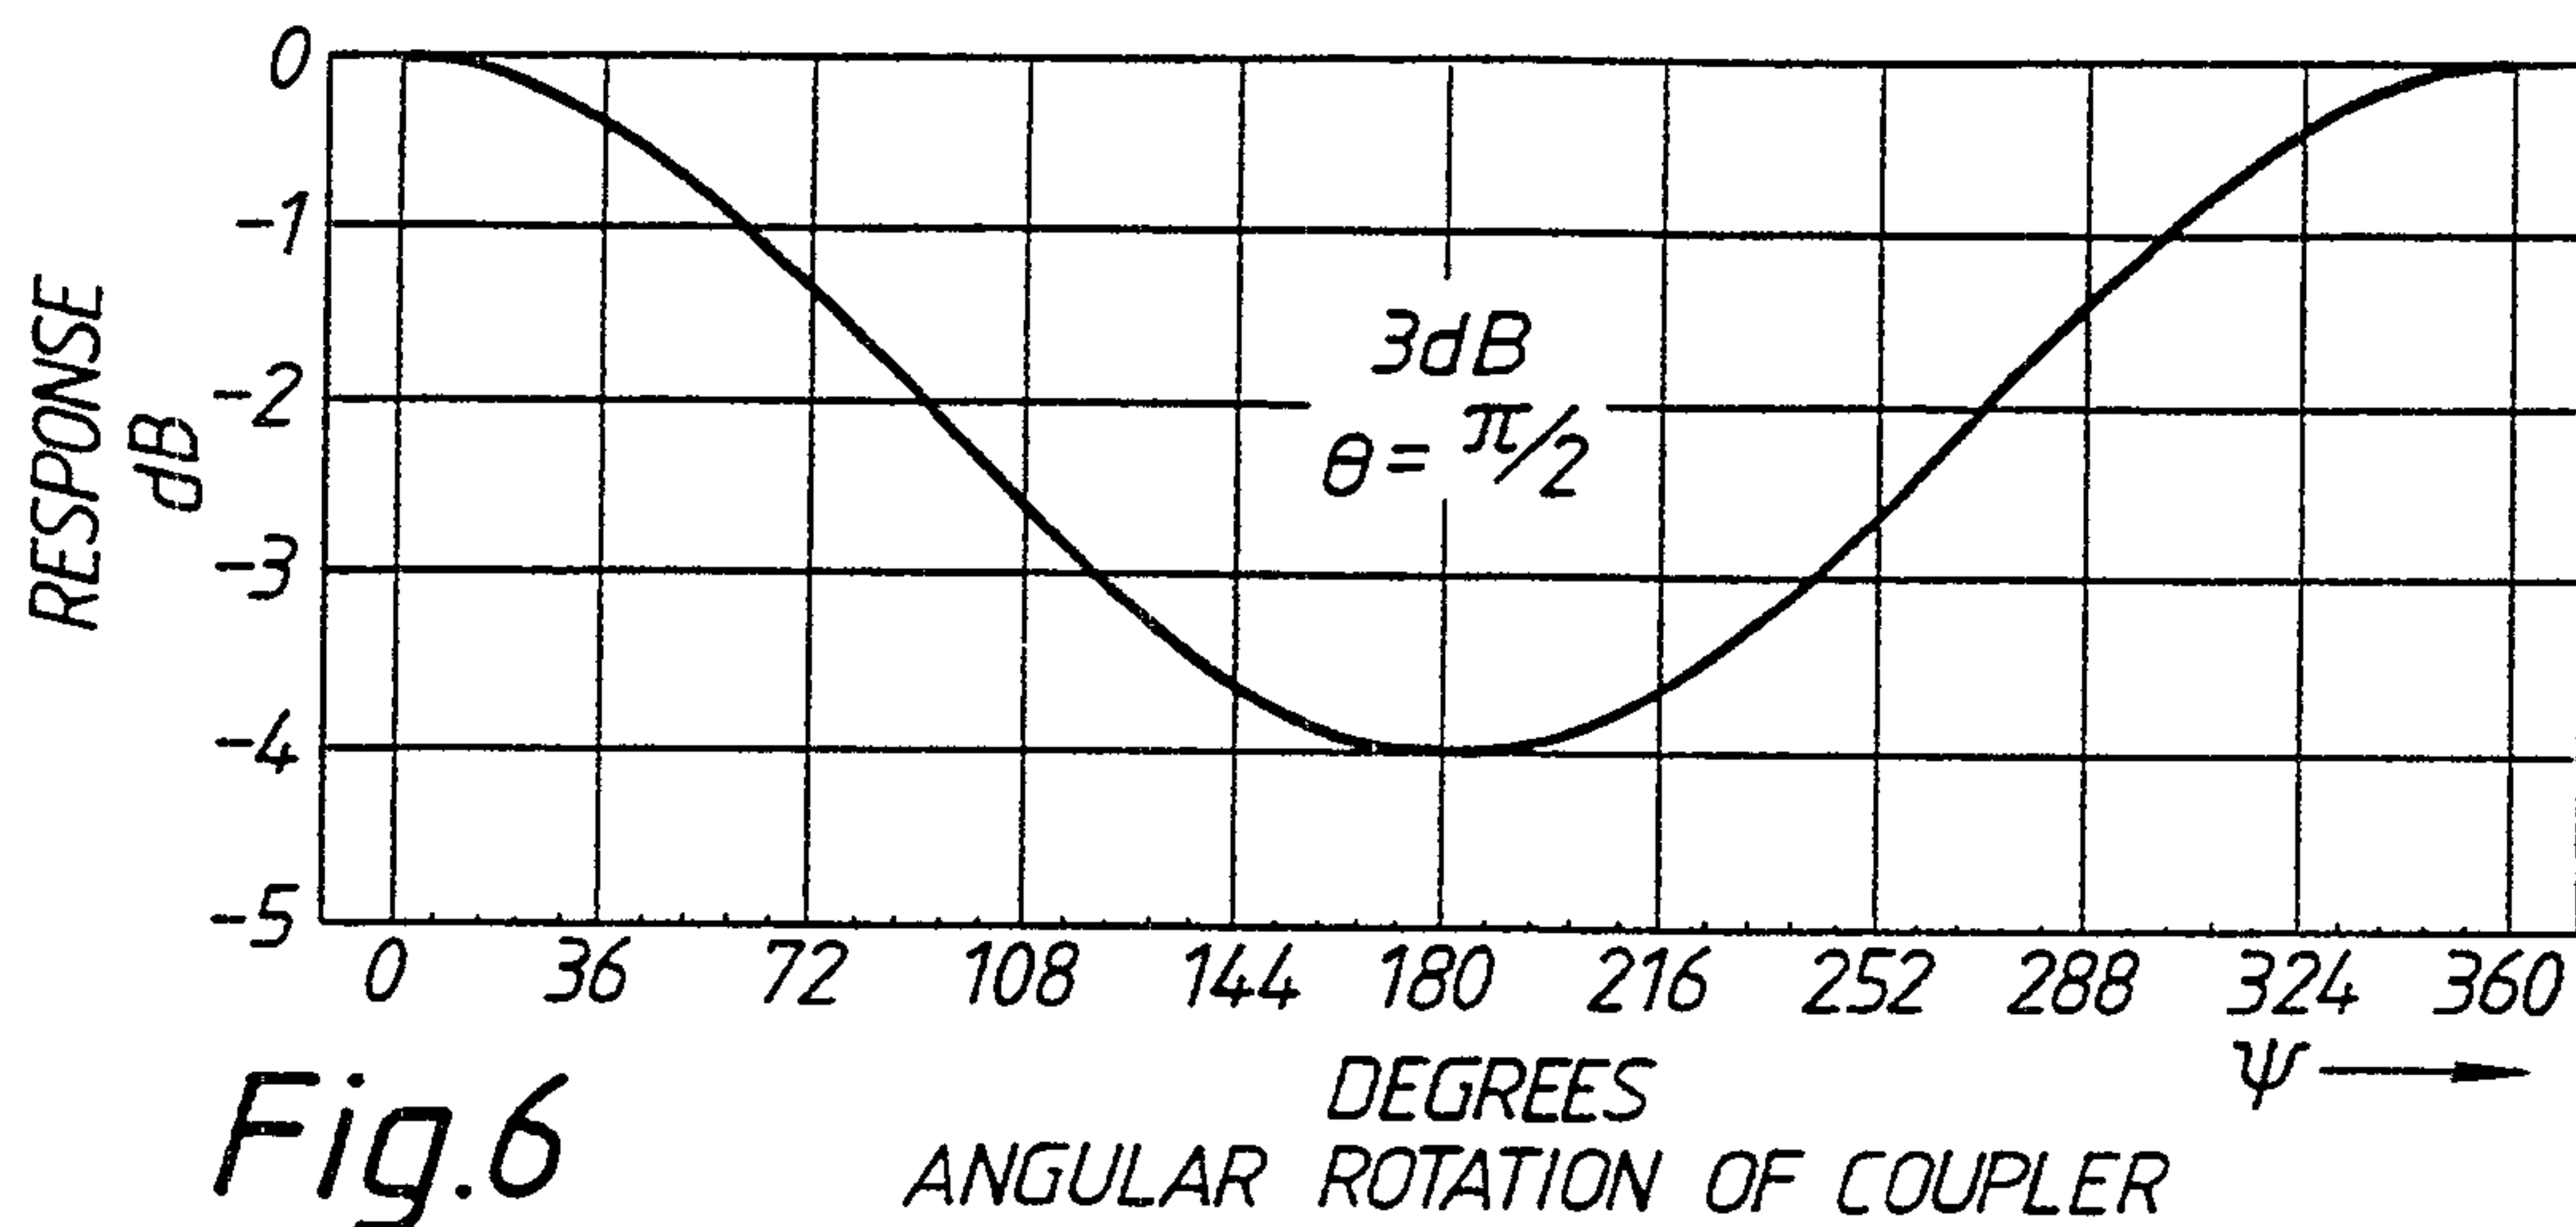

4/5

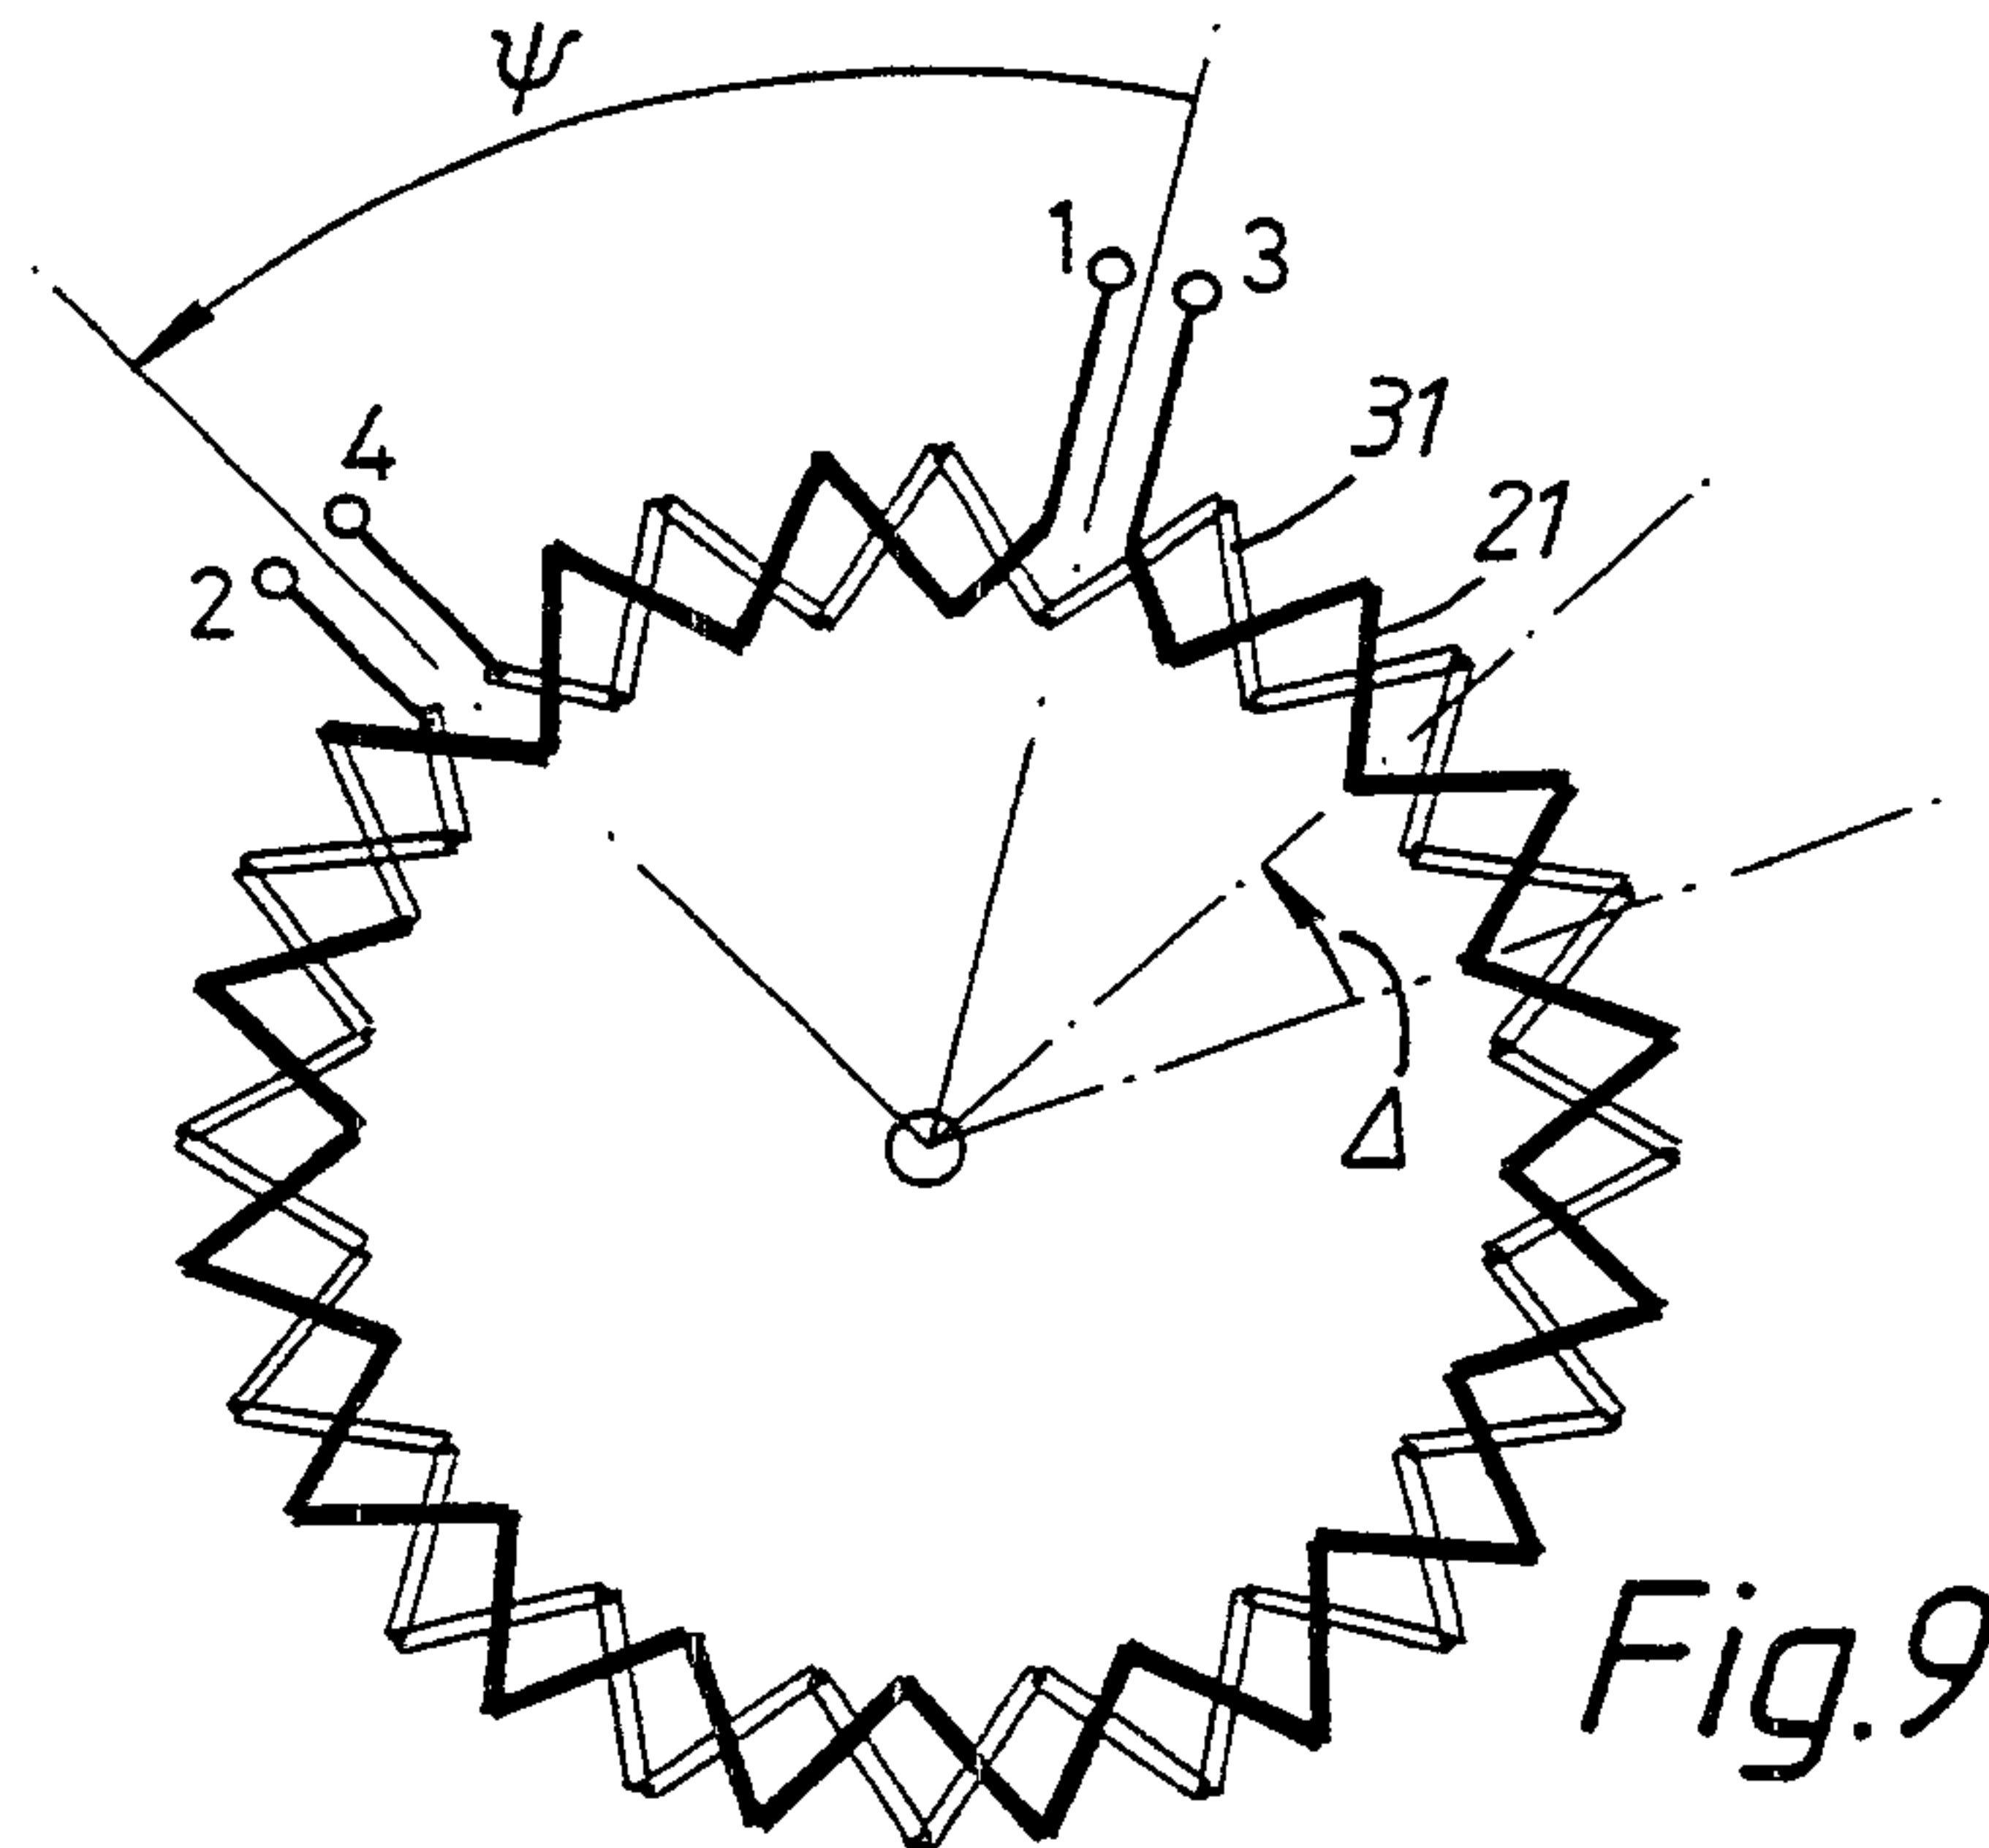


Fig. 9

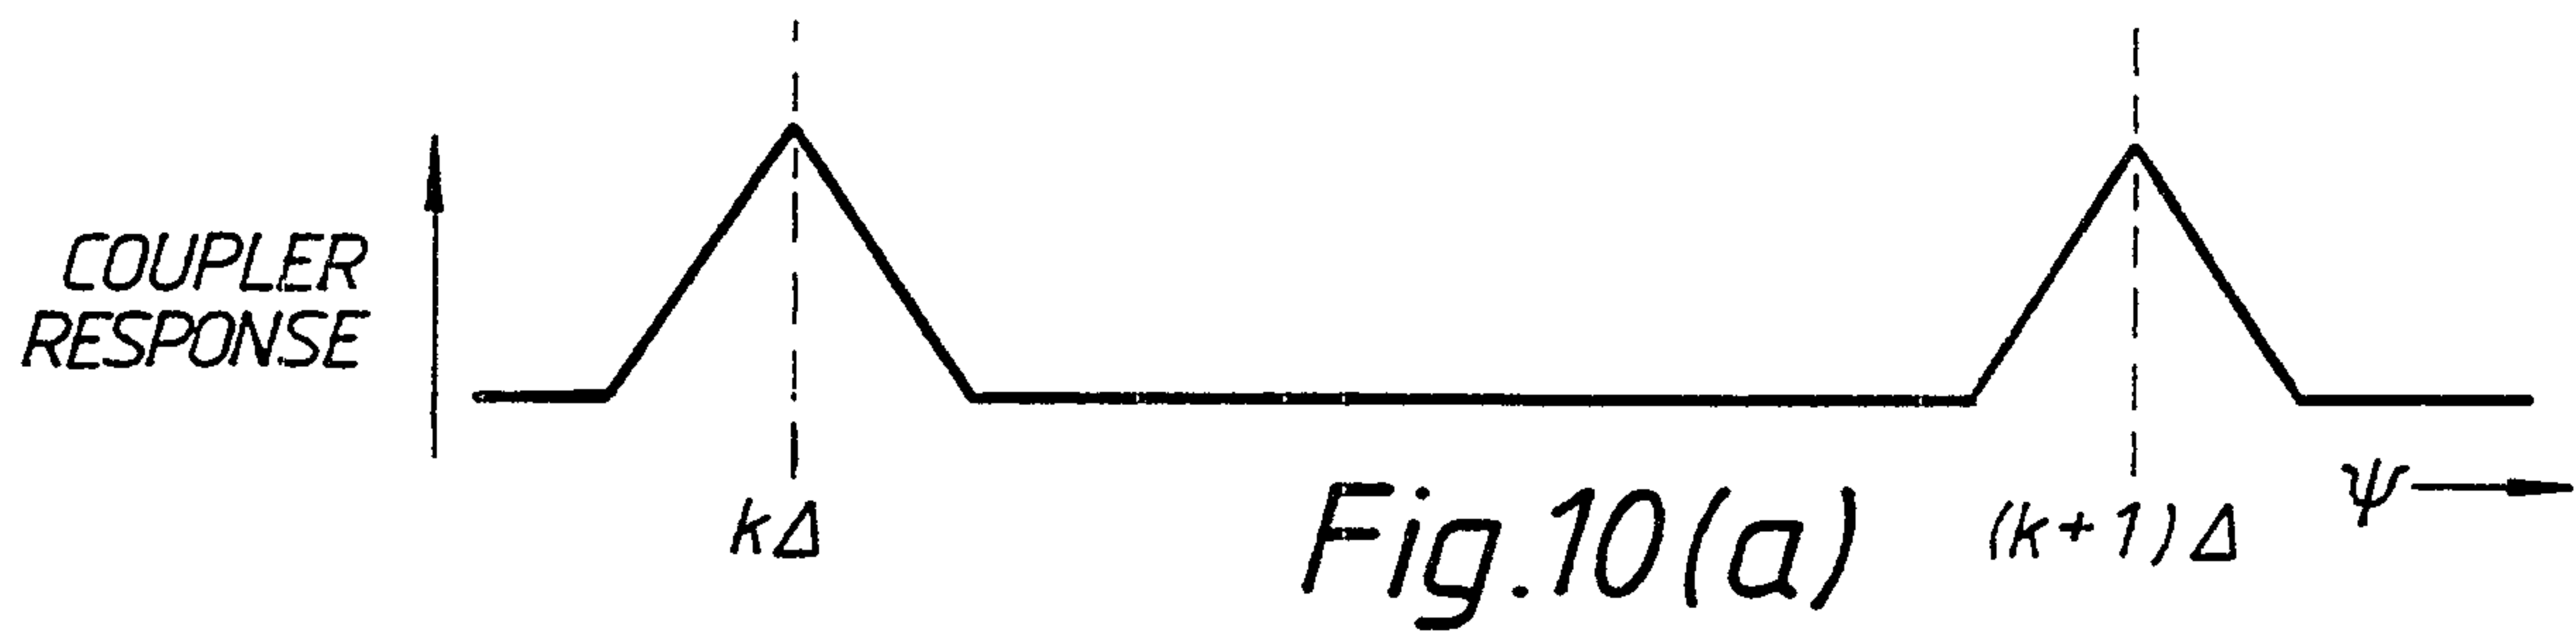


Fig. 10(a)

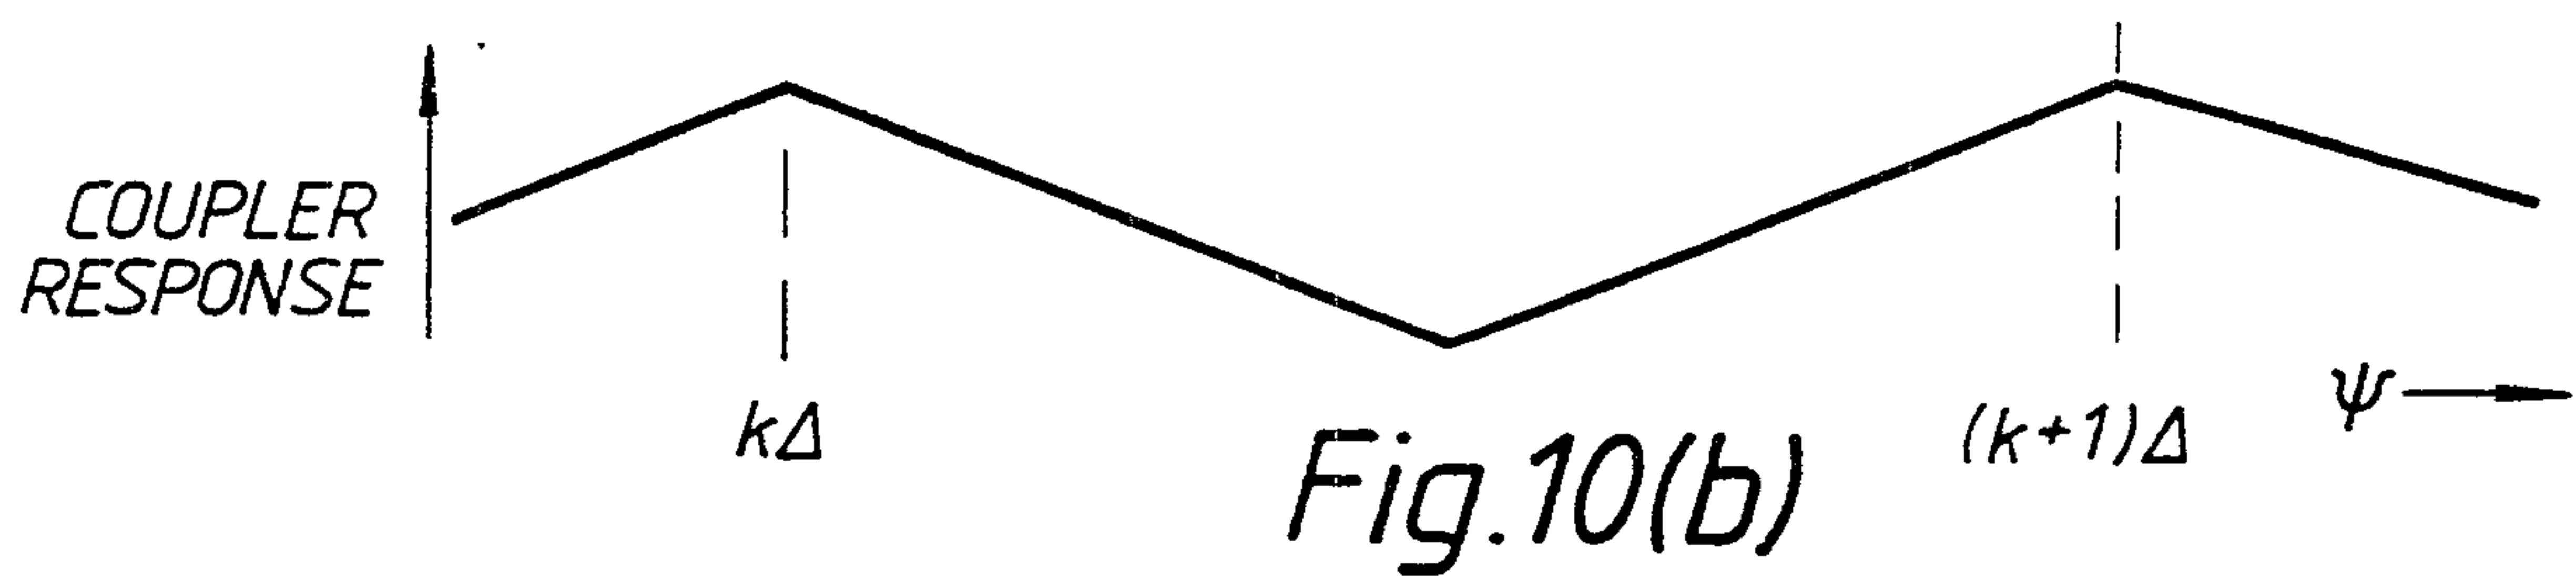


Fig. 10(b)

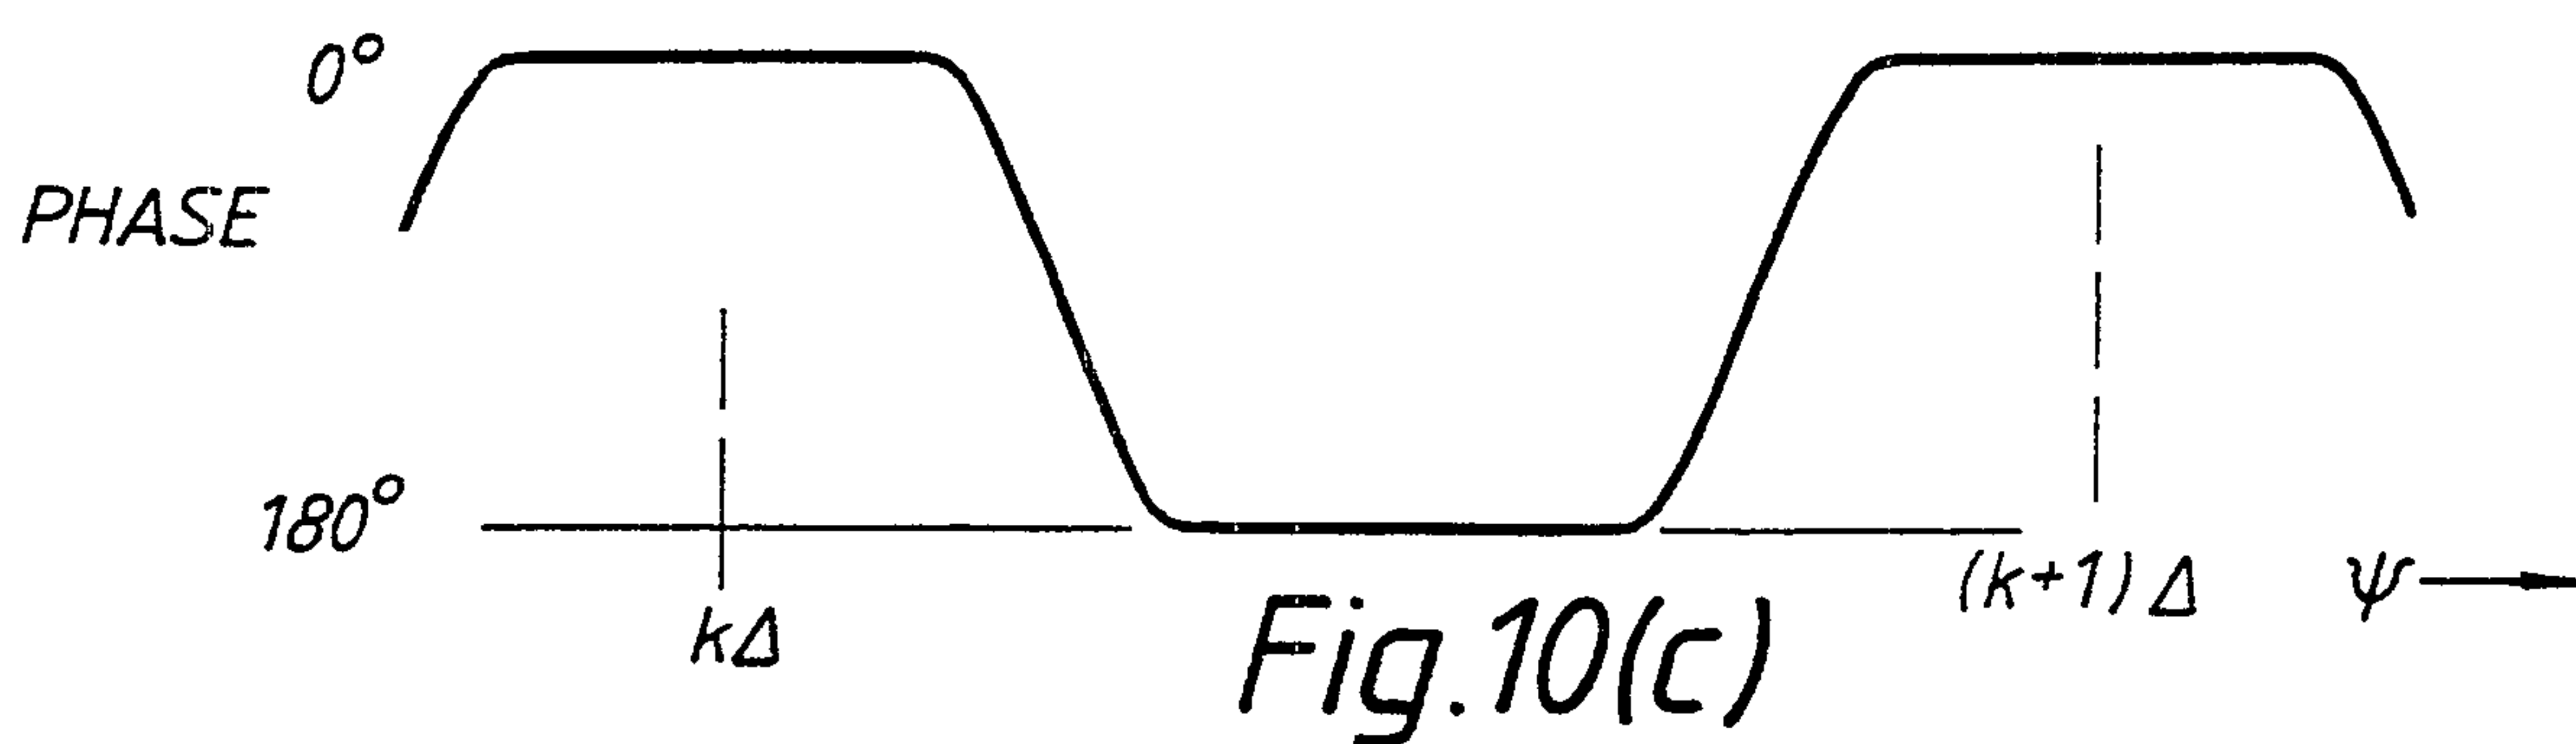


Fig. 10(c)

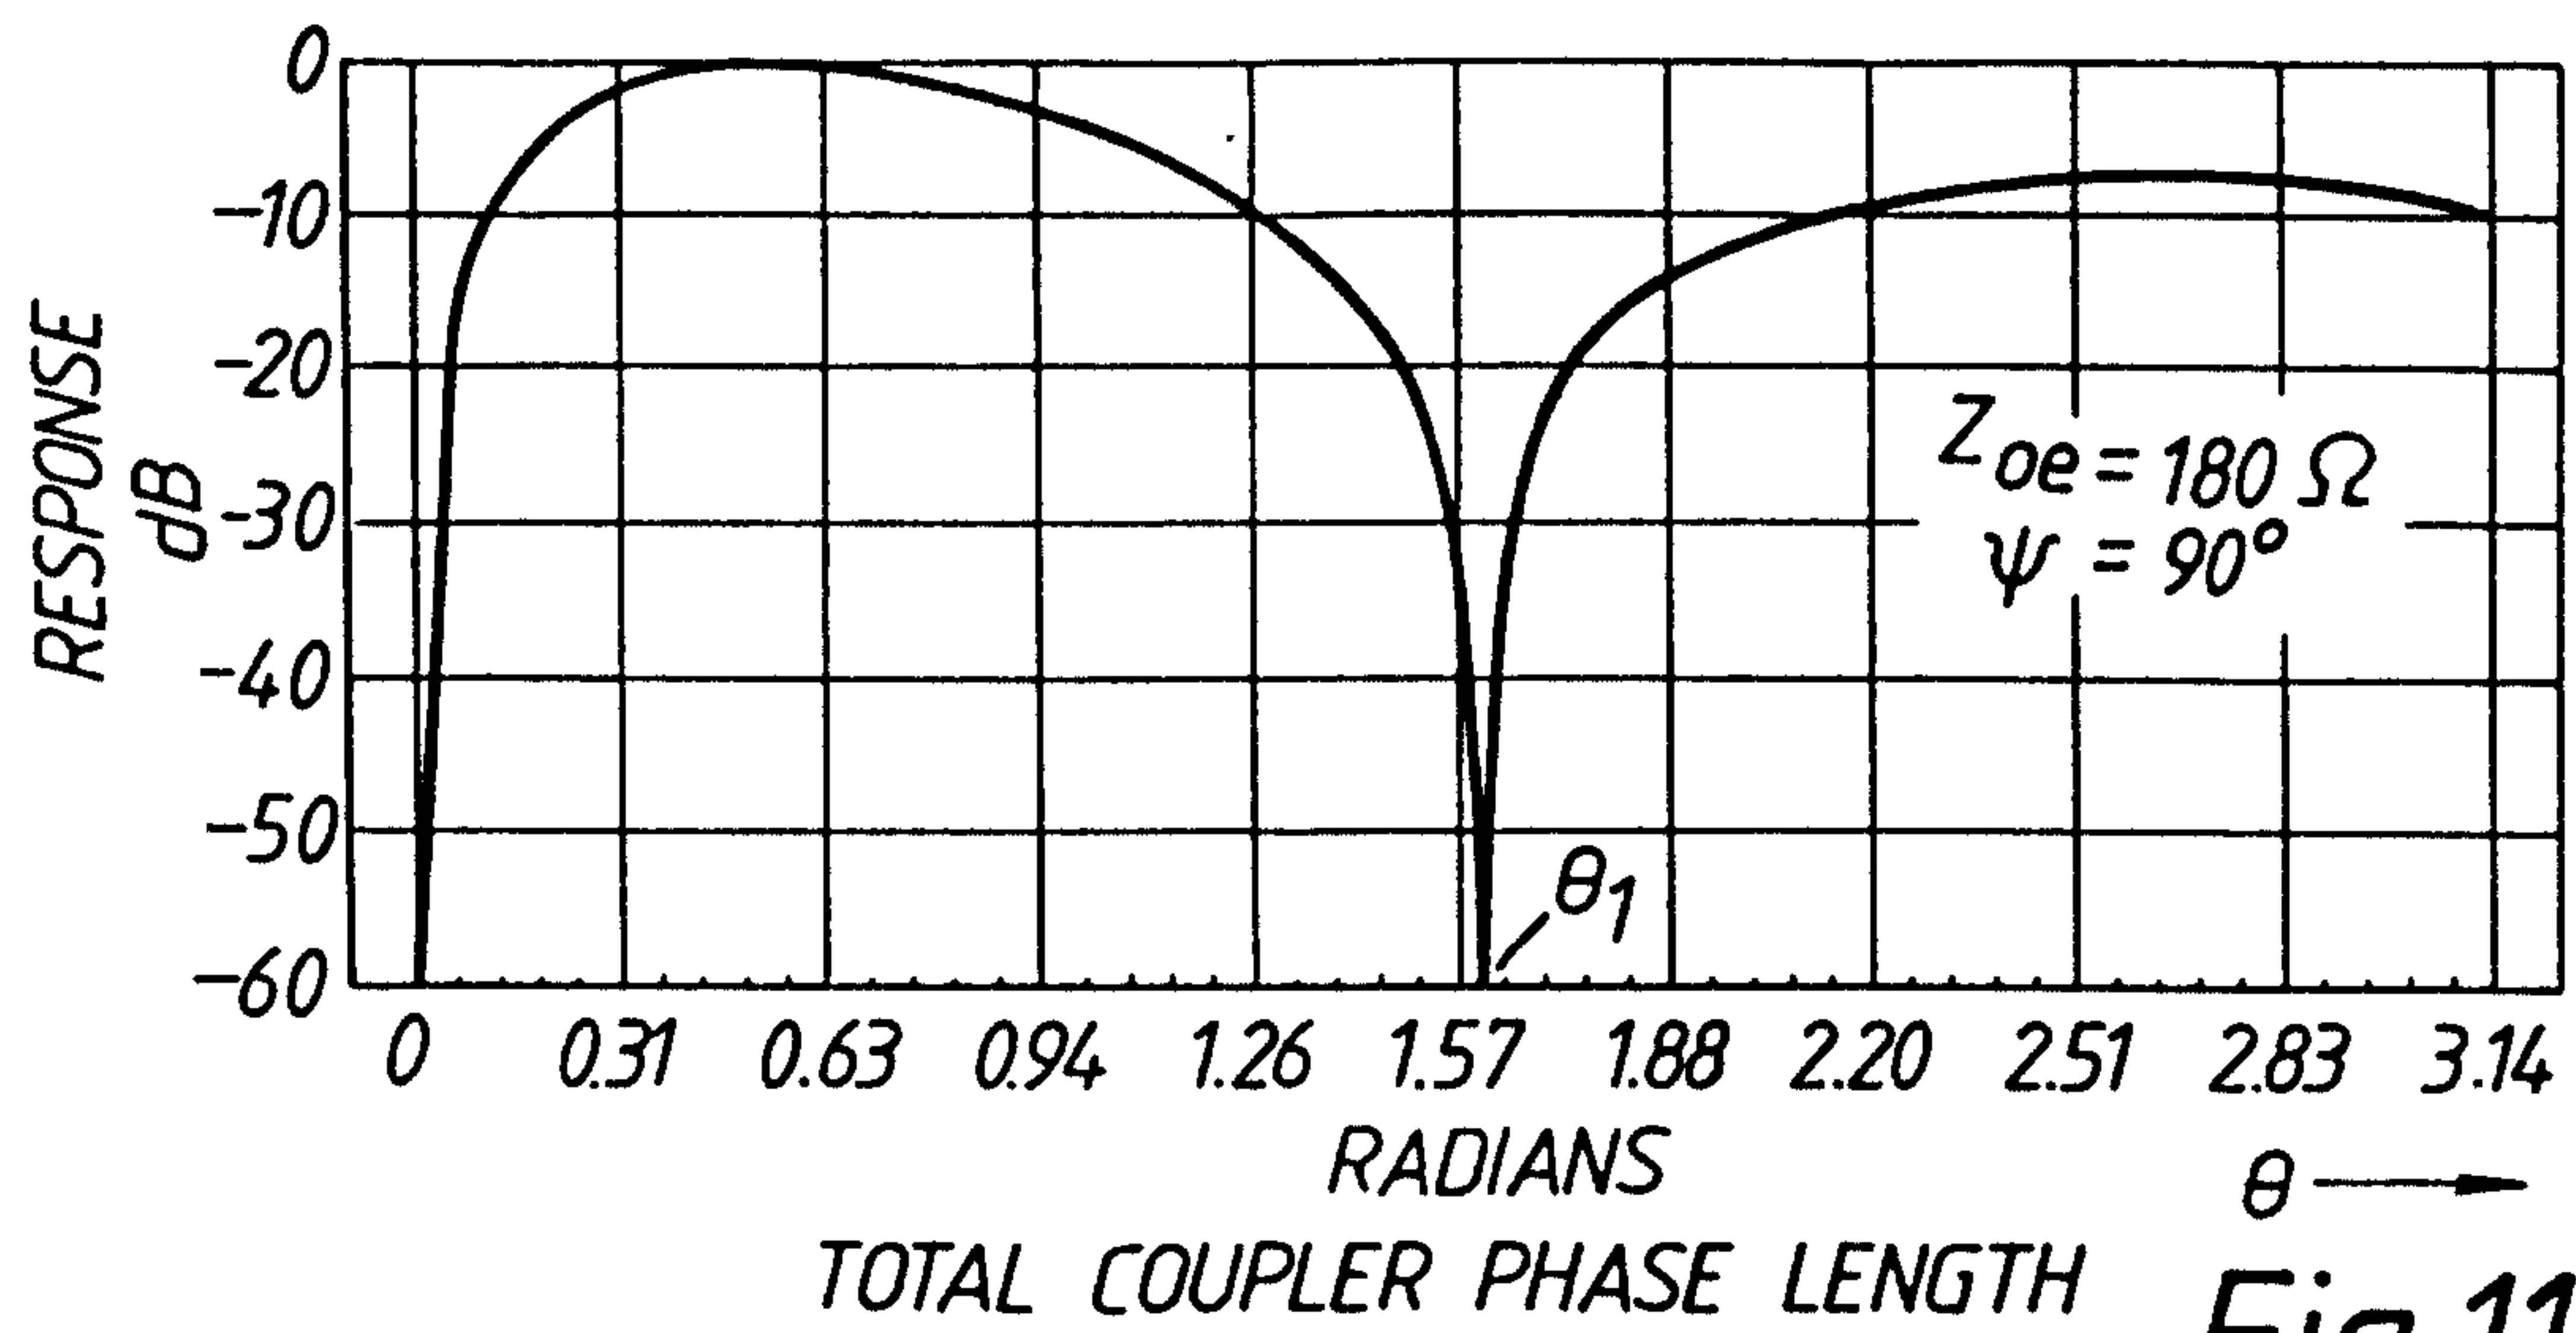


Fig. 11(a)

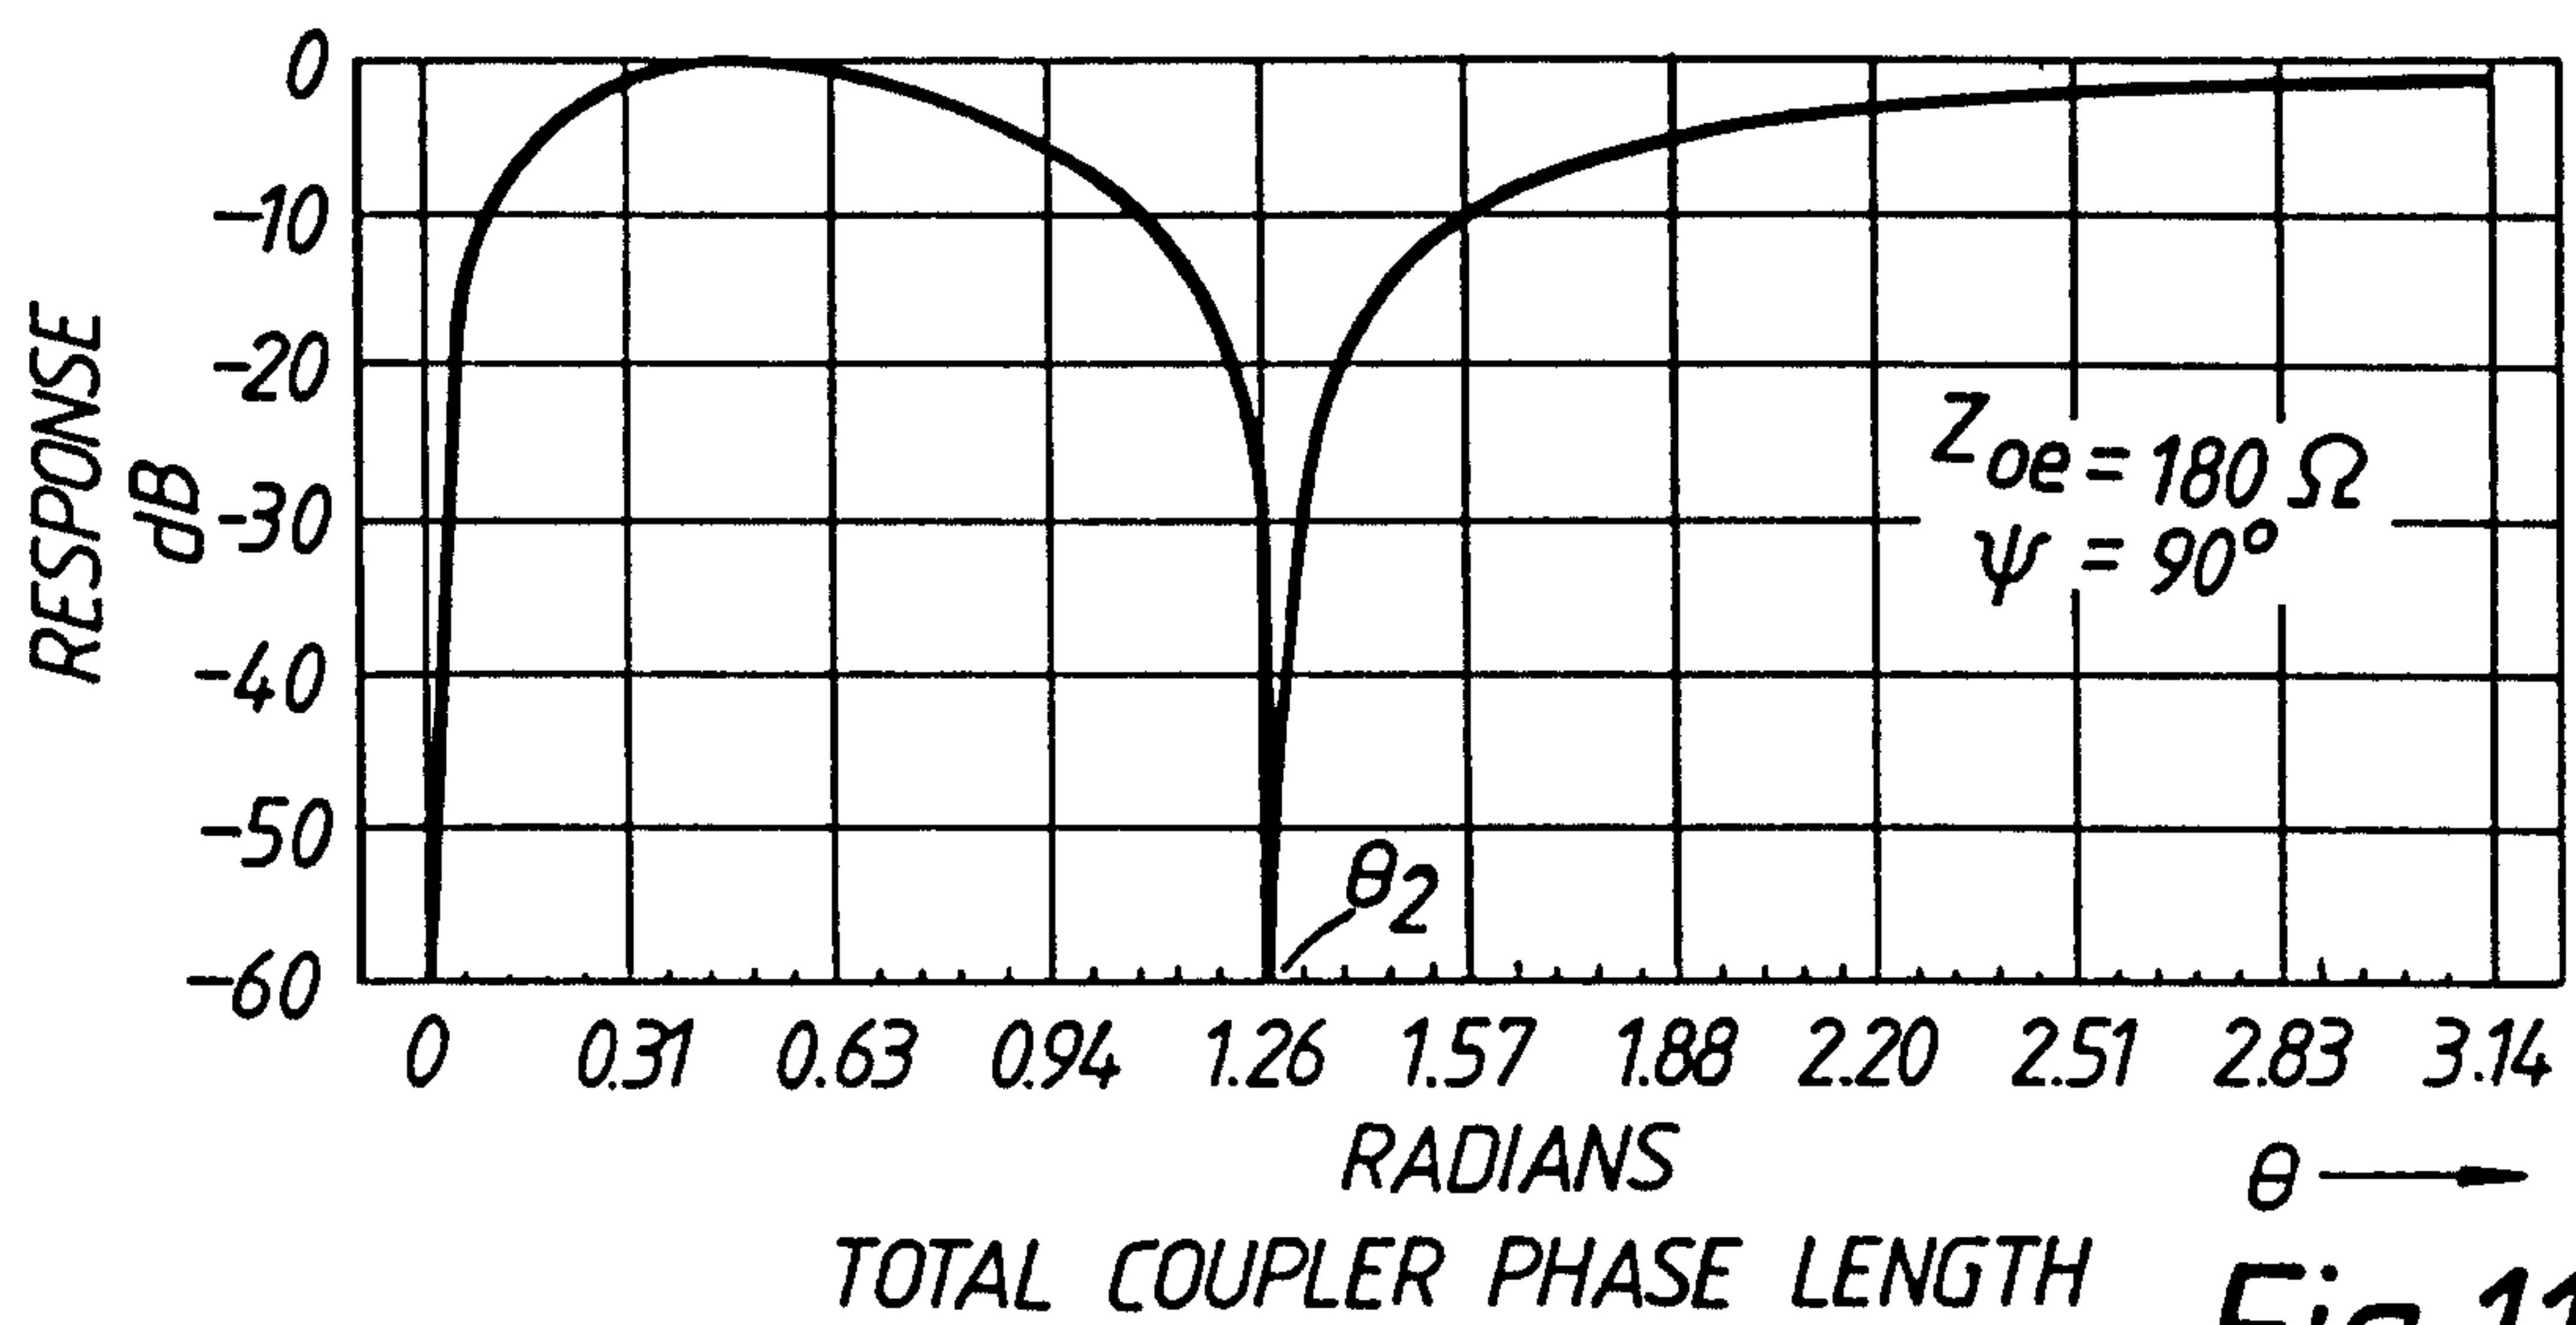


Fig. 11(b)

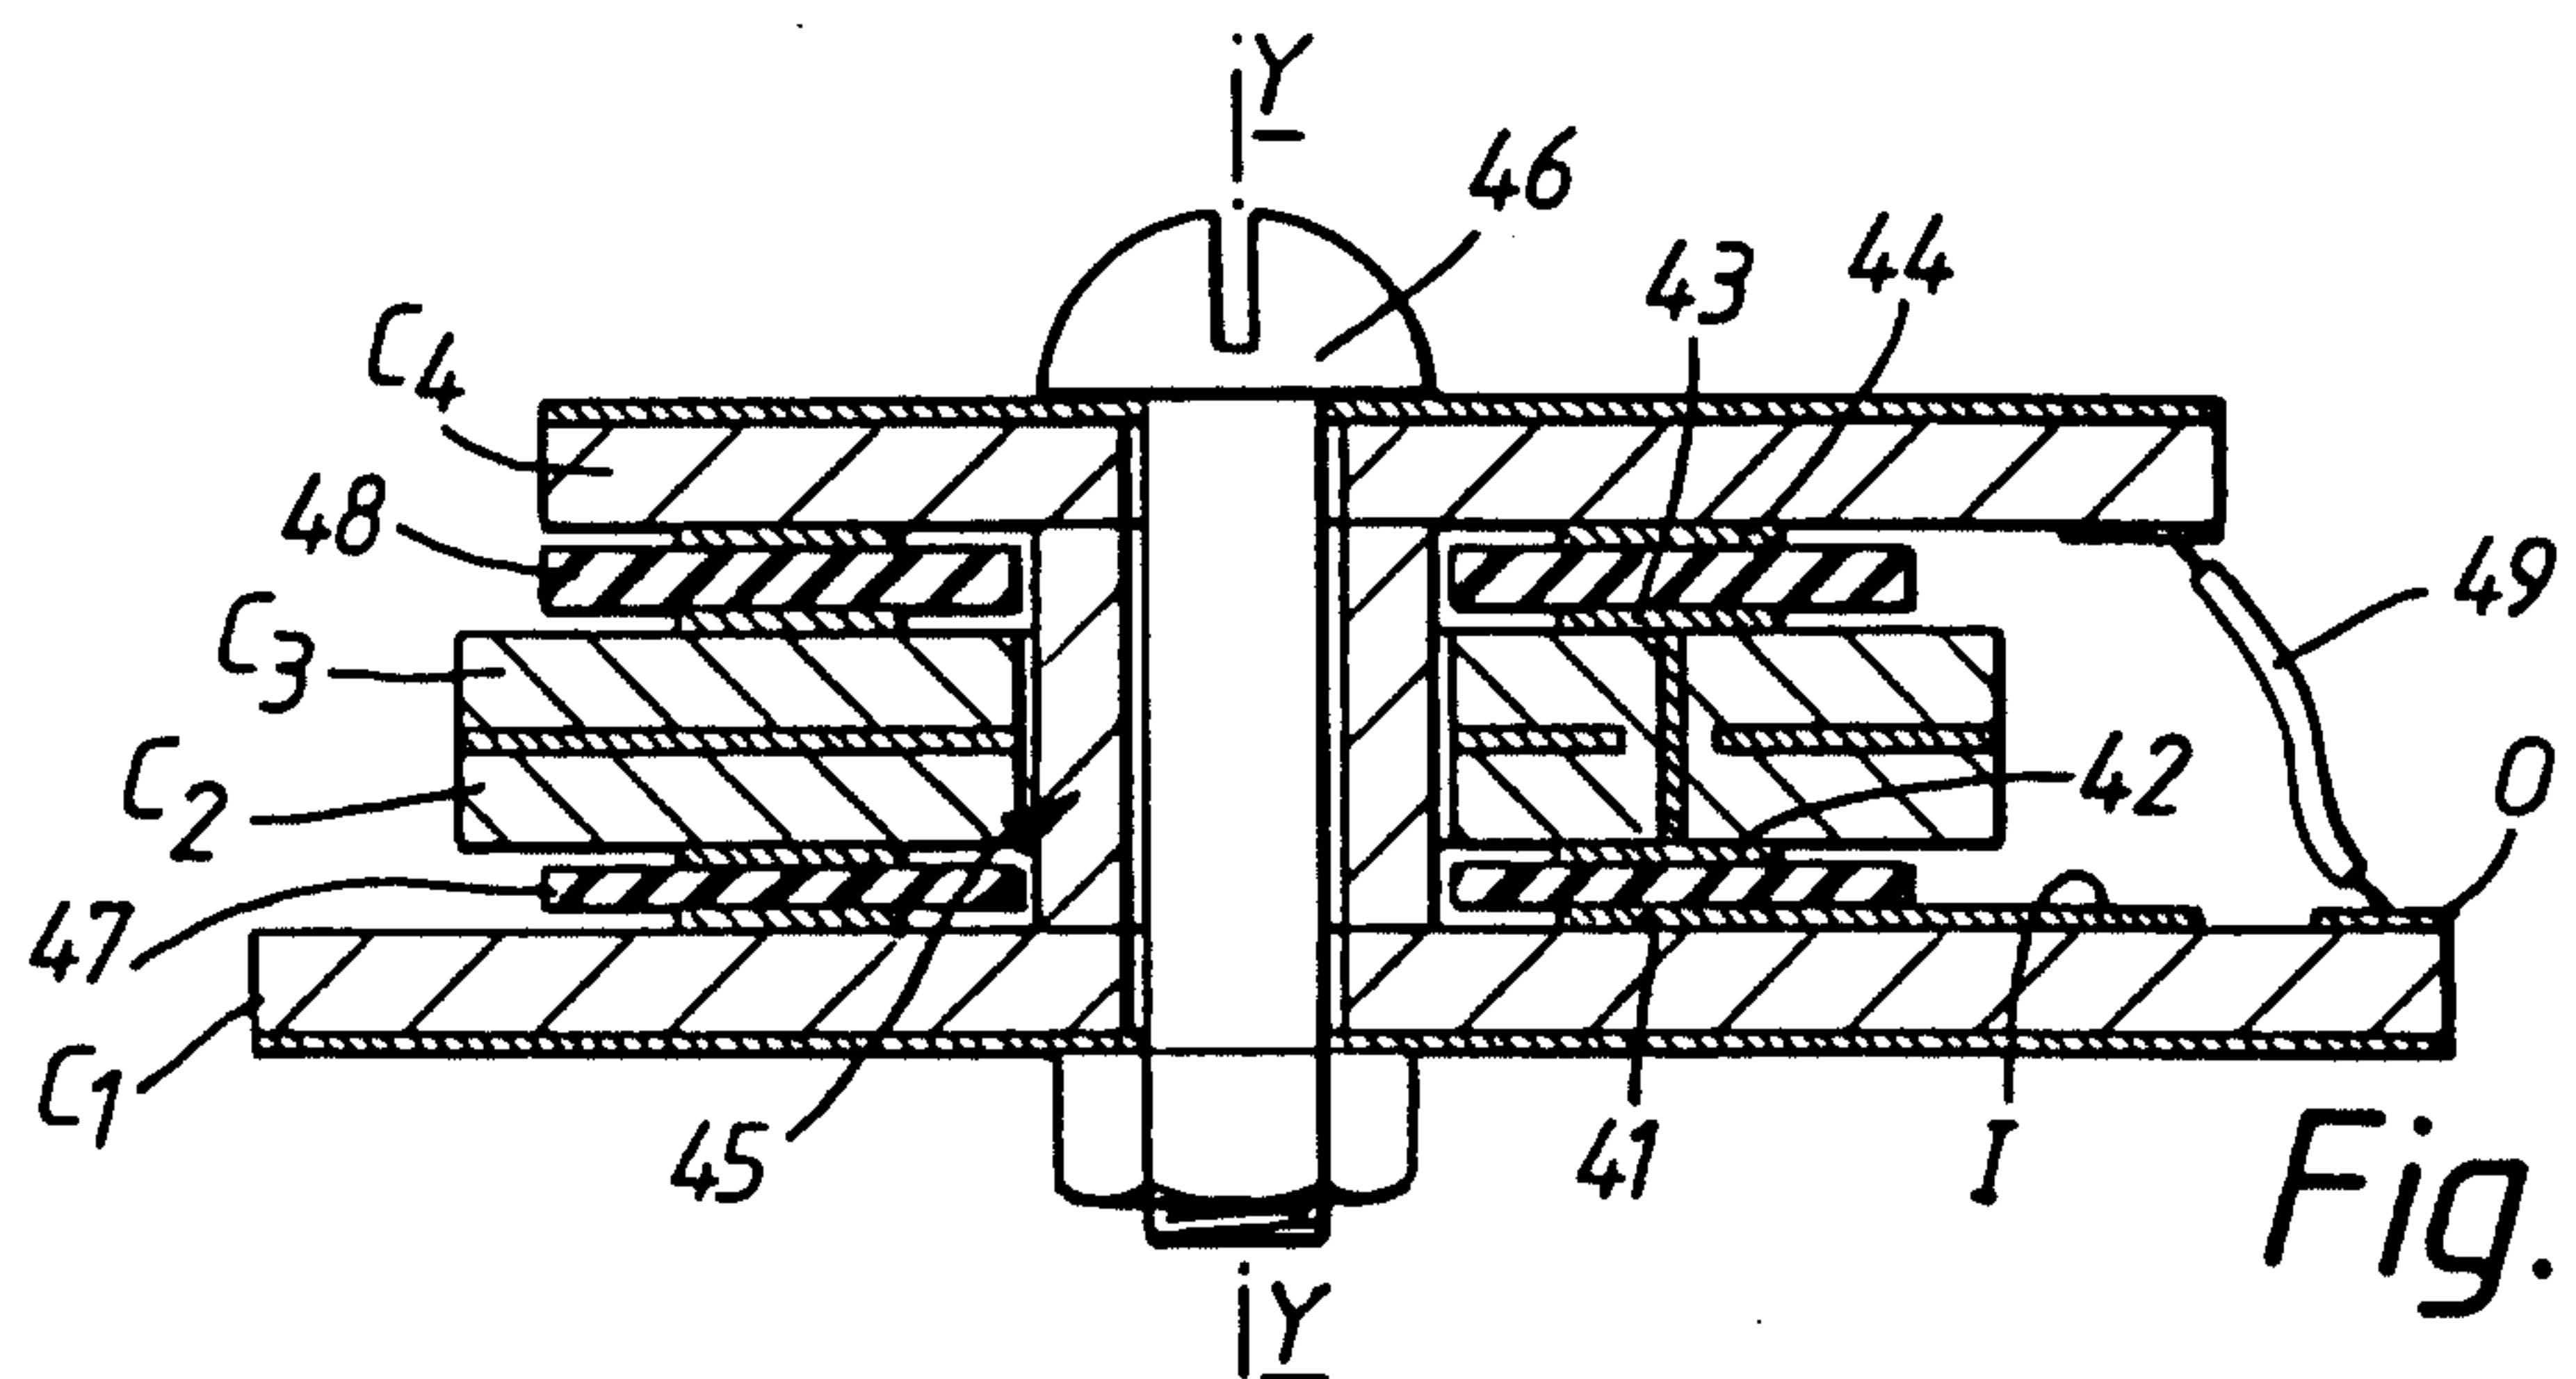


Fig. 12

