

B. Kuhns. Grain-Drill.

116719

PATENTED JUL 4 1871

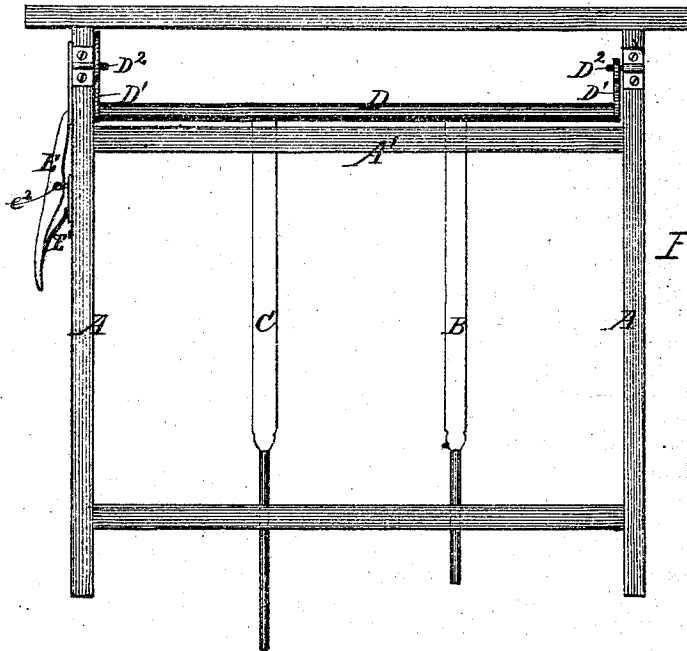


Fig. 1.

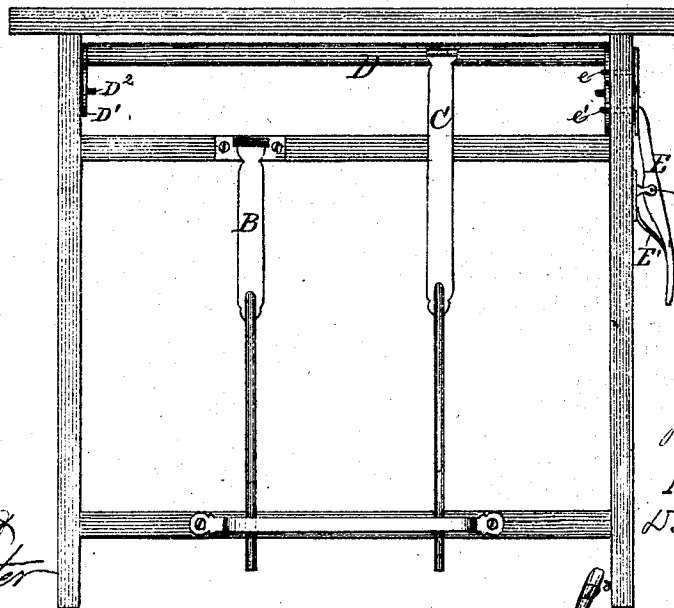


Fig. 2.

Attest
A. Ruppert
J. W. Foster

B. Kuhns
Inventor
H. P. Holloway & Co
Atty

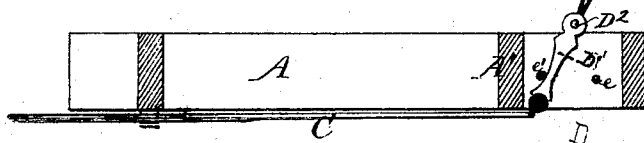


Fig. 3.

UNITED STATES PATENT OFFICE.

BENJAMIN KUHNS, OF DAYTON, OHIO.

IMPROVEMENT IN GRAIN-DRILLS.

Specification forming part of Letters Patent No. 116,719, dated July 4, 1871.

To all whom it may concern:

Be it known that I, BENJAMIN KUHNS, of Dayton, in the county of Montgomery and State of Ohio, have invented a certain Improvement in Grain-Drills; and I do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the annexed drawing making part of this specification, in which—

Figure 1 is a plan view of so much of the frame of a grain-drill as is necessary to illustrate my invention. Fig. 2 is a bottom view thereof. Fig. 3 is a longitudinal section.

The same letters are used in all the figures in the designation of identical parts.

This invention relates to that class of grain-drills in which the hoes are changeable from single-file to double-file, and vice versa; and my improvement consists in hinging the movable drag-bars to a bar which is suspended by arms at each end from stationary studs on the frame, and held in one position or the other by two studs playing through apertures in the frame and forming part of a spring-lever arranged on one side of such frame, as will be generally explained in the following description and specifically pointed out in the claim.

In the annexed drawing, A refers to the framework of a grain-drill, constructed with a cross-beam, A', to which the stationary drag-bars, B, carrying the stationary hoes, are hinged. Every alternate one of the drag-bars is movable, and those, marked C, are hinged to a bar D, located in front of the beam A'. This bar extends from side to side of the frame, between its longitudinal beams, and has an arm, D¹, at each end, by means of which it is suspended from projecting studs D² which are securely fastened to the frame. These studs may, however, be formed on the arms of the bar and turn in suitable bearings, if preferred. One of the arms is extended above the pivoted stud D² to form a suitable handle D³, by means of which the bar may be oscillated. It will be understood that on drawing the machine

forward the hoes, entering the earth, will oscillate the bar D rearward as far as its arms are permitted to swing. The movement of the bar is controlled by two studs, *e* and *e*¹, which play through apertures in one of the longitudinal beams of the frame A, so that when projected the rear edge of the arm D¹ upon that end of the bar D will come in contact with one or the other of these studs, according to the position which the changeable hoes shall occupy with reference to the stationary ones. When the hoes are to stand in a row the arm of the bar D is brought forward of the stud *e*, but when the hoes are arranged in a zigzag line the arm of the bar D will occupy the position shown in Fig. 3, so as to come in contact with the stud *e*¹. The studs *e* and *e*¹ form part of one arm of a lever, E, which is pivoted upon a stud, *e*², on the outside of the frame so as to move in a horizontal plane. The arm of the lever carrying the studs *e* and *e*¹ is kept in contact with the frame by means of a spring, E', acting upon the other arm, as clearly shown in Figs. 1 and 2. On changing the hoes from one position to the other the studs *e* and *e*¹ are temporarily withdrawn into the frame by turning the lever E.

What I claim as my invention, and desire to secure by Letters Patent, is—

In combination with the oscillating bar D, to which the changeable drag-bars are hitched, and its arms D¹ D¹, the studs *e* and *e*¹ which play through the side beam of the frame, and are retracted and projected by means such as described, or equivalent means, all operating in the manner set forth.

In testimony whereof I have signed my name to this specification in the presence of two subscribing witnesses.

BENJAMIN KUHNS.

Witnesses:

J. F. LENTZ,
GEO. M. YOUNG.