(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 February 2005 (03.02.2005)

PCT

(10) International Publication Number
WO 2005/010238 A1

(51) International Patent Classification[7]: C25C 1/00, 1/06, 1/10, 1/22, 5/02

(21) International Application Number: PCT/US2004/008815

(22) International Filing Date: 17 March 2004 (17.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/602,056 24 June 2003 (24.06.2003) US

(71) Applicant *(for all designated States except US)*: **THE GOVERNMENT OF THE UNITED STATES OF AMERICA, as represented by THE SECRETARY OF THE NAVY** [US/US]; Naval Research Laboratory, 4555 Overlook Avenue, SW, Code 1008.2, Washington, DC 20375 (US).

(72) Inventors: **O'GRADY, William, E.**; 4108 Gallatin Street, Hyattsville, MD 20781 (US). **CHEEK, Graham, T.**; 5 Leeward Court, Annapolis, MD 21403 (US).

(74) Agent: **KARASEK, John, J.**; Associate Counsel (Patents), Naval Research Laboratory, 4555 Overlook Avenue, SW, Washington, DC 20375-5325 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOW TEMPERATURE REFINING AND FORMATION OF REFRACTORY METALS

(57) Abstract: This invention discloses and claims the low temperature reduction and purification of refractory metals, metal compounds, and semi-metals. The reduction is accomplished using non-aqueous ionic solvents in an electrochemical cell with the metal entity to be reduced. Using this invention, TiO_2 is reduced directly to Ti metal at room temperature.

WO 2005/010238 A1

LOW TEMPERATURE REFINING AND FORMATION OF REFRACTORY METALS

Technical Field

This invention pertains to electrochemical reduction and purification of refractory metals, metal compounds and semi-metals at low temperatures in non-aqueous ionic solvents. Metals and semi-metals form oxides and they also have a significant oxygen solubility. Using the methods described herein below it is possible to produce metals such as titanium from bulk titanium dioxide at significant cost savings. Further, it is possible to reduce or remove the oxides on highly oxidized titanium metal surfaces.

Background Art

The Kroll process and Hunter process are methods currently in use for the production of titanium metal from titanium dioxide. In these methods, TiO_2 is reacted with chlorine gas to produce titanium tetrachloride, a volatile corrosive liquid. This is reduced to titanium metal by reacting with metallic magnesium in the Kroll process or with sodium in the Hunter process. Both processes are carried out at high temperatures in sealed reactors. Following this, a two-step refining process is carried out which includes two high temperature vacuum distillations to remove the alkali metal and its chloride from titanium metal.

The refining of titanium by electrochemical means has long been a sought after process. It has been shown in the literature that oxygen could be removed from titanium and titanium alloys using an electrochemical high temperature molten salt method. This has led to the development of a possible new method of extracting and refining titanium directly from the oxide ore and was published by G. Z. Chen, D.J. Fray and T.W. Farthing in Nature **407**, 361 (2002), and PCT international application publication number WO 99/64638,16 December 1999. This process involves electrochemistry in a high temperature molten salt, molten $CaCl_2$ at ~ 800 °C. In these publications, two different mechanisms are proposed for the reduction of titanium oxides. In the first mechanism, it is proposed that the Ca^{+2} ions are reduced to metallic Ca at the cathode. Then the Ca metal chemically reacts with the TiO_x forming an oxygenated Ca species, CaO, which is soluble in the melt forming Ca^{+2} and O^{-2}. The second mechanism proposed was the direct electrochemical reduction of the TiO_x to Ti metal and an oxygen species such as O^{-2}. This is followed by the migration of the O^{-2} to the carbon anode where it forms a volatile species such as CO or CO_2.

Disclosure of Invention

We have established that a refractory metal oxide can be electrochemically reduced directly to the metal at room temperature. In this, TiO_2 was immersed in a non-aqueous ionic

solvent in an electrochemical cell in which a highly oxidized titanium strip is the cathode, a Pt wire the anode, and an Al wire was used as a reference electrode. After determining a voltage at which TiO_2 could be converted to Ti metal, a current was passed through the electrochemical system at the determined voltage to produce Ti metal.

Brief Description of Drawings

These and other objects, features and advantages of the invention, as well as the invention itself, will become better understood by reference to the following detailed description, appended claims, and accompanying drawings where:

Figure 1 shows the voltage window for the production of Ti from TiO_2 in a non-aqueous ionized solvent.

Figure 2 shows the apparatus used to demonstrate the invention and produce the results shown in Figure 1.

Figure 3 shows XPS data for Ti, and TiO_2 recorded on the reduced bulk TiO_2 discussed below using the apparatus shown in Figure 2.

Figure 4 shows XPS spectra of TiO_2 Anatase.

Best Mode for Carrying Out the Invention

In this invention, TiO_2 has been reduced to Ti at room temperature using an electrochemical electrolysis system and a non-aqueous ionic solvent. To accomplish the reduction, or the removal of oxygen from TiO_2, current was passed through the system at a voltage predetermined to reduce the metal oxide. In this invention, a compound MX is reacted in an electrochemical system to remove X from MX. X may be an element chemically combined with M as for instance TiO_2, or dissolved in M. For instance O may react with M to form oxides, or it may also be dissolved as an impurity in M.

In this invention, M is a metal or a semi-metal, while MX is a metal compound, or a semi-metal compound or a metal or semi-metal with X being dissolved in M.

The non-aqueous ionic liquid solvent electrolytes used in this invention are mono- and dialkylimidazolium salts mixed with aluminum chloride. This is a class of compounds known as organochloroaluminates.

This class of compounds has been found to posses a wide electrochemically stable window, good electrical conductivity, high ionic mobility and a broad range of room temperature liquid compositions, negligible vapor pressure and excellent chemical and thermal stability. These compounds have described by Chauvin et al, *Chemtech,* 26-28 (1995).

The non-aqueous ionic liquids used in the reactions of this invention described above were either 1-ethyl-3-methylimidazolium tetrafluoroborate or 1-ethyl-3-methylimidazolium chloride (EMIC) and aluminum chloride. The latter solvent was prepared by mixing $AlCl_3$ with EMIC in a 0.8 to 1.0 mole ratio. Non-aqueous ionic liquids have been studied and reported upon by C.L. Hussey in *Chemistry of Nonaqueous Solutions,* Mamantov and Popov, eds., VCH publishers, chapter 4 (1994), and McEwen et al. *Thermochemica Acta*, **357-358,** 97-102 (2000). The articles describe a plurality of non-aqueous ionic liquids based particularly on alkylimidazolium salts, which are useful in the instant invention. The temperature stability of these compounds makes them particularly attractive for this application because they are stable over a considerable range up to 200 °C, and encompassing room temperature (20 °C to 25 °C). The preferred compounds for use as the ionic liquids are the dialkylimidazolium compounds. In addition, the substitution of alkyl groups for hydrogen atoms on carbon atoms in the ring increases the electrochemical and thermal stability of the resulting imidazolium compounds thus allowing for higher temperature use.

Metals and semi-metals represented by the symbol M comprise Ti, Si, Ge, Zr, Hf, Sm, U, Al, Mg, Nd, Mo, Cr, Li, La, Ce, Y, Sc, Be, V or Nb, or alloys thereof or mixtures thereof.

The Symbol X is representative of O, C, N, S, P, As, Sb, and halides. Phosphorus, arsenic, and antimony are impurities particularly associated with the semi-metals Ge, and Si whose purity is critical to the function as semi-conductors.

Experimental

To establish the efficacy of the invention described and claimed herein, the following experiments were conducted. Titanium foil 10 cm long by 2 mm wide by 0.25 mm thick was oxidized in a furnace at 550 °Cin air for 140 hours. A simple test tube type electrochemical cell as illustrated in Figure 2 was used, and experiments were carried out in a dry box. The cell contained a non-aqueous ionic liquid comprising aluminum chloride and 1-ethyl-3-methyimidazolium chloride (EMIC) in a mole ratio of 0.8:1.0 respectively giving a mole fraction of $AlCl_3$ of 0.44. A sample of the TiO_2 prepared above was placed in the cell so that ~1 cm was immersed in the electrolyte. The TiO_2 strip acts as the cathode, a platinum wire was used as the counter electrode or anode, and an aluminum wire was used as a reference electrode. Voltage was applied to the electrolysis cell and controlled by a Princeton Applied Research 283 potentiostat through a computer controlled interface. By controlling the voltage it was demonstrated that the oxide on the TiO_2 strip was removed in a short time at ambient temperature. Figure 1 shows the voltammograms recorded at a sweep rate of 50mV/sec for the oxidized Ti strip after it was introduced into the electrolyte. The initial sweep toward more

negative voltages exhibits two clearly-defined reduction waves past –0.5 V. After several cycles, the resistivity of the oxide film decreases as the titanium oxide film is reduced to the metal. This is evidenced by a decrease in the overall slope of the current-voltage curve. Further, the anodic peak observed in the solid curve at –0.5 V is indicative of metal dissolution, the metal having been formed in the original cathodic sweep. For more extensive reduction, the voltage was held at –1.6 V. This value was chosen because that voltage lies beyond the reduction waves observed in the initial cycle in Figure 1. The oxidized Ti strip was held at a voltage of –1.6V for 15 minutes, then the sweep was continued. The first full sweep after the 15 minute reaction is shown in Figure 1 with the filled dotted line. The area between the solid line and the top of the filled dotted line is the charge used to reduce the thermally grown oxide on Ti. Further, the anodic peak at –0.5 V is now considerably larger and better defined than in the initial sweep. This indicates that a substantial amount of fresh titanium metal was available for the oxidation occurring in this peak.

In another experiment to determine if bulk TiO_2 could be reduced to Ti, a basket was made of 40 mesh titanium gauze, and then ~1 mm diameter particles of TiO_2 anatase obtained from Alfa Aesar were placed in the basket. The basket and particles were then placed in a fresh vial of EMIC-$AlCl_3$ electrolyte and the electrolysis was carried out again with the setup shown in Figure 2. After 14 hours at an applied voltage of –1.8V, the sample basket was removed from the cell and the TiO_2 particles which were initially white were now dark gray. The particles were rinsed with benzene to remove the electrolyte, and the sample sealed in a vial and removed from the dry box in which the electrolysis experiments were carried out. When the titanium reaction particles were removed from the vial they were initially dark gray-almost black, but in time turned light gray with a blue cast.

X-ray photoelectron spectroscopy (XPS) was carried out on the isolated samples after reduction to determine if the titanium oxide had been reduced to titanium metal. The XPS data for the electrolyzed sample is shown in Figure 3. The data show two sets of peaks, one for Ti and one for unreduced TiO_2. Analysis showed that ~12% of the Ti observed in the data is metallic titanium. In order to obtain good XPS data, the sample was washed with water and rinsed with isopropyl alcohol. The sample for analysis was prepared using a standard preparation technique. After grinding several of the particles of the reduced TiO_2, the resulting powder was pressed into a piece of indium foil and introduced into the XPS spectrometer where the data were recorded. The grinding processes further exposes the Ti metal to air which would produce more TiO_2. Hence the actual yield of titanium metal from the electroreduction of TiO_2 would be greater than the 12% found in the analysis. The reference spectrum for the initial sample of TiO_2 is shown in Figure 4. This shows that there is no metallic titanium in the

reference sample. This experiment was repeated using a platinum basket made from 50 mesh gauze. Following the reduction, the powder resulting from the grinding was pressed into a gold foil. The yield of Ti in this experiment was ~20%.

While the experiments above are demonstrations that MX can be transformed to M, as in TiO_2 to Ti metal, it should be clear that for any non-aqueous ionic liquid electrolyte having the proper stable electrochemical voltage window, that any MX can be converted to M.

Commercially, the electrochemical cell would consist of the MX cathode, the non-aqueous ionic electrolyte, and an anode selected and compatible with the voltage required for the reaction of converting MX to M.

The above description is that of a preferred embodiment of the invention. Various modifications and variations are possible in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the invention may be practiced otherwise than as specifically described. Any reference to claim elements in the singular, e.g. using the articles "a," "an," "the," or "said" is not construed as limiting the element to the singular.

Claims:

What is claimed:

1. A low temperature electrochemical method for removing specie X from compound MX, comprising the steps of:

A. forming an electrolysis system comprising a MX cathode, an anode, and a non-aqueous ionic liquid electrolyte;

B. passing a current through said system at a voltage determined to remove X from MX;

C. isolating the reaction product resulting from removal of X from MX.

2. The method according to claim 1, where M is selected from the group consisting of a metal, a metal compound, or a semi-metal compound.

3. The method according to claim 1, where M is selected from the group consisting of Ti, Si, Ge, Zr, Hf, Sm, U, Al, Mg, Nd, Mo, Cr, Li, La, Ce, Y, Sc, Be, V or Nb, or alloys thereof or mixtures thereof.

4. The method of claim 1 or 10, wherein X is selected from the group consisting of O, C, N, S, P, As, Sb, or a halide.

5. The method according to claim 1 or 10, wherein X is oxygen.

6. The method according to claim 1 or 10, wherein said non-aqueous solvent is a chloroaluminate system based on nitrogen heterocyclic cations or functional equivalent thereof.

7. The method according to claim 1 or 10, wherein said non-aqueous solvent is selected from the group consisting of mono and dialkylimidazolium salts.

8. The method according to claim 1 or 10, wherein said non-aqueous solvent is a mixture of 1-ethyl-3-methylimidazolium chloride and aluminum chloride.

9. The method according to claim 1 or 10, wherein said solvent is 1-ethyl-3-methylimidazolium tetrafluoroborate.

10. A low temperature electrochemical method for removing O from TiO_2, comprising the steps of:

A. forming an electrolysis system comprising a TiO_2 cathode, an anode, and a non-aqueous ionic liquid electrolyte;

B. passing a current through said system at a voltage selected to remove O from said TiO_2;

C. isolating the reaction product resulting from the removal of O from TiO_2.

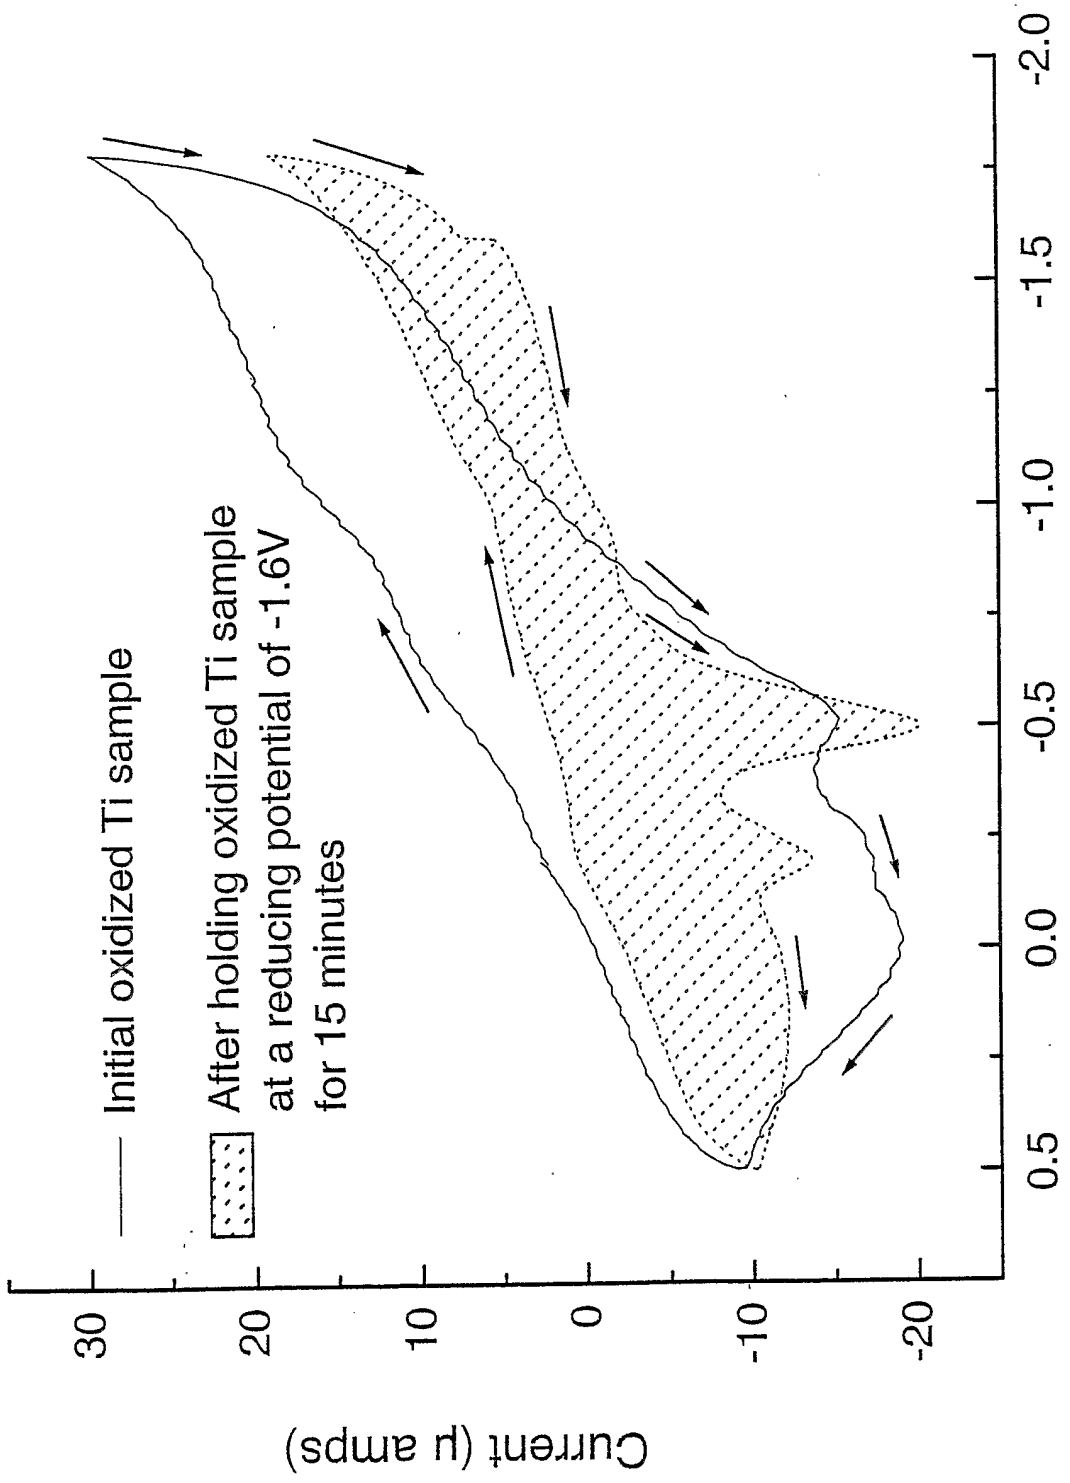

Initial oxidized Ti sample
After holding oxidized Ti sample at a reducing potential of -1.6V for 15 minutes
Current (μ amps)
30
20
10
0
-10
-20
0.5
0.0
-0.5
-1.0
-1.5
-2.0
Voltage (volts vs Al)

Figure 1

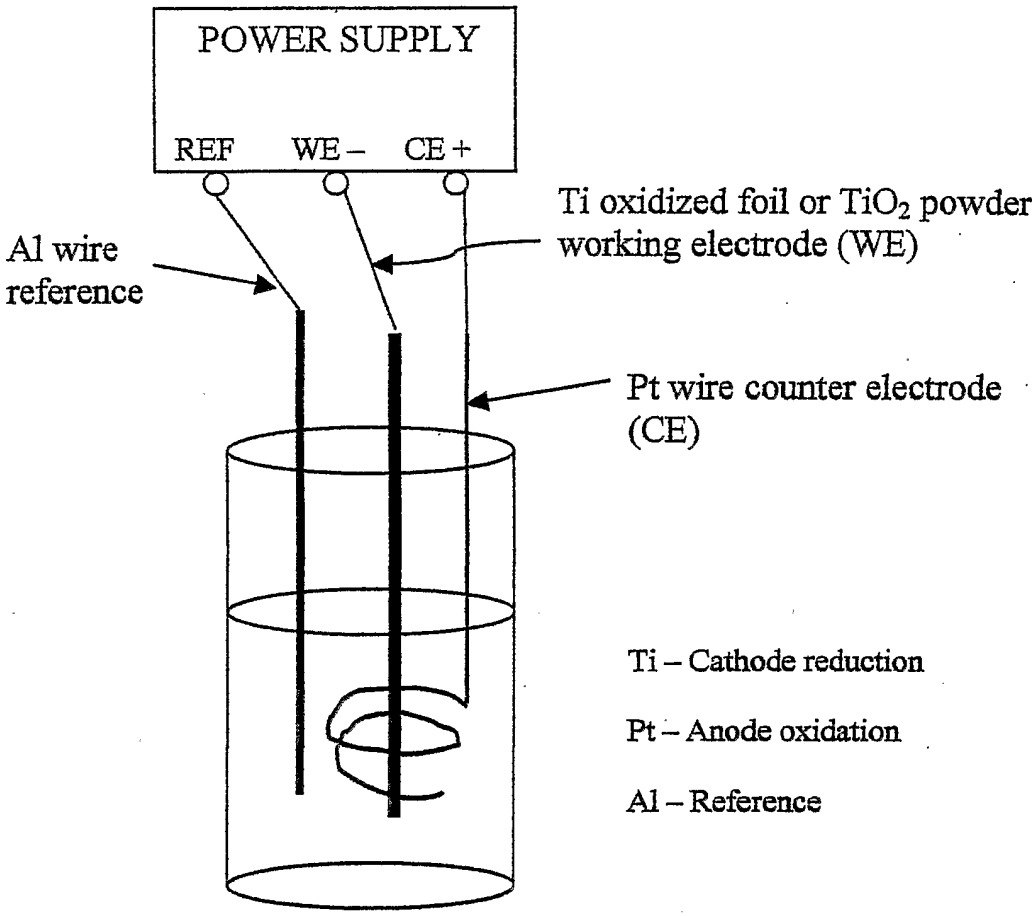

POWER SUPPLY
REF
WE –
CE +
Ti oxidized foil or TiO_2 powder working electrode (WE)
Al wire reference
Pt wire counter electrode (CE)
Ti – Cathode reduction
Pt – Anode oxidation
Al – Reference

Figure 2

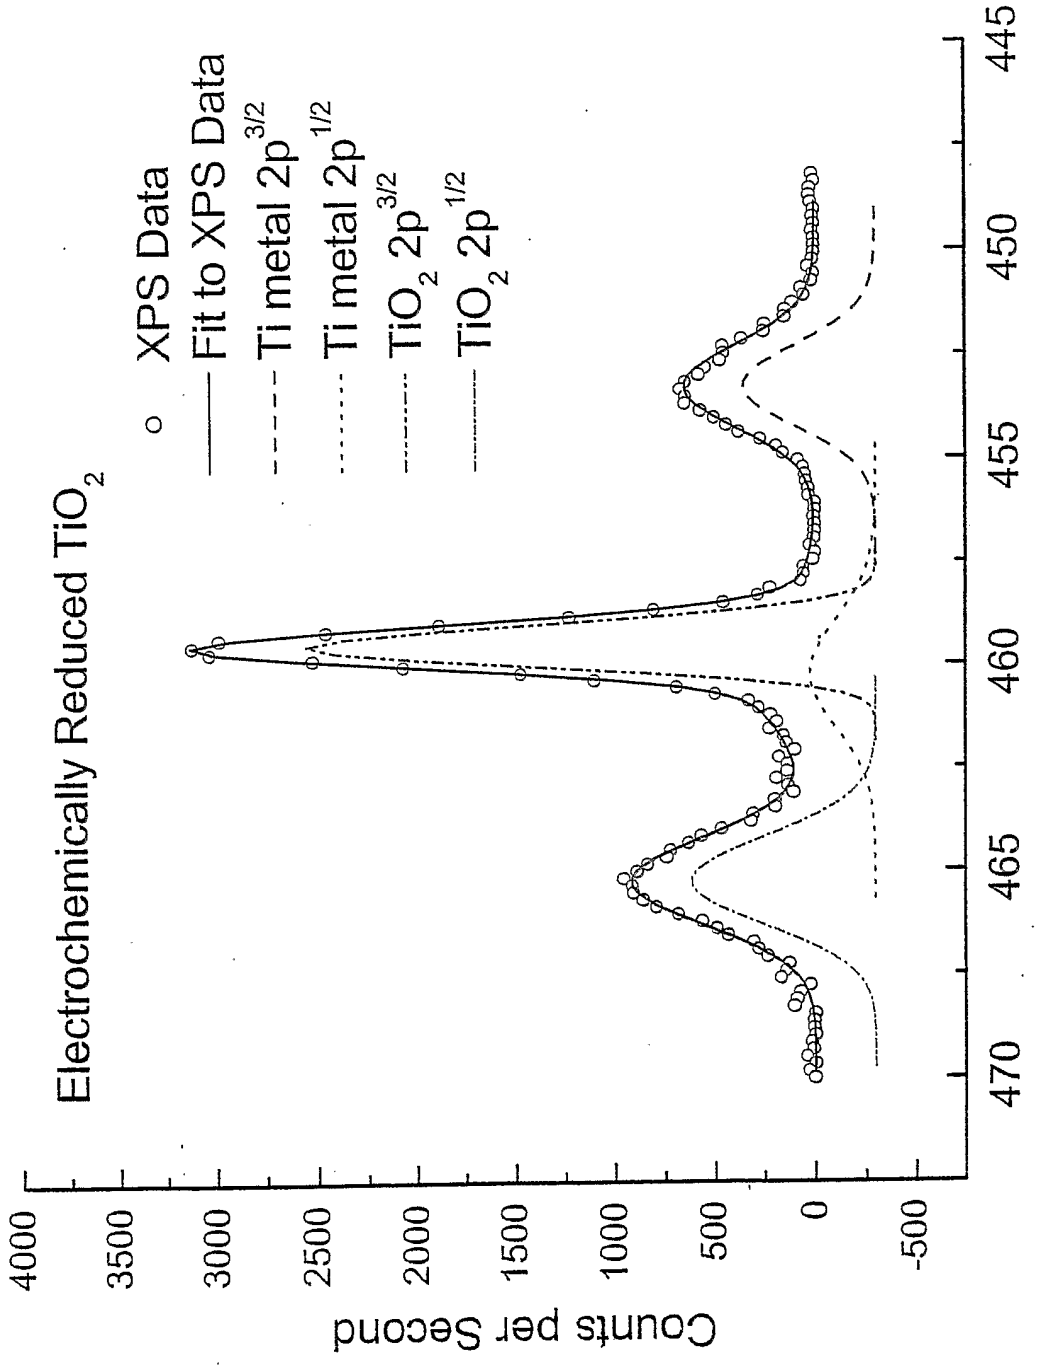

Electrochemically Reduced TiO_2
XPS Data
Fit to XPS Data
Ti metal $2p^{3/2}$
Ti metal $2p^{1/2}$
TiO_2 $2p^{3/2}$
TiO_2 $2p^{1/2}$
Counts per Second
4000
3500
3000
2500
2000
1500
1000
500
0
-500
470
465
460
455
450
445
Energy (eV)

Figure 3

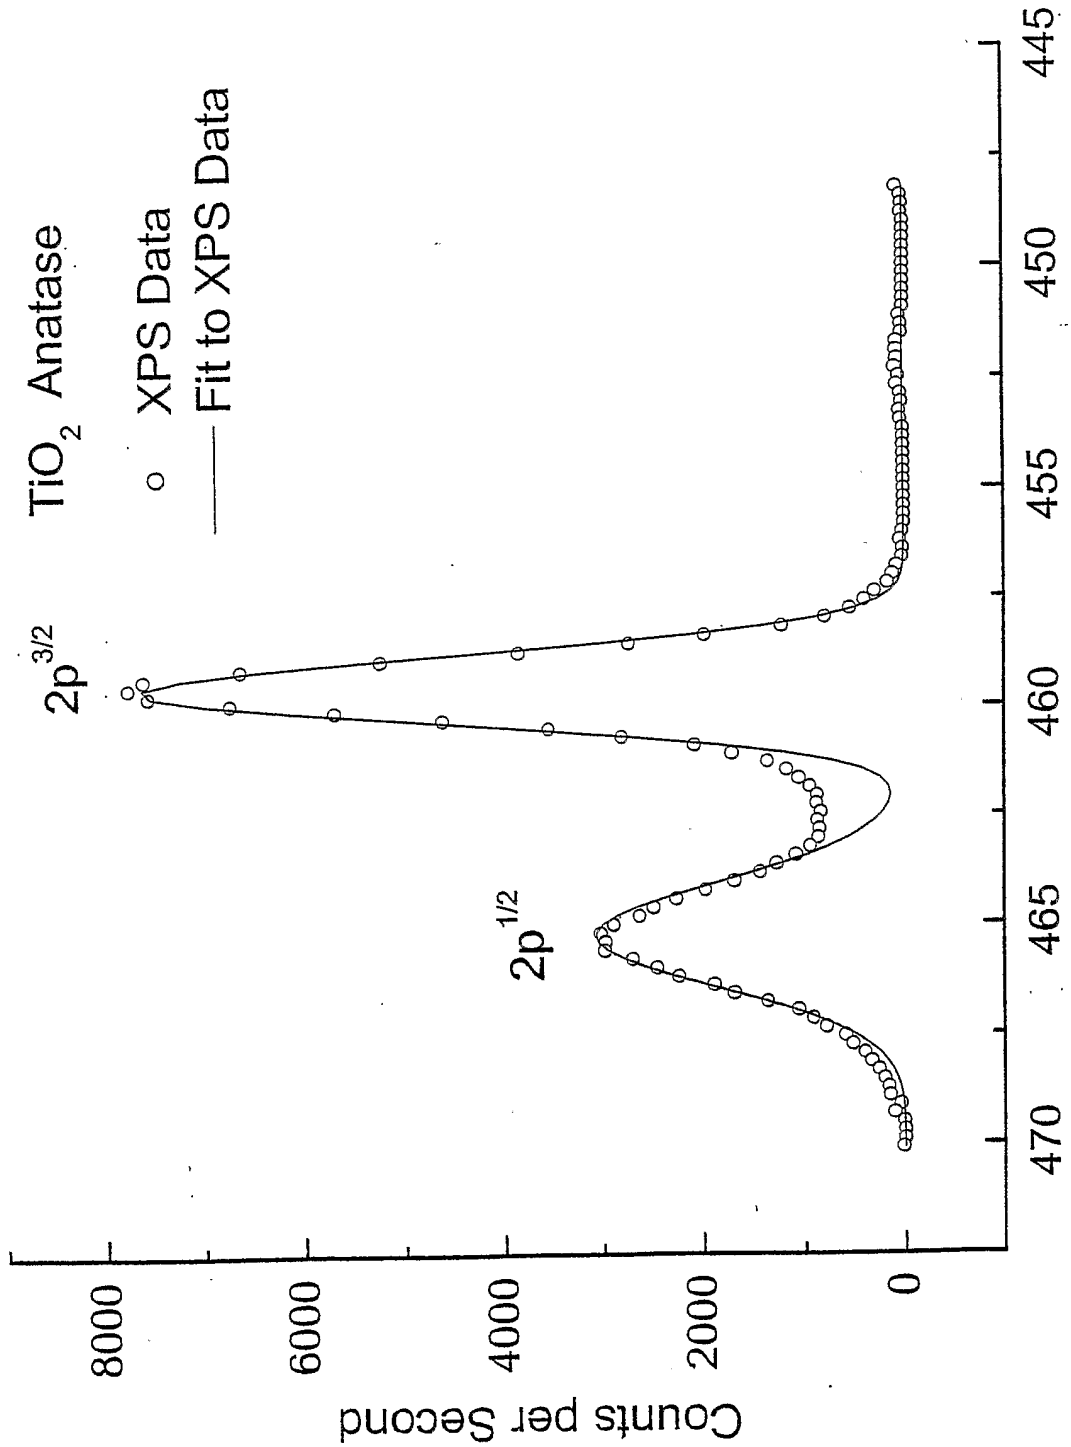

TiO2 Anatase
XPS Data
Fit to XPS Data
2p3/2
2p1/2
Counts per Second
0
2000
4000
6000
8000
470
465
460
455
450
445
Energy (eV)

Figure 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US04/08815

A. CLASSIFICATION OF SUBJECT MATTER
IPC(7) : C25C 1/00, 1/06, 1/10, 1/22, 5/02
US CL : 205/ 367, 368, 371, 397, 398, 402, 406, 410, 560, 564, 572
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 205/ 367, 368, 371, 397, 398, 402, 406, 410, 560, 564, 572

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,368,486 B1 (THOMPSON et al) 09 April 2002 (09.04.2002) See claims 1-18.	1-4, 6-8
---		---
A		5, 9-10
Y	US 6,527,938 B2 (BALES et al.) 04 March 2003 (04.03.2003) see column 4, lines 9-14.	5, 9-10

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
27 October 2004 (27.10.2004)	08 NOV 2004
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703) 305-3230	Authorized officer Arun S. Phasge Telephone No. (571) 272-1700

Form PCT/ISA/210 (second sheet) (January 2004)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US04/08815

Continuation of B. FIELDS SEARCHED Item 3:
WEST:
SEARCH TERMS: ANODE AND CATHODE, TYPES OF METALS, NON-AQUEOUS ELECTROLYTE