

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number  
**WO 2005/083229 A1**

(51) International Patent Classification<sup>7</sup>: E21B 33/05,  
33/14

(21) International Application Number:  
PCT/GB2004/005383

(22) International Filing Date:  
22 December 2004 (22.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/786,573 25 February 2004 (25.02.2004) US

(71) Applicant (for all designated States except US): HAL-  
LIBURTON ENERGY SERVICES, INC. [US/US]; P.O.  
Box 1431, Duncan, OK 73533 (US).

(71) Applicant (for MW only): WAIN, Christopher, Paul  
[GB/GB]; A.A. Thornton & Co., 235 High Holborn,  
London WC1V 7LE (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ROGERS, Henry,  
E. [US/US]; 4015 W. Seminole, Duncan, OK 73533 (US).  
WEBB, Earl, D. [US/US]; P O Box 87, Wilson, OK 73463  
(US).


(74) Agents: WAIN, Christopher, Paul et al.; A.A. Thornton  
& Co., 235 High Holborn, London WC1V 7LE (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: REMOVABLE SURFACE PACK-OFF DEVICE FOR REVERSE CEMENTING APPLICATIONS

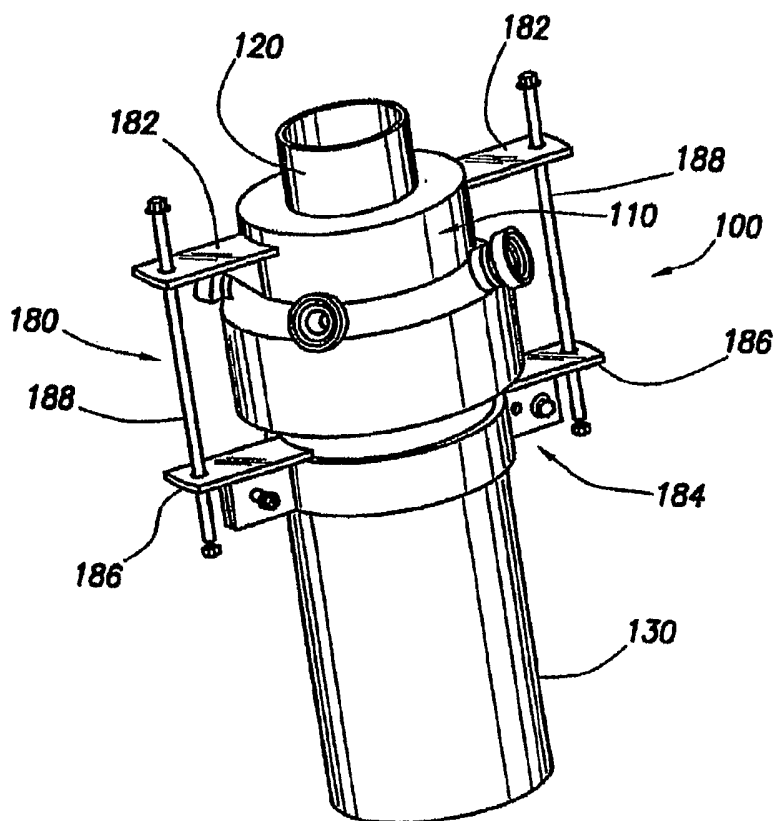

(57) Abstract: The present invention is directed to a removable surface pack-off device adapted for use in reverse cementing applications. The device includes a housing adapted to be mounted between the ends of an inner casing and an outer casing at or near the surface of a well and at least one fluid passage disposed within the housing, which is adapted to pass fluid, such as cement, from a location outside of the well into an annulus formed between the inner and outer casings. It also includes a first pressure-activated seal disposed between the inner casing and the housing and a second pressure-activated seal disposed between the outer casing and the housing. The device further includes an attachment assembly, which enables the device to be easily removed from the well.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **REMOVABLE SURFACE PACK-OFF DEVICE FOR REVERSE CEMENTING APPLICATIONS**

### **FIELD OF THE INVENTION**

The present invention relates generally to devices for cementing tubing or casing in downhole environments, and more particularly to a reverse circulation device, which easily attaches to tubing or casing and has improved sealing characteristics.

### **BACKGROUND OF THE INVENTION**

During downhole cementing operations, fluid circulation is generally performed by pumping down the inside of the tubing or casing and then back up the annular space around the casing. This type of circulation has been used successfully for many years. However, it has several drawbacks. First, the pressures required to "lift" the cement up into the annular space around the casing can sometimes damage the formation. Furthermore, it takes a fair amount of time to deliver the fluid to the annular space around the casing in this fashion.

In an effort to decrease the pressures exerted on the formation and to reduce pump time requirements, a solution involving pumping the fluid down the annular space of the casing rather than down the casing itself has been proposed. This technique, known as reverse circulation, requires lower delivery pressures, because the cement does not have to be lifted up the annulus. Furthermore, the reverse circulation technique is less time consuming than the conventional method because the fluid is delivered down the annulus only, rather than down the inside of the casing and back up the annulus. Accordingly, the cement travels approximately half the distance with this technique.

There are a number of drawbacks of current reverse circulation methods and devices. Such methods require a wellhead or other conventional surface pack-off to be attached to the surface casing that is sealably attached to the casing being cemented in place via the reverse circulation technique. These structures are often permanent and expensive, thus increasing the cost of completing the well. Furthermore, current surface pack-off equipment requires a threaded or flanged connection be at the surface casing for attaching thereto. This again adds unnecessarily to the complexity of the system, and thus its cost.

### **SUMMARY OF THE INVENTION**

The present invention is directed to a surface pack-off device, which attaches between surface pipe and casing that allows for reverse circulation down the annulus of the casing to be cemented without a need for threaded or flanged connections.

More specifically, the present invention is directed to a removable surface pack-off device, which comprises a housing adapted to be mounted between the ends of an inner casing and an outer casing at or near the surface of a well. The device further includes at least one fluid passage disposed within the housing, which is adapted to pass fluid from a location outside of the well into an annulus formed between the inner and outer casings. In one aspect, the surface pack-off device according to the present invention includes means for sealing the housing to an inner casing and an outer casing. In one embodiment, the sealing means includes a first pressure-activated seal disposed between the inner casing and the housing and a second pressure-activated seal disposed between the outer casing and the housing.

In another aspect, the surface pack-off device according to present invention includes means for removably attaching the housing to the inner and outer casings. In one exemplary embodiment, the removable attachment means includes an attachment assembly, which comprises a pair of retaining wings mounted to an outer surface of the housing, a clamp defined by a pair of flanges, which is adapted to be secured to an outer surface of the outer casing, and a pair of retention bolts, which are mounted to the pair of retaining wings at one end and the pair of flanges at the other. In another exemplary embodiment, the removable attachment means comprises a plurality of holes drilled into the outer casing, which are adapted to receive a corresponding plurality of bolts, which secure the housing to the outer casing. The surface pack-off device according to the present invention is easily removed from the surface pipe and casing so that once the cementing operation is completed it can be used for a cementing operation at another well location.

The features and advantages of the present invention will be readily apparent to those skilled in the art upon a reading of the description of the exemplary embodiments, which follows.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

A more complete understanding of the present disclosure and advantages thereof may be acquired by referring to the following description taken in conjunction with the accompanying drawings, which:

Figure 1 is a perspective view of one embodiment of a surface pack-off device according to the present invention.

Figure 2 is a top view of the surface pack-off device shown in Figure 1.

Figure 3 is a cross-sectional view of the surface pack-off taken along line A-A shown in Figure 2.

Figure 4 is an enlarged view of the upper right-hand portion of the cross-sectional view of the surface pack-off shown in Figure 3.

Figure 5 is a partial cut-away perspective view of another embodiment of the surface pack-off device according to the present invention.

Figure 6 is cross-sectional view of the surface pack-off device shown in Figure 5 taken along the longitudinal direction.

#### **DETAILED DESCRIPTION OF THE INVENTION**

The details of the present invention will now be described with reference to the accompanying drawings. Turning to Figure 1, a surface pack-off device in accordance with the present invention is shown generally by reference numeral 100. The surface pack-off device 100 includes a housing 110, which is generally cylindrical in shape. The housing 110 is designed to fit over and attach to an inner casing 120, which is the casing to be cemented, and an outer casing 130, which in one exemplary embodiment is a surface casing. An annulus 125 is formed between the inner casing 120 and outer casing 130, as shown in Figure 3. Cement is pumped into the annulus 125 through the surface pack-off device 100 to secure the inner casing 120 to the outer casing 130.

The housing 110 has an upper portion, which in one exemplary embodiment seals against an outer surface of the inner casing 120, as shown in Figure 3. The housing 110 in that same embodiment has a lower portion, which fits around an end of the outer casing 130 and seals against an outer surface of the outer casing 130, as also shown in Figure 3. Both the inner and outer diameter of the lower portion of the housing 110 are greater than the inner and outer diameter of the upper portion of the housing. Housing 110 may be cast as one piece or two halves. In one certain embodiment, it is formed of ferrous metal typically used to make the casing pipes 120 and 130.

A plurality of fluid passages 140 are formed within the housing. The fluid passages 140 pass fluids, *e.g.*, cement, from outside of the well into annulus 125. In one exemplary embodiment, four fluid passages 140 are provided. The four fluid passages are equally spaced around the circumference of the housing 110. Each fluid passage 140 has a corresponding inlet connector 142. The inlet connectors 142 couple the surface pack-off device 100 to a fluid supply line (not shown), so that fluid can be injected into annulus 125.

In one exemplary embodiment, the inlet connectors 142 are a Model No. 1502 by Weco. As those of ordinary skill in the art will appreciate, the number and size of the fluid passages may be varied depending upon a number of factors, including, the amount of fluid needing to be delivered and the desired rate at which the fluid is to be delivered.

The surface pack-off device 100 further includes an energized cup-type or lip seal 150, which seals the housing 110 to the inner casing 120 when the fluid is injected into the annulus 125, as shown in Figure 4. In one exemplary embodiment, the seal 150 is a pressure-activated seal. Furthermore, seal 150 is generally disk-shaped and may be formed of an elastomeric material. It has a tapered end, which engages a surface of the inner casing 120 in an interference fit when under pressure. The surface pack-off device further includes another energized cup-type or lip seal 160, which seals the housing 110 to the outer casing 130 when the fluid is injected into the annulus 125, as shown in Figure 4. Like seal 150, seal 160 may be a pressure activated seal, is generally disk-shaped and may be formed of an elastomeric material. Furthermore, it has a tapered end, which engages a surface of outer casing 160 in an interference fit when under pressure. A pair of retaining nuts 152 and 162 hold the seals 150 and 160 in place against the housing 110.

The surface pack-off device 100 further includes a protective sleeve 170, which is designed to fit around the outer circumferential surface of the inner casing 120, as shown in Figure 4. In one exemplary embodiment, the protective sleeve 170 is formed of a ferrous metal similar to that used in making the housing 110 and casings 120 and 130. The protective sleeve 170 protects the inner casing 120 from erosion caused by the high pressure fluid being injected into the annulus 125 through the fluid passages 140. The protective sleeve 170 is disposed opposite the exit ports of the fluid passages 140. In one embodiment, the protective sleeve is secured to the inner casing 120 by one or more set screws 171.

The surface pack-off device 100 further includes an attachment assembly 180, which is designed to removably attach the device to the surface ends of the inner and outer casings 120 and 130. In one embodiment, the attachment assembly 180 includes a pair of retaining wings 182 mounted to the outer cylindrical surface of the housing 110, as shown in Figure 1. The retaining wings 182 may be integrally formed with the housing 110 or attached thereto using known securing techniques. The attachment assembly 180 also includes a clamp 184 defined by a pair of flanges or wings 186. The clamp 184 is formed by two halves of a split collar, which are held together by a pair of nuts and bolts or other similar equivalent securing

means. The clamp 184 is designed to secure to the outer surface of the outer casing 130. As will be appreciated by those of ordinary skill in the art, the clamp 184 may be easily removed from the outer casing 130. The clamp 184 attaches to the retaining wings 182 of the housing 110 via a pair of retention bolts 188. As those of ordinary skill in the art will appreciate, any number of securing means may be used to secure the housing 110 to the clamp 184. An advantage of the attachment assembly 180 is that it enables the surface pack-off device 100 to be attached to casing assemblies that do not have threaded or flanged connections. Furthermore, the attachment assembly 180 enables the surface pack-off device 100 to be attached to an existing casing assembly without modification to the structure of the existing casing assembly.

An alternate embodiment of the attachment assembly 180' is shown in Figures 5 and 6. In this embodiment, the attachment assembly 180' essentially comprises a plurality of bolts, which are secured through holes formed in the outer casing 130 and clamp onto the outer surface of the housing 110. An advantage of attachment assembly 180' is its simplicity in design. Both attachment assemblies 180 and 180' have a significant advantage over prior art devices in that they allow for easy attachment to, and removal from, the surface of a well casing assembly.

The surface pack-off device 100 may also include one or more eye hooks 190 (one shown) attached to the top of the housing 110. The eye hook 190 is provided to enable well operators to easily lift the surface pack-off device 100 onto, or off of, the surface of the well casing assembly during installation and removal, respectively.

In the embodiment of the surface pack-off device 100 shown in Figures 1-4, the housing 110 is designed to seal against the outer surfaces of the inner and outer casings 120 and 130. This design is particularly well-suited for annuluses, which are small. For wider annuluses, an alternate design of the surface pack-off device 100 may be employed. In this alternate design, the lower cup seal 160 is disposed inside of the outer casing 130, *i.e.*, between the outer surface of the lower portion of the housing 110 and the inner surface of the outer casing 130. This configuration of the surface pack-off device 100 is illustrated in Figures 5 and 6. This embodiment is more compact than the embodiment shown in Figures 1-4.

Therefore, the present invention is well-adapted to carry out the objects and attain the ends and advantages mentioned as well as those which are inherent therein. While the

invention has been depicted, described, and is defined by reference to exemplary embodiments of the invention, such a reference does not imply a limitation on the invention, and no such limitation is to be inferred. The invention is capable of considerable modification, alteration, and equivalents in form and function, as will occur to those ordinarily skilled in the pertinent arts and having the benefit of this disclosure. The depicted and described embodiments of the invention are exemplary only, and are not exhaustive of the scope of the invention. Consequently, the invention is intended to be limited only by the spirit and scope of the appended claims, giving full cognizance to equivalents in all respects.

What is claimed is:

1. A removable surface pack-off device, comprising:  
a housing adapted to be mounted between the ends of an inner casing and an outer casing at or near the surface of a well;  
at least one fluid passage disposed within the housing, which is adapted to pass fluid from a location outside of the well into an annulus formed between the inner and outer casings;  
a first pressure-activated seal disposed between the inner casing and the housing; and  
a second pressure-activated seal disposed between the outer casing and the housing.
2. The removable surface pack-off device according to claim 1, wherein the first and second pressure-activated seals are cup-type seals.
3. The removable surface pack-off device according to claim 1, wherein the first and second pressure-activated seals are formed of an elastomeric disk having a tapered end, which engages a surface of the respective casing in an interference fit when under pressure.
4. The removable surface pack-off device according to claim 1, further comprising a pair of retaining wings mounted to an outer surface of the housing.
5. The removable surface pack-off device according to claim 4, further comprising a clamp defined by a pair of flanges, which is adapted to be secured to an outer surface of the outer casing.
6. The removable surface pack-off device according to claim 5, wherein the clamp is formed in two halves, which are secured to one another around the outer surface of the outer casing by a pair of bolts.
7. The removable surface pack-off device according to claim 5, further comprising a pair of retention bolts, which are mounted to the pair of retaining wings at one end and the pair of flanges at the other.
8. The removable surface pack-off device according to claim 1, wherein a plurality of holes are drilled into the outer casing, which are adapted to receive a corresponding plurality of bolts, which secure the housing to the outer casing.

9. The removable surface pack-off device according to claim 1, wherein the first pressure activated seal is disposed between an outer surface of the inner casing and an inner surface of the housing.

10. The removable surface pack-off device according to claim 1, wherein the second pressure activated seal is disposed between an outer surface of the outer casing and an inner surface of the housing.

11. The removable surface pack-off device according to claim 1, wherein the second pressure activated seal is disposed between an inner surface of the outer casing and an outer surface of the housing.

12. The removable surface pack-off device according to claim 1, wherein the first pressure activated seal is secured in place by a retaining nut mounted to the housing and the second pressure activated seal is secured in place by a retaining nut mounted to the housing.

13. The removable surface pack-off device according to claim 1, further comprising an inlet connector, which is attached to the housing and is adapted to couple to a fluid supply source.

14. The removable surface pack-off device according to claim 1, further comprising a protective sleeve disposed on the outer surface of the inner casing opposite the at least one fluid passage.

15. The removable surface pack-off device according to claim 1, further comprising an eye hook mounted to a top surface of the housing, which enables the surface pack-off device to be lifted onto and off of the casings.

16. A removable surface pack-off device, comprising:  
a housing adapted to be mounted between the ends of an inner casing and an outer casing at or near the surface of a well;  
at least one fluid passage disposed within the housing, which is adapted to pass fluid from a location outside of the well into an annulus formed between the inner and outer casings;  
means for sealing the housing to an inner casing and an outer casing;  
and  
means for removably attaching the housing to the inner and outer casings.

17. The removable surface pack-off device according to claim 16, wherein the sealing means comprises a first pressure-activated seal disposed between the inner casing and the housing and a second pressure-activated seal disposed between the outer casing and the housing.

18. The removable surface pack-off device according to claim 17, wherein the first and second pressure-activated seals are cup-type seals.

19. The removable surface pack-off device according to claim 17, wherein the first and second pressure-activated seals are formed of an elastomeric disk having a tapered end, which engages a surface of the respective casing in an interference fit when under pressure.

20. The removable surface pack-off device according to claim 17, wherein the first pressure activated seal is disposed between an outer surface of the inner casing and an inner surface of the housing.

21. The removable surface pack-off device according to claim 17, wherein the second pressure activated seal is disposed between an outer surface of the outer casing and an inner surface of the housing.

22. The removable surface pack-off device according to claim 17, wherein the second pressure activated seal is disposed between an inner surface of the outer casing and an outer surface of the housing.

23. The removable surface pack-off device according to claim 17, wherein the first pressure activated seal is secured in place by a retaining nut mounted to the housing and the second pressure activated seal is secured in place by a retaining nut mounted to the housing.

24. The removable surface pack-off device according to claim 16, wherein the removable attachment means comprises a pair of retaining wings mounted to an outer surface of the housing.

25. The removable surface pack-off device according to claim 24, wherein the removable attachment means further comprises a clamp defined by a pair of flanges, which is adapted to be secured to an outer surface of the outer casing.

26. The removable surface pack-off device according to claim 25, wherein the clamp is formed in two halves, which are secured to one another around the outer surface of the outer casing by a pair of bolts.

27. The removable surface pack-off device according to claim 25, further comprising a pair of retention bolts, which are mounted to the pair of retaining wings at one end and the pair of flanges at the other.

28. The removable surface pack-off device according to claim 16, wherein the removable attachment means comprises a plurality of holes are drilled into the outer casing, which are adapted to receive a corresponding plurality of bolts, which secure the housing to the outer casing.

29. The removable surface pack-off device according to claim 28, wherein the removable attachment means further comprises the corresponding plurality of mounting bolts.

30. The removable surface pack-off device according to claim 16, further comprising an inlet connector, which is attached to the housing and is adapted to couple to a fluid supply source.

31. The removable surface pack-off device according to claim 16, further comprising a protective sleeve disposed on the outer surface of the inner casing opposite the at least one fluid passage.

32. The removable surface pack-off device according to claim 16, further comprising an eye hook mounted to a top surface of the housing, which enables the surface pack-off device to be lifted onto and off of the casings.

33. A removable surface pack-off device, comprising:

- a housing adapted to be mounted between the ends of an inner casing and an outer casing at or near the surface of a well;

- at least one fluid passage disposed within the housing, which is adapted to pass fluid from a location outside of the well into an annulus formed between the inner and outer casings;

- a first pressure-activated seal disposed between the inner casing and the housing;

- a second pressure-activated seal disposed between the outer casing and the housing; and

- an attachment assembly, which comprises a pair of retaining wings mounted to an outer surface of the housing, a clamp defined by a pair of flanges, which is adapted to be

secured to an outer surface of the outer casing, and a pair of retention bolts, which are mounted to the pair of retaining wings at one end and the pair of flanges at the other.

34. The removable surface pack-off device according to claim 33, further comprising an inlet connector, which is attached to the housing and is adapted to couple to a fluid supply source.

35. The removable surface pack-off device according to claim 33, further comprising a protective sleeve disposed on the outer surface of the inner casing opposite the at least one fluid passage, which shields the inner casing from erosion caused by high pressure fluid being injected into the annulus between the inner and outer casings.

36. The removable surface pack-off device according to claim 33, further comprising an eye hook mounted to a top surface of the housing, which enables the surface pack-off device to be lifted onto and off of the casings.

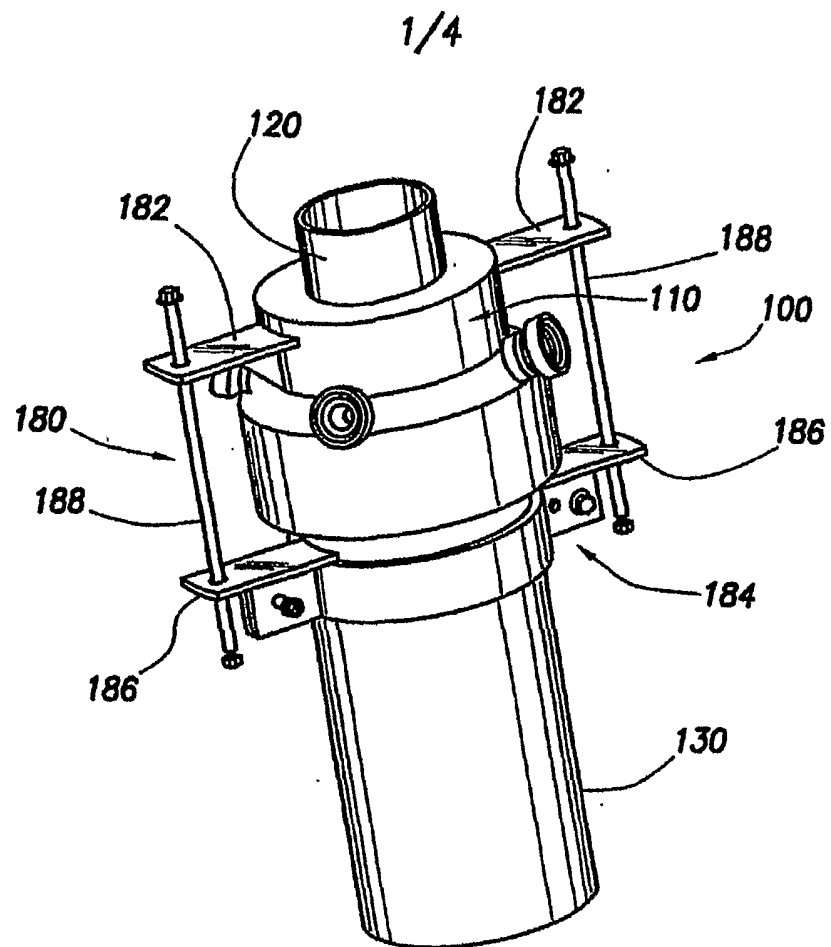


FIG. 1

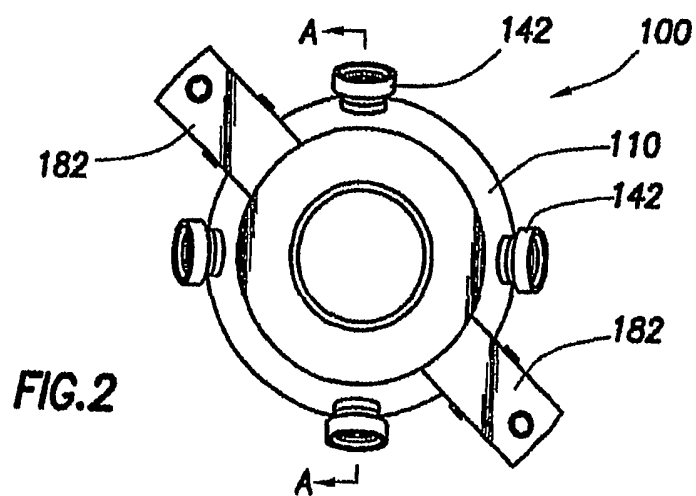


FIG. 2

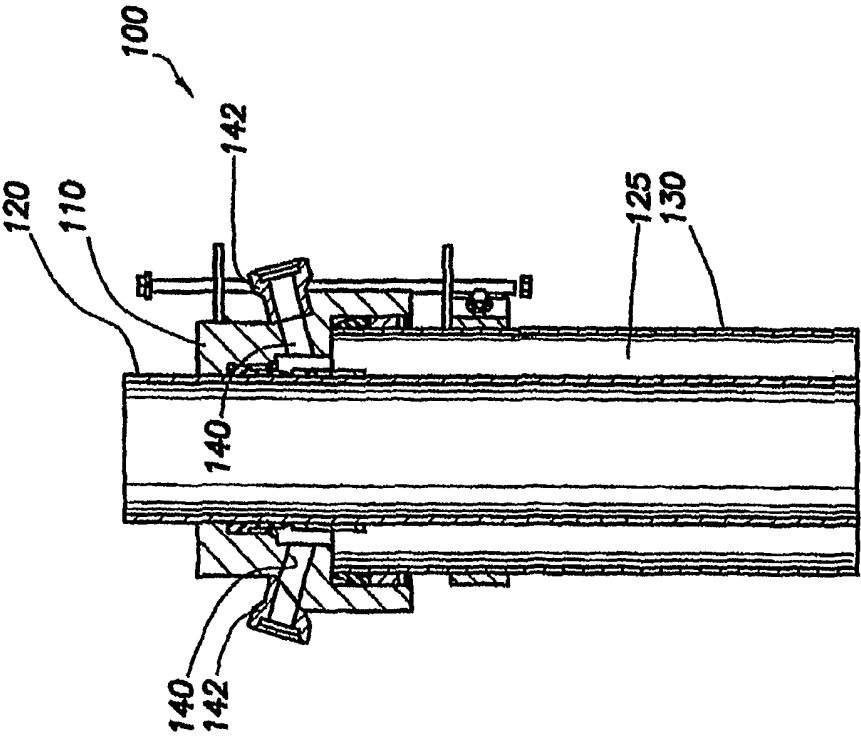


FIG.3

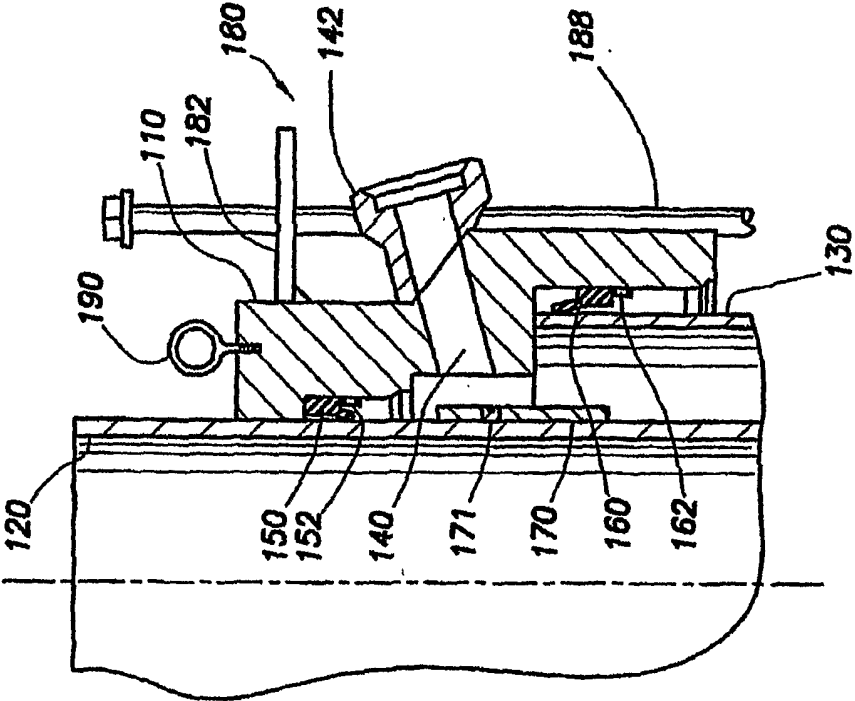


FIG.4

3/4

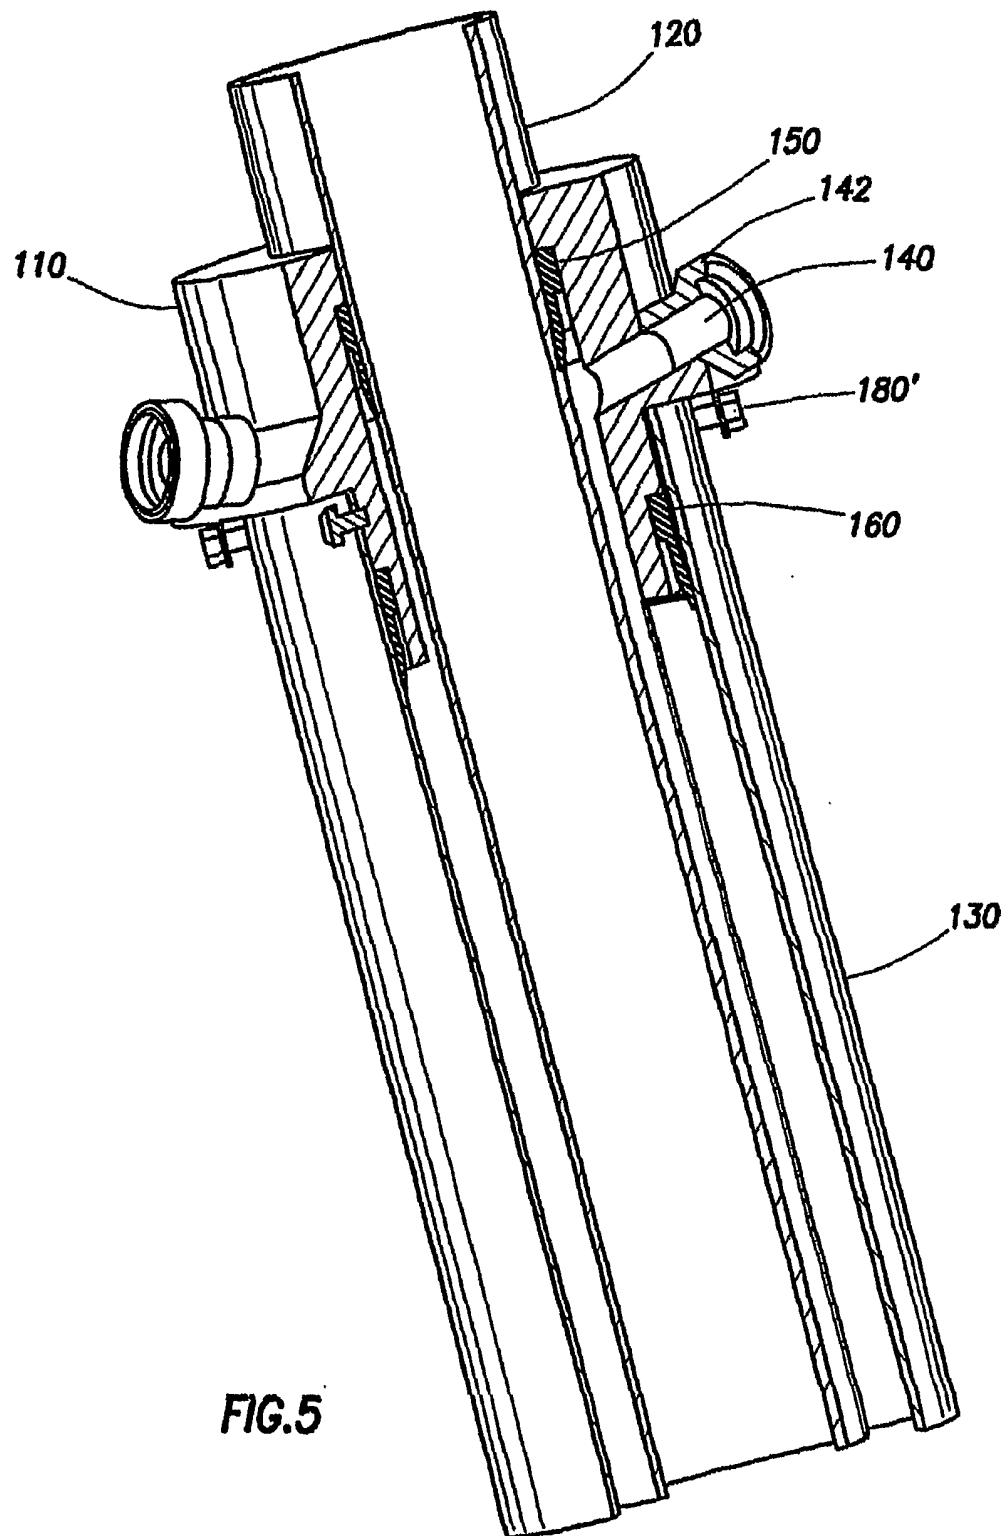


FIG. 5

4/4

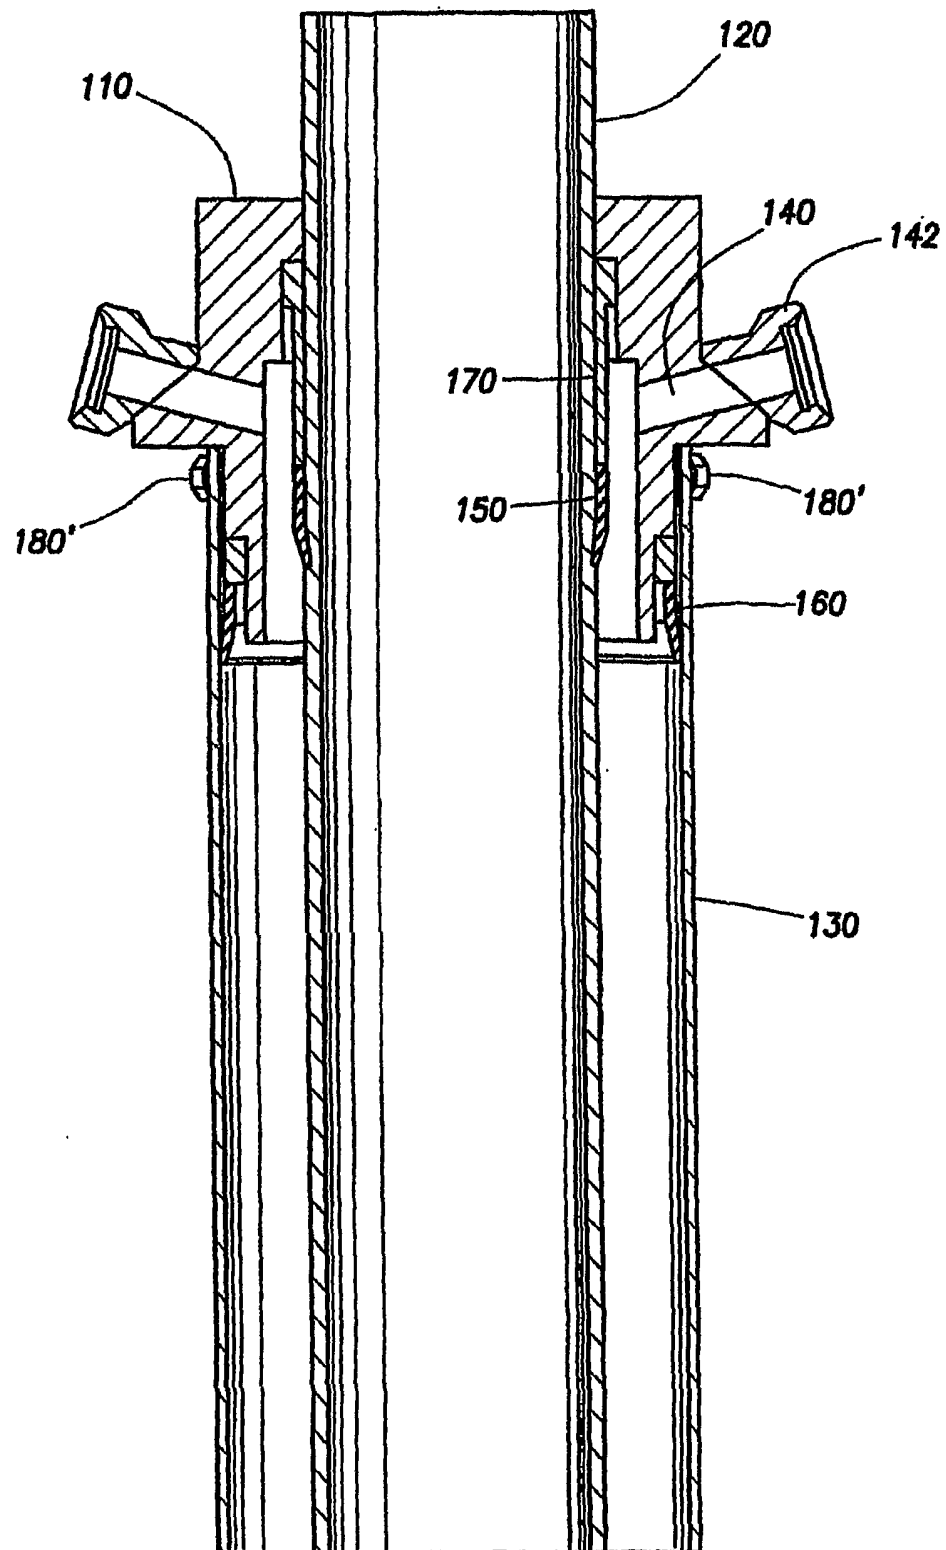


FIG. 6

# INTERNATIONAL SEARCH REPORT

Interr — I Application No  
PC1/G62004/005383

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 E21B33/05 E21B33/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, TULSA

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|------------------------------------------------------------------------------------|-----------------------|
| X          | US 3 948 588 A (CURINGTON ET AL)<br>6 April 1976 (1976-04-06)<br>figure 2a         | 16                    |
| A          | US 4 271 916 A (WILLIAMS ET AL)<br>9 June 1981 (1981-06-09)<br>figure 1            | 1, 16, 33             |
| A          | US 2 849 213 A (FAILING GEORGE E)<br>26 August 1958 (1958-08-26)<br>figure 2       | 1, 16, 33             |
| A          | US 2 675 082 A (HALL JOHN A)<br>13 April 1954 (1954-04-13)<br>claim 1<br>figure 1  | 1, 16, 33             |
|            | -----<br>-/-                                                                       |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

10 February 2005

Date of mailing of the international search report

24/02/2005

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer  
  
Schouten, A

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2004/005383

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |                                                                                                                                                                                                                                                                      |                       |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Category °                                           | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                   | Relevant to claim No. |
| A                                                    | <p>R. MARQUAIRE ET AL: "Primary Cementing by Reverse Circulation Solves Critical Problem in the North Hassi-Messaoud Field, Algeria"</p> <p>SPE 1111, February 1966 (1966-02), pages 146-150, XP002317158</p> <p>page 149, column 1</p> <p>figure 4</p> <p>-----</p> | 1,16,33               |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2004/005383

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---|---------------------|----------------------------|---------------------|
| US 3948588                                | A | 06-04-1976          | US 3871486 A               | 18-03-1975          |
|                                           |   |                     | AU 482481 B2               | 25-03-1977          |
|                                           |   |                     | AU 7057274 A               | 08-01-1976          |
|                                           |   |                     | AU 486095 B2               | 25-09-1975          |
|                                           |   |                     | AU 8268175 A               | 25-09-1975          |
|                                           |   |                     | CA 1002510 A1              | 28-12-1976          |
|                                           |   |                     | CA 1016932 A2              | 06-09-1977          |
|                                           |   |                     | CA 1016933 A2              | 06-09-1977          |
|                                           |   |                     | CA 1022148 A2              | 06-12-1977          |
|                                           |   |                     | CA 1016935 A2              | 06-09-1977          |
|                                           |   |                     | CA 1026314 A2              | 14-02-1978          |
|                                           |   |                     | GB 1461001 A               | 13-01-1977          |
|                                           |   |                     | GB 1461002 A               | 13-01-1977          |
|                                           |   |                     | GB 1461003 A               | 13-01-1977          |
|                                           |   |                     | GB 1461004 A               | 13-01-1977          |
|                                           |   |                     | GB 1461005 A               | 13-01-1977          |
|                                           |   |                     | IN 142587 A1               | 30-07-1977          |
|                                           |   |                     | IN 142586 A1               | 30-07-1977          |
|                                           |   |                     | IN 142947 A1               | 10-09-1977          |
|                                           |   |                     | IN 143251 A1               | 22-10-1977          |
|                                           |   |                     | JP 933317 C                | 14-11-1978          |
|                                           |   |                     | JP 50051002 A              | 07-05-1975          |
|                                           |   |                     | JP 53013401 B              | 10-05-1978          |
|                                           |   |                     | US 3934662 A               | 27-01-1976          |
|                                           |   |                     | US 3941196 A               | 02-03-1976          |
|                                           |   |                     | US 3970335 A               | 20-07-1976          |
|                                           |   |                     | ZA 7402740 A               | 30-04-1975          |
| US 4271916                                | A | 09-06-1981          | NONE                       |                     |
| US 2849213                                | A | 26-08-1958          | NONE                       |                     |
| US 2675082                                | A | 13-04-1954          | NONE                       |                     |