

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 834 381 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.12.2003 Bulletin 2003/50

(51) Int Cl.7: **B25F 1/00**, B25F 1/04,
B25G 1/08, B25B 7/02,
B26B 1/04

(21) Application number: **97117231.7**

(22) Date of filing: **06.10.1997**

(54) **Multi-purpose folding tool**

Klappbares Mehrzweckwerkzeug

Outil pliable multi-usage

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI NL SE

(30) Priority: **07.10.1996 US 724963**
07.10.1996 US 724964

(43) Date of publication of application:
08.04.1998 Bulletin 1998/15

(60) Divisional application:
01126061.9 / 1 262 286

(73) Proprietor: **Imperial Schrader Corp.**
Ellenville, NY 12428 (US)

(72) Inventors:
• **Gardiner, Walter A.**
Waccabuc, NY 10597 (US)
• **Swinden, David**
Ellenville, NY 12428 (US)
• **Quinn, James**
Ellenville, NY 12428 (US)
• **Andersen, Robert**
Cragmoor, NY 12420 (US)

- **Stecyk, Oleh**
Kerhonkson, NY 12446 (US)
- **Hufnagel, Joseph A.**
Bethel, CT 06801 (US)
- **Lynch, Peter F.**
Skaneateles, NY 13152 (US)
- **Furth, David A.**
Skaneateles, NY 13152 (US)
- **Naas, Robert L.**
Skaneateles, NY 13152 (US)
- **Lemaire, John Denis**
Boucherville, Quebec (CA)

(74) Representative: **Rohnke, Christian, Dr.**
Jungfernstieg 51 (Prien-Haus)
Postfach 30 40 49
20313 Hamburg (DE)

(56) References cited:
EP-A- 0 100 377 **US-A- 1 561 993**
US-A- 1 696 323 **US-A- 2 851 704**
US-A- 4 238 862 **US-A- 4 662 252**
US-A- 5 062 173 **US-A- 5 267 366**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 834 381 B1

Description

BACKGROUND OF THE INVENTION

Field of The Invention

[0001] This invention relates to a multi-purpose folding tool, commonly referred to as a compound tool, since it includes a plurality of independently used tools, or as a survival tool, since it has rapidly become the tool of choice of outdoorsmen. A typical compound tool may incorporate pliers, flat-head and Phillips-head screwdrivers, knife blades, an awl, a pick, a fish cleaning serrated blade, a ruler, a wire insulation trimmer, and a bottle/can opener. Each of these independently used tools are typically housed in a single tool capable of folding into an easily carried, compact unit. Compound tools of this type are especially useful to those who need to maximize the utility of what they carry while minimizing the size and weight thereof, e.g. back-packers, bikers, campers, electricians, fishermen, hikers, and hunters.

Description of Related Art

[0002] Combination tools, i.e., those in which several different types of tools, e.g., a knife blade, an awl, or an assortment of screwdrivers and wrenches, are individually rotatable into and out of a housing for storage and use, respectively, have been the subject of U.S. patents for some time; see, for example, Barnard & Brace, U. S. Patent No. 97,154, issued 11-23-1869, and Pierce, U. S. Patent No. 234,368, issued 11-8-1880. Combination tools which include a pair of scissors or pliers, in which the crossed jaws fold into or adjacent to their handles, were developed around the turn of the twentieth century; see, respectively, Klever, Kaiserliches Patentamt, Patentschrift No. 30,788, issued 3-12-1885, and Klever, U. S. Patent No. 858,003, issued 6-25-1907. The latter allows other tools, e.g., a knife blade, to be joined therewith, although the other tools are stored separately from the folded tool by inserting their base into a notch formed by the closed handles. Pliers having handles pivotally connected to the tangs of the pliers jaws, such that the handles fold adjacent the pliers jaws, are also known (e.g., Garrison, U. S. Patent No. 1,461,270).

[0003] Combination tools including folding pliers in combination with other, supplemental tools, usually stored within the handles, the so called "survival tools", did not achieve widespread popularity until relatively recently with the patenting of such tools by Leatherman, U. S. Patent Nos. 4,238,862, 4,744,272, and 4,888,869, and as evidenced in European Patent Application No. 513,937. Others followed quickly, e.g., Collins et al., U. S. Patent Nos. Des. 368,634, and 5,062,173, Sessions et al., U. S. Patent Nos. 5,142,721 and 5,212,844, and Frazer, U. S. Patent Nos. Des. 368,634, and 5,267,366. All of these prior art tools are generally satisfactory for their intended purposes, but they do have drawbacks

associated therewith.

[0004] In all of the folding tools cited above, from Klever to Frazer, the folding tools include straight handles. Thus, when the folding tool is closed, the jaws of the pliers are stored within the confines of the handles. Not only are the handles weakened by removing portions of the walls of the handles to receive the pliers, the space inside the handles is diminished, thereby decreasing the room available for the supplemental tools, which must perform be made smaller and weaker.

[0005] Many folding tools position the plier head over some of the supplemental tools when completely closed. It is then necessary to go to the inconvenience of opening the plier portion of the tool when desiring only to access a supplemental tool. This then requires fully closing the plier portion of the tool again before you can actually use the supplemental tool.

[0006] The handles of Leatherman, Collins et al., Sessions et al., and Frazer are channel-shaped, open along their entire length, which may make them more susceptible to bending under heavy strains, particularly near the pivotal connection of the handles with the plier jaws' tangs, depending upon the thickness of the material.

[0007] The channel openings of Leatherman and Frazer (Design Patent No. 368,634) open outwardly along the outer edge of the handles, i.e., outwardly in the plane of the handles. When squeezing the handles, the open channels and supplemental tools therein present rough surfaces and raw edges to the hands.

[0008] Prior art survival tools latch or lock the supplemental tools in their stored and extended positions by means of either (1) a leaf spring coacting with a flat on the periphery of the supplemental tools (e.g., Leatherman, Collins et al., Sessions et al., and Frazer), or by providing a projection at the end of the leaf spring to mate with a recess or notch in the periphery of the supplemental tools (Leatherman). The latter is the time-honored method used in related arts as well, such as, in jack-knives, vanity kits, or other specialized combination tools; see Hallvarson, 1,556,788, Nielsen, 1,561,993, Bovee, 2,575,652, Bassett, 2,798,290, Zoeller, 2,851,704, and Felix-Dalichow, 4,442,600. In each of these, a projection on a separate lever or spring, or a flange on a resilient portion of the housing, fits into a notch on the supplemental tool to lock the tool in place. Alternatively, a projection on the tool mates with a seat or notch on the housing. Either way, a projection is designed to mate with a notch. Projections or flanges are difficult and costly to manufacture, and notching a tool to receive the projection usually results in lost material, and thereby lost strength, in the mounting end of the tool.

[0009] Though supplemental tools may lock in extended position to some degree, many tools have little or no provision for a completely positive lock. One reason is the resulting problem of providing an unlocking means that is safe, convenient and cost effective. With supplemental tools locking in a less than completely

sure manner in the extended position, safe use can be questionable.

[0010] The jaws of pliers, wrenches, etc., have in the past occasionally been of a laminated construction, i.e., a plurality of sheets bound together by some means, often by rivets; see, e.g., Bernard, 526,480, McLeran, 831,676, Chen et al., 4,660,241, and Warheit, 4,662,252. In each of these, the laminations reinforce each other against forces acting transversely to the jaws, but they provide little to no resistance to shearing forces along the planar surfaces between the laminates.

OBJECTS AND SUMMARY OF THE INVENTION

[0011] The present invention overcomes the difficulties described above by:

- tapering the handles inwardly to create recesses which, when the tool is folded, provides storage for the plier jaws, maintaining the integrity and strength of the handle walls while providing more room for larger, heftier supplemental tools;
- reinforcing the handles with a box-beam construction in the area of the handle-to-tang pivots;
- opening the channels in a direction away from the palm of the hand when the plier is operational, so that the user's hand squeezes on relatively smooth handle surfaces;
- forming a stock on the end of a leaf spring to mate with a notch in the mounting end of the supplemental tool to lock it in place;
- interlocking the laminates of plier jaws against shear forces along their planar surfaces by providing mating countersinks and daps in their facing surfaces;
- storing supplemental tools outside the closed plier handles for quick, safe and convenient access; and
- providing a lock release mechanism that conveniently works with a completely positive locking design for the supplemental tools.

[0012] Accordingly, it is one object of the present invention to taper inwardly the folding handles of a multi-purpose folding tool, making the pair of handles more comfortable while in the process creating a recess which, when the tool is folded, stores the plier jaws externally of the handle walls.

[0013] Another object of the present invention is to reinforce the handles by providing a box-beam construction adjacent the pivotal connections with the folding pliers.

[0014] A further object of the present invention is to provide smooth, comfortable handle surfaces for contact with the user's hands when the tool is in use.

[0015] A still additional object of the present invention is to provide a stock on a flange-less leaf spring to mate with a small notch on the mounting end of the tool to

lock the tool in place.

[0016] Another object of the invention is to provide a stronger jaw structure for a gripping tool, e.g., a pair of pliers, by including complementary, mating countersinks and daps in the laminates, thereby constraining the laminates against lateral shifting.

[0017] The foregoing and other objects are achieved in accordance with one aspect of the present invention through the provision of a multi-purpose folding tool which comprises a pliers having a pair of crossed jaws. Each of the jaws includes a gripping end with a tip, a pivot bearing, and a tang. The jaws are rotatably connected to each other by a jaw pivot pin extending through each of the pivot bearings.

[0018] The folding tool further includes a pair of handles each having a secured end and a free end. A pivot bearing is located at the secured end of each handle and is rotatably connected to one of the tangs by a pivot pin. The axes of the jaw pivot pin and the tang pivot pins are substantially parallel to one another. The handles each further include a pair of upstanding sidewalls integrally connected by a web, the sidewalls and the web forming a U-shaped channel open outwardly from the plane of the handles.

[0019] The pair of sidewalls comprise an outboard sidewall facing away from the opposite handle and an inboard sidewall facing toward the opposite handle, each of the outboard sidewalls of the handles including an inwardly tapered portion to define a recess adjacent to a respective one of the pivot bearings.

[0020] The handles also include a channel pivot pin journaled in the sidewalls transverse of the channel adjacent the free end of the handle. The axis of the channel pivot pin is substantially orthogonal to the axes of the jaw and tang pivot pins.

[0021] A plurality of supplemental tools are pivotally mounted on the channel pivot pin. Each of the supplemental tools is individually rotatable between a closed position within the channel and an open position extending from the channel.

[0022] The inwardly tapered portions of the outboard sidewalls are configured such that when the folding tool is folded by pivoting the handles about the tang pivot pins, the inwardly tapered portions of the outboard sidewalls cam the tips of the jaws towards one another to assist in the folding of the multi-purpose folding tool.

[0023] In addition, when the folding tool is folded, the outboard sidewalls enclose the jaws between the recesses. The inboard sidewalls may include a second tapered portion to provide a separation between the free ends of the handles, while the outboard sidewalls preferably include protrusions or nubs formed thereon to improve the grip of a user's thumb and fingers on the folding tool.

[0024] In accordance with another aspect of the present invention, the web includes a flat, resilient leaf spring located at one end of the channel, and a slot through the free end of the leaf spring. The slot is bor-

dered across the free end by a transverse, flat, flange-free stock. Each of the supplemental tools comprises a body and a mounting end, the body being shaped as appropriate for the function of the supplemental tool. The mounting end is pivotally mounted on the channel pivot pin.

[0025] At least one of the supplemental tools includes a mounting end having a peripheral notch positioned to snugly receive the stock therein, when such supplemental tool is extended, to positively lock same.

[0026] In accordance with another aspect of the present invention, release means are provided for unlocking such supplemental tool from its extended, locked position. The release means preferably comprises an outwardly directed bulge positioned on another of the supplemental tools on the body thereof. The bulge protrudes above the longitudinal edges of the sidewalls when its supplemental tool is closed. The mounting end of such supplemental tool is configured such that depression of the bulge causes the mounting end to deflect the leaf spring, lifting the stock out of the notch. In addition, the mounting end of such supplemental tool includes a peripheral flat which coacts with the leaf spring to bias such supplemental tool closed. Such flat has a corner which contacts and deflects the leaf spring when the bulge is depressed.

[0027] Another of the supplemental tools includes a mounting end having first and second peripheral flats. The first flat coacts with the flat leaf spring to bias such supplemental tool into its closed position, while the second flat coacts with the leaf spring to bias such supplemental tool into its open position, thereby retaining such supplemental tool in its closed and open positions, respectively.

[0028] In accordance with yet another aspect of the present invention, each of the pair of jaws preferably comprises at least three laminated sheets. Each pair of adjacent sheets is preferably reinforced with at least one mating countersink and dap. Binding means, preferably in the form of a rivet, passes through the laminated sheets to secure them together. The laminated sheets preferably comprise a central body and a pair of outer strips. The countersinks are preferably formed in the central body while the daps are preferably formed in the outer strips.

[0029] In accordance with another aspect of the present invention, the handles further include a fourth wall folded over a portion of the outward opening of the U-shaped channel so as to form a box-beam construction. One of the walls of the box-beam construction further may include an aperture therethrough which is adapted to receive a lanyard.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] The foregoing and other objects, aspects, uses, and advantages of the present invention will be more fully appreciated as the same becomes better under-

stood from the following detailed description of the present invention when viewed in conjunction with the accompanying drawings, in which:

FIG. 1 is a top perspective view which shows the preferred embodiment of the present invention as it appears when opened with the plier jaws closed; FIG. 2 is a bottom perspective view of the opened inventive tool with the plier jaws closed; FIG. 3 is a top view of the open compound tool with the plier jaws open; FIG. 4 is a top view of the compound tool partially closed; FIG. 5 is a top view of the compound tool almost closed; FIG. 6 is a top view of the closed compound tool; FIG. 7 illustrates a use of the present invention clamping a cable; FIG. 8A is a sectional top view of the ends of the handles of the compound tool with two supplemental tools extended, showing the latching and locking mechanism in operation; FIGS. 8B and 8C show side views of two supplemental tools; FIG. 9A is a side view of the compound tool illustrating the release of the latching mechanism; FIG. 9B is a cross-sectional side view of one of the supplemental tools releasing the locking mechanism; FIG. 10 is a sectional side view of one of the handles of the compound tool with the supplemental tools stored therein in varying degrees of extension; FIG. 11 is a reversed sectional side view of the other of the handles of the compound tool with the supplemental tools stored therein in varying degrees of extension; FIGS. 12 and 13 show side views of the two plier jaws separated and facing one another; FIG. 14 is a side view of one of the jaws of the pliers from the outside as seen along the lines 14-14 in FIG. 12; FIG. 15 is a side view of the jaw of FIG. 14 from the inside as seen along the lines 15-15 in FIG. 12; FIG. 16 is a front end view of the jaw of FIG. 14 as seen along the lines 16-16 in FIG. 12; FIG. 17 is a sectional, cross-sectional view of the laminated structure of the plier jaws as seen along the lines 17-17 in FIG. 12; and FIG. 18 is an enlarged side view of a preferred embodiment of a rivet used with the plier jaws of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0031] A preferred embodiment of a multi-purpose folding tool or compound tool of the present invention is indicated generally by reference numeral 10 and is seen

in its opened state in FIG. 1 and its closed state in FIG. 6. When opened, it has the overall form of a pair of pliers. When closed, tool 10 is box-shaped and occupies a relatively small amount of space with relatively smooth external surfaces.

[0032] For the sake of clarity in the drawings, the reference numerals in FIGS. 1-6 have been placed on a figure only if a particular feature is most clearly shown in that figure. In other words, including reference numerals for all of the features shown in each figure has been avoided in the interest of clarity.

[0033] In FIG. 1, compound tool 10 is shown in the form of a cross-jawed pliers 12 comprising a gripping end 14 and a handle end 16. Gripping end 14 includes a pair of plier jaws 18 and 20; handle end 16 includes a pair of handles 22 and 24. Pliers 12 are cross-jawed pliers inasmuch as jaw 18 is connected across a pivot pin 26 to handle 24 and jaw 20 is connected across pivot pin 26 to handle 22. Pliers 12 preferably comprise needlenose pliers, and, while this is the preferred embodiment, any other plier shape could be substituted.

[0034] As seen in FIGS. 4, 12, and 13, jaw 18 is functionally divided into a nose 28, a bearing 30, and a tang 32. Jaw 20 is preferably although not necessarily a mirror image of jaw 18 and also comprises a nose 34, a bearing 36, and a tang 38. Jaw 18 and jaw 20 are rotationally joined together by aligning apertures 40 and 42 in bearings 30 and 36, respectively, and extending pivot pin 26 therethrough (FIGS. 1 and 4). Jaws 18 and 20 present opposing, generally flat surfaces 44 and 46 for gripping flat objects, arcuate surfaces 48 and 50 for gripping round, square, or hexagonally shaped objects, and cutting surfaces 52 and 54 for cutting materials such as wire, all as is well known in the art. Surfaces 44-50 may be serrated as desired to improve their gripping abilities. The remaining features of jaws 18 and 20 will be introduced as they arise in the following description of the invention.

[0035] Returning to FIG. 1, handle 22 is pivotally attached to tang 38 of jaw 20 by a pivot pin 56, while handle 24 is pivotally attached to tang 32 of jaw 18 by a pivot pin 58. Pins 56 and 58 extend through a pair of apertures 60 and 62, respectively, formed in tangs 38 and 32 (FIGS. 12-13). The frictional resistance to rotation of parts is controlled by pivot pins 26, 56 and 58.

[0036] Pivot pins 26, 56, and 58 are parallel and extend generally outwardly from the plane of the drawings, providing rotational movement thereabout in the plane of the drawings. This is an important feature for it provides the pliers 12 of the present invention with more structural stability than prior art compound tools in which the plier jaws fold into the handles along axes perpendicular to the plier's pivot, such as found in Collins et al., U. S. Patent No. 5,062,173, and Frazer, U. S. Patent No 5,267,366.

[0037] The structure of handles 22 and 24 are best seen in the perspective views of FIGS. 1 and 2 to which attention is now directed. Common features in each

handle will be given the same reference numeral for simplicity and clarity of description.

[0038] Handles 22 and 24 are channel shaped with each handle being formed by a pair of upstanding sidewalls, namely by an interior sidewall 64 and an exterior sidewall 66, which are connected by a web 68. ("Interior" and "exterior" are relative terms and are used here with reference to the views in FIGS. 1-3, where compound tool 10 is shown in its opened state. In the closed state of FIGS. 4-6, the relationship between "exterior" and "interior" obviously reverses.) Sidewalls 64 and 66 and web 68 define an internal channel 70 partially open toward the bottom of tool 10, as seen in FIG. 2. A partial web 72 (FIG. 2) is folded and extends integrally from the pivot end of sidewall 64 towards the pivot end of sidewall 66, thereby effectively enclosing the pivot end of channel 70 in a box-beam construction which further strengthens the handles 22 and 24 of pliers 12. The sloped edges 74 of partial webs 72 increase the torsional strength of handles 22 and 24.

[0039] Prior art compound tools which also include channel-shaped handles for housing supplemental tools, such as Leatherman, (U. S. Patent Nos. 4,238,862, 4,744,272, and 4,888,869), European Patent Application 513,937, Collins et al. (U. S. Patent Nos. Des. 368,634 and 5,062,173), Sessions et al. (U. S. Patent Nos. 5,142,721 and 5,212,844), and Frazer (U. S. Patent Nos. Des. 368,634 and 5,267,366), show U-shaped channels throughout the length of their handles. Since the foregoing do not have the enclosed, box beam construction of the handles of the present invention, they lack the torsional resistance required when twisting pliers 12 against a heavy load.

[0040] Channel 70 houses a plurality of supplemental tools 76 (FIG. 2) which may be stored and retrieved therefrom. More particularly, sidewalls 64 and 66 and webs 68 and 72 leave an opening to channel 70 through which supplemental tools 76 may be rotated about a pair of pivot pins 78 (that extend between the ends of sidewalls 64 and 66) from their stored positions shown in FIG. 2 to their extended positions, some of which are shown, for example, in FIGS. 8A and 9-11.

[0041] As seen in FIG. 2, channel 70 opens toward the bottom of tool 10, in contrast to the side tool openings shown in so many of the prior art compound tools mentioned above, so that supplemental tools 76 of the present invention are facing away from the palm of the hand when pliers 12 are being used. Sidewalls 64 and 66 and webs 68 of handles 22 and 24 are solid sheets, so that there are no rough surfaces or standing handle edges to cause discomfort to one's hand when squeezing handle end 16 of the present invention. A plurality of raised, rounded nubs 80 or various other configurations may be added to exterior sidewalls 66 to improve the user's grip on handles 22 and 24 without adding potentially painful sharp edges.

[0042] Referring to FIGS. 3-6, the shape of handles 22 and 24 provides important functional results which

distinguishes the present invention from the prior art. More particularly, as seen in FIG. 3, webs 68 of handles 22 and 24 include a tapered portion 82 positioned between two portions having substantially constant widths, namely, a wider end portion 84 adjacent end 86 and a narrower waist portion 88 adjacent pivot bearing 90, to delineate a pair of recesses 92 positioned on exterior sidewalls 66.

[0043] The disclosed shape allows for many advantages. First, recesses 92 afford a very comfortable nesting area for the thumb and fingers to grip pliers 12. Second, recesses 92 combine to provide an area for storing plier jaws 18 and 20 when compound tool 10 is closed, as seen in FIG. 6. Tapered portions 82 are dimensioned and located so as to compliment the shape of a pair of tapered portions 94 formed on plier jaws 18 and 20 (FIGS. 3 and 12-13); the smaller, constant width waist portion 88 mates with a pair of flat sides 96 of plier jaws 18 and 20; and the curved portion 89 between waist portion 88 and annular bearing 90 snugly fits around annular bearings 30 and 36. Third, external recesses 92 store gripping end 14 of the pliers 12 externally of the handles' walls, leaving more interior room in the handles for supplemental tools 76. Fourth, storing the gripping end 14 externally of compound tool 10 allows pliers 12 to be used to clamp items, hands-free, for an extended period of time, as will be seen in FIG. 7 to be discussed in greater detail below.

[0044] FIGS. 3-6 illustrate the manner in which pliers 12 fold into the closed state of compound tool 10. Handles 22 and 24 are pulled apart, as in FIG. 3, until a pair of outer shoulders 98 (FIGS. 3 and 12-13) come into contact with vertical portions of shoulders 104, at which time jaws 18 and 20 cease to diverge. Further outward pressure on handles 22 and 24 overcomes the inherent friction between bearings 90 and tangs 32 and 38, and the plier's handles 22 and 24 begin to converge, as seen in FIG. 4. Further movement of handles 22 and 24 towards one another results in the orientation of handles and jaws as shown in FIG. 5. In this orientation, a pair of tips 100 of jaws 18 and 20 contact tapered surfaces 82 of exterior (now interior) sidewalls 66 which cam the jaws 18 and 20 together, also forcing tangs 32 and 38 and handle bearings 90 towards one another. Continued pressure brings compound tool 10 finally to the closed position shown in FIG. 6.

[0045] Referring again to FIGS. 3, 12, and 13, when squeezing pliers 12 together from the FIG. 3 position to seize an object, edges 102 at the pivot end of interior sidewalls 64 adjacent bearings 90 are in contact with shoulders 104 of tangs 32 and 38 (FIGS. 12-13). The forces generated by squeezing handles 22 and 24 are directed from edges 102 through shoulders 104, which, being offset from their pivot pins 26, 56, and 58, applies a force rotating jaws 18 and 20 of pliers 12 together. Each of the interior sidewalls 64 is a relatively planar, solid sheet which is integrally connected with web 68 and sidewall 66. With the force vectors essentially lying

within the plane of sidewalls 64, a very stable structure is provided which can withstand high clamping pressures.

[0046] One use of tool 10 to clamp items is shown in FIG. 7. A multi-strand cable 106 is clamped in jaws 18 and 20 with tool 10 in a semi-closed state. An aperture 108 is preferably formed through web 68 of handle 24 and is adapted to receive, when desired, a lanyard 110. Lanyard 110 provides a convenient way to carry tool 10 on a belt or back-pack. It also allows tool 10 to clamp cable 106, or other desired item, by closing tool 10 with cable 106 between the jaws 18 and 20 of pliers 12, and by wrapping lanyard 110 tightly around handles 22 and 24. Tool 10 will continue to clamp cable 106 without the necessity of gripping the pliers in one's hands. As noted above, this advantage is due to the storing of gripping end 14 externally of the handles when tool 10 is closed.

[0047] Supplemental tools 76 and their relationship to tool 10 will now be described with reference to FIGS. 8-11.

[0048] The selection of which supplemental tools to include in any particular model of tool 10 is discretionary with the manufacturer of tool 10, depending on its intended audience. For example, a fisherman's tool might include supplemental tools useful for fishing, e.g., a serrated blade for cleaning fish, a whetstone for sharpening fish hooks, scissors for cutting line, and an assortment of knife blades, whereas an electrician's tool might include an assortment of screwdrivers, a wire insulation cutter and stripper, a saw, a file, and a ruler. The supplemental tools included in this preferred embodiment are therefore only exemplary of the possibilities.

[0049] Referring first to FIG. 10, a side view of a section of handle 22 is shown with five supplemental tools 76: a bottle/can opener 112, a Phillips head screwdriver 114, a scribe 116, a clip blade 118, and a file 120. FIG. 11 shows the other handle 24 with five additional tools: a small screwdriver 122, a combination large screwdriver/wire stripper 124, a scraper 126, a sheepfoot blade 128, and a ruler 142. The supplemental tools 76 have been rotated to varying degrees of extension to illustrate them better; they would not normally be used as shown. Normally, only one supplemental tool 76 would be extended at any given time. For example, when one needs to use Phillips head screwdriver 114, it would be extended alone (as shown in the lower portion of FIG. 8A). Tool 10 should be closed, as in FIG. 8A (note the location of nubs 80), to provide a hefty handle for the screwdriver.

[0050] FIG. 8A is a partial top view of the ends of handles 22 and 24 intended to illustrate, along with FIGS. 8B, 8C, 9A and 9B, the operation of the latching and locking mechanism of the present invention. It should be understood that in FIG. 8A, both screwdriver 114 and ruler 142 are shown extended from their respective handles 22 and 24; however, during actual use, only one such tool will be extended at any given time.

[0051] As shown in FIGS. 6 and 8A, webs 68 of handles 22 and 24 each include a resilient tongue 132 ad-

jacent end 86. A pair of recesses 134 inwardly and oppositely extend at the side junction between tongue 132 and web 68 to aid in the flexibility of tongue 132. A rectangular aperture or slot 136 is formed adjacent the end of tongue 132 and is bordered by two side strips 138 and a transverse stock 140 having an outer edge 158.

[0052] Ruler 142 (FIGS. 8A and 8B) is typical of a supplemental tool 76 mounted on pivot pin 78 outboard of the other tools in handle 24 and, therefore, in alignment with one of the side strips 138. File 120 is another such outboard mounted supplemental tool which is, however, located in the other handle 22. Ruler 142 (FIG. 8B) includes a tool body 144 and a mounting end 146. Tool body 144 is unique to the type of tool 76 included in compound tool 10 and includes whatever working surfaces are important to that particular tool. Mounting end 146 is constructed substantially the same as the mounting end of other outboard-mounted supplementary tools, such as file 120. Mounting end 146 includes an aperture 148 for receiving pivot pin 78 and a camming surface 150 having a first flat 152 formed adjacent a stop 154 and a second flat 156 positioned diametrically opposite to first flat 152. The radial width of camming surface 150 is slightly more than the distance between pivot pin 78 and tongue 132, whereas the radial width of flats 152 and 156 are substantially equal to that distance.

[0053] In operation, when ruler 142 is in its fully extended position in longitudinal alignment with handle 24 (as shown in FIG. 8A, or when file 120 is in its fully extended position as shown in FIG. 9A), flat 152 is flush with the unflexed tongue 132, and stop 154 is in contact with outer edge 158 of stock 140. Stop 154 and edge 158 prevent ruler 142 (and any other similar supplemental tool such as file 120) from rotating beyond its alignment with handle 24. The force of tongue 132 urges stock 140 against flat 152 and thus biases ruler 142 and file 120 toward their fully extended positions, not preventing closure thereof but requiring an additional force be applied to overcome the bias. As such, ruler 142 and file 120 will be latched, as opposed to being positively locked (as some of the interior tools can be which will be described in greater detail shortly).

[0054] When in its closed position, housed within channel 70 of handle 22, file 120 is biased to its closed position by resilient tongue 132 pressing on flat 156, effectively holding file 120 in place. When being closed from its fully open position, as indicated by arrow A in FIG. 9A, camming surface 150 flexes tongue 132 (arrow B in FIG. 9A) slightly outwardly from the plane of web 68. If flats 152 and 156 were not of slightly less radial distance from pivot pin 78 than the remainder of camming surface 150, file 120 would not be held in its closed and extended positions, but rather would flop about uncontrollably.

[0055] File 120 and ruler 142 are merely illustrative of outboard mounted tools, or possibly an inboard mounted tool, which do not need to be positively locked in their open, extended positions. Clip blade 118 (FIG. 8C) is

illustrative of an inboard mounted supplementary tool which needs to be positively locked in its open, extended position.

[0056] Clip blade 118 is shown having a body 144 appropriate to its function. Included in body 144 of clip blade 118 is a nail nick 159 to facilitate opening of clip blade 118. Some outboard tools, such as file 120 and ruler 142, have a notch 160 on their top edge when they are closed, to allow access to interior tools having nail nicks 159, such as bottle/can opener 112, scribe 116, clip blade 118, large screwdriver/wire stripper 124, and scraper 126. Handles 22 and 24 likewise include notches 162 (FIG. 1) for the same reason.

[0057] The mounting end 146 of clip blade 118 includes a pivot pin aperture 148, a camming surface 150, and a flat 156, all provided for the same purposes as described in connection with ruler 142. Mounting end 146 of clip blade 118 differs, however, from those of non-positively locked outboard tools in that in place of flat 152 and stop 154, mounting end 146 of clip blade 118 has a locking transverse slot 164 located to mate with stock 140 of tongue 132.

[0058] As with all other supplemental tools 76, clip blade 118 is biased toward its closed position by tongue 132 acting upon flat 156. As clip blade 118 is rotated to its open position about pivot pin 78 (opposite to arrow A in FIG. 9A), tongue 132 flexes (arrow B), because it is riding on the radially enlarged camming surface 150, until stock 140 snaps into slot 164 of clip blade 118.

[0059] The width of aperture 136 (the smaller of its rectangular dimensions) must be large enough to enclose the portion of camming surface 150 that is located to the right of notch 164 as viewed in FIG. 8C in order to prevent the camming of stock 140 out of slot 164 by camming surface 150. Other than that, the dimensions of aperture 136 are not significant except for structural considerations.

[0060] The width of stock 140 (the smaller of its rectangular dimensions) is critical, however. It must be such that stock 140 fits snugly in slot 164. Stock 140 will remain in slot 164 until positively, forcibly removed. Before that occurs, therefore, clip blade 118 is positively locked in place.

[0061] The locking mechanism described herein is a radical departure from prior art locking mechanisms, and has profound benefits associated therewith; as such it is an important feature of the present invention.

[0062] Bassett (U.S. Pat. No. 2,798,290) is representative of prior art patents which utilize a transverse slot in a leaf spring in the handle of a compound tool as part of a locking mechanism for tools. Bassett's knifeblade 41 has a detent lobe 28 on the camming surface of its mounting end. Locking of blade 41 is therefore effected by a projection on its camming surface entering the slot 42 in a leaf spring at the end of the tool. A projection from the camming surface on the mounting end of a tool is profoundly different from a notch therein as with the present invention. Provision of a radial projection on the

mounting end requires a reduction in the radial width of the annular ring surrounding the pivot pin which provides the structural support for the blade; a notch does not remove any material except to form the relatively small notch.

[0063] Prior art locking mechanisms which include a locking aperture in the housing inevitably include a projection on the blade to enter the locking aperture. Those members of the prior art which utilize a notch in the blade also traditionally provide a projection which fits in the notch to lock the blade, e.g., an L-shaped flange on the end of a separate element. Representative of this time-honored class, which are legion, are Barnard & Brace, U. S. Patent No. 97,154, issued in November of 1869, and Evrell, U. S. Patent No. 4,669,188. The addition of the extra locking element decreases the number of supplemental tools which can be housed in the tool while increasing the number of elements required for a functional tool and concomitantly the manufacturing costs.

[0064] A few patents, e.g., Hallvarson, U. S. Patent No. 1,556,788, and Leatherman, U. S. Patent Nos. 4,238,862 and 4,888,869, include a resilient spring on the housing with an L-shaped flange on the outer edge of the resilient spring to lock within a notch in the blade. This is in line with the conventional wisdom of the art, for it perpetuates the teachings of the prior art to include a projection for entering the notch.

[0065] Referring back to the present invention, the release means for the locking mechanism is illustrated in FIG. 9B. At least two of the supplemental tools 76 in each handle, shown as scribe 116 in FIGS. 9A, 9B, and 10, and scraper 126 in FIG. 11, have a bulge 166 on their upper surfaces which protrudes above the open side edges 170 of sidewalls 64 and 66 when tools 76 are closed. Manual depression of bulge 166 rotates scribe 116 counter-clockwise (as viewed in FIGS. 9A-9B) about pivot pin 78, until the leading edge 168 of flat 156 depresses and deflects tongue 132 downwardly, thereby lifting stock 140 out of the notch 164 of an extended tool. This means of release does not necessarily need to be incorporated into a supplemental tool but would function equally as well as a single function release lever. The combination of a supplemental tool and a release lever into one component adds utility to the compound tool. By way of comparison with the prior art, Leatherman (U. S. Patent No. 4,238,862; FIG. 6) shows a locking mechanism for a supplemental tool in which flange 90 on tongue 86 detents into notch 91 on the tool mounting end. Leatherman releases the lock by "partially opening one of the other tools on pivot pin 70 causing its cam surface 87 to retract the flange 90 out of notch 91" (column 7, lines 32-35). The instant invention constitutes a major improvement over this prior art by: (1) eliminating the flange, as discussed above; and (2) by depressing another tool rather than partially opening one. Depressing a tool, rather than partially opening it, has significant advantages. Depression of a closed tool requires no more than one hand squeezing the tool han-

dle until bulge 166 descends below the open side edges 170 of sidewalls 64 and 66, where it will stop, keeping the tool within the handle. In contrast, partially opening a tool to release a locking mechanism (Leatherman) requires two hands, one to hold the handle and the other to grasp and lift the tool. As just alluded to, depressing the tool keeps it in the handle, out of the way, whereas opening a tool places it outside the handle where it is at least inconvenient and could be potentially dangerous (e.g., if it had a sharp point or edge).

[0066] An important feature of the present invention is the laminated construction of the plier jaws, illustrated in detail in FIGS. 14-17, where the same reference numerals used in FIGS. 12-13 identify the same features.

[0067] In FIGS. 14-17, jaw 18 is shown as comprising a central body 172 laminated with two outer strips 174 and 176. FIG. 17 is a sectional view of jaw 18 (taken along lines 17-17 of FIG. 12), wherein central body 172 and outer strips 174 and 176 are not shown to scale; in practice, central body 172 is much thicker than outer strips 174, 176; closer to the illustrations of FIGS. 14 and 15. As seen in FIG. 17, central body 172, being the heftier of the pieces, includes countersinks 178 which mate with daps 180 formed in outer strips 174 and 176. Countersinks 178 and daps 180 are preferably circular, but any convenient shape will do so long as they mate snugly. The countersink/dap combination prevents lateral sliding of the two outer strips relative to the central body and maintains the pieces in their relative orientations. Central body 172 and outer strips 174 and 176 can be secured together by any known means which is not detrimental to the use of pliers 12. A preferred method of securing the laminates (body 172 and outer strips 174 and 176) utilizes rivets 182, countersunk at 184 (FIG. 18), to provide added strength and to positively prevent separation of the laminates.

[0068] The laminated central body 172 and outer strips 174 and 176 are shaped as plier jaws as shown in FIGS. 14-16, jaw 20 being a mirror image of jaw 18, though some other shape, if advantageous, could be desirable. Central body 172 extends the full length of jaw 18 from tip 100 through bearing 32. Outer strip 176 extends similarly except that its forwardmost portion 187 does not extend as far as tip 100. Outer strip 174 terminates at its lower end at recess 186 adjacent bearing 30 which receives bearing 36 from jaw 20, when the two jaws are rotatably joined by pivot pin 26. The upper end of outer strip 174 terminates in a position 187 that is the same as the uppermost tip of outer strip 176. Tip 100 is tapered on both sides thereof as at 188. Similarly, tips 187 of outer strips 174 and 176 are each tapered on both sides thereof as at 189. Taken together with the outer taper 94 of jaws 18 and 20 (FIGS. 12-13), the net effect is that jaws 18 and 20 comprise a pair of needlenose pliers. This needlenose effect is enhanced by having the tips 187 of outer strips 174 and 176 terminate rearwardly of tip 100, as previously described.

[0069] The laminated construction of plier jaws 12 as

shown and described above is believed to be significantly stronger than non-laminated plier jaws.

[0070] It is clear from the above that the objects of the invention have been fulfilled.

[0071] Those skilled in the art will appreciate that the conception, upon which this disclosure is based, may readily be utilized as a basis for the designing of other structures, methods and systems for carrying out the several purposes of the present invention. It is important, therefore, that the claims be regarded as including such equivalent constructions insofar as they do not depart from the spirit and scope of the present invention as defined in the appended claims.

Claims

1. A multi-purpose folding tool which may be moved between an unfolded position where it is usable as a pair of pliers and a folded position comprising:

(a) a pliers (12) having a pair of crossed jaws (18,20) and a pair of handles (22,24);

(b) each of said pair of crossed jaws (18,20) of said pliers comprising a gripping end (14) with a tip (100), a pivot bearing (30,36) and a tang (32,38);

(c) said pair of crossed jaws (18,20) being rotatably coupled to each other by a jaw pivot pin (26) extending through each of the pivot bearings (30,36);

(d) each of said pair of handles (22,24) comprising a secured end and a free end, said secured end of each handle being pivotally coupled to one of said tangs (32,38) of said pair of crossed jaws (18,20) to define two handle pivot axes (56,58), said handle pivot axes (56,58) being substantially parallel to one another and to said jaw pivot pin (26);

characterized in that

(e) each of said pair of said handles (22,24) further includes an outboard sidewall (66) facing away from the opposite handle and an inboard sidewall (64) facing towards the opposite handle, integrally connected by a web (68), said sidewalls (64,66) and said web (68) forming a U-shaped channel (70) open outwardly from the plane of said handles (22,24); and

each of said outboard sidewalls (66) of said handles include an inwardly tapered portion (82) to define a recess (92) adjacent to a respective one of the pivot bearings (30,36).

2. The folding tool of claim 1, comprising a channel pivot pin (78) journaled in said sidewalls (64,66) transverse of said channel (70) adjacent said free end of said handle (22,24), the axis of said channel pivot pin (78) being substantially orthogonal to the axes of said jaw and said tang pivot pins (26;56,58).

3. The folding tool of claim 2, comprising further a plurality of supplemental tools (76) pivotally mounted on said channel pivot pin (78), each of said supplemental tools (76) being individually rotatable between a closed position within said channel (70) and an open position extending from said channel.

4. The folding tool of one of claims 1 to 3, wherein said outboard walls (66) each further include contact portions (82) such that, when said tool is folded by pivoting said handles (22,24) about said first and second pivot axes (56,58), said contact portions (82) of said outboard walls (66) cam said tips (100) of said jaws (18,20) toward one another to assist in the folding of said tool.

5. The folding tool of one of claims 1 to 4, wherein said pair of handles (22,24) further comprises a partial web (72) covering a portion of said U-shaped channel (70) adjacent said pivot bearing (90), said partial web being integrally connected with one of said sidewalls (66,64) and folded over in close proximity to the other said sidewalls (66,64) to form a box-beam construction.

6. The folding tool of one of claims 1 to 5, wherein when said folding tool is folded by pivoting said handles (22,24) about said tang pins (56,58), said outboard sidewalls (66) enclose said jaws (18,20) between said recesses (92).

7. The folding tool of one of claims 1 to 6, wherein said pair of jaws (18,20) each comprise at least three laminated sheets (172, 174, 176), each pair of adjacent sheets being reinforced with at least one mating countersink (178) and dap (180); and binding means (182) passing through said at least three laminated sheets (172,174,176) to bind said sheets together.

8. The folding tool of claim 7, wherein said binding means comprises at least one rivet (182) that passes through mating countersink (178) and dap (180).

9. The folding tool of claim 7 or 8, wherein said laminated sheets comprise a central body (172) and a pair of outer strips (174, 176), said countersinks (178) being formed in said central body and said daps (180) being formed in said outer strips.

10. The multi-purpose folding tool of one of claims 1 to

9, wherein said channel (70) is adapted to house a plurality of supplemental tools (76), said web (68) includes a flat, resilient spring (132) at one end (86) of said channel, and a slot (136) through the free end of said leaf spring (132), said slot being bordered across said free end by a transverse, flat stock (140);

each of said supplemental tools (76) comprising a body (144) and a mounting end (146), said body being shaped as appropriate for the function of said supplemental tool, and said mounting end (146) being pivotally mounted on said channel (70); and at least one of said supplemental tools (76) including on its said mounting end (146) a peripheral notch (154, 164) positioned to snugly receive said stock (140) therein, when said at least one of said supplemental tools is extended, to positively lock said at least one of said supplemental tools (76) in its extended position, and means (166) for releasing said stock (140) from said notch (154, 164).

11. The multi-purpose folding tool of claim 10, wherein said release means comprises an outwardly directed bulge (166) positioned on at least one other of said supplemental tools (76) on the body (144) thereof, said bulge protruding above the longitudinal edges (170) of said sidewalls (64, 66) when said at least one other supplemental tool is closed, said mounting end (146) of said at least one other supplemental tool (76) being configured such that depression of said bulge (166) causes said mounting end (146) to deflect said leaf spring (132), lifting said stock (140) out of said notch (154, 164).
12. The multi-purpose folding tool of claim 11, wherein said mounting end (146) of said at least one other supplemental tool (76) includes a peripheral flat (156) which coacts with said leaf spring (132) to bias said other supplemental tool closed, said peripheral flat (156) having a corner (168) which contacts and deflects said leaf spring (132) when said bulge (166) is depressed.
13. The multi-purpose folding tool of one of claims 10 to 12, wherein at least a second other of said supplemental tools (76) includes a mounting end (146) having a first and a second peripheral flat, said first peripheral flat (156) coacting with said flat leaf spring (132) to bias said at least a second other of said supplemental tools (76) into its closed position and said second peripheral flat (152) coacting with said flat leaf spring (132) to bias said at least a second other of said supplemental tools (76) into its open position, thereby latching said at least a second other of said supplemental tools (76) in said closed and said open positions, respectively.

Patentansprüche

1. Klappbares Mehrzweckwerkzeug, das zwischen einer auseinandergeklappten Stellung, in der es als Zange verwendet werden kann, und einer zusammengeklappten Stellung bewegt werden kann, mit Folgendem:

(a) einer Zange (12), die ein Paar sich kreuzender Backen (18, 20) und ein Paar Handgriffe (22, 24) aufweist;

(b) wobei jede des Paares sich kreuzender Backen (18, 20) der Zange ein Greifende (14) mit einer Spitze (100), ein Schwenklager (30, 36) und einen Schaft (32, 38) umfasst;

(c) wobei das Paar sich kreuzender Backen (18, 20) durch einen sich durch jedes der Schwenklager (30, 36) erstreckenden Backendrehzapfen (26) drehbar miteinander verbunden ist;

(d) wobei jeder des Paares Handgriffe (22, 24) ein festgelegtes Ende und ein freies Ende umfasst, wobei das festgelegte Ende jedes Handgriffs schwenkbar mit einem der Schäfte (32, 38) des Paares sich kreuzender Backen (18, 20) verbunden ist, so dass zwei Handgriffschwenkachsen (56, 58) definiert werden, wobei die Handgriffschwenkachsen (56, 58) im Wesentlichen parallel zueinander und zu dem Drehzapfen (26) verlaufen;

dadurch gekennzeichnet, dass

(e) jeder des Paares Handgriffe (22, 24) weiterhin eine äußere Seitenwand (66), die von dem gegenüberliegenden Handgriff weg weist, und eine innere Seitenwand (64), die zum gegenüberliegenden Handgriff weist, enthält, welche durch einen Steg (68) miteinander verbunden sind, wobei die Seitenwände (64, 66) und der Steg (68) einen U-förmigen Kanal (70) bilden, der von der Ebene der Handgriffe (22, 24) nach außen hin mündet;

jede der äußeren Seitenwände (66) der Handgriffe einen sich nach innen verjüngenden Teil (82) enthält, um eine Aussparung (92) neben einem jeweiligen der Schwenklager (30, 36) zu definieren.

2. Klappbares Werkzeug nach Anspruch 1, das einen Kanaldrehzapfen (78) umfasst, der neben dem freien Ende des Handgriffs (22, 24) in den Seitenwänden (64, 66) quer zum Kanal (70) gelagert ist, wobei die Achse des Kanaldrehzapfens (78) im Wesentlichen orthogonal zu den Achsen der Backe und der Schaftdrehzapfen (26; 56, 58) verläuft.

3. Klappbares Werkzeug nach Anspruch 2, das weiterhin mehrere zusätzliche Werkzeuge (76) umfasst, die schwenkbar an dem Kanaldrehzapfen (78) angebracht sind, wobei jedes der zusätzlichen Werkzeuge (76) einzeln zwischen einer geschlossenen Stellung im Kanal (70) und einer sich vom Kanal erstreckenden geöffneten Stellung drehbar ist. 5
4. Klappbares Werkzeug nach einem der Ansprüche 1 bis 3, bei dem die äußeren Wände (66) weiterhin jeweils Kontaktteile (82) enthalten, so dass die Kontaktteile (82) der äußeren Wände (66) beim Zusammenklappen des Werkzeugs durch Schwenken der Handgriffe (22, 24) um die erste und die zweite Schwenkachse (56, 58) die Spitzen (100) der Backen (18, 20) aufeinander zu schieben, um das Zusammenklappen des Werkzeugs zu unterstützen. 10 15
5. Klappbares Werkzeug nach einem der Ansprüche 1 bis 4, bei dem das Paar Handgriffe (22, 24) weiterhin einen Teilsteg (72) umfasst, der einen Teil des U-förmigen Kanals (70) neben dem Schwenklager (90) bedeckt, wobei der Teilsteg integral mit einer der Seitenwände (66, 64) verbunden und in unmittelbarer Nähe der anderen der Seitenwände (66, 64) umgeklappt ist, so dass eine Kastenträgerkonstruktion gebildet wird. 20 25
6. Klappbares Werkzeug nach einem der Ansprüche 1 bis 5, bei dem bei seinem Zusammenklappen durch Schwenken der Handgriffe (22, 24) um die Schaftzapfen (56, 58) die äußeren Seitenwände (66) die Backen (18, 20) zwischen den Aussparungen (92) einschließen. 30 35
7. Klappbares Werkzeug nach einem der Ansprüche 1 bis 6, bei dem das Paar Backen (18, 20) jeweils mindestens drei laminierte Platten (172, 174, 176) umfasst, wobei jedes Paar benachbarter Platten mit mindestens einer Gegen-Aussenkung (178) und einer Ausformung (180) verstärkt ist; sowie ein Verbindungsmittel (182), das sich durch die mindestens drei laminierten Platten (172, 174, 176) erstreckt, um die Platten miteinander zu verbinden. 40 45
8. Klappbares Werkzeug nach Anspruch 7, bei dem das Verbindungsmittel mindestens einen Niet (182) umfasst, der sich durch die Gegen-Aussenkung (178) und die Ausformung (180) erstreckt. 50
9. Klappbares Werkzeug nach Anspruch 7 oder 8, bei dem die laminierten Platten einen mittleren Körper (172) und ein Paar äußerer Streifen (174, 176) umfassen, wobei die Aussenkungen (178) in dem mittleren Körper und die Ausformungen (180) in den äußeren Streifen ausgebildet sind. 55
10. Klappbares Mehrzweckwerkzeug nach einem der Ansprüche 1 bis 9, bei dem der Kanal (70) zur Aufnahme mehrerer zusätzlicher Werkzeuge (76) ausgeführt ist, der Steg (68) eine flache, elastische Feder (132) an einem Ende (86) des Kanals und einen Schlitz (136) durch das freie Ende der Blattfeder (132) enthält, wobei der Schlitz quer über das freie Ende durch ein in Querrichtung verlaufendes Flachmaterial (140) begrenzt wird; wobei jedes der zusätzlichen Werkzeuge (76) einen Körper (144) und ein Befestigungsende (146) umfasst, wobei der Körper so geformt ist, dass er für die Funktion des zusätzlichen Werkzeugs geeignet geformt ist, und das Befestigungsende (146) schwenkbar am Kanal (70) angebracht ist; und mindestens eines der zusätzlichen Werkzeuge (76) an seinem Befestigungsende (146) eine Umfangskerbe (154, 164), die so vorgesehen ist, dass sie das Material (140) passgenau darin aufnimmt, wenn das mindestens eine der zusätzlichen Werkzeuge ausgezogen ist, um das mindestens eine der zusätzlichen Werkzeuge (76) in seiner ausgezogenen Stellung formschlüssig zu verriegeln, und ein Mittel (166) zur Freigabe des Materials (140) aus der Kerbe (154, 164) enthält.
11. Klappbares Mehrzweckwerkzeug nach Anspruch 10, bei dem das Freigabemittel eine nach außen gerichtete Ausbauchung (166) umfasst, die an mindestens einem anderen der zusätzlichen Werkzeuge (76) am Körper (144) davon angeordnet ist, wobei die Ausbauchung über die Längsränder (170) der Seitenwände (64, 66) vorsteht, wenn das mindestens eine andere zusätzliche Werkzeug geschlossen ist, wobei das Befestigungsende (146) des mindestens einen anderen zusätzlichen Werkzeugs (76) so konfiguriert ist, dass ein Niederdrücken der Ausbauchung (166) bewirkt, dass das Befestigungsende (146) die Blattfeder (132) durchbiegt, wodurch das Material (140) aus der Kerbe (154, 164) herausgehoben wird.
12. Klappbares Mehrzweckwerkzeug nach Anspruch 11, bei dem das Befestigungsende (146) des mindestens einen zusätzlichen Werkzeugs (76) eine Umfangsabflachung (156) enthält, die mit der Blattfeder (132) zusammenwirkt, um das andere zusätzliche Werkzeug in den geschlossenen Zustand vorzuspannen, wobei die Umfangsabflachung (156) eine Ecke (168) aufweist, die die Blattfeder (132) berührt und durchbiegt, wenn die Ausbauchung (166) niedergedrückt wird.
13. Klappbares Mehrzweckwerkzeug nach einem der Ansprüche 10 bis 12, bei dem mindestens ein zweites anderes der zusätzlichen Werkzeuge (76) ein Befestigungsende (146) mit einer ersten und einer zweiten Umfangsabflachung enthält, wobei die er-

ste Umfangsabflachung (156) mit der flachen Blattfeder (132) dahingehend zusammenwirkt, dass sie das mindestens das zweite andere der zusätzlichen Werkzeuge (76) in seine geschlossene Stellung vorspannt, und die zweite Umfangsabflachung (152) dahingehend mit der flachen Blattfeder (132) zusammenwirkt, dass sie das mindestens zweite andere der zusätzlichen Werkzeuge (76) in seine geöffnete Stellung vorspannt, wodurch das mindestens zweite andere der zusätzlichen Werkzeuge (76) in der geschlossenen bzw. geöffneten Stellung verriegelt wird.

Revendications

1. Outil pliant multi-usages pouvant être déplacé entre une position dépliée dans laquelle il est utilisable comme une paire de pinces et une position pliée, comprenant:

(a) une pince (12) comportant une paire de mâchoires croisées (18, 20) et une paire de poignées (22, 24);

(b) chacune de ladite paire de mâchoires croisées (18, 20) de ladite pince comprenant une extrémité de saisie (14) pourvue d'une pointe (100), d'un coussinet de pivot (30, 36) et d'une patte (32, 38);

(c) ladite paire de mâchoires croisées (18, 20) étant couplée d'une façon rotative l'une à l'autre par une broche de pivot de mâchoire (26) s'étendant à travers chacun des coussinets de pivot (30, 36);

(d) chacune de ladite paire de poignées (22, 24) comprenant une extrémité fixée et une extrémité libre, ladite extrémité fixée de chaque poignée étant couplée d'une façon pivotante à l'une desdites pattes (32, 38) de ladite paire de mâchoires croisées (18, 20) pour définir deux axes de pivot de poignée (56, 58), lesdits axes de pivot de poignée (56, 58) étant substantiellement parallèles l'un à l'autre et à ladite broche de pivot de mâchoire (26);

caractérisé en ce que

(e) chacune de ladite paire de poignées (22, 24) comprend en outre une paroi latérale extérieure (66) qui tourne le dos à la poignée opposée et une paroi latérale intérieure (64) qui fait face à la poignée opposée, reliées intégralement par une âme (68), lesdites parois latérales (64, 66) et ladite âme (68) formant un canal en forme de U (70) ouvert vers l'extérieur à partir du plan desdites poignées (22, 24); et

chacune desdites parois latérales extérieures (66) desdites poignées comprenant une portion oblique vers l'intérieur (82) pour définir un évide-

ment (92) à proximité d'un respectif des coussinets de pivot (30, 36).

2. Outil pliant selon la revendication 1, comprenant une broche de pivot de canal (78) insérée dans lesdites parois latérales (64, 66) transversalement audit canal (70) à proximité de ladite extrémité libre de ladite poignée (22, 24), l'axe de ladite broche de pivot de canal (78) étant substantiellement orthogonal aux axes de ladite mâchoire et desdites broches de pivot de patte (26; 56, 58) .

3. Outil pliant selon la revendication 2, comprenant en outre une pluralité d'outils supplémentaires (76) montés d'une façon pivotante sur ladite broche de pivot de canal (78), chacun desdits outils supplémentaires (76) pouvant tourner individuellement entre une position fermée à l'intérieur dudit canal (70) et une position ouverte s'étendant à partir dudit canal.

4. Outil pliant selon l'une quelconque des revendications 1 à 3, dans lequel lesdites parois latérales extérieures (66) comprennent en outre chacun des portions de contact (82) de telle sorte que, lorsque ledit outil est plié en faisant pivoter lesdites poignées (22, 24) autour desdits premier et deuxième axes de pivot (56, 58), lesdites portions de contact (82) desdites parois extérieures (66) poussent lesdites pointes (100) desdites mâchoires (18, 20) en direction l'une de l'autre de manière à contribuer au pliage dudit outil.

5. outil pliant selon l'une quelconque des revendications 1 à 4, dans lequel ladite paire de poignées (22, 24) comprend en outre une âme partielle (72) couvrant une portion dudit canal en forme de U (70) à proximité dudit coussinet de pivot (90), ladite âme partielle étant reliée intégralement avec l'une desdites parois latérales (66, 64) et pliée à proximité immédiate de l'autre desdites parois latérales (66, 64) de manière à former une structure de caisson.

6. Outil pliant selon l'une quelconque des revendications 1 à 5, dans lequel lorsque ledit outil pliant est plié en faisant pivoter lesdites poignées (22, 24) autour desdites broches de patte (56, 58), lesdites parois latérales extérieures (66) enferment lesdites mâchoires (18, 20) entre lesdits évidements (92).


7. Outil pliant selon l'une quelconque des revendications 1 à 6, dans lequel ladite paire de mâchoires (18, 20) comprennent chacune au moins trois feuilles lamellées (172, 174, 176), chaque paire de feuilles voisines étant renforcée avec au moins un fraisage (178) et un rebord (180) correspondants; et des moyens d'assemblage (182) qui passent à travers lesdites au moins trois feuilles lamellées

(172, 174, 176) de manière à attacher lesdites feuilles ensemble.

8. Outil pliant selon la revendication 7, dans lequel lesdits moyens d'assemblage comprennent au moins un rivet (182) qui passe à travers le fraisage (178) et le rebord (180) correspondants. 5
9. Outil pliant selon la revendication 7 ou 8, dans lequel lesdites feuilles lamellées comprennent un corps central (172) et une paire de bandes extérieures (174, 176), lesdits fraisages (178) étant formés dans ledit corps central et lesdits rebords (180) étant formés dans lesdites bandes extérieures. 10
10. Outil pliant multi-usages selon l'une quelconque des revendications 1 à 9, dans lequel ledit canal (70) est apte à loger une pluralité d'outils supplémentaires (76), ladite âme (68) comprenant un ressort élastique plat (132) à une extrémité (86) dudit canal, et une fente (136) à travers l'extrémité libre dudit ressort à lame (132), ladite fente étant limitée transversalement à l'extrémité libre par une barre plate transversale (140) ; 15
chacun desdits outils supplémentaires (76) comprend un corps (144) et une extrémité de montage (146), ledit corps étant configuré d'une manière appropriée à la fonction dudit outil supplémentaire, et ladite extrémité de montage (146) étant montée d'une façon pivotante sur ledit canal (70) ; et 30
au moins un desdits outils supplémentaires (76) comprenant sur sa dite extrémité de montage (146) une encoche périphérique (154, 164) positionnée de manière à accueillir solidement ladite barre (140) lorsque ledit au moins un desdits outils supplémentaires est déployé, afin de verrouiller d'une façon positive ledit au moins un desdits outils supplémentaires (76) dans sa position déployée; et 35
des moyens (166) pour libérer ladite barre (140) de ladite encoche (154, 164). 40
11. Outil pliant multi-usages selon la revendication 10, dans lequel lesdits moyens de libération comportent un renflement orienté vers l'extérieur (166) positionné sur au moins un autre desdits outils supplémentaires (76) sur le corps (144) de celui-ci, ledit renflement saillant au-dessus des bords longitudinaux (170) desdites parois latérales (64, 66) lorsque ledit au moins un outil supplémentaire est fermé, ladite extrémité de montage (146) dudit au moins un autre outil supplémentaire (76) étant configurée de telle sorte qu'une dépression dudit renflement (166) entraîne ladite extrémité de montage (146) à défléchir ledit ressort (132), entraînant le soulèvement de ladite barre (140) hors de ladite encoche (154, 164). 45 50 55
12. Outil pliant multi-usages selon la revendication 11,

dans lequel ladite extrémité de montage (146) dudit au moins un autre outil supplémentaire (76) comprend un méplat périphérique (156) qui co-agit avec ledit ressort à lame (132) pour pousser ledit autre outil supplémentaire dans sa position fermée, ledit méplat périphérique (156) présentant un coin (168) qui touche et défléchit ledit ressort à lame (132) lorsque ledit renflement (166) est enfoncé.

13. Outil pliant multi-usages selon l'une quelconque des revendications 10 à 12, dans lequel au moins un deuxième autre desdits outils supplémentaires (76) comprend une extrémité de montage (146) comportant un premier et un deuxième méplats périphériques, ledit premier méplat périphérique (156) coopérant avec ledit ressort à lame plat (132) pour pousser ledit au moins un deuxième autre desdits outils supplémentaires (76) dans sa position fermée, et ledit deuxième méplat périphérique (152) coopérant avec ledit ressort à lame plat (132) pour pousser ledit au moins un deuxième autre desdits outils supplémentaires (76) dans sa position ouverte, verrouillant ainsi ledit au moins un deuxième autre desdits outils supplémentaires (76) dans lesdites positions fermée et ouverte, respectivement.

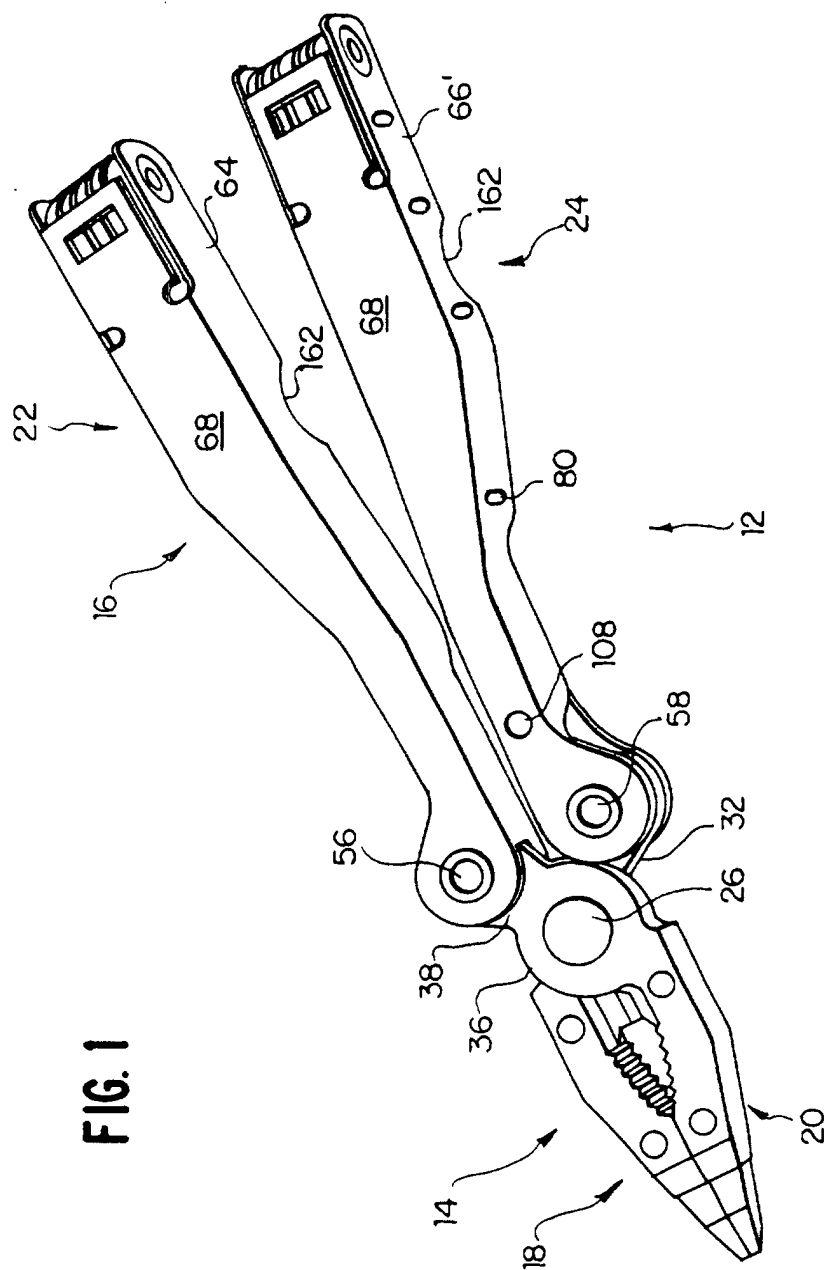

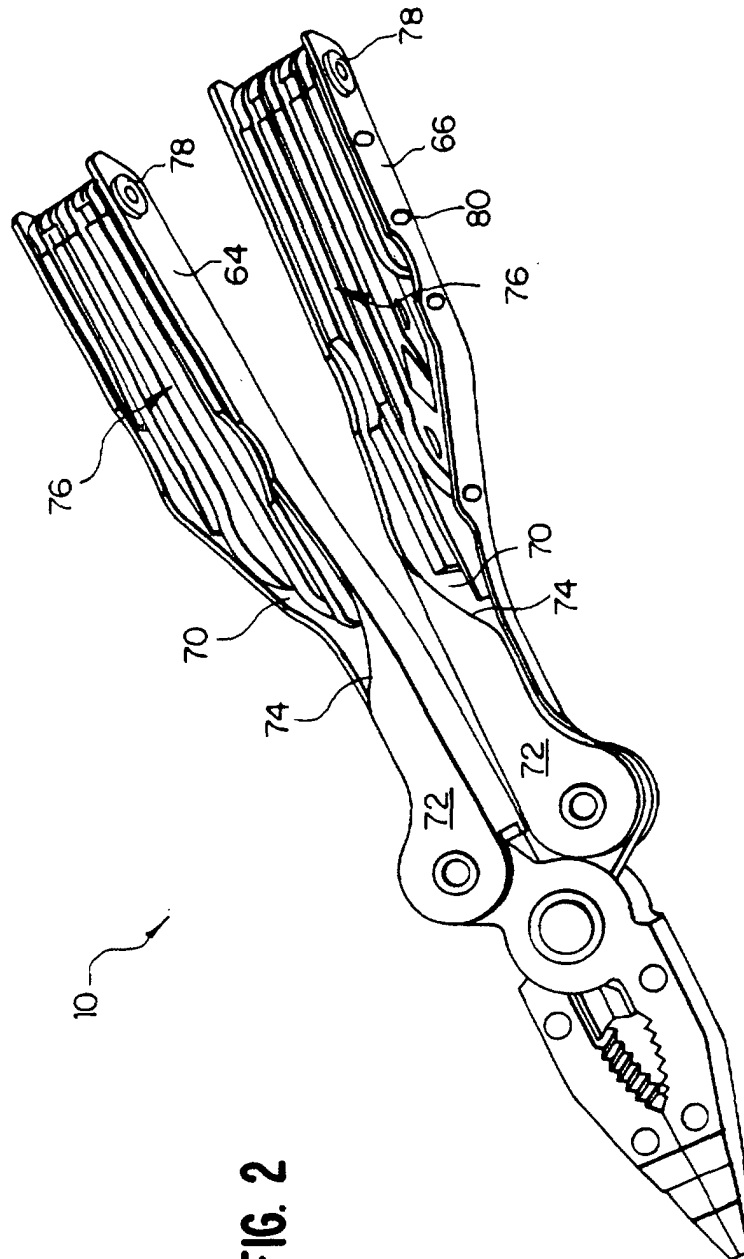


FIG. 2

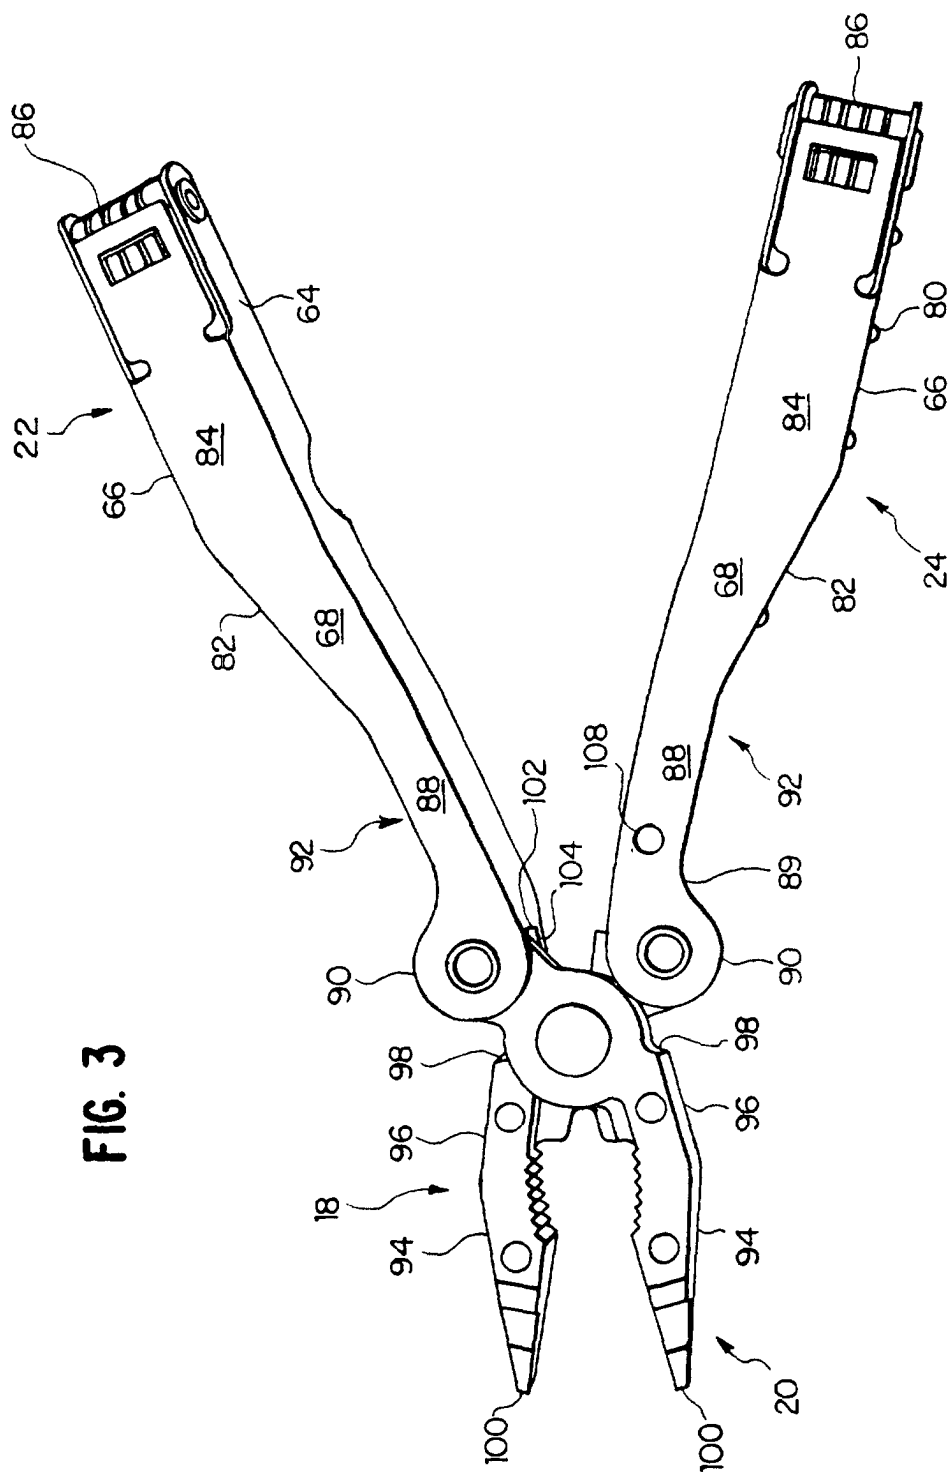


FIG. 3

FIG. 4

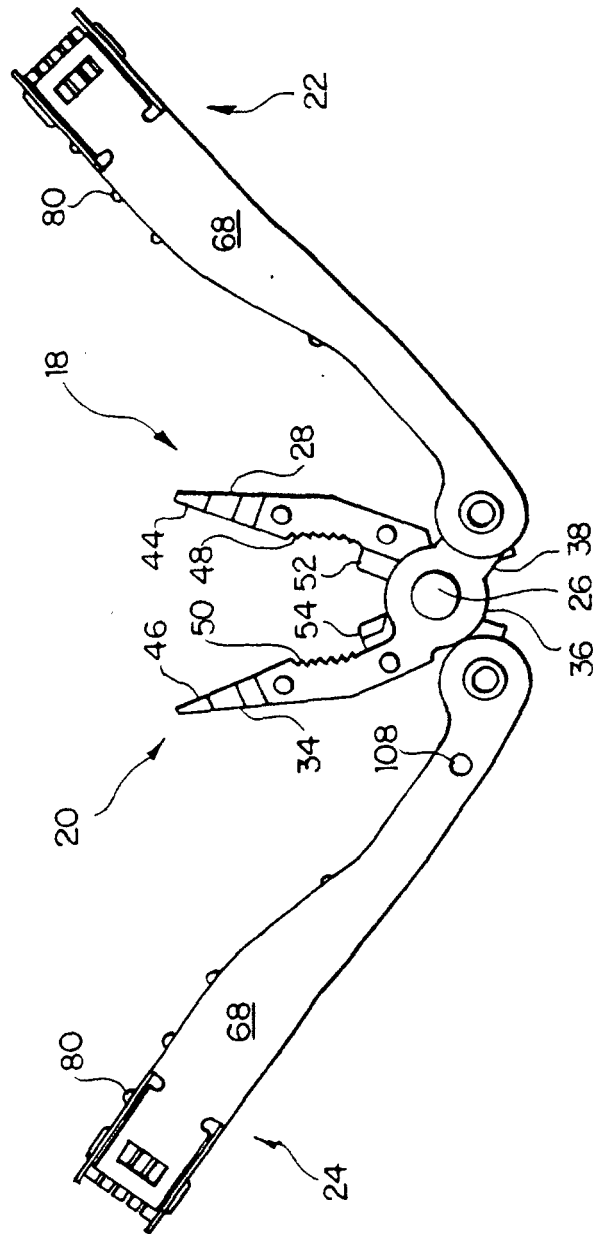
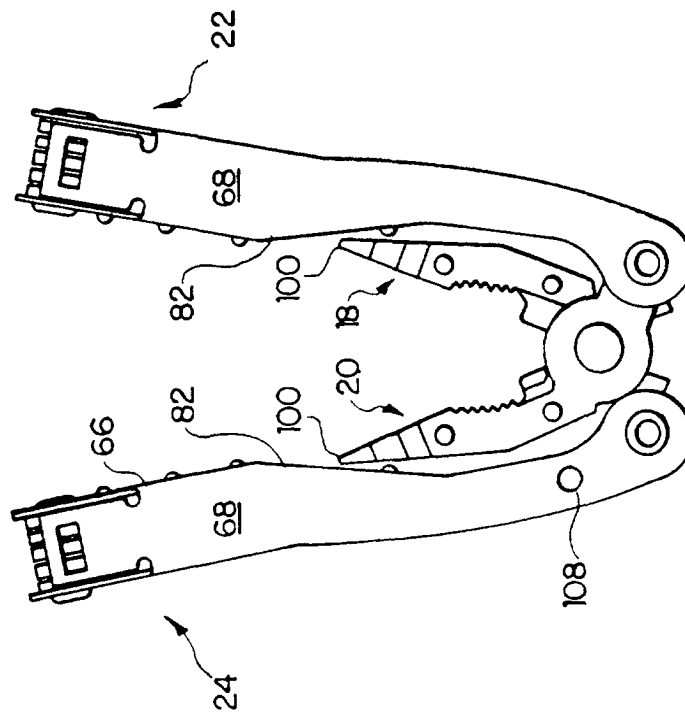


FIG. 5



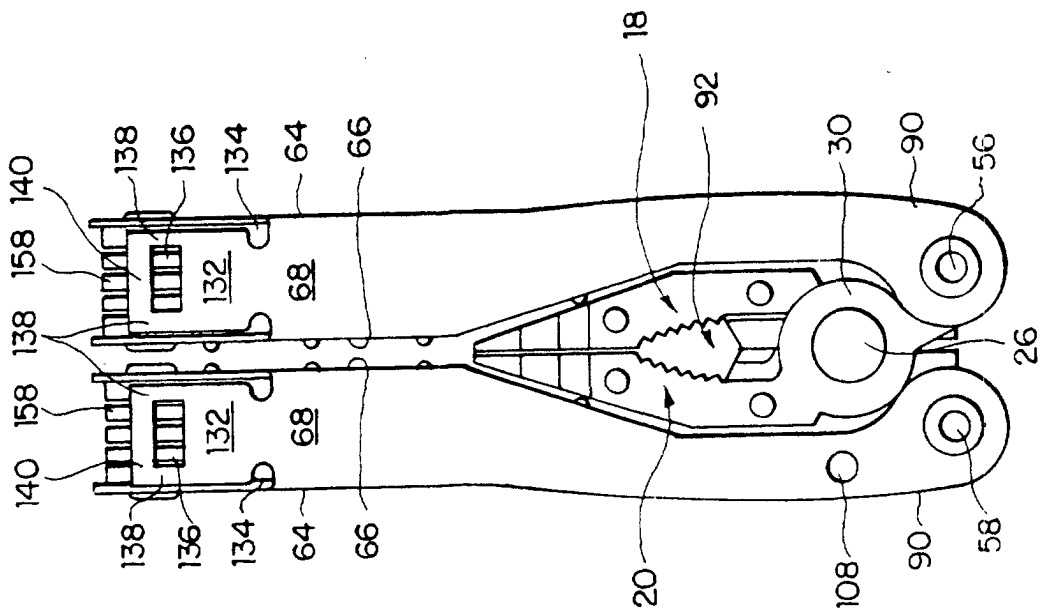


FIG. 6

FIG. 7

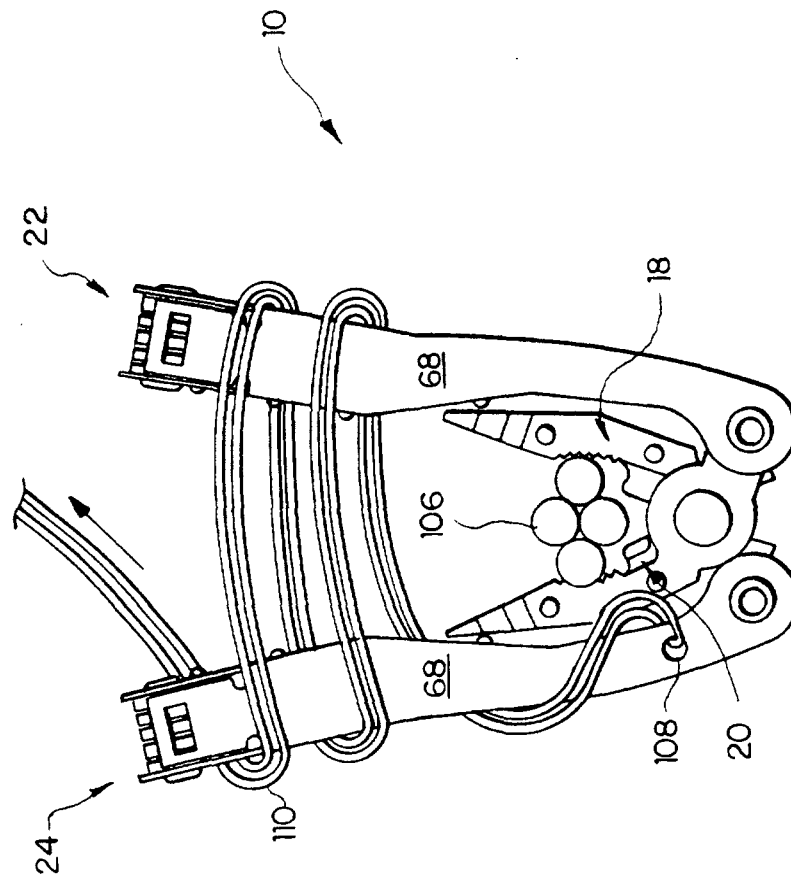


FIG. 8A

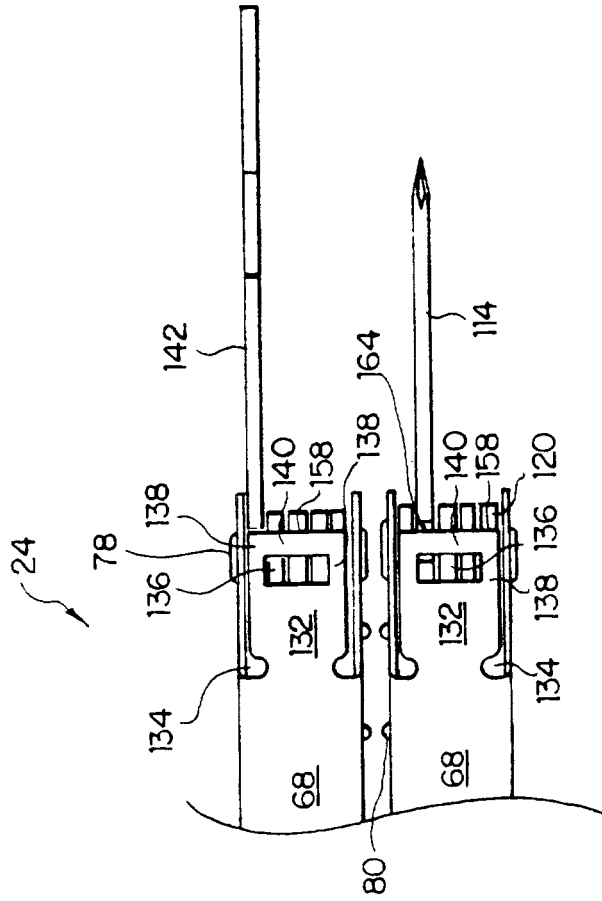


FIG. 8C

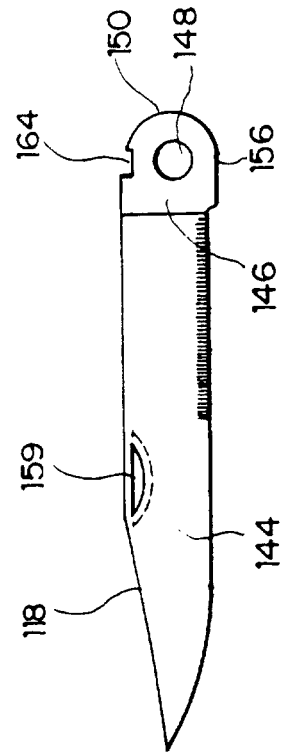


FIG. 8B

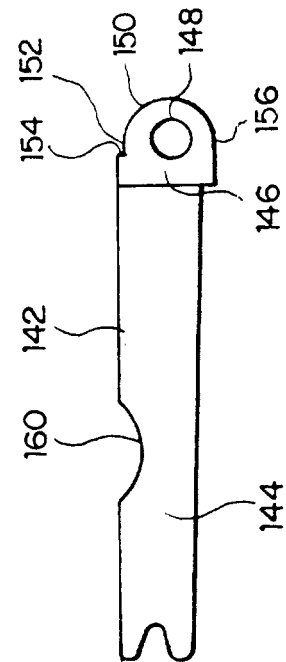


FIG. 9A

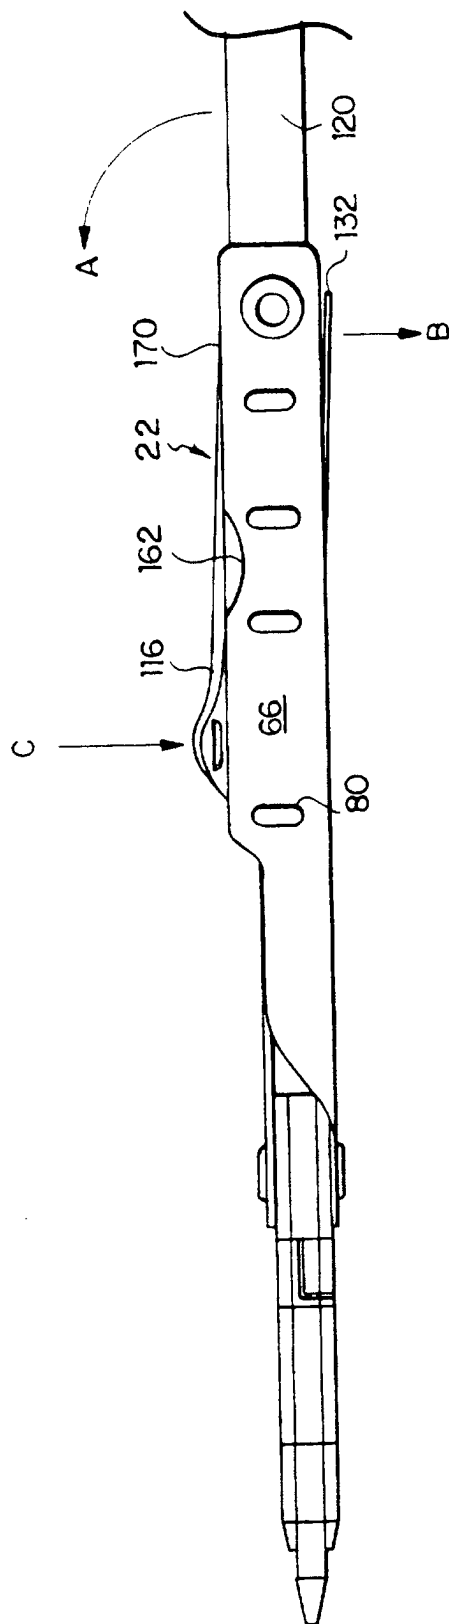
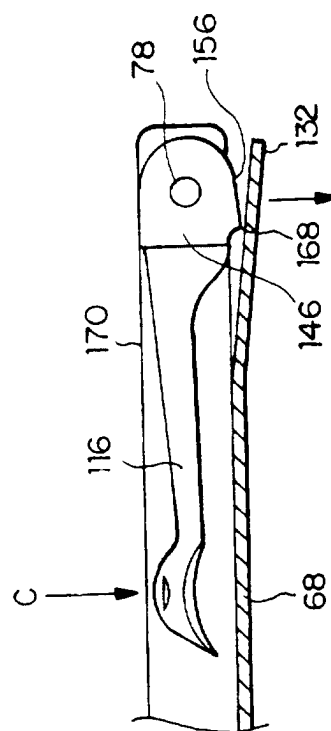


FIG. 9B



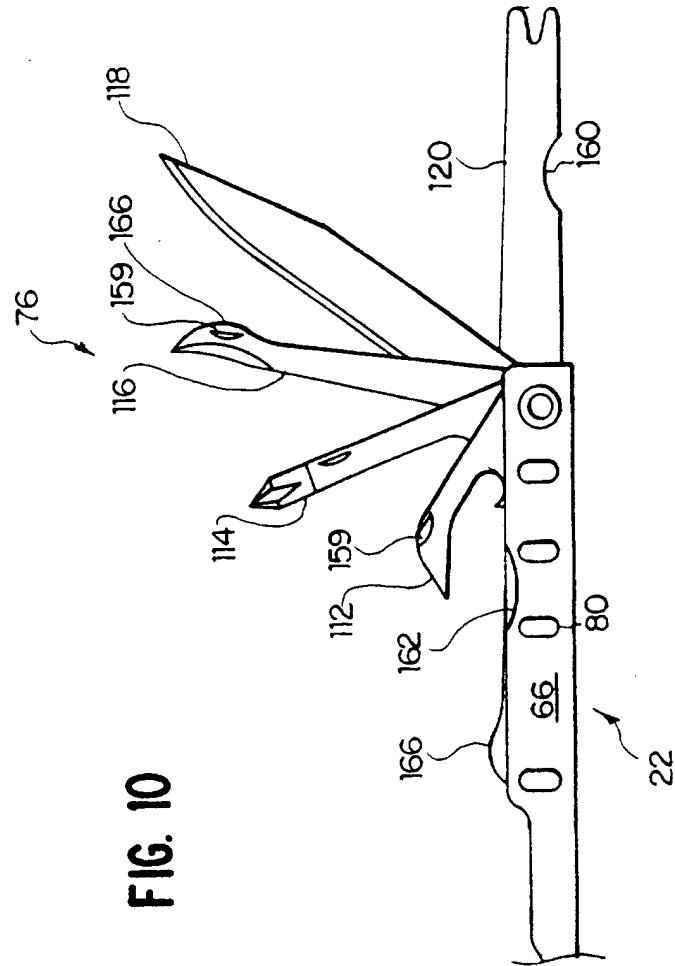


FIG. 10

FIG. 11

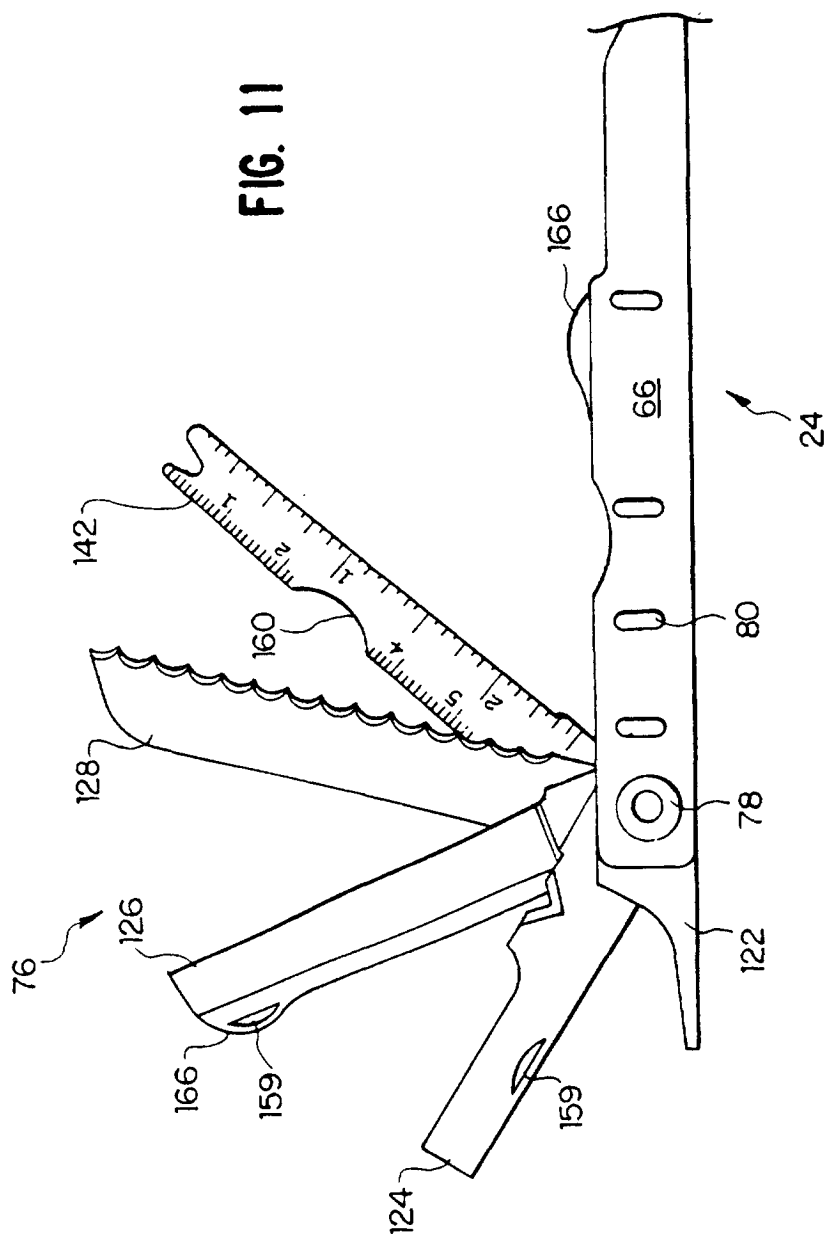


FIG. 12

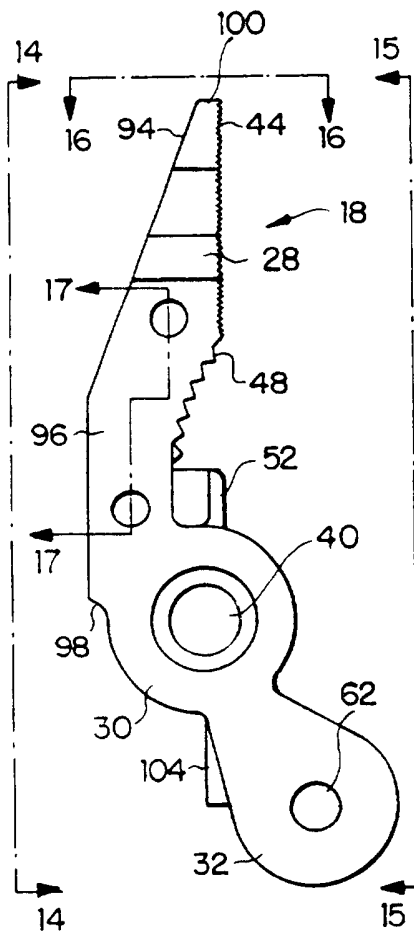


FIG. 13

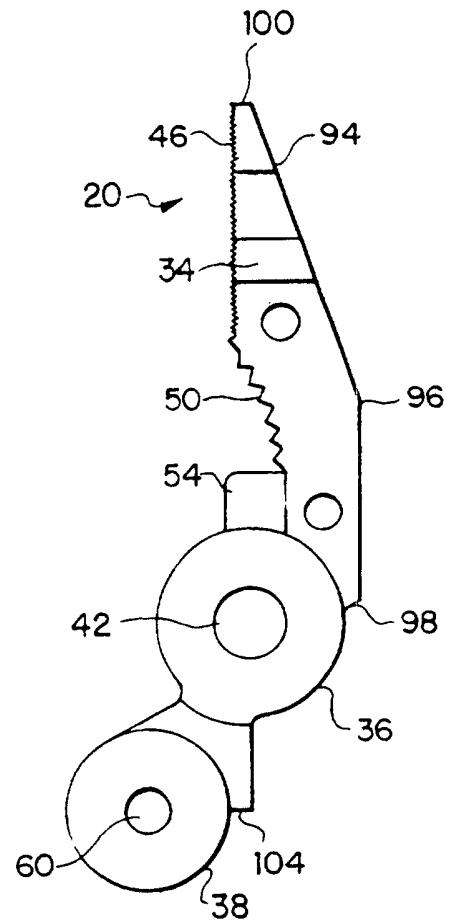


FIG. 14

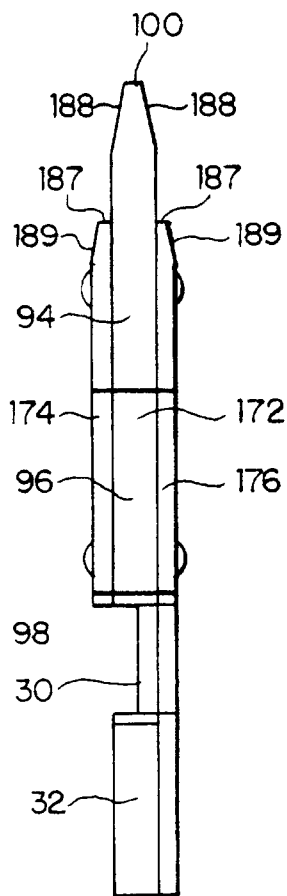


FIG. 15

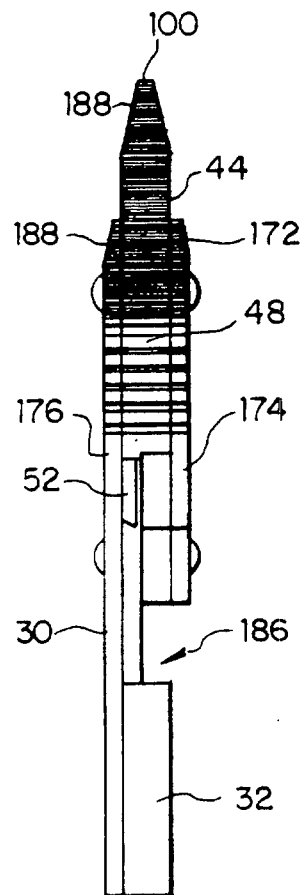


FIG. 16

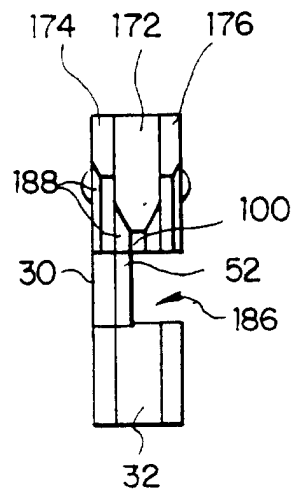


FIG. 17

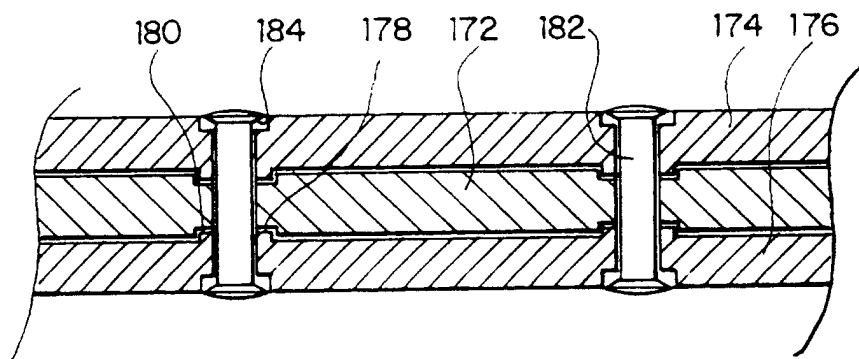


FIG. 18

