

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/019806 A1

(51) International Patent Classification⁷: **G01N 1/28**

(21) International Application Number:
PCT/GB2004/001904

(22) International Filing Date: 5 May 2004 (05.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0319709.2 21 August 2003 (21.08.2003) GB

(71) Applicant (for all designated States except US):
THERMO SHANDON LIMITED [GB/GB]; 93-96
Chadwick Road, Astmoor, Runcorn, Cheshire WA7 1PR
(GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LOMAS, Peter**
[GB/GB]; 57 Rosefield Avenue, Bebington, Wirral CH63
5JN (GB).

(74) Agent: **FORRESTER, KETLEY & CO**; Forrester
House, 52 Bounds Green Road, London N11 2EY (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A CENTRIFUGATION DEVICE

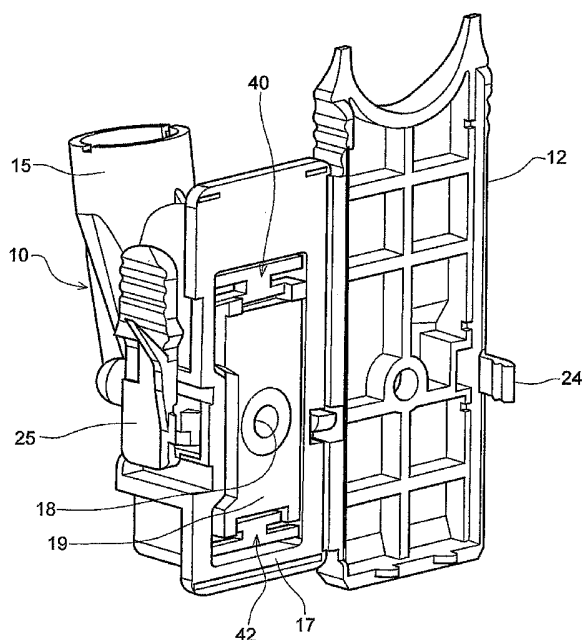

(57) Abstract: A centrifugation device comprising a combined sample chamber and slide holder adapted to be mounted, with a microscope slide, in a centrifuge in a predetermined position, after placing, in the sample chamber, a fluid biological sample containing cells, the centrifugation device comprising a body (10) affording a base (14) adapted for engagement with a microscope slide, structure on one side of the base defining a chamber for a fluid sample, with an opening (15) for the introduction of fluid to said chamber, the base (14) including an aperture (18) and carrying a means for sealing the edges of such aperture with respect to the surface of a microscope slide placed across the base (14), or for allowing the passage of liquid but obstructing the passage of cells, the centrifugation device further including a back plate (12) arranged, when the back plate (12) is closed against the rear of a microscope slide engaged with the base (14), to locate the slide between the base and the cover plate and to hold the cover plate in this closed position, wherein said base (14) comprises a supporting frame (17) and, within said supporting frame, a pressure plate (19) provided with said aperture (18), and wherein the pressure plate is supported from said frame by flexible resilient means (40, 42) such as to allow the pressure plate to "float" and to align itself with a microscope slide located between the pressure plate and the back plate as the back plate is closed.

5 DESCRIPTION OF INVENTION

“A Centrifugation Device”

10 THIS INVENTION relates to a centrifugation device comprising a combined sample chamber and slide holder adapted to be mounted, with a microscope slide, in a centrifuge in a predetermined position, after placing, in the sample chamber, a fluid biological sample containing cells, the device being so-arranged that when the centrifuge is operated, a thin layer - ideally a
15 monolayer - of cells is deposited from the fluid onto a predetermined deposition area on the glass microscope slide. Such a centrifugation device is herein referred to as being “of the kind specified”.

Various forms of centrifugation device of the kind specified have been
20 known in the past. Examples of such devices are disclosed, for example, in US Patents 4,391,710; 4,696,743; 4,853,188 and 4,874,582 and European Patents Nos. 0184374 and 0047840. Some examples have been reusable, that is to say it was possible and intended that after the device had been used to deposit cells from a fluid sample onto a first microscope slide, and the slide removed, the
25 device could be cleaned, a fresh slide fitted, a fresh fluid sample placed in the sample chamber and the device again placed into the centrifuge and so on indefinitely. In these arrangements the slide is, of course retained by a releasable and re-attachable clip of some description. Some later centrifugation devices of the kind specified were of the single-use type, that is to say they
30 were designed in such a way that they could not, or could not conveniently, be

used more than once, thereby avoiding contamination problems resulting from improper cleaning procedures between uses. In view of their inevitably disposable nature, devices of the latter character have generally been largely of plastics in order to minimise production costs.

5

A centrifugation device of the kind specified generally comprises a combined sample chamber and slide holder adapted to be mounted, with a microscope slide, in a pre-determined position in a centrifuge after placing, in the sample chamber, a fluid biological sample containing cells, the centrifugation device comprising a body affording a base adapted for engagement with such microscope slide, structure on one side of the base defining the sample chamber with an opening for the introduction of fluid to the sample chamber, the base including an aperture for communicating with the sample chamber and the base carrying means for sealing the edges of such aperture with respect to the surface of the microscope slide placed across the base, or for allowing the passage of liquid but obstructing the passage of cells. Such a centrifugation device further typically includes a back plate hingedly connected with the base, or otherwise securable to the base.

20

A problem which arises, particularly in relation to single use, moulded plastics centrifugation devices of the kind specified, is that of ensuring effective sealing or quasi-sealing of the edge of said aperture communicating with the sample chamber with respect to the slide. The Applicant's have proposed, in co-pending UK Patent Application No. 0301047.7 to use an elastomeric gasket around said aperture to effect a seal with respect to the slide. However, in the past, it has been common to interpose between the slide and the base of the device in which the said aperture is provided, a sheet of liquid-absorbent paper or card, with a hole therein which is aligned with the aperture in said base of the centrifugation device and which serves to absorb liquid from the sample

25

whilst blocking passage of cells, etc. which are to be deposited on the slide. Such a filter card arrangement is still preferred for small capacity centrifugation devices of the kind specified. However, because of limited compressibility of the filter card paper used, correct alignment of the surface of the said base
5 which in the closed position provides engages the and provides support for the filter card held against the slide surface, good alignment of that surface with the opposing slide surface is necessary if leakage of fluid, (and/or cell material) past the filter card is to be avoided.

10 It is an object of the present invention to provide an improved centrifugation device.

According to one aspect of the invention there is provided a centrifugation device comprising a combined sample chamber and slide holder
15 adapted to be mounted, with a microscope slide, in a centrifuge in a predetermined position, after placing, in the sample chamber, a fluid biological sample containing cells, the centrifugation device comprising a body affording a base adapted for engagement with a microscope slide, structure on one side of the base defining a chamber for a fluid sample, with an opening for the
20 introduction of fluid to said chamber, the base including an aperture and carrying a means for sealing the edges of such aperture with respect to the surface of a microscope slide placed across the base, or for allowing the passage of liquid but obstructing the passage of cells, the centrifugation device further including a back plate arranged, when the back plate is closed against
25 the rear of a microscope slide engaged with the base, to locate the slide between the base and the cover plate and to hold the cover plate in this closed position, wherein said base comprises a supporting frame and, within said supporting frame, a pressure plate provided with said aperture, and wherein the pressure

plate is supported from said frame by flexible resilient means such as to allow the pressure plate to "float" and to align itself with a microscope slide located between the pressure plate and the back plate as the back plate is closed.

- 5 An embodiment of the invention is described below by way of example with reference to the accompanying drawings in which:-

Figure 1 is a perspective view from the rear, of a centrifugation device in accordance with the invention in a condition in which a back plate is open
10 relative to a body part, the body part being fitted with a filter card.

Figure 2 is a rear elevation view to a larger scale of the centrifugation device of Figure 1, also in the open condition, with the filter card omitted,

Figure 3 is a perspective view corresponding to Figure 1 but with the filter card omitted,

- 15 Figure 4 is a partial view in vertical section of the body part of the device of Figures 1 to 3, and

Figure 5 is a partial perspective view, from the rear and above, of the centrifugation device of Figures 1 to 4 in the condition in which the back plate is closed against the body part, with a microscope slide located therebetween.

- 20 Figure 6 is a perspective view, with a back plate in an open position, of a variant of the centrifugation device of Figures 1 to 4.

Referring to Figures 1 to 5, a centrifugation device in accordance with the present invention comprises a body part 10 and a back plate 12 formed
25 integrally with one another by moulding in a suitable plastics material such as polypropylene, the back plate 12 being connected with the body part 10 by way of an integral "living hinge" 22. As shown in Figures 1 to 5, the body part 10 comprises a base 14 which, as described below, comprises a frame 17 bounding a plate 19 which carries on its front side integral structure providing a sample

5

chamber 16 which is closed at its end remote from the base 14 and which terminates, in the plane of the plate 19, in an aperture or port 18. A funnel 15 extends upwardly from an entrance opening in the sample chamber, whereby a fluid sample can be introduced into the sample chamber 16.

5

The base 14 is generally rectangular, as is the back plate 12, and the living hinge 22 extends along one vertical edge of the base 14, more particularly along one vertical edge of the frame 17, and the adjacent vertical edge of the back plate 12. The vertical edge of the back plate 12 remote from the living hinge 22 carries a detent 24 for co-operating with elements 25 carried by the body 10 adjacent the edge of the base 14 remote from the living hinge 22 and which elements, together with detent 24, form a catch arrangement whereby the back plate may be secured in a closed position on the base 14 with a microscope slide, indicated at 26 in Figure 5, held between the base 14 and the back plate 12. As illustrated, the upper edge of the back plate 12 may be scalloped or recessed, as indicated, to allow ready grasping of the upper edge of the microscope slide 26 between finger and thumb during removal of the slide from the device after centrifugation, as described below. A filter card 20 is fixed to the rear surface of frame 17 and extends over the plate 19. The filter card 20 comprises a sheet of liquid-absorbent card or paper, which is secured, for example, by ultrasonic welding, at its upper and lower ends, (as viewed in Figure 1) to the frame 17 and extends over the counter plate 19. The filter card 20 has an aperture 21 therein which corresponds in size, shape and position to the port 18 and is aligned therewith.

25

In use of the device, a microscope slide 26 is located between the back plate 12 and the filter card on the base 14. (Figures 1 to 3 show integral lugs 31 to support the lower end of a microscope slide 26 fitted against the front surface of the back plate 12 until the back plate 12, with the slide, is closed against the
5 base 14).

The device is then mounted in a centrifuge (not shown) in such a manner that bosses 30 projecting from the sides of the back plate act as journals received in bearings provided by complementary slots in mounting structure
10 within the centrifuge. When the centrifuge is at rest, the device rests in the centrifuge in a position in which the slide 26 is at an angle. When the centrifuge is spun up, the device pivots about the axis of bosses 30, into a position in which the slide is vertical. When the centrifuge is spun, the centrifugal force generated produces a rapid settling of the cells within the
15 biological sample against the surface of the glass slide 26, within an area bounded by the edges of port 18 and the aperture 21 in the card 20 and these cells remain in a thin layer on the slide after the centrifuge is stopped. After the centrifuge is stopped, the centrifugation device is removed from the centrifuge, and the slide carefully removed after opening of the back plate. The catch
20 arrangement 24,25 is preferably so devised, for example as described in our co-pending UK Patent Application GB0301047.7, that the process of opening the back plate fractures part of the catch arrangement and ensures that the centrifugation device cannot be re-used.

25 As noted above, the base 14 comprises a peripheral frame 17 and a central panel or counter plate 19 which is mounted with respect to the frame 17 in such a manner as to allow movement of the counter plate 19 with respect to the frame 17. Both the frame 17 and the counter plate 19 have substantially planar rearwardly facing surfaces, i.e. surfaces which face away from the

sample chamber 16, and in the unstressed condition of the counter plate 19 and the mounting means therefor, the rear surface of the counter plate is generally parallel with but spaced slightly rearwardly of the plane of the rear surface of the frame 17, as shown in Figure 4. The sample chamber 16 and funnel 15 are preferably substantially rigid with counter plate 19 and can move slightly, with the counter plate 19, relative to the peripheral frame 17.

Ideally, in the closed condition of the device, in order to ensure that there is no gap between the filter card and the edge of the port 18 or between the filter card in the region around the aperture 21 and the slide 26, through which the cell component of the sample as well as the liquid component might leak, the slide should bear evenly on the filter paper all around the periphery of the aperture 21 and the part of the counter plate around the aperture 18 should likewise bear evenly against the filter paper. Thus, ideally, the relevant parts of the counter plate and the slide, and the portions of the back plate bearing against the slide, should be substantially parallel with one another to achieve this condition. Furthermore, in the regions of the apertures 18 and 21, there should be controlled force pressing the slide against the filter card and hence against the counter plate. In order to achieve these conditions despite inevitable manufacturing tolerances, the counter plate 19, as mentioned above, is mounted within the frame 17 in such a way as to allow the counter plate to "float" i.e. to adjust its position slightly in relation to the frame 17. As best shown in Figure 2, this is achieved as follows.

The frame 17 takes the form of a generally rectangular plate which preferably has stiffening structures (not shown in detail), extending from and integral with the front of that plate, i.e. extending generally in the direction in which the sample chamber extends from the counter plate. The counter plate 19 and the support or suspension means therefor are mounted in a generally

rectangular aperture 38 in the frame 17 by a respective torsion bar arrangement 40, 42 respectively at the upper or lower end of aperture 38, (as viewed in Figure 2), the counter plate 19 having a profile complementary with that of the aperture 38 and being mounted with a generally uniform gap between the side
5 edges of the counter plate 19 and the adjacent edges of aperture 38 and with a larger gap, accommodating the respective torsion bar arrangement, between the upper edge of the plate 19 and the upper edge of the aperture 38 and between the lower edge of plate 19 and the lower edge of the aperture 38. In the arrangement illustrated, each torsion bar arrangement comprises a first bar 44,
10 adjacent the respective upper or lower edge of the aperture 38 and spanning the aperture 38 from one side edge of that aperture to the other, a second, parallel bar 46, spanning the space between two lugs 48 at the upper corners or two lugs 49 at the lower corners respectively of the counter plate 19, and an intermediate web 50, much narrower than the counter plate 19 and thus extending along only
15 over a limited middle portion of the first and second bars 44, 46.

As illustrated in Figure 4, in the unstressed position of the parts of the device, with the back plate 12 in the open position, the rear surface of the counter plate 19 is, as previously noted, set rearwardly somewhat relatively to
20 the rear surface of the frame 17. In this position, however, the rear surface of the counter plate is still generally parallel with the rear surface of the frame 17. When the back plate is moved into the closed position with the slide and the filter card 20 interposed between the back plate and the counter plate and frame, the filter card being interposed between the slide and the counter plate
25 19 and frame, the counter plate 19 is displaced forwardly relative to the frame 17 by the pressure applied by the back plate via the slide and the filter card, this displacement being permitted by resilient twisting and flexing of the torsion bars, particularly the longer torsion bars 44. Should it occur that, due, for example, to manufacturing inaccuracies, the position in which the slide is

supported by the back plate in the closed position of the back plate is not precisely parallel with the rear face of the frame 17, or that, in the unstressed position, the rear face of the counter plate 19 is not quite parallel with the rear face of the frame 17, differential flexing of the upper and lower torsion bars 44, 46 and, if necessary, a measure of transverse twisting, (i.e. about a vertical axis as viewed in Figure 2) of the webs 50 of the torsion bar arrangements, allows the counter plate 19 to align itself into perfect register with the slide/filter card combination. The ease with which the counter plate 19 may be twisted about a vertical axis as viewed in Figure 2 depends largely upon the transverse extent - i.e. the extent parallel with the longer torsion bars - of the webs 50 connecting the longer and shorter torsion bars 44 and 46 and need generally be somewhat less than the flexibility of each torsion bar arrangement about horizontal axes.

Whilst, in the above, the front face of the rear cover and the rear face of the frame and counter plate have been described as being generally planar, it may be advantageous, in order to secure firm clamping of the slide glass and the filter card between the counter plate and the rear cover, to provide, around the port 18, an annular region 180 standing slightly proud of the remainder of the rear surface of the counter plate and to form the back plate 12, as shown, on its forward side, with a plurality of ribs extending horizontally and vertically, with an annular or cylindrical rib 182 positioned for alignment with the annular region 180 in the closed position of the back plate, with the front surfaces of the horizontal and vertical ribs and the annular region 182 alone lying in a common plane for engagement with the rear surface of the slide 26.

25

Figure 6 illustrates a variant of the device of Figures 1 to 5 which differs from that of Figures 1 to 5 in that there are two sample chambers (not shown) terminating in respective apertures or ports 18a, 18b, in the counter plate 19 and connected with respective funnels (defined by distinct and mutually isolated

10

parts of a unitary funnel structure 15a). The variant of Figure 6 is intended to be used with a filter card (not shown) having respective apertures aligned with the ports 18a, 18b.

- 5 The frame, counter plate and torsion bar arrangements in the embodiments described are preferably formed in one piece, with the remainder of the centrifugation device, as a unitary injection moulding in a suitable plastics material such as polypropylene.

10

15

20

25

CLAIMS

1. A centrifugation device comprising a combined sample chamber and slide holder adapted to be mounted, with a microscope slide, in a centrifuge in a predetermined position, after placing, in the sample chamber, a fluid biological sample containing cells, the centrifugation device comprising a body affording a base adapted for engagement with a microscope slide, structure on one side of the base defining a chamber for a fluid sample, with an opening for the introduction of fluid to said chamber, the base including an aperture and carrying a means for sealing the edges of such aperture with respect to the surface of a microscope slide placed across the base, or for allowing the passage of liquid but obstructing the passage of cells, the centrifugation device further including a back plate arranged, when the back plate is closed against the rear of a microscope slide engaged with the base, to locate the slide between the base and the cover plate and to hold the cover plate in this closed position, wherein said base comprises a supporting frame and, within said supporting frame, a pressure plate provided with said aperture, and wherein the pressure plate is supported from said frame by flexible resilient means such as to allow the pressure plate to "float" and to align itself with a microscope slide located between the pressure plate and the back plate as the back plate is closed.

2. A centrifugation device according to Claim 1 wherein said flexible resilient mounting means is such as to allow the pressure plate to tilt about two mutually perpendicular axes generally parallel with the plane of the frame, i.e. with the plane of the major surfaces of such microscope slide in the closed position of the device.

3. A centrifugation device according to any preceding claim wherein said resilient flexible suspension means comprises a torsion bar arrangement moulded integrally with the remainder of the device.
- 5 4. A centrifugation device substantially as hereinbefore described with reference to and as shown in the accompanying drawings.
5. Any novel feature or combination of features described herein.

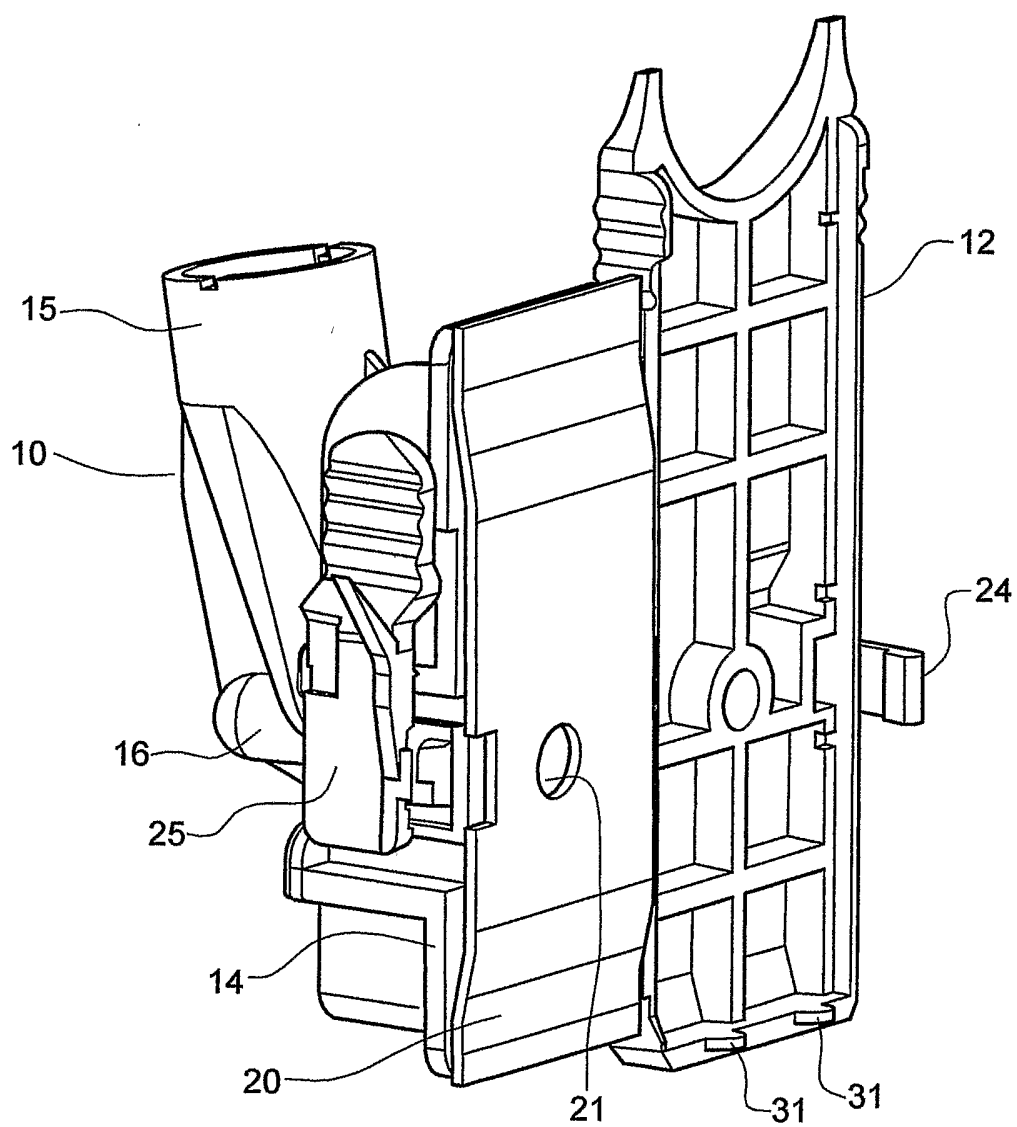
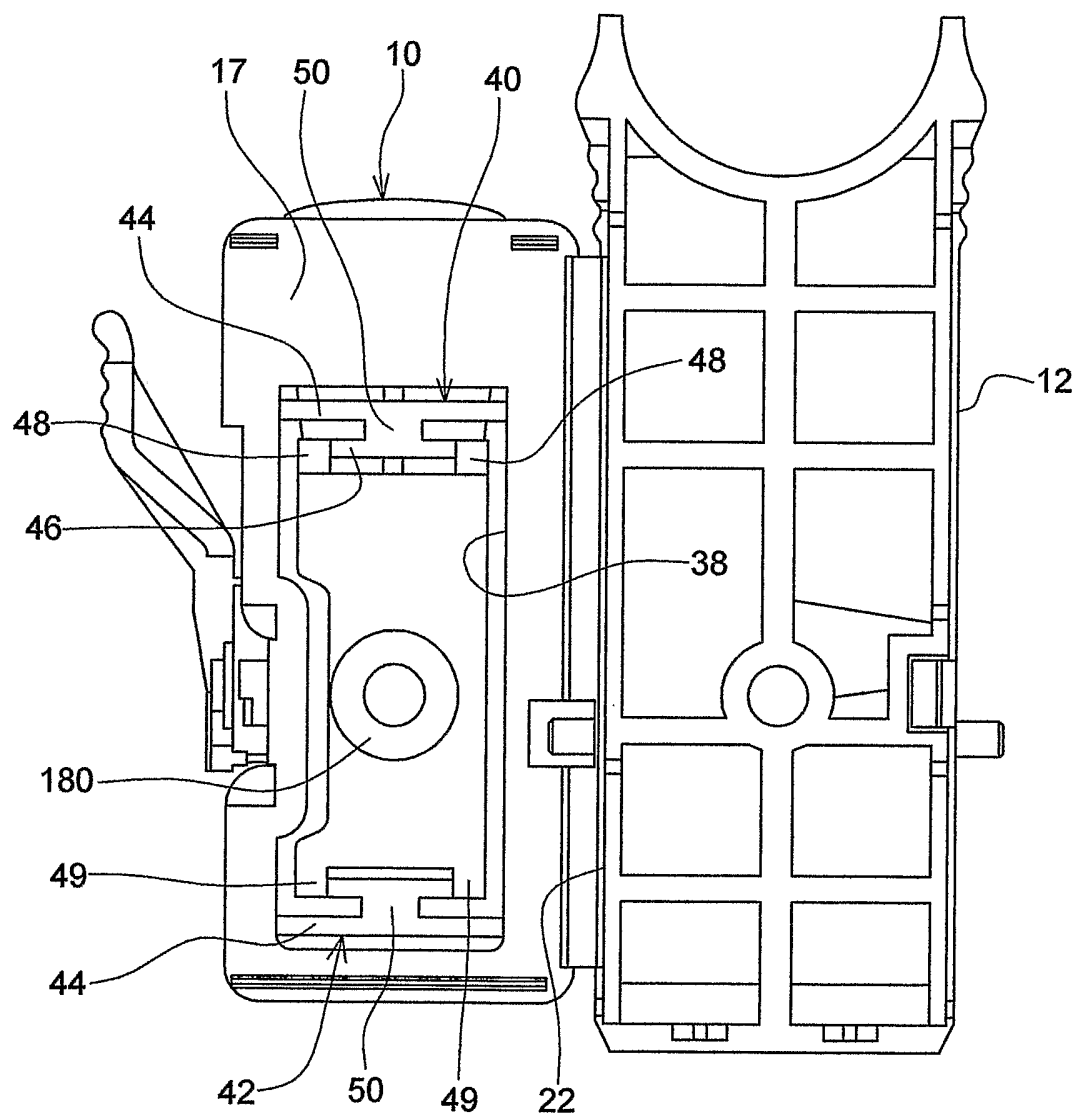
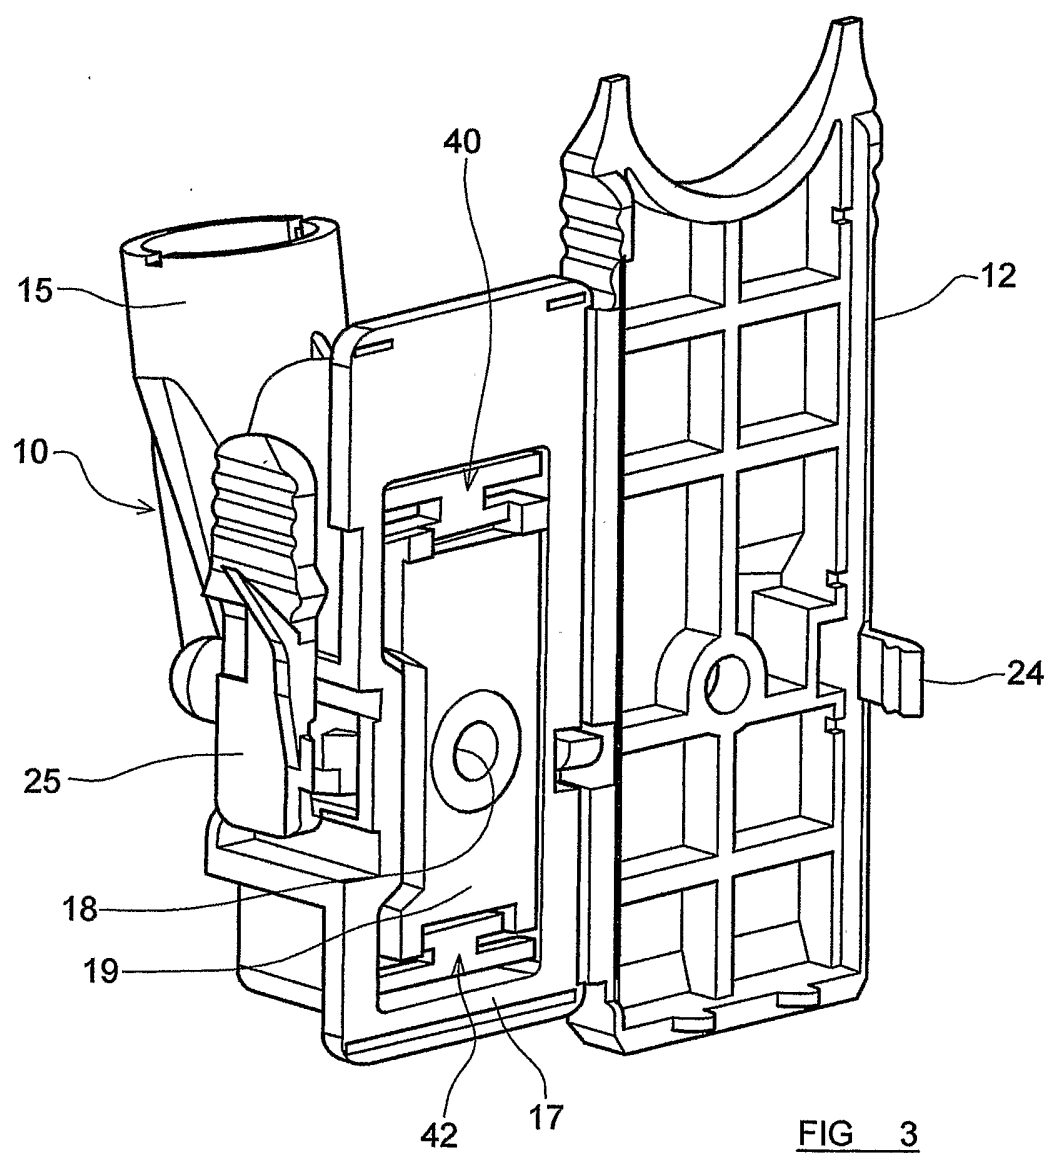


FIG 1





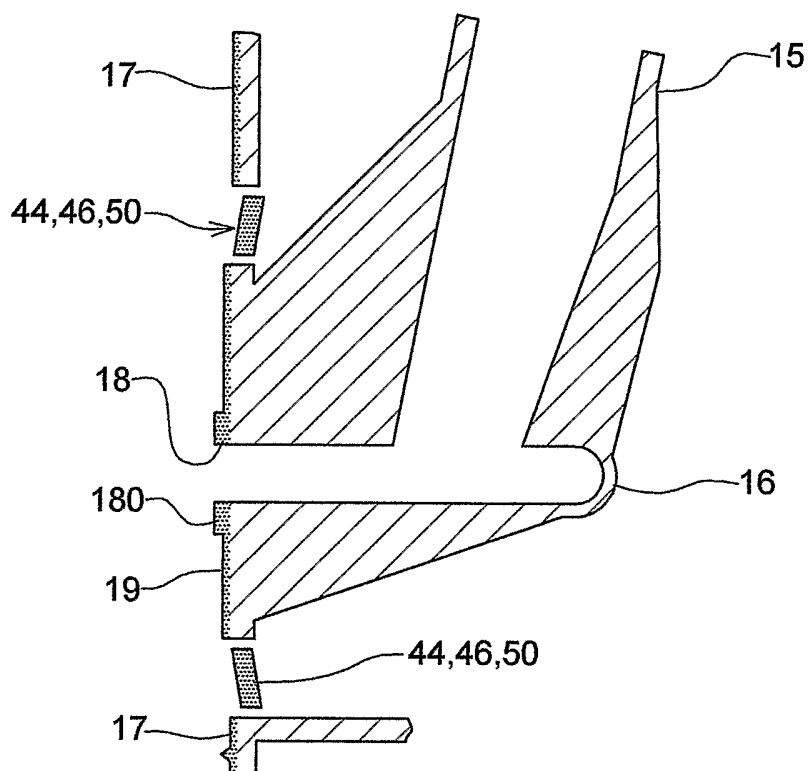


FIG 4

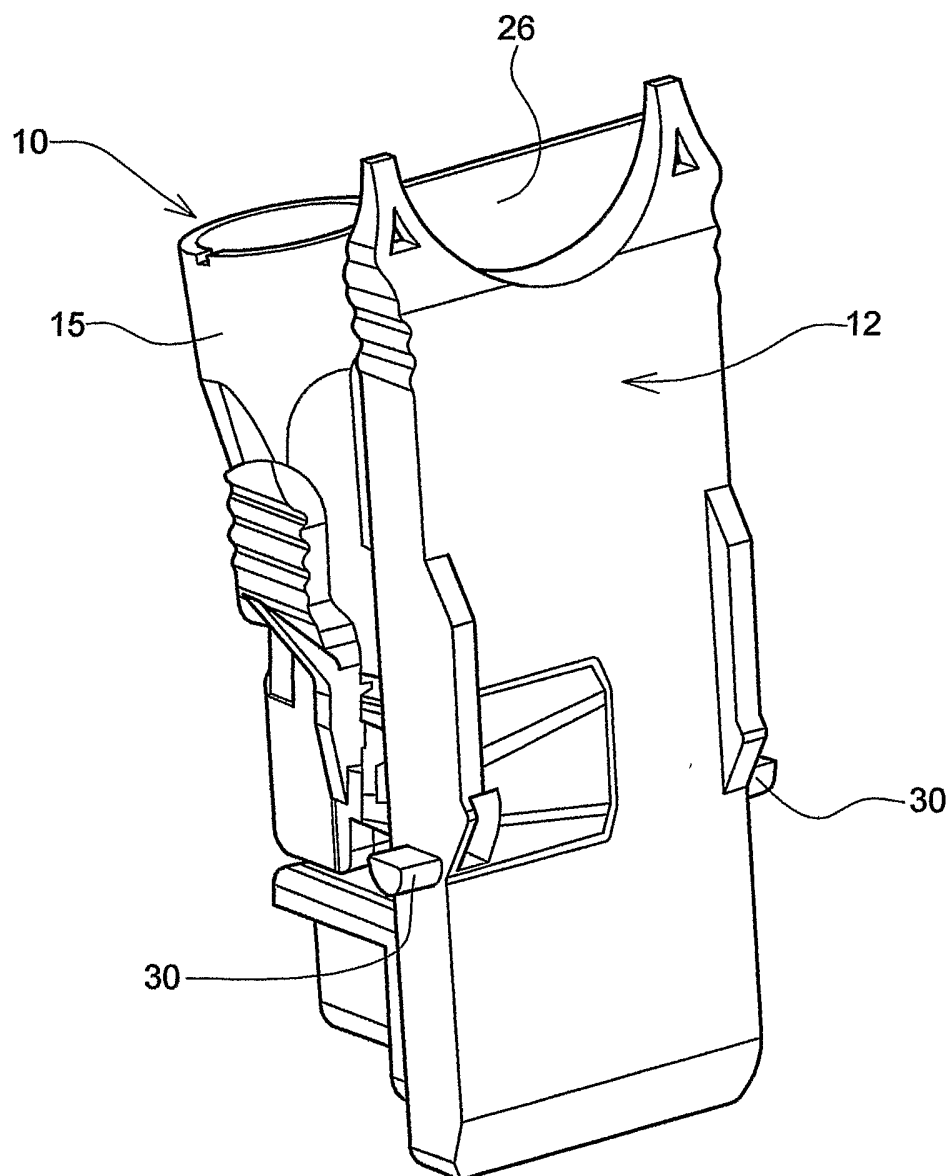


FIG 5

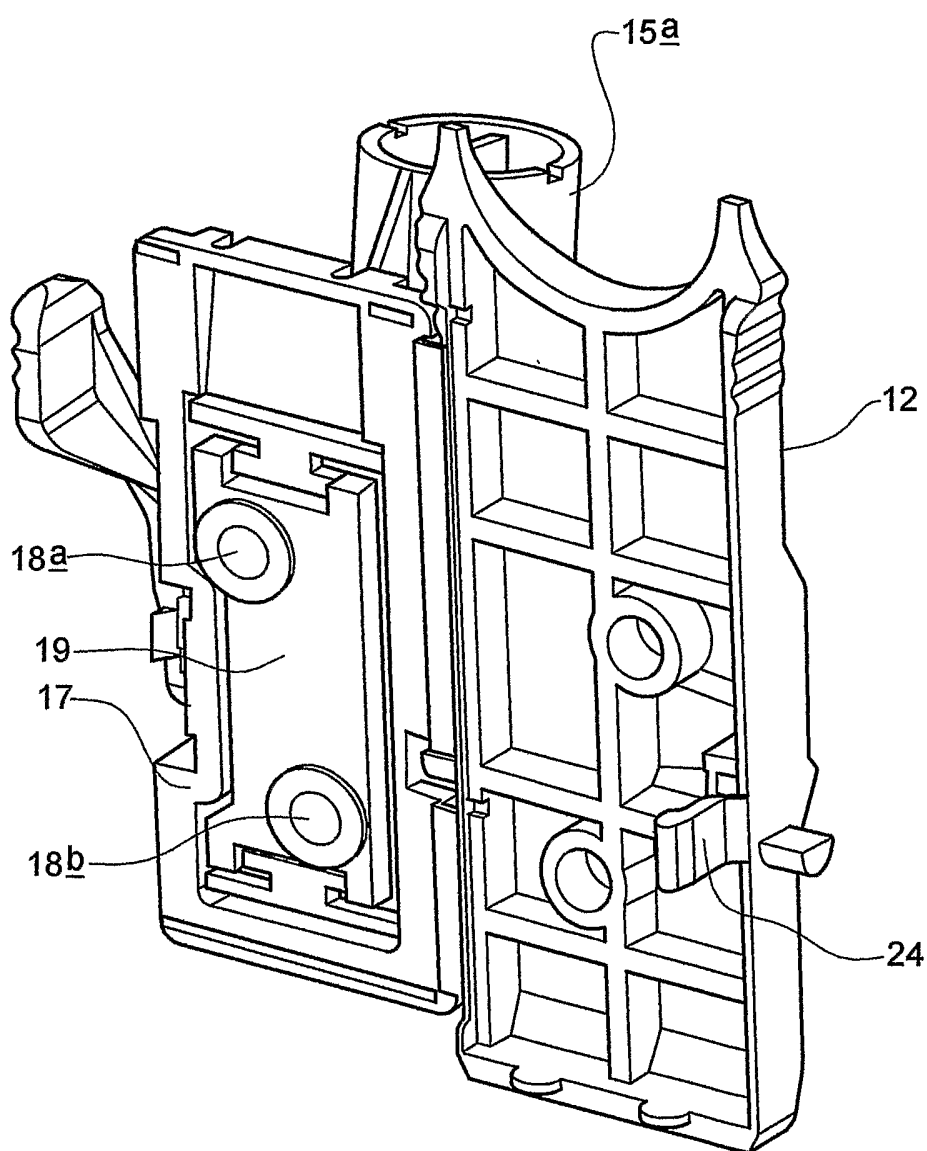


FIG 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/001904

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N1/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 853 188 A (TOYA MATSUMI) 1 August 1989 (1989-08-01) cited in the application abstract; figures 1-7 column 2, line 58 -column 4, line 8 ---	1
A	US 4 696 743 A (BILLINGTON DONALD G ET AL) 29 September 1987 (1987-09-29) cited in the application abstract; figures 1-4 column 5, line 55 -column 6, line 18 ---	1
A	US 5 470 758 A (HAYES WILLIAM J) 28 November 1995 (1995-11-28) the whole document -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

4 August 2004

Date of mailing of the international search report

13/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Runser, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2004/001904

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4853188	A	01-08-1989	JP 62121542 U	01-08-1987
			JP 62083952 U	28-05-1987
			DE 3639041 A1	21-05-1987
			FR 2590023 A1	15-05-1987
			GB 2184837 A , B	01-07-1987
US 4696743	A	29-09-1987	AT 41706 T	15-04-1989
			DE 3662562 D1	27-04-1989
			EP 0205107 A2	17-12-1986
			JP 2003669 C	20-12-1995
			JP 7018782 B	06-03-1995
			JP 62002134 A	08-01-1987
US 5470758	A	28-11-1995	US 5589400 A	31-12-1996