



US 20050027186A1

(19) **United States**

(12) **Patent Application Publication**

Chen et al.

(10) **Pub. No.: US 2005/0027186 A1**

(43) **Pub. Date: Feb. 3, 2005**

(54) **VIDEO-BASED SURGICAL TARGETING SYSTEM**

(76) Inventors: **David T. Chen**, Somerville, MA (US);
Steven D. Pieper, Thetford Center, VT (US);
Michael A. McKenna, Cambridge, MA (US)

Correspondence Address:
Mark J. Pandiscio
Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, MA 02154 (US)

(21) Appl. No.: **10/775,754**

(22) Filed: **Feb. 10, 2004**

Related U.S. Application Data

(63) Continuation of application No. 10/104,256, filed on Mar. 21, 2002, now Pat. No. 6,690,960, which is a continuation-in-part of application No. 09/746,992, filed on Dec. 21, 2000, now Pat. No. 6,675,032.

(60) Provisional application No. 60/277,664, filed on Mar. 21, 2001.


Publication Classification

(51) **Int. Cl.⁷ A61B 5/05**

(52) **U.S. Cl. 600/407**

(57) **ABSTRACT**

A video-based surgical targeting system for targeting anatomical structures within a patient.

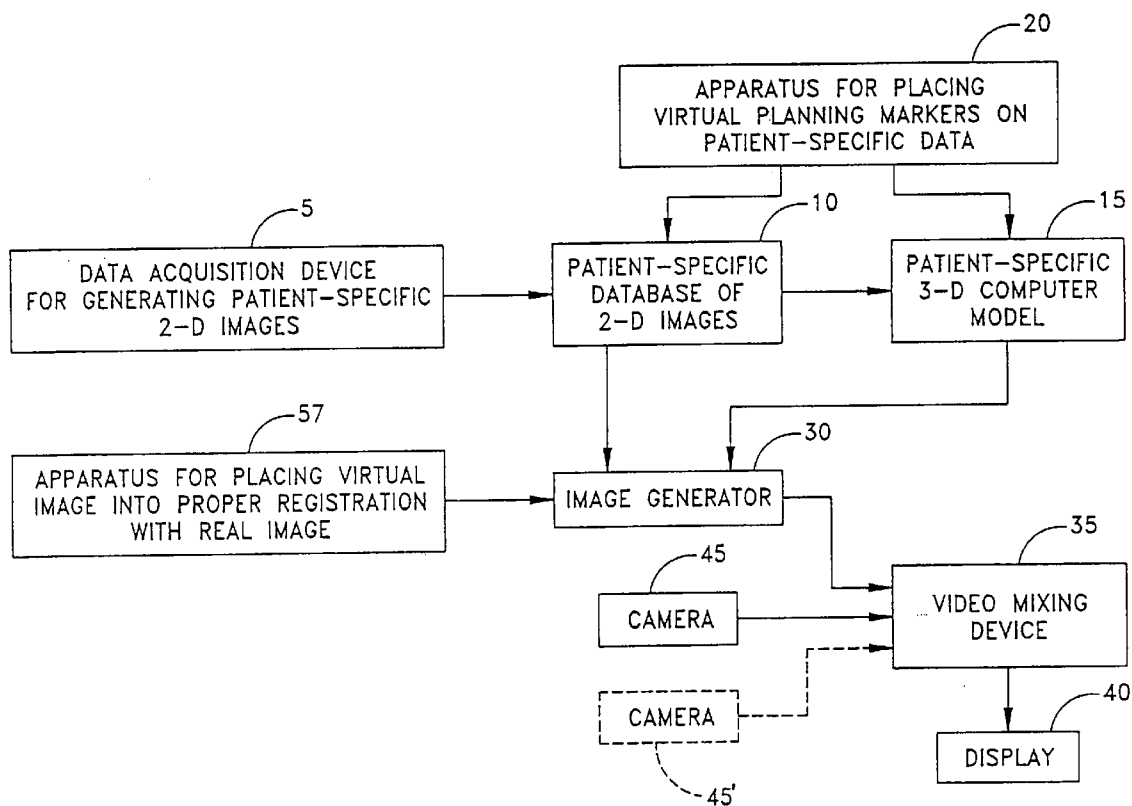

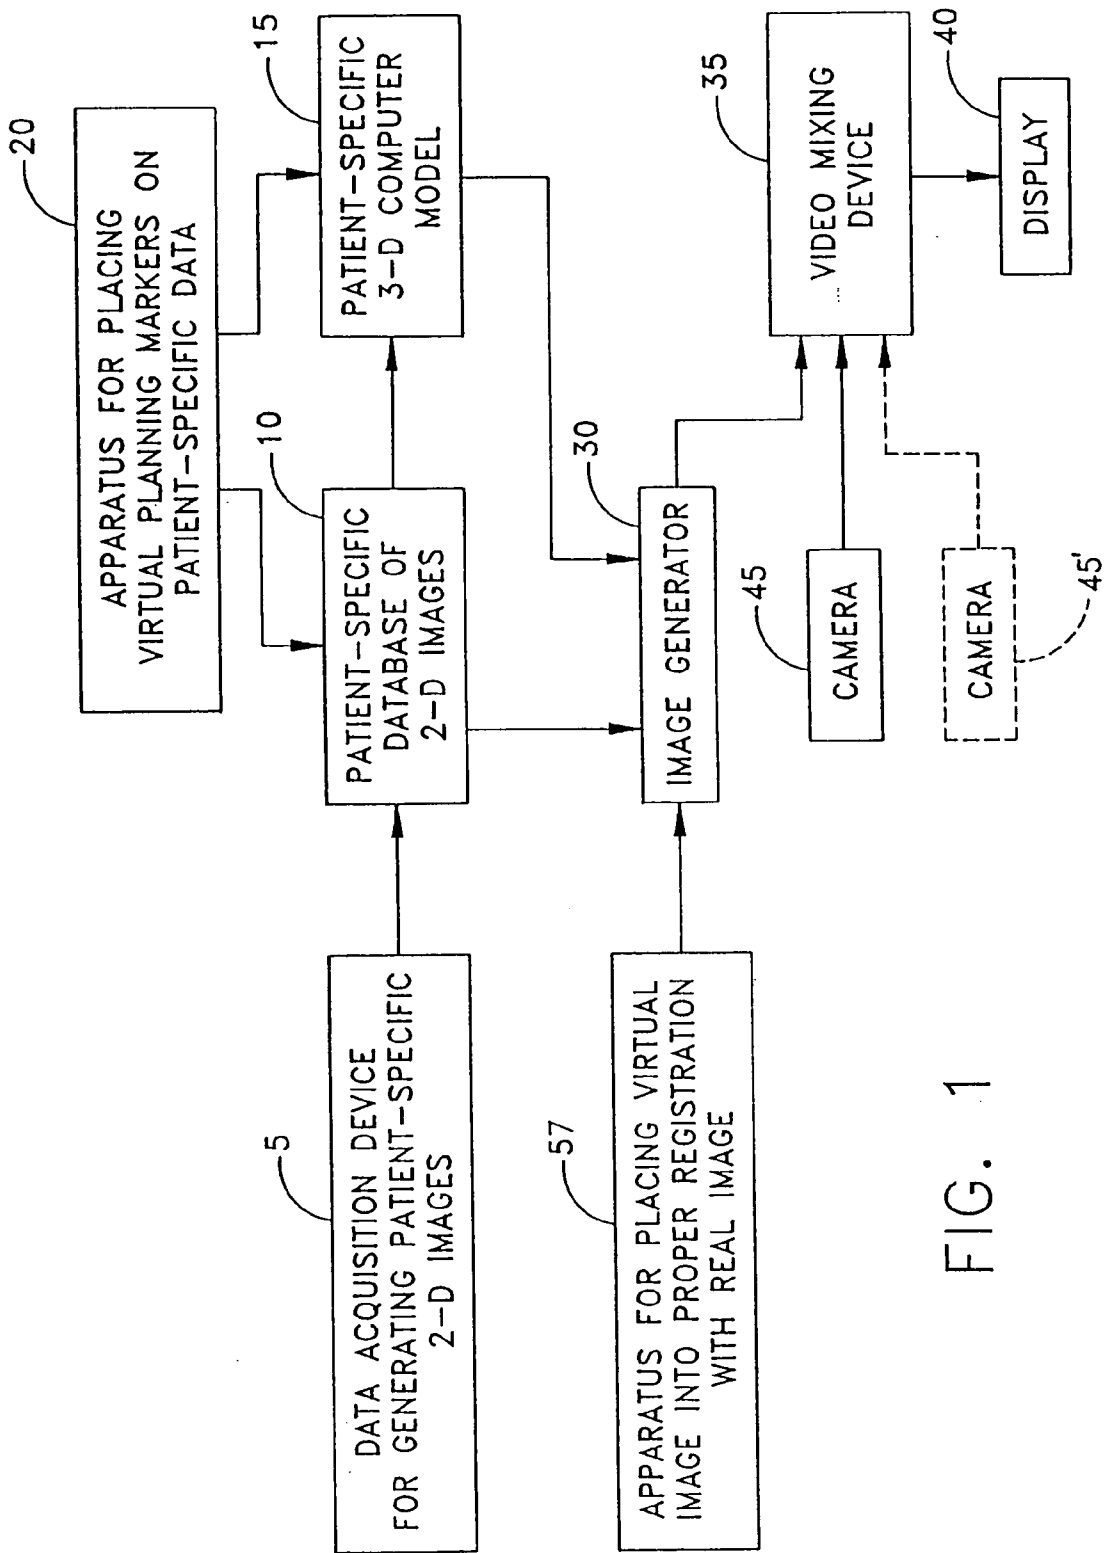


FIG. 1

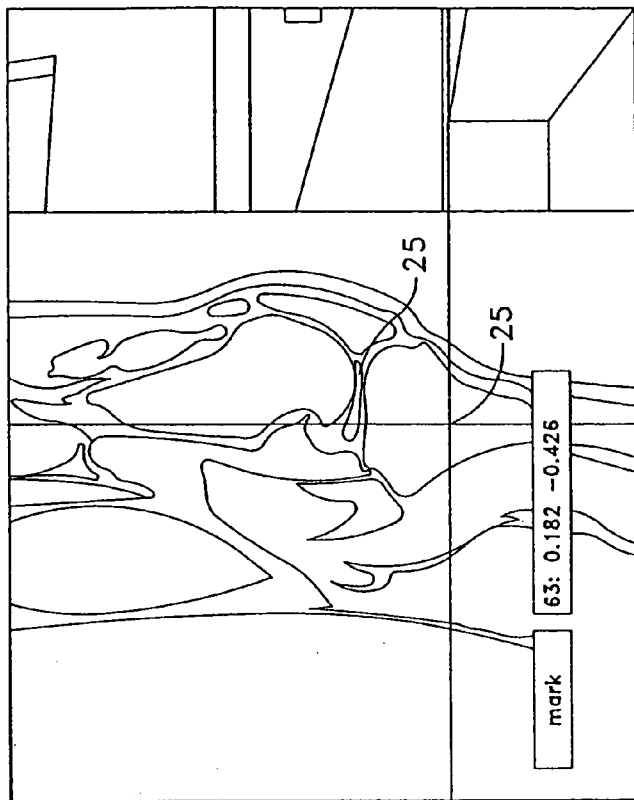


FIG. 2

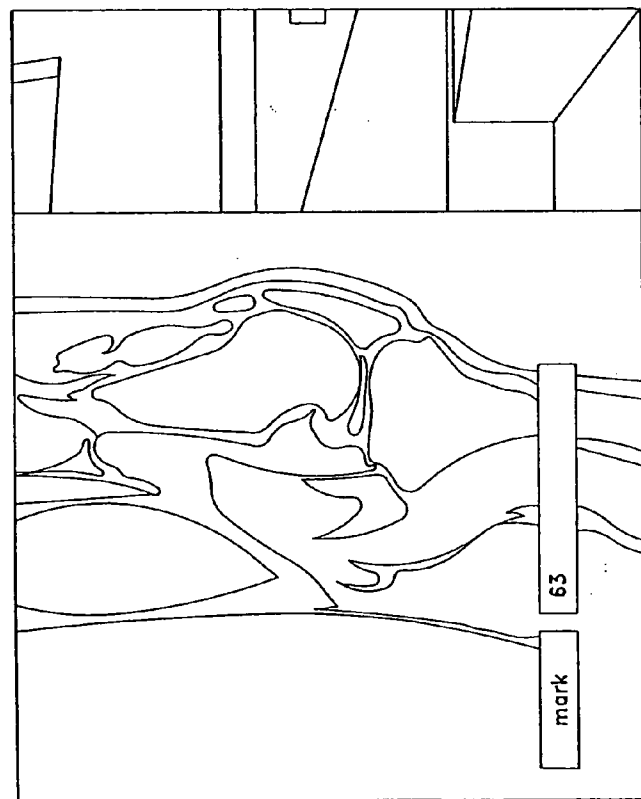


FIG. 3

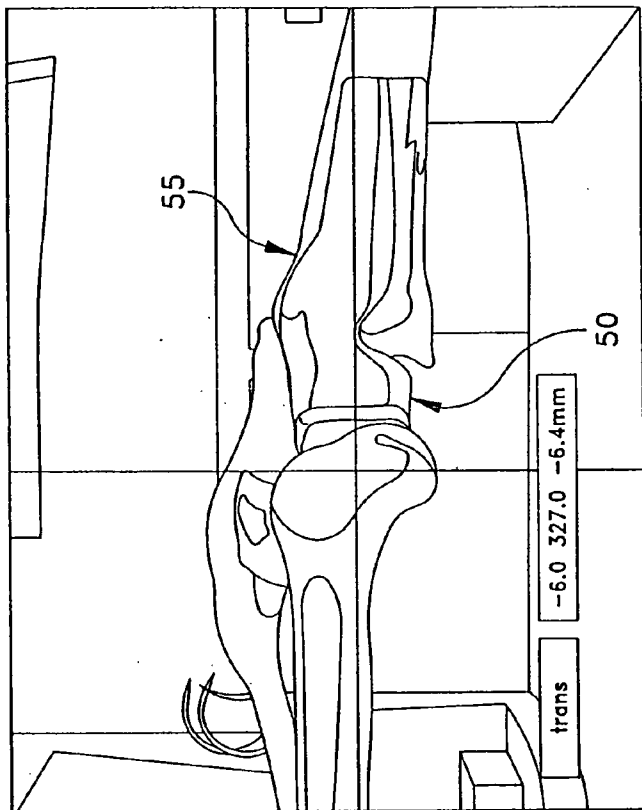


FIG. 4

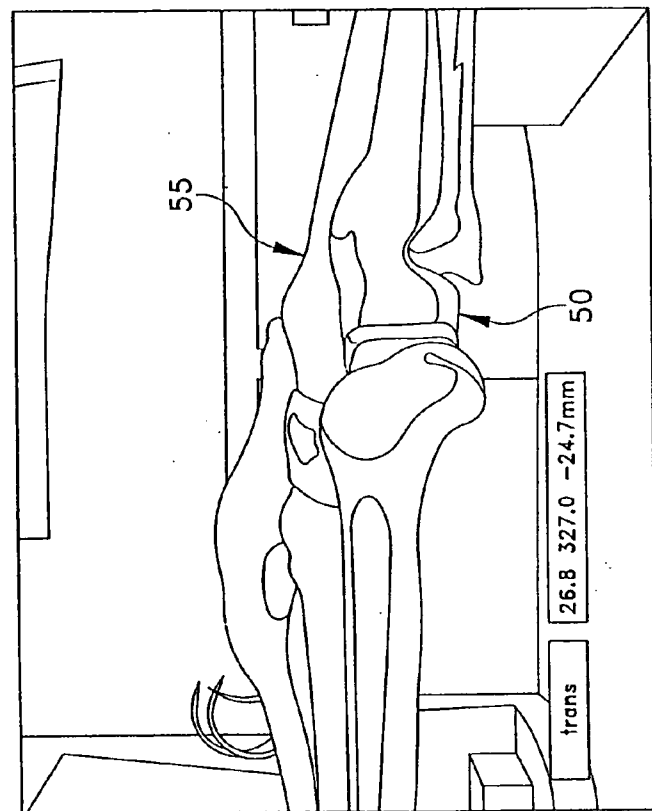


FIG. 5

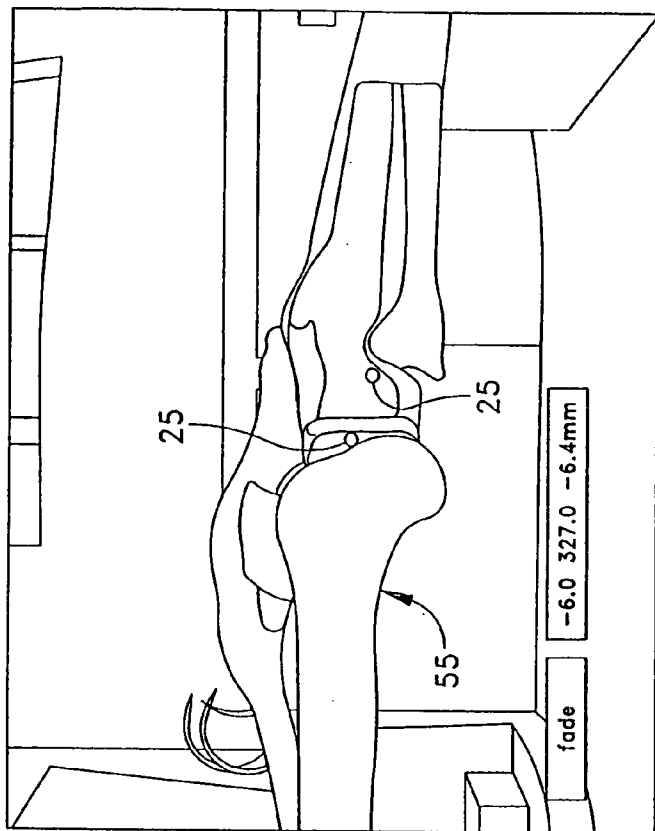


FIG. 6

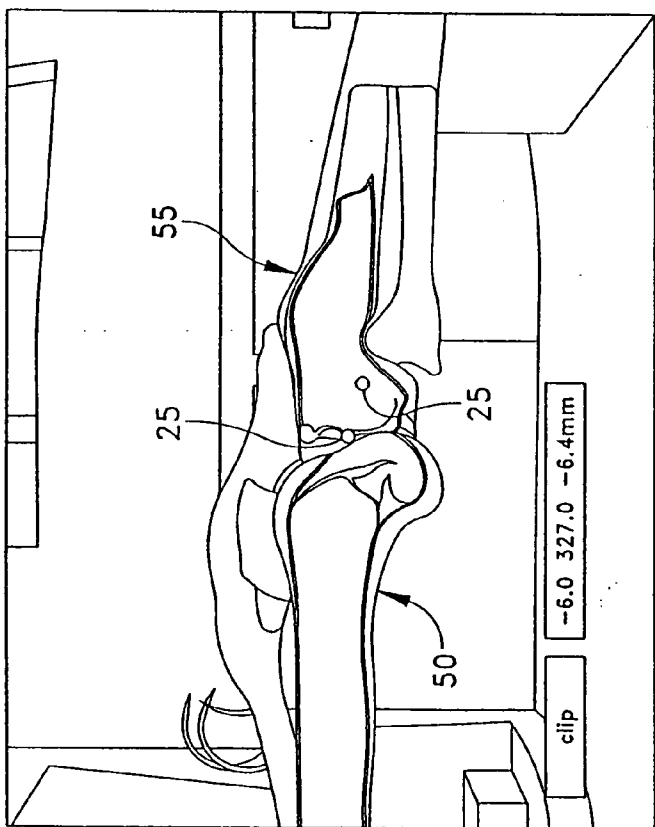


FIG. 7

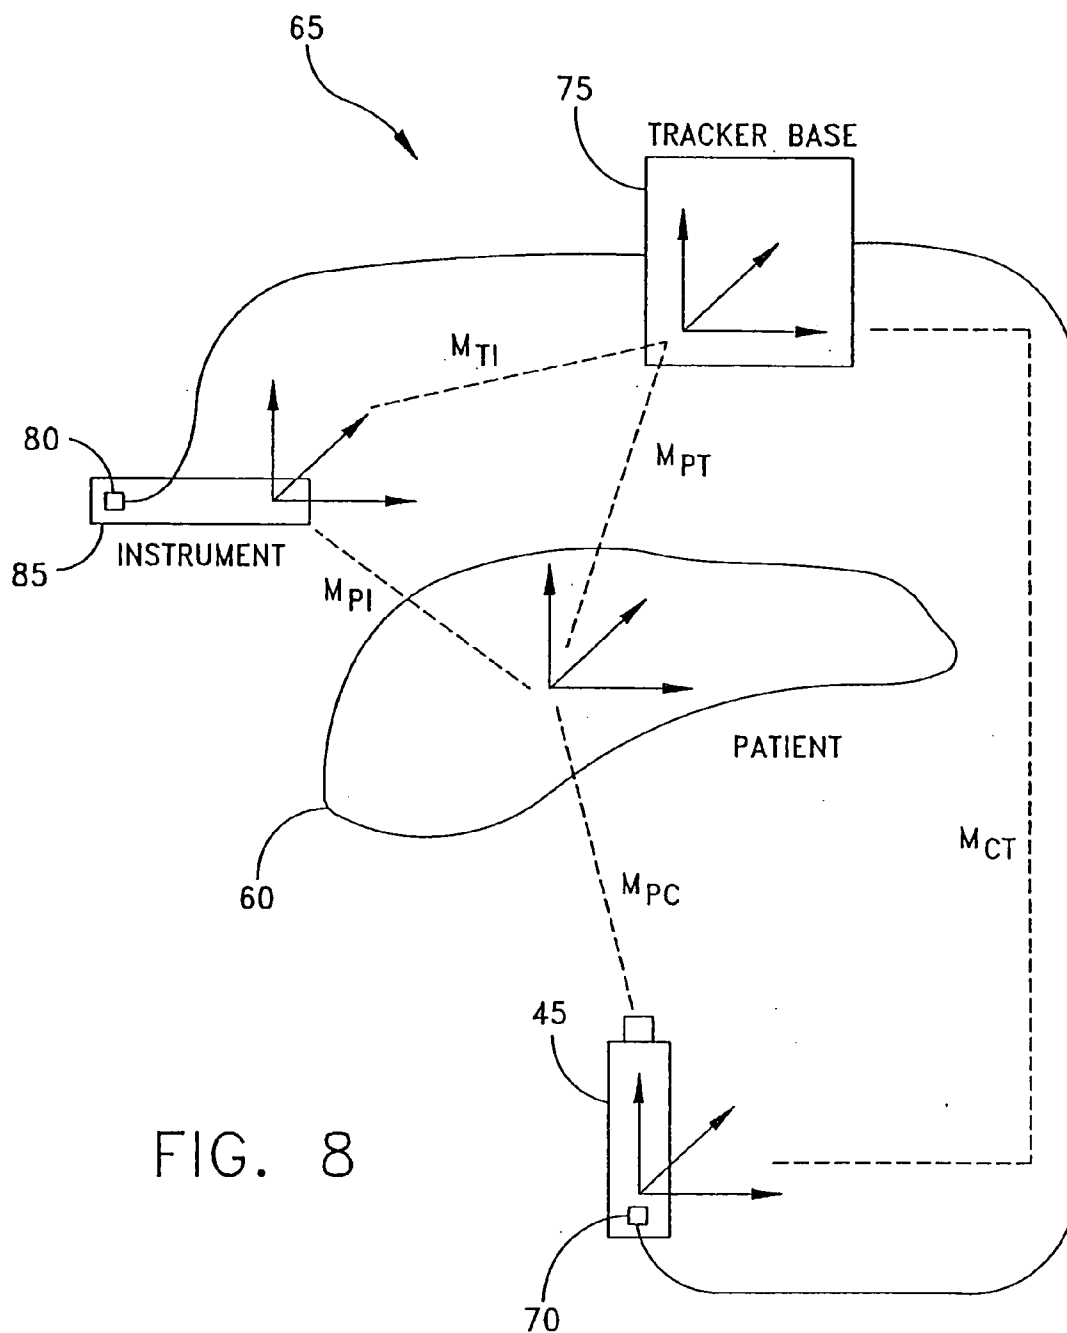


FIG. 8

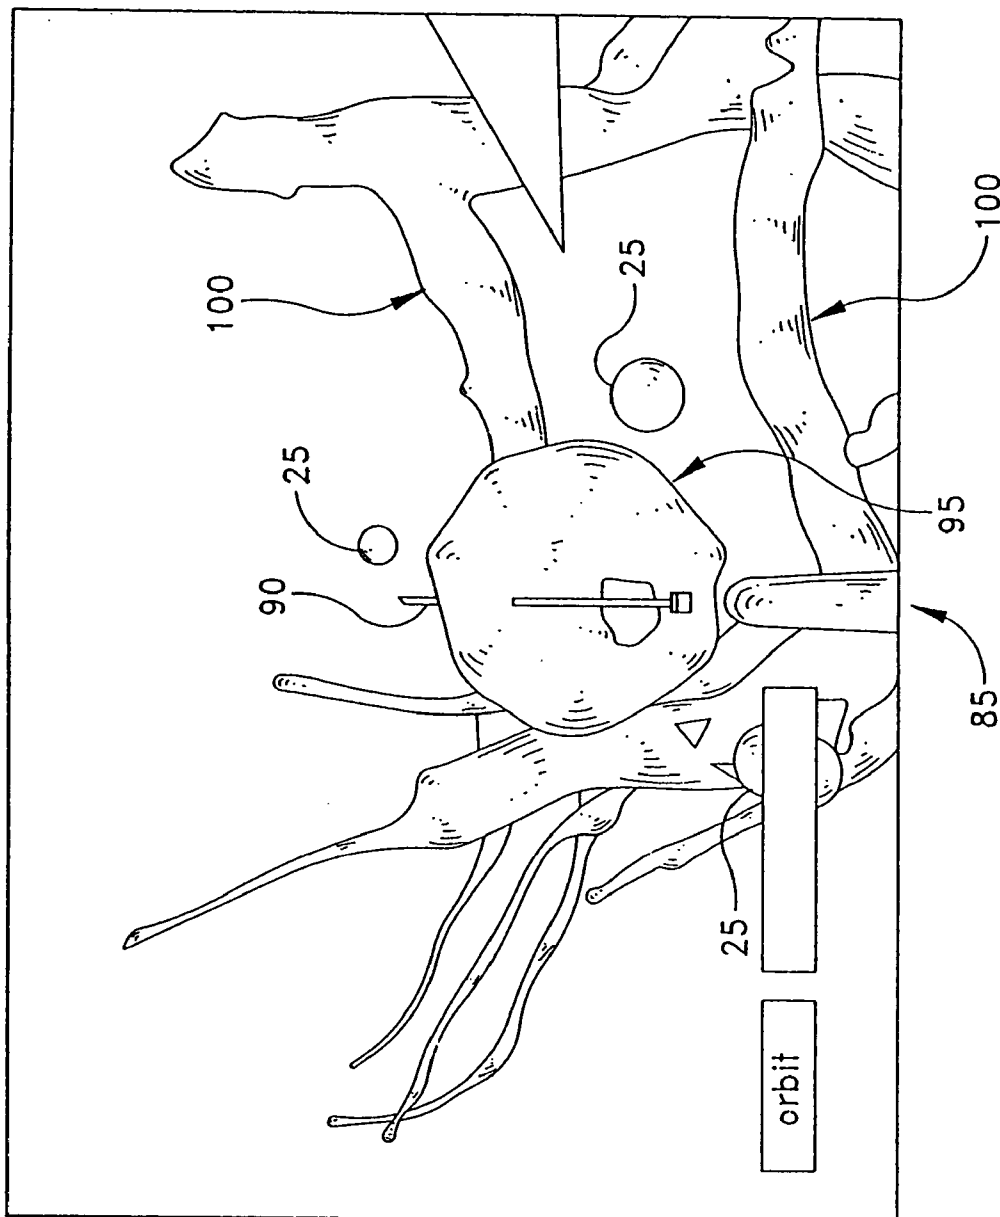


FIG. 9

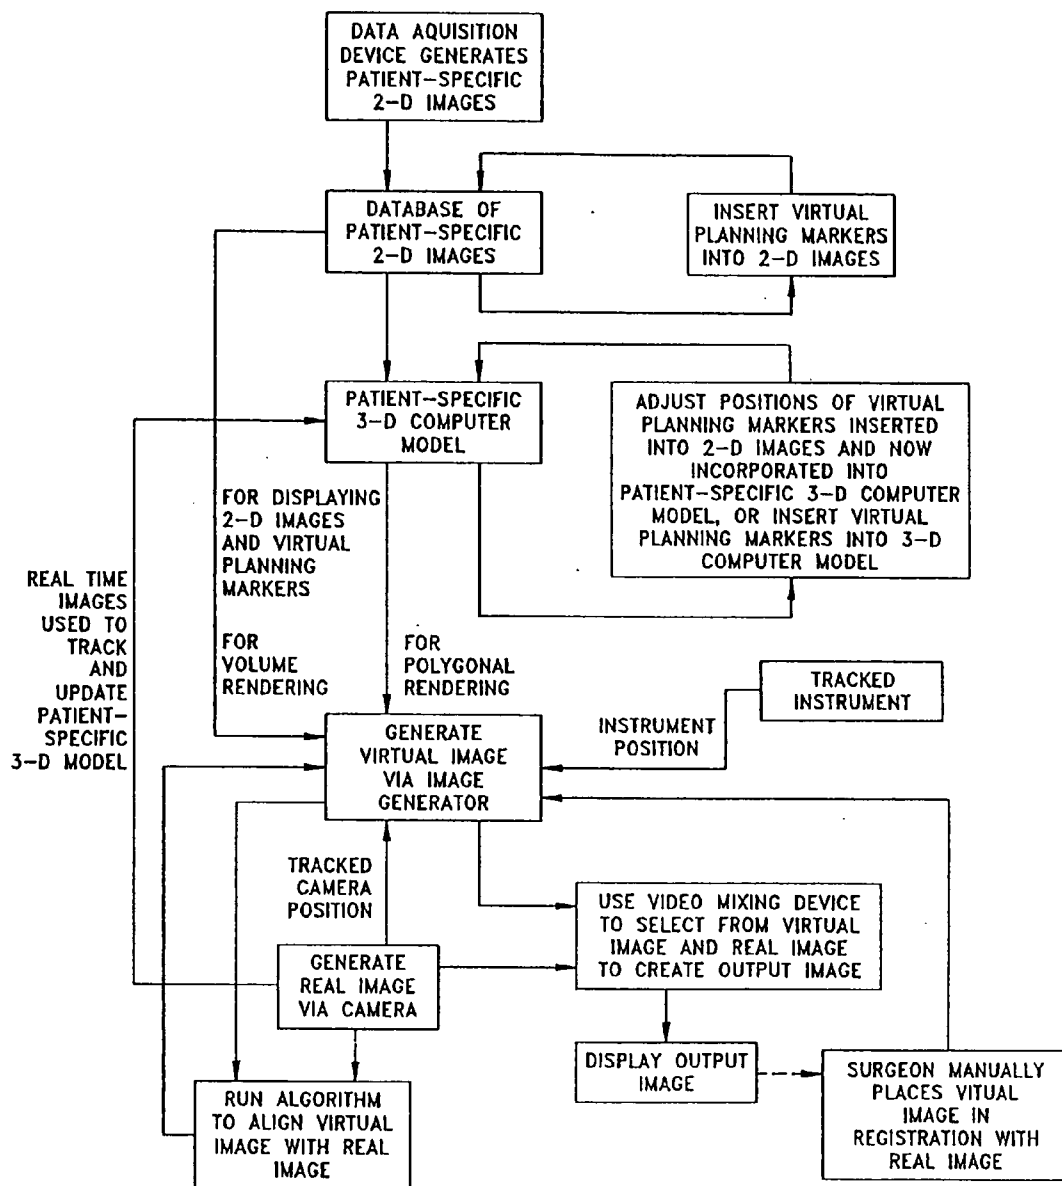


FIG. 10

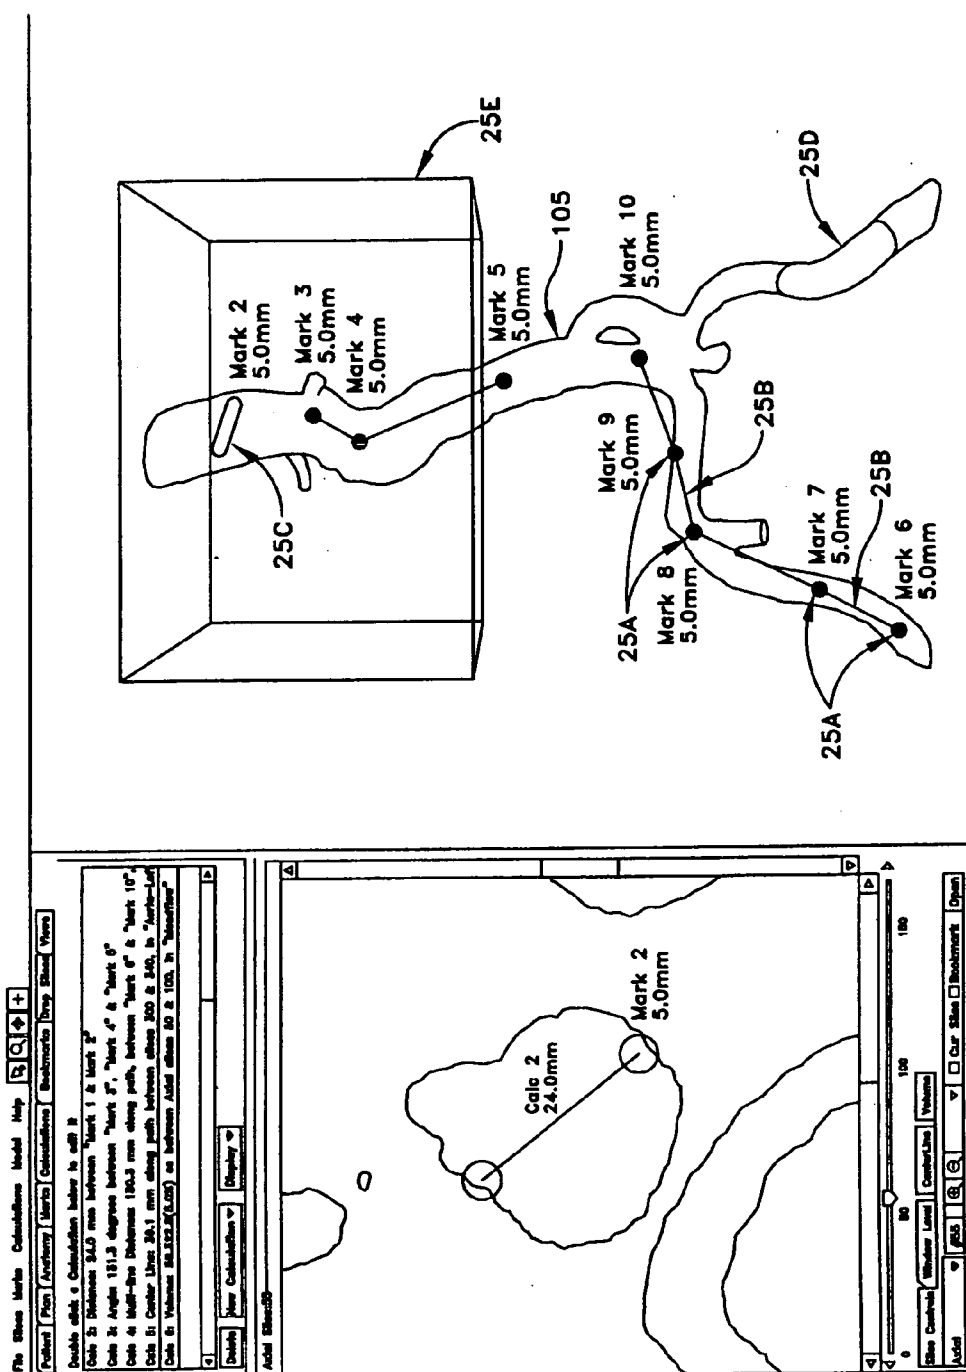


FIG. 11

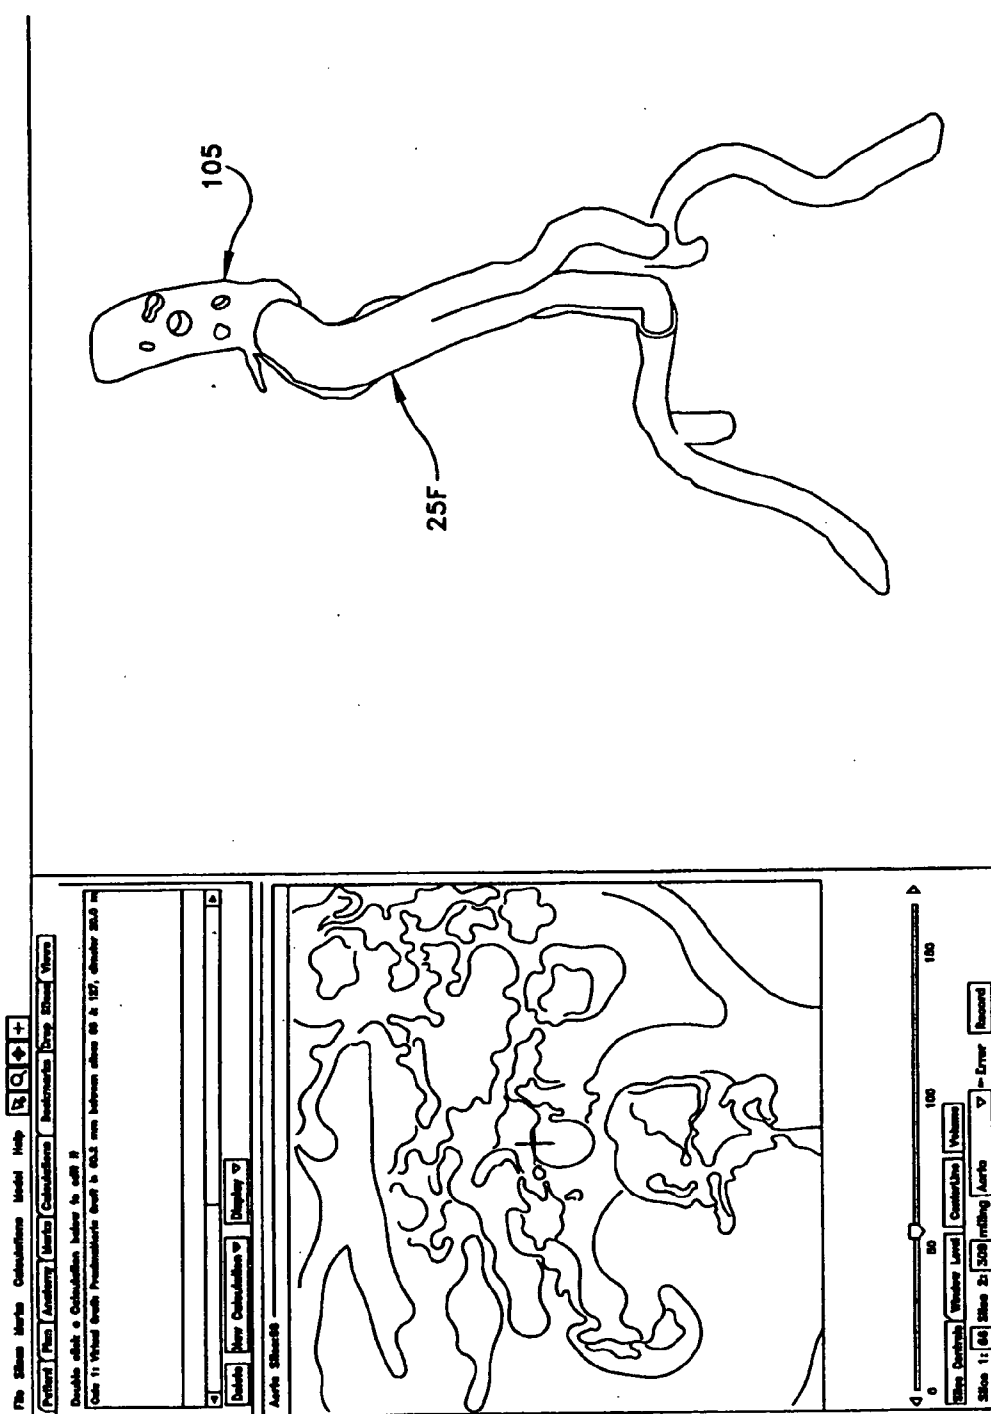


FIG. 12

VIDEO-BASED SURGICAL TARGETING SYSTEM

REFERENCE TO PENDING PRIOR APPLICATIONS

[0001] This application:

[0002] (1) is a continuation in part-of-pending prior U.S. patent application Ser. No. 09/746,992, filed Dec. 21, 2000 by David T. Chen et al. for VIDEO-BASED SURGICAL TARGETING SYSTEM (Attorney's Docket No. MMS-4 CON 2), which patent application is hereby incorporated herein by reference; and

[0003] (2) claims benefit of prior pending U.S. Provisional Patent Application Ser. No. 60/277,664, filed Mar. 21, 2001 by David T. Chen et al. for VIDEO-BASED SURGICAL TARGETING SYSTEM (Attorney's Docket No. MMS-B PROV), which patent application is hereby incorporated herein by reference.

FIELD OF THE INVENTION

[0004] This invention relates to surgical systems in general, and more particularly to surgical targeting systems.

BACKGROUND OF THE INVENTION

[0005] Many medical procedures must be carried out at an interior site which is normally hidden from the view of the physician. In these situations, the physician typically uses some sort of scanning device to examine the patient's anatomy at the interior site prior to, and in preparation for, conducting the actual procedure itself. These scanning devices typically include MRI devices, CT scanners, X-ray machines, ultrasound devices and the like, and serve to provide the physician with a preliminary knowledge of the patient's internal anatomical structure prior to commencing the procedure. The physician can then use this information to plan the procedure in advance, taking into account patient-specific anatomical structure. In addition, the physician can also use the information obtained from these scans to more precisely identify the location of selected structures (e.g. tumors and the like) which may themselves be located within internal organs or other internal body structures. As a result, the physician can more easily "zero in" on such selected structures during the subsequent procedure, with less trauma to host organs or other internal body structures. Furthermore, in many cases the structures of interest may be quite small and difficult to identify with the naked eye. In these cases, preliminary scanning of the patient's internal anatomy using high resolution scanning devices can help the physician locate such structures during the subsequent procedure.

[0006] In general, scanning devices of the sort described above tend to generate a series of two-dimensional (i.e., "2-D") images of the patient's anatomical structure. For example, CT scanners generate 2-D images which are viewed directly by the physician. By viewing a plurality of these 2-D images, the physician can mentally generate a three-dimensional (i.e., "3-D") sense of the patient's anatomical structure.

[0007] Some scanning devices create large numbers of 2-D images during the scanning process, with each 2-D image representing a plane or slice taken through the scanned structure. Furthermore, some scanning devices also

have associated computer hardware and software for building a 3-D computer model of the patient's scanned structure using a plurality of these 2-D images. For example, some MRI devices and some CT scanners leave such associated computer hardware and software. In these cases, an operator using this scanning equipment and associated computer hardware and software can create a number of 2-D images, assemble them into a 3-D computer model of the scanned structure, and then generate various images of that 3-D computer model as seen from various angles so as to enhance understanding of the patient's anatomical structure.

[0008] While the information generated by the aforementioned scanning devices is generally of great benefit to physicians, certain significant limitations still exist. For one thing, it can be very difficult for a physician to physically locate a particular anatomical structure during a medical procedure, even when that structure is readily identifiable in a scanned image. This may be because the structure is very small and difficult to see with the naked eye, or because it is not readily visible against a particular background, or because it is itself located within an internal organ or other internal body structure, etc. For another thing, even when the structure of interest is successfully located by the physician, it can sometimes still be extremely difficult for the physician to reliably direct a medical instrument to that structure. This may be because the structure is quite small and difficult to target accurately, or because intervening body structure mandates a complex approach, etc.

OBJECTS OF THE INVENTION

[0009] Accordingly, one object of the present invention is to provide a surgical targeting system to facilitate locating a particular anatomical structure during a medical procedure.

[0010] Another object of the present invention is to provide a video-based surgical targeting system to facilitate locating a particular anatomical structure during a medical procedure.

[0011] And another object of the present invention is to provide a video-based surgical targeting system which permits a series of patient-specific 2-D images (obtained by scanning patient anatomy using one or more scanning devices of the type described above) to be assembled into a 3-D computer model of the patient's scanned structure.

[0012] Still another object of the present invention is to provide a video-based surgical targeting system which allows a physician to view the aforementioned patient-specific 2-D images on a display in any desired access sequence.

[0013] And another object of the present invention is to provide a video-based surgical targeting system which allows a physician to assemble a series of patient-specific 2-D images into a patient-specific database, and then to generate virtual images from the aforementioned patient-specific database, as seen from any desired virtual camera position, for viewing on a display.

[0014] Yet another object of the present invention is to provide a video-based surgical targeting system which allows a physician to generate virtual images from the aforementioned 3-D computer model, as seen from any desired virtual camera position, for viewing on a display.

[0015] And another object of the present invention is to provide a video-based surgical targeting system which permits a physician to place virtual planning markers about any sites of interest while viewing one or more of the aforementioned patient-specific 2-D images, with those virtual planning markers then being incorporated into the 3-D computer model, whereby those virtual planning markers can be displayed in their appropriate 3-D positions when generating virtual images of the 3-D computer model.

[0016] Still another object of the present invention is to provide a video-based surgical targeting system which permits a physician to place virtual planning markers about any sites of interest while viewing virtual images of the 3-D computer model, with those virtual planning markers then being incorporated into the 3-D computer model, whereby those virtual planning markers can be displayed in their appropriate positions when generating subsequent virtual images of the 3-D computer model.

[0017] Still another object of the present invention is to provide a video-based surgical targeting system which permits a physician to place virtual planning markers about any sites of interest while viewing virtual images of the 3-D computer model, with those virtual planning markers then being incorporated into the 3-D computer model and into the database of 2-D images, whereby those virtual planning markers can be displayed in their appropriate positions when subsequently generating virtual images of the 3-D computer model or when subsequently displaying 2-D images from the patient-specific database.

[0018] Yet another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be displayed to a physician, and which permits a virtual image generated from the 3-D computer model to be displayed to a physician, according to the directive of the physician.

[0019] Another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be appropriately merged with a corresponding virtual image generated from the 3-D computer model.

[0020] And another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be appropriately merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be in registration with one another.

[0021] Still another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be in registration with one another, and whereby the physician can choose to display either one of the two images exclusive of the other, or a composite of both images simultaneously.

[0022] Yet another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device

(e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby the physician can modify the virtual image generated from the 3-D computer model as needed, by clipping or fading, so as to expose the virtual planning markers to view, with the virtual planning markers being superimposed on the real image generated by the real-time viewing device.

[0023] And another object of the present invention is to provide a video-based surgical targeting system which permits a real image generated by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby the physician can modify the virtual image generated from the 3-D computer model so as to expose only the virtual planning markers to view, with the virtual planning markers being superimposed on the real image generated by the real-time imaging device.

[0024] Still another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained even as the real-time imaging device is moved about relative to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0025] Still another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained through the use of a computerized position and orientation tracker connected to the imaging device even as the real-time imaging device is moved about relative to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0026] Still another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained through the use of a computer search algorithm based on the real image and the virtual image even as the real-time imaging device is moved about relative to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0027] Yet another object of the present invention is to provide a video-based surgical targeting system which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration

with one another, and whereby a surgical instrument can be tracked along with the real-time imaging device in order that the surgical instrument can be guided about the anatomical site using the virtual image generated from the 3-D computer model.

[0028] And another object of the present invention is to provide a video-based surgical targeting system which permits a virtual image to be generated from the 3-D computer model, and further wherein this virtual image can correspond to an "over the shoulder" view of the working tip of a surgical instrument located at the anatomical site.

[0029] And another object of the present invention is to provide an improved method for locating anatomical structures during a medical procedure.

SUMMARY OF THE INVENTION

[0030] These and other objects of the present invention are achieved through the provision and use of a novel video-based surgical targeting system.

[0031] In one form of the invention, the video-based surgical targeting system comprises a patient-specific database comprising a plurality of 2-D images of the anatomical structure of a patient; a patient-specific 3-D computer model of the anatomical structure of the patient, the patient-specific 3-D computer model being assembled from the plurality of 2-D images contained in the patient-specific database; marker placement means for (i) inserting virtual planning markers into the 2-D images contained in the patient-specific database, and/or (ii) adjusting the positions of virtual planning markers inserted into the 2-D images contained in the patient-specific database and thereafter incorporated into the patient-specific 3-D computer model, or inserting virtual planning markers into the 3-D computer model; an image generator for generating a virtual image of the anatomical structure modeled by the patient-specific 3-D computer model; real-time image generating means for generating a real image of the anatomical structure of a patient; video mixing means for mixing the virtual image and the real image into an output image, whereby the output image may comprise either one of the two images exclusive of the other, or a composite of both images; and display means for displaying the output image.

[0032] Preferably the video-based surgical targeting system also includes registration means for placing the virtual image in registration with the real image. These registration means may include means for manually aligning the virtual image with the real image, or means for automatically aligning the virtual image with the real image. The registration means may also include tracking means for tracking the position of the real-time image generating means.

[0033] Preferably, the video-based surgical targeting system further comprises instrument tracking means for tracking the position of a surgical instrument.

[0034] In an alternative form of the invention, the video-based surgical targeting system comprises a patient-specific database comprising a plurality of 2-D images of the anatomical structure of a patient; marker placement means for inserting virtual planning markers into the 2-D images contained in the patient-specific database; an image generator for generating a virtual image of the anatomical structure represented by the plurality of 2-D images contained in the

patient-specific database; real-time image generating means for generating a real image of the anatomical structure of a patient; video mixing means for mixing the virtual image and the real image into an output image, whereby the output image may comprise either one of the two images exclusive of the other, or a composite of both images; and display means for displaying the output image.

[0035] In another alternative form of the invention, the video-based surgical targeting system comprises a patient-specific database comprising a plurality of images of the anatomical structure of a patient; a patient-specific 3-D computer model of the anatomical structure of the patient, the patient-specific 3-D computer model being assembled from the plurality of images contained in the patient-specific database; marker placement means for (i) inserting virtual planning markers into the images contained in the patient-specific database, and/or (ii) adjusting the positions of virtual planning markers inserted into the images contained in the patient-specific database and thereafter incorporated into the patient-specific 3-D computer model, or inserting virtual planning markers into the 3-D computer model; an image generator for generating a virtual image of the anatomical structure modeled by the patient-specific 3-D computer model; real-time image generating means for generating a real image of the anatomical structure of a patient; video mixing means for mixing the virtual image and the real image into an output image, whereby the output image may comprise either one of the two images exclusive of the other, or a composite of both images; and display means for displaying said output image.

[0036] In yet another alternative form of the invention, the video-based surgical targeting system comprises a patient-specific database comprising a plurality of 2-D images of the anatomical structure of a patient; marker placement means for inserting virtual planning markers into the 2-D images contained in the patient-specific database; an image generator for generating a virtual image of the anatomical structure defined by the patient-specific database; real-time image generating means for generating a real image of the anatomical structure of a patient, the real-time image generating means being adapted so as to dynamically update the patient-specific database via the real image; video mixing means for mixing the virtual image and the real image into an output image, whereby the output image may comprise either one of the two images exclusive of the other, or a composite of both images; and display means for displaying said output image.

[0037] The present invention also comprises a method for targeting an anatomical structure using the video-based surgical targeting system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] These and other objects and features of the present invention will be more fully disclosed or rendered obvious by the following detailed description of the preferred embodiments of the invention, which are to be considered together with the accompanying drawings wherein like numbers refer to like parts and further wherein:

[0039] FIG. 1 is a schematic view of the major components of a video-based surgical targeting system formed in accordance with the present invention;

[0040] FIG. 2 is a view of an exemplary patient-specific 2-D image of the sort contained in the patient-specific database;

[0041] FIG. 3 is a view of an exemplary patient-specific 2-D image of the sort contained in the patient-specific database, wherein the image has had several virtual planning markers placed into the image;

[0042] FIG. 4 is a composite view of (i) a real image obtained by a real-time imaging device (e.g. a video camera), and (ii) a virtual image generated from the 3-D computer model, wherein the two images are not yet in registration with one another;

[0043] FIG. 5 is a composite view of (i) a real image obtained by a real-time imaging device (e.g. a video camera), and (ii) a virtual image generated from the 3-D computer model, wherein the two images have been placed in registration with one another;

[0044] FIG. 6 is a view like that of FIG. 5, except that the virtual image generated from the 3-D computer model has been sliced away to expose the virtual planning markers;

[0045] FIG. 7 is a view like that of FIG. 5, except that the virtual image generated from the 3-D computer model has been faded away to expose the virtual planning markers;

[0046] FIG. 8 is a schematic view showing the positional relationships between various elements of the video-based surgical targeting system and the patient's anatomical structure, as well as the positional relationship between an exemplary surgical instrument and the patient's anatomical structure;

[0047] FIG. 9 is a virtual image generated from the 3-D computer model, showing a virtual "over the shoulder" view from the tip of a tracked surgical instrument; and

[0048] FIG. 10 is a flowchart illustrating one way of operating a video-based surgical targeting system formed in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0049] Looking first at FIG. 1, the starting point for the present invention involves a data acquisition device 5 which is adapted to generate patient-specific 2-D images. For example, data acquisition device 5 might comprise an MRI device, a CT scanner or any other scanning device of the sort adapted to provide a series of 2-D images of the patient's anatomical structure, where each 2-D image corresponds to a plane or slice taken through the scanned structure. Alternatively, data acquisition device 5 might comprise an X-ray machine or other imaging machine adapted to provide a set of 2-D images of the patient's anatomical structure, where each 2-D image corresponds to a data set relating to the scanned structure.

[0050] The patient-specific 2-D images generated by data acquisition device 5 are stored in a patient-specific database 10. Patient-specific database 10 is constructed so that the patient-specific 2-D images can be accessed individually or in any particular sequence desired. Preferably patient-specific database 10 comprises an appropriate set of data contained in a computer storage system.

[0051] The patient-specific 2-D images stored in patient-specific database 10 are used in building a patient-specific 3-D computer model 15. Patient-specific 3-D computer model 15 may be built from the information stored in patient-specific database 10 using any one of the many algorithms well known in the art, so long as the patient-specific 3-D computer model is capable of generating virtual images of the patient's anatomical structure from substantially any location where a real camera may be positioned relative to that anatomical structure during a given procedure. Alternatively, patient-specific 3-D computer model 15 may be built from the information stored in patient-specific database 10 using any one of the many algorithms well known in the art, where the patient-specific 3-D computer model is capable of generating virtual images of the patient's anatomical structure from a predetermined set of possible virtual camera positions. Preferably, patient-specific 3-D computer model 15 is constructed so that it is capable of generating virtual images of the patient's anatomical structure from any location whatsoever, with any desired field of view, and including any other camera-specific criteria desired (e.g. particular camera characteristics such as focus, optical characteristics, optical distortions, etc.). By way of example, one possible algorithm for building the patient-specific 3-D computer model out of the information stored in the patient-specific database 10 might be the Marching Cubes algorithm.

[0052] In one preferred embodiment of the invention, patient-specific 3-D computer model 15 comprises an appropriate computer software model resident on an appropriate digital computer. Patient-specific 3-D computer model 15 is preferably constructed using a plurality of polygonal models to model the patient's real anatomical structure. As is well known in the art, such polygonal models generally comprise a collection of points defining the surface of the 3-D computer model, along with some connectivity information relating to how these surface points are connected to one another. Preferably there is one polygonal model per anatomical structure being modeled. Of course, the choice of which particular computer software model is used to model a particular anatomical structure ultimately depends on a variety of factors, such as the particular anatomical structure being modeled, the computer hardware available, the volume of data to be handled, the particular medical procedure which is to be conducted, etc.

[0053] Of course, it is also anticipated that the patient-specific 3-D computer model could be dynamic as well as static. For example, dynamic changes could occur in the model as a result of computer simulation (e.g. through the use of a Finite Element Model) or because more current real-time data (e.g. from video camera 45) is used to update the model, or both.

[0054] It is also anticipated that patient-specific 3-D computer model 15 might include data from sources other than the 2-D images contained in patient-specific database 10. For example, patient-specific 3-D computer model 15 might include information obtained from a 3-D surface digitizer such as that used in certain types of cranial surgery, or patient-specific 3-D computer model 15 might include information obtained from a temperature probe or a chemical probe. In fact, in addition to the 2-D image data obtained from patient-specific database 10, patient-specific 3-D com-

puter model **15** might include substantially any type of information gathered by almost any type of device or sensor or process.

[0055] An integral part of the present invention involves the placement of virtual planning markers into the patient-specific data, using apparatus **20**. This may be done by placing such virtual planning markers into one or more of the patient-specific 2-D images contained in patient-specific database **10** before patient-specific 3-D computer model **15** is created; or by placing such virtual planning markers into patient-specific 3-D computer model **15** after that model has been created; or by some combination of the two.

[0056] More particularly, apparatus **20** preferably comprises computer hardware and software adapted to allow a physician to access one or more of the patient-specific 2-D images contained in patient-specific database **10** and present them for viewing, in the manner shown in FIG. 2. Then, using a mouse or other data entry device, the physician can place one or more virtual planning markers **25** into an accessed patient-specific 2-D image, in the manner shown in FIG. 3. These virtual planning markers **25** can consist of substantially any geometric form such as a point, a line, a circle, a plane, a path (either straight or curved) etc., and are positioned about anatomical structures of particular interest to the physician. For example, virtual planning markers **25** might be placed about a suspected tumor, or they might be placed about particularly sensitive anatomical structures such as vascular tissue or nerve bundles, etc. Naturally, the particular geometric form chosen for a particular virtual planning marker may depend on a variety of factors, such as the particular anatomical structure involved, the computer hardware available, the volume of data to be handled, the particular medical procedure to be conducted, etc. Regardless of the particular form of virtual planning marker chosen, each virtual planning marker **25** which is placed on the 2-D image using apparatus **20** is then stored in patient-specific database **10** along with its associated 2-D image. As a result, when patient-specific 3-D computer model **15** is subsequently created from the data contained in patient-specific database **10**, patient-specific 3-D computer model **15** will incorporate virtual planning markers **25** into the model.

[0057] Alternatively, a physician may use apparatus **20** to access patient-specific 3-D computer model **15** and then, using a mouse or other data entry device, adjust the position of one or more of the virtual planning markers **25** which were previously placed into patient-specific database **10** (and thus incorporated into patient-specific 3-D computer model **15** when that 3-D computer model was created). The adjusted positions of these virtual planning markers **25** are then stored in patient-specific 3-D computer model **15**. Furthermore, an updated 2-D image of these virtual planning markers can then be incorporated into the patient-specific database **10**.

[0058] Furthermore, where patient-specific 3-D computer model **15** has not already had a particular virtual planning marker **25** incorporated therein, a physician may also use apparatus **20** to access patient-specific 3-D computer model **15**, and then use a mouse or other data entry device to insert one or more virtual planning markers **25** directly into patient-specific 3-D computer model **15**.

[0059] Once virtual planning markers **25** have been properly positioned in patient-specific 3-D computer model **15**,

virtual images incorporating these virtual planning markers can be created by an image generator **30**, fed through a video mixing device **35**, and then presented to the physician on display **40**.

[0060] At the same time, real images obtained from a video camera **45** can be fed through video mixing device **35** and then presented to the physician on display **40**.

[0061] More particularly, image generator **30** comprises computer hardware and software of the sort well known in the art for generating virtual images from patient-specific 3-D computer model **15**.

[0062] Video mixing device **35** comprises a video mixing device of the sort well known in the art, whereby the surgeon can selectively display (i) a virtual image created by image generator **30** from patient-specific 3-D computer model **15**, (ii) a real image obtained from video camera **45**, or (iii) a composite of the virtual image and the real image, where the virtual image is superimposed against the real image.

[0063] In order for the foregoing composite image to be more useful to the physician, the virtual image generated from patient-specific 3-D computer model **15** should be placed into registration with the real image obtained from video camera **45**. This is done in several steps.

[0064] First, and looking now at FIG. 4, a virtual image **50** is created by image generator **30**, fed through video mixing device **35**, and presented on display **40**. Simultaneously, a real image **55** is captured by video camera **45**, fed through video mixing device **35**, and presented on display **40**. Video mixing device **35** is arranged so as to present virtual image **50** and real image **55** simultaneously on display **40**, with the virtual image being superimposed on the real image (i.e., so that the virtual image is in the foreground and the real image is in the background, in the manner shown in FIG. 4).

[0065] Second, and looking now at FIG. 5, the two images are placed into proper registration with one another. This image registration can be accomplished in either one of two ways.

[0066] A first, and generally more preferable, technique involves holding the position of video camera **45** (and hence real image **55**) constant and moving the position of the "virtual object" or the "virtual camera" by means of apparatus **57** until the virtual image **50** is brought into registration with real image **55**. This can be done automatically by having image generator **30** use a search algorithm to match the virtual image to the real image, in which case apparatus **57** includes computer hardware and software of the sort well known in the art to cause image generator **30** to work through a search algorithm to match the virtual image to the real image; or it can be done manually, in which case apparatus **57** includes computer hardware and software of the sort well known in the art to allow the physician to drag the virtual image **50** into registration with real image **55**, using a mouse or other data entry device attached to image generator **30**. One convenient way that mouse motion can be used to control the 3-D movements or the patient-specific model is to map such motion into vectors defined by the view direction of the virtual camera, as will be well known to persons skilled in the art.

[0067] A second, and generally less preferable, technique involves holding the virtual image **50** constant and moving video camera **45** (or the patient) until real image **55** matches virtual image **50**.

[0068] Regardless of which technique is used, once virtual image 50 has been matched to real image 55, the position of the “virtual camera” (i.e., the location from which the virtual image appears to be seen) will be matched to the actual position of video camera 45.

[0069] Once virtual image 50 has been placed into proper registration with real image 55, image generator 30, video camera 45 and video mixing device 35 can be used to present the virtual and real images on display 40 in various presentation formats so as to facilitate a particular medical procedure. In particular, one can use image generator 30, video camera 45 and video mixing device 35 to superimpose a virtual image (generated from patient-specific 3-D computer model 15) against a real image (generated by video camera 45), with image generator 30 being directed to modify the virtual image so as to expose one or more of the virtual planning markers 25 present in patient-specific 3-D computer model 15, whereby the anatomy highlighted by virtual planning markers 25 will be brought quickly to the attention of the physician.

[0070] In this respect it is to be appreciated that since virtual planning markers 25 will frequently be located within interior portions of the structure modeled by patient-specific 3-D computer model 15, exposing the otherwise-hidden virtual planning markers to view will involve rendering some or all of the virtual anatomical structure transparent or semi-transparent. This can be done either by (i) slicing away any portions of the virtual image required in order to expose virtual planning markers 25, whereby those virtual planning markers will be rendered visible against the background real image, in the manner shown in FIG. 6; or (ii) fading away some or all of the virtual image so as to expose such virtual planning markers against the real image, in the manner shown in FIG. 7. As a result, a physician can then conduct a medical procedure with the confidence of using real images generated by video camera 45, while having virtual planning markers 25 superimposed against the real image of the anatomical structure so as to help guide the procedure.

[0071] While the foregoing system constitutes a major improvement over the prior art, it has also been recognized that it can itself be improved upon significantly by adding camera tracking means to video camera 45.

[0072] More particularly, in many medical procedures, the position of video camera 45 may change on a fairly frequent basis. Since it is important for virtual image 50 (generated from patient-specific 3-D computer model 15) to remain in proper registration with real image 55 (obtained from video camera 45), it is necessary for the video-based surgical targeting system to reestablish proper correspondence between the two images each time the video camera moves. As noted above, this proper correspondence can be reestablished each time video camera 45 moves, by either (i) having the physician manually drag virtual image 50 into registration with real image 55, using a mouse or other data entry device attached to image generator 30, or (ii) having the system use a search algorithm to match the virtual image to the real image. While both of these procedures are generally capable (assuming that the anatomical structure remains stationary) of accurately yielding the desired image correspondence, each one suffers from a significant disadvantage. In the first case, requiring the physician to physically drag the virtual image into registration with the real image each

time the video camera moves can be inconvenient where the video camera is moved about frequently. In the second case, it can take the system a substantial amount of time to solve for the correct image correspondence when using a search algorithm, even where high speed hardware is utilized. Even where speed is not a problem, automated search strategies of the type generally used are prone to errors through false matches.

[0073] Accordingly, it has been recognized that by putting a tracker on video camera 45, the position of the real camera can be continuously monitored, whereby each time the real camera moves, the position of the virtual camera can be correspondingly adjusted by image generator 30. In this way, the virtual image generated by image generator 30 can quickly and easily be maintained in registration with the real image, regardless of how often video camera 45 is moved.

[0074] More particularly, and looking now at FIG. 8, there is shown a video camera 45, an anatomical structure 60, and a tracker system 65. Tracker system 65 comprises a tracker 70 which is attached to video camera 45, and a tracker base 75 which defines the coordinate system of the tracker system.

[0075] In this setting, M_{PC} can be considered to represent the matrix transformation from the patient's anatomical structure 60 to camera 45; M_{CT} can be considered to represent the matrix transformation from camera 45 to tracker base 75; and M_{PT} can be considered to represent the matrix transformation from anatomical structure 60 to tracker base 75.

[0076] M_{CT} is known from the tracker system. Furthermore, once the virtual image generated by image generator 30 has been placed in registration with the real image generated by camera 45, the virtual camera position will be known relative to the virtual anatomical structure, and hence the real camera position will be known relative to the real anatomical structure. Thus, real matrix M_{PC} will also be known. In addition, since M_{CT} and M_{PC} are then both known, it is possible to solve for M_{PT} . Accordingly, the position of anatomical structure 60 will then also be known within the relative coordinate system defined by the tracker system.

[0077] In view of the foregoing, the virtual image generated by image generator 30 can be quickly and easily maintained in registration with the real image, regardless of how often camera 45 is moved.

[0078] Furthermore, another tracker 80 can be positioned on a surgical instrument 85. In this case, tracker 80 will provide M_{TI} , where M_{TI} represents the matrix transformation from tracker base 75 to instrument 85. Accordingly, once M_{PT} and M_{TI} are known, it is possible to solve for M_{PI} , where M_{PI} represents the matrix transformation from the patient's anatomical structure 60 to instrument 85. With M_{PI} known, it is then possible to track the position of surgical instrument 85 relative to anatomical structure 60. This is a very powerful tool, since it allows a virtual representation of surgical instrument 85 to be accurately added to the properly registered virtual and real images presented on display 40, i.e., it allows a virtual representation of instrument 85 to be shown in proper registration with a real image of anatomical structure 60 on display 40.

[0079] Furthermore, as the position of surgical instrument 85 is tracked relative to anatomical structure 60, it is also

possible to provide a virtual image of surgical instrument **85** as that surgical instrument **85** moves through the anatomical structure, even when some or all of that instrument might be hidden from the view of video camera **45**. For example, and looking now at **FIG. 9**, it is possible to generate a virtual "over the shoulder" view of the distal tip of surgical instrument **85** moving through anatomical structure **60**, where that tip will be shown in proper correspondence to various structures, e.g. a tumor **95**, vascular structures **100**, etc. It is also possible to generate an additional virtual object **90** showing a line extended along the axis of the surgical instrument **85** so that the physician can see where the surgical instrument would go if moved further along its current trajectory. Of course, since the virtual image generated by the video-based surgical targeting system will then differ significantly from the real image generated by video camera **45**, video mixing device **35** should be directed to totally suppress the real image generated by video camera **45** so that it will no longer be shown on display **40**, in order to avoid confusing the physician.

MODIFICATIONS OF THE PREFERRED EMBODIMENTS

[**0080**] It is, of course, possible to modify the preferred embodiments disclosed above without departing from the scope of the present invention.

[**0081**] Thus, for example, while only one camera **45** has been disclosed above, it should be appreciated that two or more cameras **45** may be used. Furthermore, it should also be appreciated that camera **45** may comprise a video camera, or it may comprise an endoscope, or it may comprise some other type of real-time image capturing means, e.g. it may comprise an ultrasound device.

[**0082**] Additionally, it should be recognized that the system might be adapted so that patient-specific database **10** comprises non-2-D images, e.g. database **10** might comprise one or more images generated by a Cyberware 3-D scanner.

[**0083**] Alternatively, patient-specific 3-D computer model **15** might be omitted from the apparatus entirely. In this case, the virtual images could be generated from patient-specific database **10** by image generator **30** through the use of a volume rendering procedure of the sort well known in the art.

[**0084**] It is also anticipated that one could use a tracked surgical instrument **85** to determine the location of anatomical structure **60**. This can be accomplished by using the tracked surgical instrument **85** to engage known fiducial points on the anatomical structure. Alternatively, a tracked surgical instrument **85** can be used to sample multiple surface points located on the anatomical structure and then use a data matching procedure to correlate the sampled points with either patient-specific database **10** or patient-specific 3-D computer model **15**. By way of example, a least squares fit might be used to correlate the sampled points with the 3-D computer model.

[**0085**] Also, it should be appreciated that the video-based targeting system could be used to target objects in non-medical applications, e.g. it could be used to target objects concealed within the interior of complex machines, or objects (e.g. a conduit) concealed beneath surface of a structure (e.g. the floor of a building).

[**0086**] Furthermore, it is possible to place tracking means directly on the patient so as to track the position of the patient's anatomical structure.

[**0087**] Still other changes will be obvious to a person skilled in the art.

ADVANTAGES OF THE PRESENT INVENTION

[**0088**] Numerous advantages are obtained through the use of the present invention.

[**0089**] For one thing, a surgical targeting system is provided to facilitate locating a particular anatomical structure during a medical procedure.

[**0090**] For another thing, a video-based surgical targeting system is provided to facilitate locating a particular anatomical structure during a medical procedure.

[**0091**] And a video-based surgical targeting system is provided which permits a series of patient-specific 2-D images (obtained by scanning patient anatomy using one or more scanning devices of (the type described above) to be assembled into a 3-D computer model of the patient's scanned structure.

[**0092**] Also, a video-based surgical targeting system is provided which allows a physician to view the aforementioned patient-specific 2-D images on a display in any desired access sequence.

[**0093**] Furthermore, a video-based surgical targeting system is provided which allows a physician to assemble a series of patient-specific 2-D images into a patient-specific database, and then to generate virtual images from the aforementioned patient-specific database, as seen from any desired virtual camera position, for viewing on a display.

[**0094**] And a video-based surgical targeting system is provided which allows a physician to generate virtual images from the aforementioned 3-D computer model, as seen from any desired virtual camera position, for viewing on a display.

[**0095**] In addition, a video-based surgical targeting system is provided which permits a physician to place virtual planning markers about any sites of interest while viewing one or more of the aforementioned patient-specific 2-D images, with those virtual planning markers then being incorporated into the 3-D computer model, whereby those virtual planning markers can be displayed in their appropriate 3-D positions when generating virtual images of the 3-D computer model.

[**0096**] And a video-based surgical targeting system is provided which permits a physician to place virtual planning markers about any sites of interest while viewing virtual images of the 3-D computer model, with those virtual planning markers then being incorporated into the 3-D computer model, whereby those virtual planning markers can be displayed in their appropriate positions when subsequently generating virtual images of the 3-D computer model.

[**0097**] And a video-based surgical targeting system is provided which permits a physician to place virtual planning markers about any sites of interest while viewing virtual images of the 3-D computer model, with those virtual planning markers then being incorporated into the 3-D

computer model and into the database of 2-D images, whereby those virtual planning markers can be displayed in their appropriate positions when subsequently generating virtual images of the 3-D computer model or when subsequently displaying 2-D images from the patient-specific database.

[0098] For another thing, a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be displayed to a physician, and which permits a virtual image generated from the 3-D computer model to be displayed to a physician, according to the directive of the physician.

[0099] And a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be appropriately merged with a corresponding virtual image generated from the 3-D computer model.

[0100] Also, a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be appropriately merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be in registration with one another.

[0101] Furthermore, a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be in registration with one another, and whereby the physician can choose to display either one of the two images exclusive of the other, or a composite of both images simultaneously.

[0102] And a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby the physician can modify the virtual image generated from the 3-D computer model as needed, by clipping or fading, so as to expose the virtual planning markers to view, with the virtual planning markers being superimposed on the real image generated by the real-time imaging device.

[0103] And a video-based surgical targeting system is provided which permits a real image generated by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby the physician can modify the virtual image generated from the 3-D computer model so as to expose only the virtual planning markers to view, with the virtual planning markers being superimposed on the real image generated by the real-time imaging device.

[0104] Moreover, a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained even as the real-time imaging device is moved about relative

to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0105] And a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained through the use of a computerized position and orientation tracker connected to the imaging device even as the real-time imaging device is moved about relative to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0106] Also, a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby this registration will be automatically maintained through the use of a computer search algorithm based on the real image and the virtual image even as the real-time imaging device is moved about relative to the anatomical site, with the virtual image being automatically generated so as to follow the real image.

[0107] And a video-based surgical targeting system is provided which permits a real image obtained by a real-time imaging device (e.g. a video camera) to be merged with a corresponding virtual image generated from the 3-D computer model, whereby the two images will be simultaneously displayed in registration with one another, and whereby a surgical instrument can be tracked along with the real-time imaging device in order that the surgical instrument can be guided about the anatomical site using the virtual image generated from the 3-D computer model.

[0108] In addition, a video-based surgical targeting system is provided which permits a virtual image to be generated from the 3-D computer model, and further wherein this virtual image can correspond to an "over the shoulder" view of the working tip of a surgical instrument located at the anatomical site.

[0109] And an improved method for locating anatomical structures during a medical procedure is provided.

[0110] In the preceding description, data acquisition device **5** was used to generate patient-specific 2-D images, and these images were stored in patient-specific database **10**; the patient-specific 2-D images stored in patient-specific database **10** were used to build patient-specific 3-D computer model **15** viewable with image generator **30**; and the output of image generator **30** and video source **45** were connected through video mixing device **35**, whereby the surgeon can selectively display (i) a virtual image created by image generator **30** from patient-specific 3-D computer model **15**, or (ii) a real image obtained from video source **45**, or (iii) a composite of the virtual image and the real image, where the virtual image is superimposed against the real image.

[0111] In addition, means **20** are provided for the placement of virtual planning markers **25** into the patient-specific data; this may be done by placing such virtual planning

markers into one or more of the patient-specific 2-D images contained in patient-specific database 10, or by placing such virtual planning markers into patient-specific 3-D computer model 15, or by some combination of the two. In accordance with one aspect of the invention, virtual planning markers 25 placed in the patient-specific 2-D images stored in patient-specific database 10 will be automatically incorporated into patient-specific 3-D computer model 15, and virtual planning markers 25 placed into patient-specific 3-D computer model 15 will be automatically incorporated into the patient-specific 2-D images stored in patient-specific database 10.

[0112] In this respect it should be appreciated that video source 45 may comprise a video camera, an endoscope, an ultrasound device, a fluoroscope, or any other type of appropriate image capturing means.

[0113] It should also be appreciated that it is possible to create virtual planning markers 25 having a form other than the sphere-like markers shown in FIG. 9.

[0114] By way of example, and looking now at FIG. 11, there is shown the aorta 105 of a patient as generated by a video source 45, e.g., a fluoroscope. Also shown is a series of sphere-like markers 25A placed into the system (e.g., by a human operator using a mouse) and a series of line segments 25B extending between selected ones of the sphere-like markers 25A. These sphere-like markers 25A and line segments 25B may be used to plan a surgical procedure, to determine anatomical lengths or angles, etc.

[0115] Also shown is a straight tube 25C which may also be used for planning and measurement purposes, etc., a curved tube 25D which may be used for planning and measurement purposes, and a box 25E which may be used for planning and measurement purposes, e.g., for volume calculations.

[0116] In addition, other geometric elements such as curved lines, intersecting lines, etc. may also be provided for planning and measurement purposes.

[0117] Significantly, it is also possible to insert into the system virtual planning markers representing virtual grafts, virtual implants, etc. By way of example, in FIG. 12 there is shown a virtual graft 25F which represents an arterial stent which may be deployed in the aorta, e.g., to treat an aortic aneurysm.

[0118] FIG. 12 is a view showing a virtual graft 25F positioned on aorta 105.

What is claimed is:

- 1. A video-based surgical targeting system comprising:
 - a patient-specific database comprising a plurality of 2-D images of the anatomical structure of a patient;
 - a patient-specific 3-D computer model of said anatomical structure of said patient, said patient-specific 3-D computer model being assembled from said plurality of 2-D images contained in said patient-specific database;
 - graft placement means for (i) inserting virtual grafts into said 2-D images contained in said patient-specific database, and/or (ii) or inserting virtual grafts into said 3-D computer model;
 - an image generator for generating a virtual image of the anatomical structure modeled by said patient-specific 3-D computer model;
 - real-time image generating means for generating a real image of the anatomical structure of a patient;
 - video mixing means for mixing said virtual image and said real image into an output image, whereby said output image may comprise either one of the two images exclusive of the other, or a composite of both images; and
 - display means for displaying said output image.

* * * * *