

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952
APPLICATION FOR A STANDARD PATENT

Sumitomo Electric Industries, Ltd., incorporated in Japan, of 5-37 Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka, JAPAN, hereby apply for the grant of a standard patent for an invention entitled:

Coated Optical Fiber

which is described in the accompanying complete specification.

Details of basic application(s):-

<u>Basic Applic. No:</u>	<u>Country:</u>	<u>Application Date:</u>
1-163341	JP	26 June 1989
2-114255	JP	27 April 1990


The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia

DATED this TWENTY SIXTH day of JUNE 1990

Sumitomo Electric Industries, Ltd.

By:



Registered Patent Attorney

TO: THE COMMISSIONER OF PATENTS
OUR REF: 134686
S&F CODE: 59080

6015700 26/06/90

DECLARATION IN SUPPORT OF A
CONVENTION APPLICATION FOR A PATENTIn support of the Convention Application made for a
patent for an invention entitled:

Title of Invention

COATED OPTICAL FIBER

Full name(s) and
address(es) of
Declarant(s)

I/~~We~~ Tsuneo Nakahara, Representative Director
of c/o Sumitomo Electric Industries, Ltd., 5-33,
Kitahama 4-chome, Chuo-ku, Osaka-shi, Osaka, Japan

do solemnly and sincerely declare as follows:-

Full name(s) of
Applicant(s)1. ~~I am/We are the applicant(s) for the patent~~

(or, in the case of an application by a body corporate)

1. I am/~~We are~~ authorised by

SUMITOMO ELECTRIC INDUSTRIES, LTD.

the applicant(s) for the patent to make this declaration on
its/~~their~~ behalf.2. The basic application(s) as defined by Section 141 of the
Act ~~was/were~~ made

Basic Country(ies)

in Japan

Priority Date(s)

on June 26, 1989 and April 27, 1990

Basic Applicant(s)

by SUMITOMO ELECTRIC INDUSTRIES, LTD.

Full name(s) and
address(es) of
inventor(s)3. ~~I am/We are the actual inventor(s) of the invention referred~~
- to in the basic application(s)

(or where a person other than the inventor is the applicant)

3. Akihiko Mizutani

of c/o Yokohama Works of Sumitomo Electric Industries, Ltd.,
1, Taya-cho, Sakae-ku, Yokohama-shi, Kanagawa, Japan

~~(xxxxxxx)~~

is/~~are~~ the actual inventor(s) of the invention and the facts upon
which the applicant(s) is/~~are~~ entitled to make the application are
as follows:

Set out how Applicant(s)
derive title from actual
inventor(s) e.g. The
Applicant(s) is/~~are~~ the
assignee(s) of the
invention from the
inventor(s)

The applicant is the assignee of the invention
from the inventor.

4. The basic application(s) referred to in paragraph 2 of this
Declaration ~~was/were~~ the first application(s) made in a Convention
country in respect of the invention(s) the subject of the application.

Declared at Osaka, this 18th day of June 1990
Japan

Signature of Declarant(s)

Tsuneo Nakahara

Representative Director

To: The Commissioner of Patents

11/81

(12) PATENT ABRIDGMENT (11) Document No. AU-B-57902/90
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 622331

- (54) Title
COATED OPTICAL FIBER
- (51)⁵ International Patent Classification(s)
C03C 025/02
- (21) Application No. : 57902/90 (22) Application Date : 26.06.90
- (30) Priority Data
- | | | |
|-------------|-----------|--------------|
| (31) Number | (32) Date | (33) Country |
| 1-163341 | 26.06.89 | JP JAPAN |
| 2-114255 | 27.04.90 | JP JAPAN |
- (43) Publication Date : 03.01.91
- (44) Publication Date of Accepted Application : 02.04.92
- (71) Applicant(s)
SUMITOMO ELECTRIC INDUSTRIES, LTD.
- (72) Inventor(s)
AKIHIKO MIZUTANI
- (74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents
US 4629285
US 3887265

- (57) The inventor has found that a strictly optimized density of pigment mixed into the covering layer of a coated optical fiber can provide both excellent visual identification of coated optical fibers and perfect curing of ultraviolet curable resin.

1. An optical fiber unit comprising:
an opaque tensile strength member;
a plurality of coated optical fibers disposed around said tensile strength member;
and an ultraviolet curable resin layer covering said tensile strength member and said coated optical fibers to form a single solid structure;

wherein each of said coated optical fibers comprises an optical fiber strand and a resin covering layer containing pigment for covering said optical fiber strand, wherein said resin covering layer contains said pigment in the range of 0.01 to 1.40 percent by weight.

2. A method of forming an optical fiber unit, said method comprising the steps of:

mixing an optimized concentration of pigment into a resin covering layer for a coated optical fiber; the concentration of pigments mixed

(11) AU-B-57902/90
(10) 622331

-2-

into said resin covering layer being in a range of from 0.01 to 1.40 by weight;

applying said resin covering layer to a plurality of coated optical fibers, each of said plurality of coated optical fibers being colored differently by the resin covering layer;

arranging said plurality of coated optical fibers around an inner tensile member;

applying an ultraviolet curable resin about the arrangement of the plurality of coated optical fibers and said tensile member; and

passing ultraviolet light through said plurality of coated optical fibers and thus curing said ultraviolet curable resin by irradiating it with said ultraviolet light.

FORM 10

S & F Ref: 134686

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

Name and Address
of Applicant:

Sumitomo Electric Industries, Ltd.
5-33, Kitahama 4-chome
Chuo-ku, Osaka-shi
Osaka
JAPAN

Address for Service:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

Coated Optical Fiber

The following statement is a full description of this invention, including the best method of performing it known to me/us

ABSTRACT OF THE DISCLOSURE

A coated optical fiber and an optical fiber unit including a plurality of coated optical fibers as well as a method of forming the optical fiber unit. The coated optical fiber is able to minimize transmission losses of the optical fiber unit by utilizing a pigment in a resin covering layer that covers an optical fiber strand in a specific range, the range being from 0.01 to 1.40 percent by weight.

COATED OPTICAL FIBER

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to a coated optical fiber. More particularly, the present invention relates to a coated optical fiber where a secondary layer of the coated optical fiber contains pigment and is colored by the pigment, and an optical fiber unit which is constructed by a plurality of the coated optical fibers using photo setting resin.

Description of the Art:

Fig. 1 is a cross sectional view showing a structure of a typical coated optical fiber to which the present invention is applicable.

Generally, a coated optical fiber 11 is made up of a secondary layer 3 and an optical fiber strand 10 including an optical fiber 1 made of SiO_2 as a main component and a primary layer 2 made of material such as silicone resin or ultraviolet curable resin. The primary layer 2 coats the optical fiber 1, and the secondary layer 3 made of thermoplastic resin, e.g., nylon, coats the optical fiber strand 10. The resin of covering layers 2 and 3 is originally transparent, however where a plurality of coated optical fibers are gathered, as will be described below, the coated optical fiber 11 is frequently colored by mixing pigment into the secondary layer 3, in order to distinguish the coated optical fibers from one another.

Generally, the coated optical fiber thus constructed is dimensionally designed such that the diameter of optical fiber 1 is approximately 125 μ m, the diameter of a strand as formed by covering the fiber with primary layer 2 is approximately 400 μ m and the diameter of a coated optical fiber formed by covering the strand with secondary layer 3 is approximately 600 to 900 μ m.

The coated optical fibers are usually used in such a way that a plurality of coated optical fibers are collectively arranged into an optical fiber unit or an optical fiber cable.

Fig. 2(a) is a cross sectional view showing a typical structure of an optical fiber unit using coated optical fibers. As shown, in an optical fiber unit 20, a tensile strength member 21 is disposed at the center. A plurality of coated optical fibers 11 are disposed around the member 21. Ultraviolet curable resin 22 is applied to an arrangement of the tensile strength member 21 and the coated optical fibers 11, and is cured into a single solid structure.

In manufacturing the optical fiber unit 20, coated optical fibers 11 are twisted and disposed around the tensile strength member 21. The ultraviolet curable resin 22 is then applied to an arrangement of the fibers and the member 21, forming a single solid structure. Finally, the ultraviolet curable resin layer 22 is cured by irradiating it with ultraviolet rays.

In the above described optical fiber unit, a coated optical fiber is covered with a plurality of covering layers, to form an optical fiber. A plurality of coated optical fibers are gathered, twisted, disposed around a tensile strength member, and covered again with ultraviolet curable resin. Even with such a solid structure, when the fiber unit is bent, transmission loss thereof is often remarkably increased.

Such a tendency of the fiber unit limits the practical bendable range of the fiber unit. This is one of the problems urgently needed to be solved in this technical field.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide an optical fiber unit with a broadened bendable range.

Another object of the present invention is to provide a coated optical fiber that is free from unexpected increases in transmission losses when coated optical fibers are gathered and assembled into a solid structure, and the resultant structure is bent.

According to a first embodiment of the present invention there is provided an optical fiber unit comprising:

- an opaque tensile strength member;
- a plurality of coated optical fibers disposed around said tensile strength member;
- and an ultraviolet curable resin layer covering said tensile strength member and said coated optical fibers to form a single solid structure;

wherein each of said coated optical fibers comprises an optical fiber strand and a resin covering layer containing pigment for covering said optical fiber strand, wherein said resin covering layer contains said pigment in the range of 0.01 to 1.40 percent by weight.

According to a second embodiment of the present invention there is provided a method of forming an optical fiber unit, said method comprising the steps of:

- mixing an optimized concentration of pigment into a resin covering layer for a coated optical fiber; the concentration of pigments mixed into said resin covering layer being in a range of from 0.01 to 1.40 by weight;



- 3A -

applying said resin covering layer to a plurality of coated optical fibers, each of said plurality of coated optical fibers being colored differently by the resin covering layer;

5 arranging said plurality of coated optical fibers around an inner tensile member;

applying an ultraviolet curable resin about the arrangement of the plurality of coated optical fibers and said tensile member; and

10 passing ultraviolet light through said plurality of coated optical fibers and thus curing said ultraviolet curable resin by irradiating it with said ultraviolet light.



TMS/1483u

~~tensile strength member, a plurality of coated optical fibers~~
disposed around the tensile strength member, and an ultraviolet
curable resin layer covering the tensile strength member and
the coated optical fibers to form a single solid structure,
5 wherein each coated optical fiber is a coated optical fiber as
~~just described above.~~

Other objects, features and characteristics of the
present invention, as well as the methods of operation and the
functions of the related elements and the economies of
10 manufacture will become apparent upon consideration of the
following description and the appended claims with reference to
the accompanying drawings, all of which form a part of this
specification.

BRIEF DESCRIPTION OF THE DRAWINGS

15 This invention will be better described with reference
to the drawings in which:

FIGURE 1 is a cross sectional view showing a structure
of a typical coated optical fiber to which the present
invention is applicable;

20 FIGURE 2(a) is a cross sectional view showing a typical
structure of an optical fiber unit using the coated optical
fibers shown in FIGURE 1; and

FIGURE 2(b) shows an enlarged cross sectional view of
a part of the cross section of the optical fiber unit shown in
25 FIGURE 2(a).

DETAILED DESCRIPTION OF THE PRESENTLY



PREFERRED EXEMPLARY EMBODIMENTS

In a coated optical fiber according to the present invention, one of the essential features resides in that a concentration of pigment contained in the covering layer is set within a specific range.

Fig. 2(b) shows an enlarged cross sectional view of a part of the cross section of an optical fiber unit shown in Fig. 2(a).

In an optical fiber unit 20 in which a plurality of coated optical fibers 11 are assembled into a solid structure by ultraviolet curable resin, gaps between a tensile strength member 21 and the coated optical fibers 11 are filled with the ultraviolet curable resin. Consider the case where the fiber unit 20 is irradiated with ultraviolet rays. The member 21 is generally opaque and pigment is contained in the coated fibers 11. Accordingly, the irradiated ultraviolet rays are absorbed or scattered by those components. A quantity of the irradiated rays in an area A within the fiber unit is remarkably smaller than that of the irradiated rays in the remaining area. In the area A, the resin is insufficiently cured, resulting in incomplete fixing of the coated fibers 11 within the fiber unit. When such a fiber unit is bent, the coated fibers 11 are displaced within the fiber unit 20, so that the optical fiber 1 is locally bent. This increases transmission losses in the coated fiber or fiber unit. The above fact was found and confirmed by the inventor in the present patent application.

Constructing the coated fibers so that they are colorless or transparent should be avoided. Consider the case where colorless optical coated fibers are used for an optical fiber unit. The optical fiber unit is extremely long and both ends of the fiber unit are separated by an extremely long distance. Therefore, it is very difficult to identify a specific coated optical fiber at both ends of the fiber unit, because the coated fibers are all transparent and hence cannot be distinguished from one another. To identify each coated optical fiber, it is necessary to enter light into the coated fiber at one end and receive it at the other end. This work must repeatedly be done for all coated fibers. However, it is almost impossible to apply such a coated fiber identifying technique for a fiber unit containing a great number of coated optical fibers. In this respect, use of pigment for coated optical fiber is essential in practical use.

One possible way to accelerate curing of the ultraviolet curable resin in the optical fiber unit is to increase the energy of the irradiating ultraviolet rays. The ultraviolet rays' energy (expressed usually in mJ) is the product of an intensity of ultraviolet rays (usually in mW) and irradiation time (usually in second). It is clear that to accelerate the curing of the resin, it is necessary to increase the irradiation time or the intensity of the ultraviolet rays. Actually, a light source for emitting ultraviolet rays also emits infrared rays for heating the ultraviolet curable resin.

Accordingly, if quantity of ultraviolet rays is increased, the resin deteriorates due to heat.

Ideally, the curing of the entire resin is saturated, but unfortunately, such is not the case. When the quantity of the energy of ultraviolet rays is merely increased, a portion of the optical fiber unit which is not shaded with the coated fibers is fully saturated and is undergoing deterioration already, while in a portion shaded with the coated fibers, the curing of the resin is not yet saturated and the resin has been insufficiently cured.

The inventor has found that a strictly optimized density of pigment mixed into the covering layer of a coated optical fiber can provide both excellent visual identification of coated optical fibers and perfect curing of ultraviolet curable resin.

According to the present invention, a concentration of pigment mixed into resin as the material of a covering layer, or a secondary layer, of the coated optical fiber for coloring the layer is set at 0.01 to 1.40 percent by weight in a standard coated optical fiber in which the diameter of an optical fiber strand is approximately 400 μ m, and a thickness of a resin layer covering the fiber strand is 100 to 250 μ m.

When the concentration of the pigment exceeds the above range, ultraviolet curable resin used for an optical fiber unit cures irregularly. On the other hand, when it is below the above noted range, it is difficult to visually perceive the

coloration of the coated fiber. Accordingly, it becomes meaningless to use the pigment.

When the thickness of the covering layer made of the resin mixed with the pigment exceeds the above range, the concentration of the pigment must be properly decreased, in order to secure an optimum quantity of transmitted ultraviolet rays. Generally, where a particle diameter of the pigment exceeds a wavelength of transmitted light, a transmissivity is abruptly decreased. Therefore, it is preferable to use pigment of the smallest possible particle diameter. A preferable particle diameter of the pigment is 50 μ m or less, although it depends on the wavelength of ultraviolet rays used.

White pigment, such as TiO₂, may be used as pigment providing white color, but usually it is used together with other pigment, in order to make color clear. In a case where a plurality of pigments are used, a total concentration of the pigments must be selected so as to allow a smooth transmissivity of ultraviolet rays.

In cases where pigment of TiO₂ is solely used, a concentration of the pigment in the covering layer is preferably within a range of 0.01 to 0.80 percent by weight. In case where a combination of the pigment TiO₂ and another pigment is used, a concentration of the pigment TiO₂ is preferably within a range of 0.01 to 0.80 percent by weight, a concentration of the remaining pigment is preferably within a

range of 0.03 to 1.00 % by weight. In this case, a total concentration of those pigments must be within the above range.

The optical fiber according to the present invention is based on the assumption that the coated optical fibers disposed around the tensile strength member are not arranged in a line as radially viewed. To manufacture an optical fiber unit having such a structure that the coated fibers are disposed in an alignment fashion, it is preferable that a concentration of pigment contained in each coated fiber must be properly decreased.

Some examples of the present invention will be described, but it should be understood that those examples are used by way of example, and the present invention is not limited to such examples.

Example 1

Coated optical fibers were manufactured according to the present invention, and characteristics were measured.

An optical fiber of 125 μ m in diameter was covered with a primary layer made of ultraviolet curable resin, thereby forming an optical fiber strand of 400 μ m in diameter. The strand thus formed was further covered with a secondary layer 100 μ m thick, thereby forming a coated optical fiber as shown in Fig. 1. The secondary layer was made of nylon containing pigment and TiO₂ at concentrations as shown in Table 1. A diameter of each coated fiber was 0.6mm.

Table 1

	Pigment concentration (% by weight)	TiO ₂ concentration (% by weight)
Sample Number (1)	0.30%	0.50%

An optical fiber unit structured as shown in Fig. 2(a) by using six coated optical fibers was manufactured. Six coated optical fibers were twisted and disposed around a tensile strength member as a steel wire of 0.6mm in diameter. Then, ultraviolet curable resin was applied to an arrangement of the tensile strength member and the twisted coated fibers, thereby forming an optical fiber unit of about 2.7mm in diameter. The layer was cured by irradiating it with ultraviolet rays of 100mJ.

A transmission loss of an optical fiber unit thus formed was measured. Then, it was wound around a drum of 100mm in diameter by three turns, and an increase of the transmission loss was measured. The measurement result is as shown in Table 2.

Table 2

	Increase of transmission loss
Sample Number (1)	Below measurement limit

As seen from Table 2, in the optical fiber unit using the coated optical fibers 11 according to the present invention, an increase of the transmission loss due to bending was negligible. The color of each coated fiber was satisfactorily perceived by naked eyes.

Example 2

To form a colored covering layer material, pigments (of white, blue, yellow, red, and black) were mixed into 12 nylon at mixing ratios as shown in Table 3. In Table 3, concentration of each pigment contained in the colored covering material at each mixing ratio was expressed in weight percent. In the table, colors of each pigment in the column of "Mixed pigments" are shown in the left column. For white, its pigment in the column of "Mixed pigments" is blue pigment. In Table 3, materials whose pigment's concentrations are outside the concentration range as defined by the present invention were used for preparing comparative coated fibers.

Table 3-1

Color	Mixed pigments (% by weight)			Remarks	Sample Number
	TiO ₂	Pigment	Total		
White	2.091	0.545	2.636	Comparative Example	2
Blue	1.182	0.909	2.091	Comparative Example	3
Yellow	1.091	1.182	2.273	Comparative Example	4
Red	-----	1.818	1.818	Comparative Example	5
Black	-----	1.000	1.000	Example	6

Table 3-2

Color	Mixed pigments (% by weight)			Remarks	Sample Number
	TiO ₂	Pigment	Total		
White	1.438	0.375	1.813	Comparative Example	7
Blue	0.813	0.625	1.438	Comparative Example	8
Yellow	0.750	0.813	1.563	Comparative Example	9
Red	-----	1.350	1.350	Example	10
Black	-----	0.688	0.688	Example	11

Table 3-3

Color	Mixed pigments (% by weight)			Remarks	Sample Number
	TiO ₂	pigment	Total		
White	0.742	0.194	0.935	Example	12
Blue	0.419	0.323	0.742	Example	13
Yellow	0.387	0.419	0.806	Example	14
Red	-----	0.645	0.645	Example	15
Black	-----	0.355	0.355	Example	16

Table 3-4

Color	Mixed pigment (% by weight)			Remarks	Sample Number
	TiO ₂	Pigment	Total		
White	0.377	0.098	0.475	Example	17
Blue	0.213	0.164	0.377	Example	18
Yellow	0.197	0.213	0.410	Example	19
Red	-----	0.328	0.328	Example	20
Black	-----	0.180	0.180	Example	21

Table 3-5

Color	Mixed pigment (% by weight)			Remarks	Sample Number
	TiO ₂	Pigment	Total		
White	0.007	0.002	0.009	Comparative Example	22
Blue	0.004	0.003	0.007	Comparative Example	23
Yellow	0.004	0.004	0.008	Comparative Example	24
Red	-----	0.007	0.007	Comparative Example	25
Black	-----	0.004	0.004	Comparative Example	26

By using the colored resin thus prepared, coated optical fibers were manufactured as in Example 1. An optical fiber of 125 μ m in diameter was covered with a primary layer made of ultraviolet curable resin, thereby forming an optical fiber strand of 400 μ m in diameter. The strand thus formed was further covered with a secondary layer, thereby forming a coated optical fiber of 600 μ m in outer diameter. An optical fiber unit was manufactured for each type of the coated fibers in the same way as that for Example 1. Specifications of the fiber unit were the same as those of Example 1.

As in Example 1, an increase of transmission loss of each of 25 number of optical fiber units was measured. The results of the measurements are shown in Table 4.

Table 4

Sample No.	Increase of Transmission loss [dB]	Sample No.	Increase of Transmission loss [dB]
2	0.010	15	Below measurement limit
3	0.009	16	↑
4	0.007	17	↑
5	0.015	18	↑
6	Below measurement limit	19	↑
7	0.005	20	↑
8	0.004	21	↑
9	0.005	22	↑
10	Below measurement limit	23	↑
11	↑	24	↑
12	↑	25	↑
13	↑	26	↑
14	↑		

As seen from Table 4, when an optical fiber unit using the coated optical fibers as the comparative coated optical fibers in which pigment of more than 1.4 percent by weight is contained in the resin, is bent, the transmission loss is remarkably increased. When an optical fiber unit using coated optical fibers as manufactured according to the present invention is bent, no increase of the transmission loss was measured. Also in the case of an optical fiber unit using coated optical fibers in which pigment of less than 0.01 percent by weight is contained in the resin, no increase of the transmission loss was measured. However, it was difficult to perceive the color of the coated fiber.

In the examples and the comparative examples as mentioned above, 12 nylon was used for the covering material of the coated fiber. Alternatively, the covering material may be any of vinyl chloride, polyethylene, 6 nylon, and nylon or nylon copolymer as mixture of various types of nylon.

As described above, the present invention succeeded in providing a coated optical fiber that can form an optical fiber unit in which each coated fiber can be visually identified, and when the fiber unit is bent, no increase of transmission loss occurs in the fiber unit or coated fibers.

A coated optical fiber according to the present invention can readily be identified by a color of its covering layer. When an optical fiber unit is manufactured

using such coated fibers, the coated fibers allow ultraviolet rays to transmit therethrough with little loss. Accordingly, ultraviolet curable resin can be cured uniformly when it is irradiated with ultraviolet rays, and a reliable support of the coated fibers are ensured. Consequently, an optical fiber unit manufactured using the coated fibers suffers from little transmission loss when it is bent.

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiments, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

For example, a metal layer such as a Cu or Ag plating layer may be provided on the surface of the tensile strength member 21, so that ultraviolet ray is reflected on the metal layer toward the area A shown in Fig. 2.

Further, metal pieces may be mixed in the ultraviolet curable resin 22, so that ultraviolet ray is reflected toward the region A.

Still further, a fluorescent paint emitting ultraviolet ray may be coated on the surface of the tensile strength member 21. Still further, a fluorescent pigment (fluorescent paint) may be used to color the coated optical fiber 11.

The claims defining the invention are as follows:

1. An optical fiber unit comprising:

an opaque tensile strength member;

5 a plurality of coated optical fibers disposed around said tensile strength member;

and an ultraviolet curable resin layer covering said tensile strength member and said coated optical fibers to form a single solid structure;

10 wherein each of said coated optical fibers comprises an optical fiber strand and a resin covering layer containing pigment for covering said optical fiber strand, wherein said resin covering layer contains said pigment in the range of 0.01 to 1.40 percent by weight.

2. A method of forming an optical fiber unit, said method comprising the steps of:

15 mixing an optimized concentration of pigment into a resin covering layer for a coated optical fiber; the concentration of pigments mixed into said resin covering layer being in a range of from 0.01 to 1.40 by weight;

20 applying said resin covering layer to a plurality of coated optical fibers, each of said plurality of coated optical fibers being colored differently by the resin covering layer;

arranging said plurality of coated optical fibers around an inner tensile member;

25 applying an ultraviolet curable resin about the arrangement of the plurality of coated optical fibers and said tensile member; and

passing ultraviolet light through said plurality of coated optical fibers and thus curing said ultraviolet curable resin by irradiating it with said ultraviolet light.

30 3. A method as claimed in claim 2, wherein said applying said resin covering layer step includes applying said resin onto optical fibers having a diameter of approximately 125 μm .

35 4. A method as claimed in claim 2, wherein said applying said resin covering layer step includes applying a resin to said optical fibers so that resulting optical fiber strands have a diameter of approximately 400 μm .

5. A method as claimed in claim 2, wherein said method further comprises the step of coating said optical fiber strand with said resin covering layer so that said resin covering layer is 100 μm to 250 μm .



TM/1483u

6. A method as claimed in any one of claims 2 to 5, wherein said mixing step includes mixing at least TiO_2 into said pigments.

7. An optical fiber unit comprising:

an opaque tensile strength member;

5 a plurality of coated optical fibers disposed around said tensile strength member;

and an ultraviolet curable resin layer covering said tensile strength member and said coated optical fibers to form a single solid structure substantially as hereinbefore described with reference to any
10 one of Samples 1, 6 or 10 to 21 or Figs. 2(a) and 2(b).

8. A method of forming an optical fiber unit, substantially as hereinbefore described with reference to Example 1 and 2 and any one of Sample, 1, 6 or 10 to 21.

9. An optical fiber unit whenever formed by the method as claimed
15 in any one of claims 2 to 6 or 8.

DATED this TWENTY-EIGHTH day of JANUARY 1992

Sumitomo Electric Industries, Ltd.

Patent Attorneys for the Applicant
SPRUSON & FERGUSON



57902/90

FIG. 1

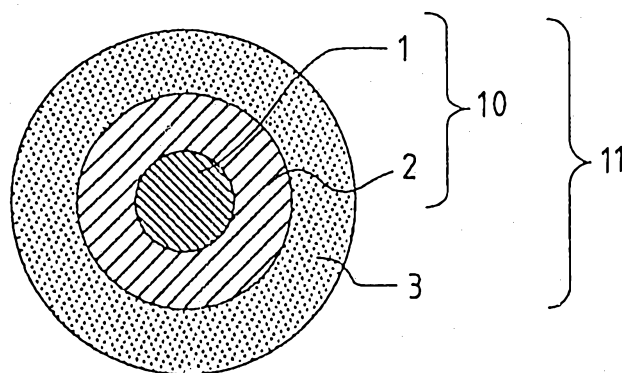


FIG. 2(a)

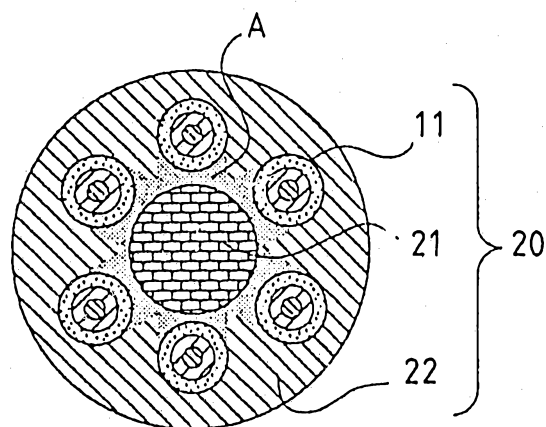


FIG. 2(b)

