



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>C23C 18/30</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 91/09986</b>  <b>(43) International Publication Date:</b> 11 July 1991 (11.07.91)
<b>(21) International Application Number:</b> PCT/US90/07340 <b>(22) International Filing Date:</b> 13 December 1990 (13.12.90)  <b>(30) Priority data:</b> 454,565                      21 December 1989 (21.12.89)    US 569,882                      20 August 1990 (20.08.90)        US 609,718                      13 November 1990 (13.11.90)    US  <b>(71) Applicant:</b> MONSANTO COMPANY [US/US]; 800 North Lindbergh Boulevard, St. Louis, MO 63167 (US).  <b>(72) Inventor:</b> VAUGHN, George, Douglas ; 1720 Claymont Estates Drive, Ballwin, MO 63011 (US).  <b>(74) Agent:</b> BOLDING, James, Clifton; Monsanto Company, 800 North Lindbergh Boulevard, St. Louis, MO 63167 (US).		<b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL (European patent), NO, SE (European patent), SU.  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> CATALYTIC, WATER-SOLUBLE POLYMERIC FILMS FOR METAL COATINGS  <b>(57) Abstract</b>  <p>Metal coated articles where the metal is electrolessly deposited onto catalytic films prepared by thermally activating catalytically inert films formed from an aqueous solution comprising polymer, e.g. cellulosic, vinyl alcohol or oxyolefin polymers, and catalytic metal of group 8, e.g. palladium. Copper electrolessly deposited on activated films exhibits high ductility similar to electrolytic copper, e.g. at least about 8 percent ductility.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

-1-

## CATALYTIC, WATER-SOLUBLE POLYMERIC FILMS FOR METAL COATINGS

Disclosed herein are metal coated articles, including metal-coated textile materials, where the metal is electrolessly deposited onto catalytic films prepared by thermally activating catalytically inert, polymeric films prepared from aqueous solutions of a polymer and a compound of a Group 8 metal. Also disclosed are methods of preparing and using such metal coated articles, catalytic films, catalytically inert films and solutions.

## BACKGROUND OF THE INVENTION

Electroless deposition of metal is effected by immersing catalyzed substrates into metal solutions, e.g. of soluble nickel, cobalt or copper, a reducing agent and a chelant. Although substrates can be catalyzed with a variety of metals from Group 1B or Group 8, palladium, despite its cost, is often the catalyst of choice due to its activity. Maintaining adhesion of the catalyst to the surface is of considerable importance since loosely adhered catalytic metal can be washed from the surface in the agitation of the plating bath causing depletion of the metal value of the plating bath as uncontrolled metal deposition occurs, resulting in what is commonly referred to as a "crashed" bath.

Morgan et al. in U.S. Patent 4,910,072 and O'Connor et al. in U.S. Patent 4,900,618 disclose selective catalytic activation of catalytically inert polymeric films comprising complexes of a polymer and a compound of a Group 1B or 8 metal having essentially no metal on the surface. Solutions for preparing such films are prepared with a variety of organic solvents, e.g. tetrahydrofuran, acetone, methyl ethyl ketone, methanol, methyl acetate and ethyl acetate, which are preferably anhydrous. Low levels of water in the organic solvent can be tolerated provided the film is

-2-

formed in a high humidity environment. Because of environmental concerns with organic vapor emissions, it is becoming more desirable to form films from aqueous solutions rather than from organic solvent solutions.

5       The use of aqueous coating systems to selectively provide catalytic surfaces has been a long term goal of practitioners in the field of electroless deposition of metals. Lenoble in U.S. Patent 3,615,471 discloses the use of catalytic polymeric photoresistant coatings from  
10 aqueous solutions of a polymer such as polyvinyl alcohol (PVOH), a light activated crosslinker such as potassium bichromate and a catalytic metal compound such as palladium dichloride. Such coatings can be used to provide a catalytic pattern on circuit board substrate  
15 by exposing the dried coating to U.V. light through a template causing the exposed coating to crosslink; the unexposed water soluble coating is removed by water washing; and the crosslinked coating is cured, i.e. dried by heating at 190° C for 15 minutes, and  
20 electrolessly plated. Polichette et al. in U.S. Patents 3,772,056; 3,772,078; 3,925,578; 3,959,547; 3,930,963; and 3,994,727 disclose selective electroless deposition of metal onto films coated from solutions of light or heat reducible metal salt solutions, e.g. containing  
25 cupric formate and a light sensitive reducing agent such as anthraquinone 2,6-disulfonic acid disodium salt and a minor amount of surfactant; after exposure to light through a pattern the unexposed coating is washed away with water allowing electroless deposition on the light  
30 reduced metal; and Polichette et al. in U.S. Patent 3,779,758 disclose selective electroless deposition of metal onto light cured adhesive films coated from solutions of polymeric adhesive, a catalytic metal salt, e.g. palladium chloride, and a photosensitizer such as a  
35 diazonium compound; after exposure to light through a pattern the unexposed coating is washed away allowing electroless deposition on the reduced metal-containing, light-crosslinked adhesive. A disadvantage of using

-3-

such coatings as disclosed by Lenoble and Polichette et al. is that inadvertent failure to wash away all of the non-crosslinked coating can cause undesired electroless deposition on the substrate or subsequent washing of the coating from agitation in the plating bath can cause the plating bath to crash, i.e. uncontrolled metal reduction and deposition throughout the plating bath.

Miller in U.S. Patent 3,656,952 discloses a photosensitive polymeric, e.g. polyvinylpyrrolidone and polyoxyethylated fatty alcohol, coating containing a photoactive reducing agent, e.g. ferric ammonium oxalate, and a noble metal compound, e.g. complexes of palladium (II) and platinum (IV) with EDTA. On exposure to U.V. or visible light the light sensitive ferric ammonium oxalate causes reduction of the palladium compound. The film is then treated with a reducing agent such as dimethyl borane solution which reduces the palladium in the non-exposed surface. Electroless deposition of nickel results in a non-reversed reproduction of the image, e.g. because light-generated metal nuclei apparently decrease the quality of chemically reduced metal nuclei formed in the light-struck areas resulting in more or faster electroless deposition on the chemically reduced metal nuclei in the areas which were not exposed to light. A disadvantage of such coatings is a lack of good control in selectivity in electroless deposition between areas exposed to light and areas not exposed to light.

Yudelson et al. in U.S. Patent 3,719,490 disclose light sensitive palladium compounds, e.g. potassium palladous chloride, palladium tetramine chloride and potassium palladium oxalate, which on exposure to actinic light form catalytic centers for the electroless deposition of metal; such compounds are applied as coatings from aqueous solutions or from solutions of a polymeric binder such as gelatin or PVOH with a boric acid crosslinker; and, after exposure to actinic light, metal can be electrolessly deposited on the light

-4-

exposed surface. A disadvantage of using such coatings as disclosed by Yudelson et al. is that only surfaces which can be exposed to light can be provided catalytically active; for instance surfaces on fibers 5 within a bundle which are not readily exposed to direct light cannot be made catalytic.

Rolker et al. in U.S. Patent 3,900,320 discloses processes for metallizing plastic using films of polymer and a catalytic metal compound. In Example 5 Rolker et 10 al. disclose preparing a film using a pre-plate solution of 0.05 parts of palladium chloride and 0.25 parts of polyvinyl alcohol in 100 parts of water; a polyester sheet was dipped in the pre-plate solution and air dried; and when the coated film was then dipped into an 15 electroless nickel plating bath for three minutes, a layer of nickel was deposited. A disadvantage of using such coatings is that selective parts of a substrate can be made catalytic only by selective application of the coating.

20 Moreover, attempts to duplicate the experimental work of Rolker et al. have been generally unsuccessful. For instance, it has been discovered that when coatings of the Rolker et al. pre-plate solution are air dried at temperatures up to 100° C, the solutions provide 25 catalytically inert films, i.e. the films do not catalyze the electroless deposition of nickel. Only when films are dried at temperatures above the boiling point of water, e.g. at about 150°C, are non-uniform catalytic films formed. Catalytic films formed from 30 aqueous solutions at such high temperatures are undesirable because the films are often poorly formed with wide variations in catalytic activity, apparently because the rapid evolution of solvent causes concentration gradients of catalytic metal across the 35 coating. This is manifest by colored spots on the dried film which comprise high levels of catalytic metal, e.g. about twice the concentration of catalytic metal as present on non-colored portions of the film. A

-5-

disadvantage of using catalytic metal coatings prepared and dried according to Rolker et al. is the lack of uniform deposition of metal from electroless deposition solutions.

5       Metal-coated textile materials are useful for a variety of electromagnetic radiation shielding applications, e.g. wall coverings, gaskets, composite housings, protective clothing, and the like from adverse effects of electromagnetic interference. The shielding  
10 performance of such metal-coated textile materials is influenced by integrity, adhesion and electrical conductivity of the metal coating, especially the long term conductivity in common environments, e.g. metal-oxidizing environments of high humidity, rain, fog or  
15 salt spray.

      Metal-coated textile materials prepared by electroless deposition techniques are preferred to textiles coated by other means, e.g. vapor deposition, because line of sight deposition from vapor does not  
20 provide uniform metal coating, e.g. at interior surfaces of the textile. Electroless deposition methods are generally more favored because catalytic metal such as palladium can be applied more evenly to fibrous surfaces even interior fibrous surfaces. Nishwitz in U.S. Patent  
25 4,002,779 discloses the metal coating of non-woven fabrics which are made catalytic to electroless deposition by sensitizing with an aqueous hydrochloric acid solution of tin chloride followed by treatment with an aqueous hydrochloric acid solution of palladium  
30 chloride. Copper-coated non-woven fabric prepared by such technique is reported to have surface resistivity of 30-80 ohms; and, nickel-coated non-woven fabric, 80-150 ohms.

      More conductive metal coated textiles are  
35 disclosed by Ebnet in U.S. Patents 4,201,825 where textile materials made catalytic using colloidal palladium are reported as having surface resistivity as low as 4 ohms for copper coatings and 10 ohms for nickel

-6-

coatings. The environmental durability of the metal coatings was such that after only ten washings of 30 minutes duration in 30° C emulsifier-containing water, the surface resistivity of nickel-coated fabric degraded  
5 from 10 ohms to 300 ohms. In U.S. Patent 4,572,960 Ebneth discloses metallized knitted polyester yarn catalyzed with a solution of butadiene palladium chloride in methylene chloride and plated with nickel having a resistance per square meter of 0.1-0.2 ohms; as  
10 indicated above the use of methylene chloride solutions are environmentally undesirable.

#### SUMMARY OF THE INVENTION

I have discovered that metal coatings having enhanced electrical conductivity and environmental  
15 resistance can be electrolessly deposited onto articles coated with a catalytic film prepared by thermally activating a catalytically inert film formed from an aqueous solution of polymer and a Group 8 metal. Thus, one aspect of this invention provides metal coated  
20 articles having uniform surface resistivity of less than 1 ohm. A preferred aspect of this invention is electrolessly-deposited metal coated textiles. Another aspect of this invention provides essentially aqueous solutions of polymer and a water soluble compound of a  
25 catalytic metal of Group 8 which can be used to prepare catalytically inert polymeric films which can be selectively activated, e.g. to electroless deposition of metals, by exposure to heat or heat generating radiation. This invention also provides novel,  
30 catalytically inert films prepared from aqueous solution of polymer and catalytic metal which can be selectively catalytically activated by heat, e.g. by localized exposure to a heat transfer agent, without the need to employ masking layers or photoreactive additives such as  
35 crosslinking and metal reducing agents. Still another aspect of this invention provides catalytically activated films prepared by thermally activating catalytically inert films formed from an aqueous



-7-

solution of polymer and catalytic metal where such catalytically active films have a uniform distribution of catalytic metal that allows superior catalytic performance, e.g. in catalyzing electroless deposition  
5 of strongly adherent metal surfaces.

Yet another aspect of this invention provides processes for preparing catalytically inert, selectively catalytically activatable films from aqueous solutions of water soluble polymers and catalytic metal; methods  
10 of selectively catalytically activating such films; and methods of using such films, e.g. for catalyzing the electroless deposition of metal coatings onto such films.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 is a graphical representation of the minimum amount of palladium required in certain catalytically inert films according to this invention.

Figure 2 is a graphical representation of the maximum weight ratio of polymer to palladium in  
20 providing certain catalytically inert films of this invention.

Figure 3 is a graphical representation of the effect of sodium acetate on the minimum amount of palladium in providing catalytically inert films  
25 according to this invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Throughout this specification, percentages of compositions are by weight and temperatures are in degrees Celsius, unless indicated otherwise.

30 The term "catalytic metal" as used herein refers to metals of Group 8 of the Periodic Table of Elements, i.e. iron, cobalt, nickel, ruthenium, rhodium, palladium, iridium, osmium and platinum. Preferred Group 8 metals are ruthenium, rhodium, palladium,  
35 iridium and platinum. The most preferred metal used in preparing films according to this invention is palladium. Such catalytic metals are desirably employed as water soluble compound, e.g. salts or complexes with

-8-

ligands such as acetonitrile, acetone, acetate, chloride, nitrate,

The term "complex" as used herein refers to organic ligand-metal combinations where there is molecular interaction, e.g. coordinate bonding, between nucleophilic groups on polymers used in the films of this invention and solubilized catalytic metal compounds.

The term "aqueous solution" as used herein refers to solutions consisting essentially of water and low levels of dissolved catalytic metal and polymer where the polymer is dissolved or dispersed.

The term "Copper Bath" as used herein refers to an agitated electroless plating solution comprising about 8 g/l formalin, about 4 g/l copper, and about 0.12 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and about 35 °C.

The term "Nickel Bath" as used in the following examples refers to an agitated electroless nickel plating bath (obtained from MacDermid identified as XD7054EN) comprising 6 g/l nickel and 30 g/l sodium hypophosphite monohydrate adjusted to pH 6.5 with ammonium hydroxide solution and maintained at about 60° C.

The term "2 percent caustic/formaldehyde" means an aqueous solution of 2 weight percent sodium hydroxide and 2 weight percent formaldehyde.

The term "catalytically inert" as used herein refers to films of polymer and catalytic metal compounds having surfaces onto which metal is not effectively deposited from standard electroless plating solutions such as a Copper Bath.

The term "catalytically activatable" as used herein refers to catalytically inert films comprising polymer and a compound of a catalytic metal which can be made catalytic, e.g. receptive to effective deposition of metal such as copper or nickel from a standard electroless plating bath, by exposing selected areas of

-9-

the catalytically inert film to heat or heat generating radiant energy. For instance, heat can be provided to the polymer film by exposing selected areas to heat transfer fluid, e.g. hot air, or coherent

5 electromagnetic radiation such as from a laser, electron beam radiation, etc., which can be adsorbed generating sufficient heat to allow activation. As illustrated in the examples herein the catalytically inert films of this invention, unlike films of the prior art, have not  
10 been found to be activatable by exposure to U.V. radiation which does not substantially heat the film.

A useful indication of electrical conductivity of metal-coated articles, e.g. metal coated textile materials is "surface resistivity" which can be measured  
15 according to ASTM Standard Test method D-4496 or DIN No. 54345. It is common practice to report surface resistivity in a variety of units of measure, namely "ohms", "ohms per square" and "ohms per square centimeter", which are understood by practitioners in  
20 the art to be interchangeable. In the above description of the prior art and the following description of this invention, the illustrative examples and claims, the unit of measure for surface resistivity is "ohms."

The term "uniform surface resistivity" as used  
25 herein means that at least nine of ten random measurements of surface resistivity will be below the specified value, e.g. 1 ohm. "Uniform surface resistivity" does not mean average of values both greater than and less than the specified value.

30 The term "weathering" as used herein means subjecting metal coated articles to continuous exposure to ultraviolet light from xenon lamps and intermittent water spray, i.e. 18 minutes durations of water spray every two hours, under conditions specified in ASTM  
35 Standard Practice G-26, e.g. a black body temperature of 63 °C.

The metal coated articles of this invention comprise a layer of electrolessly deposited metal on a

-10-

catalytic layer of polymer and Group 8 metal. Such articles can comprise molded articles where the metal layer provides shielding against electromagnetic radiation, e.g. for electronic equipment housings, or environmental resistance, e.g. for automotive trim or fixtures. Other articles can comprise printed circuits on rigid polymeric substrates or on flexible polymeric films. An especially preferred aspect of this invention provides metal coated textile materials, e.g. woven, non-woven, knitted or needle-punched fabrics, threads, yarns, chopped fiber sliver or monofilament tow and the like. The substrate of the metal coated articles can comprise any of a variety of materials including inorganic materials such as metals, metal oxides, stone, ceramics, glass, quartz, alumina, carbon and graphite; organic polymers including organic thermoset polymers such as epoxy and phenolic resins and thermoplastic polymers such as polyamides, polyaramides, polyesters, polyolefins, polycarbonates, polysulfones, styrenics, and cellulosics; and natural materials such as wood. In the case of textile materials the substrate can comprise natural fibers such as cellulosics, synthetic fibers of acrylic, nylon, polyester, polyaramide, inorganic fibers such as glass, quartz, graphite and the like.

25       Metal coatings on the articles of this invention can comprise any of a variety of the metals which can be deposited electrolessly from aqueous solutions onto palladium catalyzed surfaces, e.g. copper, nickel, cobalt, silver, palladium, platinum, etc. In many cases it is desirable to provide the metal-coated textiles of this invention with a multilayered metal coating, e.g. a first electrolessly deposited layer of copper or nickel and one or more subsequent layers applied electrolessly, electrolytically or by replacement, e.g. in the case of silver. Depending on the application the subsequent layer can comprise copper, nickel, zinc, cobalt, gold, silver, zinc, platinum, palladium, iridium, etc.

-11-

The metal coated articles of this invention have an electrolessly deposited metal layer which exhibits enhanced electrical conductivity. For instance the metal coated articles can exhibit uniform surface resistivity of less than about 1 ohm, preferably metal coated textile materials of this invention exhibit a surface resistivity of about 0.1 ohm or less. An especially advantageous property of the metal coated articles of this invention is the ability to withstand weathering without substantial degradation of electrical conductivity. To illustrate the superior environmental resistance of the metal coatings of the this invention, it has been discovered that, even when exposed to 300 hours of weathering according to ASTM Standard Practice G-26, metal coated textiles of this invention have typically exhibited uniform surface resistivity of not more than 15 ohms, e.g. not more than 3 ohms. In preferred embodiments of this invention metal coated textiles exhibit uniform surface resistivity of less than 1 ohm after 300 hours of such weathering.

An even more surprising discovery is that copper electrolessly deposited on films according to this invention can be oxidation resistant and exhibit ductility more than double the heretofore reported ductility of electrolessly deposited copper. Thus, another aspect of this invention is unique electrolessly deposited metals, e.g. copper having substantially the ductility of electrolytic copper. Thus this invention also provides copper coated articles having a coating of electrolessly deposited copper which exhibits unexpectedly high ductility, e.g. greater than 8 percent, even when the copper is deposited on a non-metallic substrate. In preferred aspects of this invention the electrolessly deposited copper exhibits ductility greater than 10 percent or higher, say at least 12 percent or even up to 16 percent.

The metal-coated textile materials of this invention are especially useful in electromagnetic

-12-

radiation shielding applications. For instance, copper-coated nylon non-woven fabric according to this invention exhibited greater than 60 dB attenuation in near field shielding of radiation between 100 and 800 5 megahertz. Metal-coated nylon non-woven fabric according to this invention comprising a first layer of copper and a second layer of tin exhibited far field shielding effectiveness of greater than 60 dB for radiation up to 10 gigahertz.

10       The metal coated articles of this invention are prepared by electrolessly depositing metal onto a catalytic layer of polymer prepared from aqueous solutions of polymer, e.g. water soluble polymer or emulsions of water insoluble polymer, and catalytic 15 metal of Group 8. Prior art solutions of water soluble polymer and Group 8 metal contain sufficiently high levels of catalytic metal that films dried at room temperature catalyze the electroless deposition of poorly adhering metal films that are readily oxidized. 20 The aqueous solutions of this invention are distinguished from prior art solutions in that the amount of catalytic metal is sufficiently low that films prepared by drying wet films of such solutions at room temperature are catalytically inert, that is such room 25 temperature dried films do not catalyze electroless deposition, e.g. of copper. This is surprising in view of my discovery that, even when catalytically inert, uniformly dispersed catalytic metal is detectible by ESCA (as defined herein) on the surface of such 30 catalytically inert film. I have also discovered that, when wet films of such aqueous solutions are dried at low temperatures, preferably at temperatures less than the boiling point of water in wet films, there is provided catalytically inert films having a surface on 35 which the concentration of such uniformly dispersed catalytic metal at the surface of said film, as measured by ESCA, can vary less than 50 percent from the average concentration of catalytic metal at the surface. I have

-13-

further discovered that, when catalytically activated by thermal means, such films can catalyze the electroless deposition of metals and essentially no metal oxide providing electrolessly deposited coatings of

5 surprisingly advantageous properties, e.g. exceptional adhesion.

Polymers that are useful in providing the catalytically inert, catalytically activatable films of this invention comprise water soluble polymers and

10 suspensions, e.g. emulsions, of water insoluble polymers. Preferred polymers have weak nucleophilic groups which can coordinately bond to catalytic metal. Such nucleophilic groups include hydroxyl groups, carboxyl groups, carboxylic acid groups, and the like.

15 It has been discovered that certain water soluble polymers have sufficiently strong nucleophilic groups as to be inoperative in this invention. For instance, polyethyleneimine and gelatin have nucleophilic groups that appear to complex with catalytic metal to form

20 catalytically inert films that are not catalytically activatable according to this invention. Thus, a characteristic of the water soluble polymers useful in this invention is the presence of nucleophilic groups that form weaker coordinate bonds with catalytic metal

25 than coordinate bonds between palladium and polyethyleneimine.

Useful water soluble polymers having nucleophilic groups include certain cellulosic polymers, certain vinyl polymers, certain polyoxyolefins and certain

30 inorganic polymers. Among the preferred cellulosic polymers are methylcellulose and substituted methylcellulose polymers, e.g. hydroxypropyl methylcellulose. Among the preferred vinyl polymers are polyvinyl alcohol and esters thereof such as partially

35 hydrolized polyvinyl acetate, polyvinyl pyrrolidone, polyvinyl methyl ether, poly acrylic acid and derivatives thereof such as poly methacrylic acid or polyacrylamide, and polyvinyl acetals such as polyvinyl

-14-

formal and polyvinyl butyral. Among the preferred polyoxyolefins are polyoxyethylene (where low molecular weight polymers, e.g. up to about 10,000 Daltons, are commonly referred to as polyethylene glycol and high molecular weight polymers, e.g. about 100,000 - 5,000,000 Daltons, are commonly referred to as polyethylene oxide) and polyoxypropylene including oligomers thereof having at least one nonionic end group, e.g. an alkyl or alkaryl end group, which are commonly referred to as surfactants. Preferred inorganic polymers include polysilicas, e.g. suspensions of colloidal silica are useful in preparing metal coated articles of this invention that will can operate at higher temperatures than when an organic polymer is used. Among the more preferred water soluble polymers are polyvinyl alcohol, polyoxyethylene and hydroxypropyl methylcellulose. Oligomeric polyoxyolefins are useful when mixed with other polymers, including water soluble polymers, in forming films that will wet substrates. Thus, many preferred film forming solutions comprise a mixture of water soluble polymers, e.g. polyvinyl alcohol and polyoxyethylene or hydroxypropyl methylcellulose and polyoxyethylene.

Water insoluble polymers can be used in the aqueous solutions of this invention when dispersed in the aqueous solution with a surfactant, e.g. a cationic, anionic or neutral charged molecule, oligomer or polymer. Preferred surfactants which are compatible with many water insoluble polymers are neutral polymeric surfactants such as polyoxyethylenes. Thus, aqueous solutions of this invention also include suspensions of a water soluble polymer, e.g. a polyoxyolefin surfactant, and colloidal particles of a thermoplastic polymer capable of forming a coherent film when formed from water emulsions of said polymer, e.g. at a temperature of less than about 200° C. Preferred water insoluble polymers include ionomers such as polyester



-15-

ionomers having sulfonimide groups and polymers such as polyolefins and polystyrenics.

In many cases it has been found that the dry, catalytically activated films of this invention are  
5 stable against solubilization, e.g. when immersed in agitated, aqueous electroless deposition solutions. For instance, metal is sufficiently rapidly deposited on the film to preclude solubilization of the film. In certain other cases, e.g. where only selective areas of water  
10 soluble film are activated causing non-selective areas to be exposed to long immersion in agitated aqueous solutions, it may be desirable to incorporate crosslinking agents in the film forming solutions to minimize any tendency for non-selectively activated  
15 areas of the film to solubilize and be washed away. Terephthaldicarboxaldehyde, glutaraldehyde or dialdehyde starch are useful for crosslinking hydroxyl containing polymers such as polyvinyl alcohol and cellulosic polymers. In other cases, e.g. when cellulosic polymers  
20 are employed, a basic solubilizing agent, e.g. ammonia, other amine or inorganic hydroxide, is commonly used to facilitate solubilization of the cellulosic polymer. When ammonia is used as a cellulosic solubilizing agent, the ammonia can be effectively liberated in providing a  
25 dry film that does not tend to dissolve when immersed in aqueous reducing or metal deposition solutions.

The films of this invention are formed from aqueous solutions of the above described polymers and a water soluble compound of catalytic metal. Useful  
30 solutions comprise as little as 0.1 weight percent polymer. Lesser or greater amounts of polymer can be used depending on the film forming character of the polymer and the desired thickness of the film. Especially useful film forming solutions can contain up  
35 to about 1 weight percent polymer, e.g. 0.2 or 0.4 weight percent polymer. The upper limit on polymer concentration is limited by the viscosity of the solution. Since useful thin films can be prepared from

-16-

solutions having generally low concentrations of polymer, it is often desirable, e.g. to promote adhesion and conserve catalytic metal, to consider solutions having less than about 5 weight percent polymer as a  
5 practical upper limit for practicing this invention. Preferably solutions will contain less than 3, and more preferably less than 2, weight percent polymer.

Because of the low level of polymer the solutions of this invention generally exhibit low viscosity, e.g.  
10 less than about 50 centipoises (as measured at room temperature with a Brookfield No. 1 spindle at 100 rpm), say about 20 centipoises or lower. In cases where it is desired to apply the films of this invention in fine patterns, e.g. onto vertical surfaces of by rotogravure  
15 or intaglio printing techniques, it is useful to employ more viscous solutions, e.g. about 50 centipoises or higher. For instance, solutions containing about 0.6 weight percent HPMC have exhibited viscosity of about 100 centipoises.

20 The catalytically inert films of this invention are provided by employing a higher proportion by weight of polymer than catalytic metal, e.g. in a weight ratio of polymer to catalytic metal of at least 3:1, say about 6:1 or even about 9:1, or even higher. In some cases it  
25 may be desirable to provide a film in a weight ratio of polymer to catalytic metal of at least 15:1 or 20:1, even up to 30:1 or more.

Although the solutions of polymer and catalytic metal are essentially aqueous solutions, in some cases  
30 it may be useful or desirable to incorporate low levels of one or more low boiling, water-miscible compounds such as ammonia or organic solvent, e.g. acetonitrile or acetone, which as Group 8 metal coordinating ligands facilitate solubility of the catalytic metal compound;  
35 such organic solvents tend to be liberated from the film during thermal activation. Since aqueous solutions of many Group 8 metals tend to be unstable, it is often advantageous to utilize volatile stabilizer such as a

-17-

primary, secondary or tertiary amine, e.g. triethylamine, especially in solutions to be utilized over extended periods of time. Solutions can also comprise noncatalytic compounds, that provide Group 8 metal coordinating ligands, e.g. alkali metal salts of acetate, chloride, nitrate, or other anionic ligands. From observation of experimental results it is believed that such noncatalytic metal compounds can be useful to effect electroless deposition using lower palladium concentrations especially at lower concentrations of certain water soluble polymer, e.g. polyvinyl alcohol. It has also been observed that the use of such noncatalytic compounds promote better adhesion of electrolessly deposited metal. In this regard it is believed that the presence of such noncatalytic compounds enhance the swelling of the polymeric film in an electroless deposition solution allowing reducing agent such as caustic/formaldehyde to reduce catalytic metal within the polymeric film and further allowing metal ions to diffuse to the reduced catalytic metal thus providing the growth of roots of electrolessly deposited metal within the polymeric film which anchor a strongly adhesive layer of electrolessly deposited metal to the polymeric film. In this regard it has been observed when using transparent polymeric films on transparent substrate films that the film side of electrolessly deposited metal is bright when polymeric films do not contain such noncatalytic compounds and dark when polymeric films do contain such noncatalytic metal compounds. The dark appearance is believed to result from light scatter from an irregularly deposited metal surface at the metal/polymeric film interface e.g. where metal roots have been electrolessly deposited into the polymeric film. Useful noncatalytic compounds include sodium or potassium acetate.

The choice of method for applying the aqueous solution to provide catalytically inert films depends on the nature of the substrate and the metallized layer

-18-

desired. For instance in the case of textile materials such fibers, yarns, woven and nonwoven fabrics, catalytically inert films can be provided by dipping the textile substrate into an aqueous solution and letting the solution drip off or passing the textile through rolls to remove excess solution. The water can be evaporated by letting the wet coated substrate stand in air or be facilitated by warm air passing through the textile material. In the case of flexible or rigid films, the aqueous solution can be applied by roller, doctor blade, spray and such to provide large area coverage of a wet film which can be dried to a catalytically inert film by allowing the water to evaporate. Fine patterns can be applied to film substrates by printing techniques, e.g. intaglio, rotogravure or ink jet printing onto a moving web of the substrate. Methods for coating other types of substrates, e.g. foams, elastomers, housings, containers, etc., will be readily apparent to those skilled in the art of coatings. Depending on the composition of the substrate those skilled in the art can readily prepare aqueous solutions with an appropriately polymer that will be sufficiently compatible with the substrate to allow the desired adhesion of the catalytically inert film to the substrate. The following description of preparing catalytically inert films on common substrates, e.g. films and fibers, is not intended as a limitation but an illustration of the ease in which the aqueous solutions of this invention can be applied to unique substrates. The application of this invention to other substrates should be readily apparent.

Moreover, it has been observed that drying is an important step in the practice of this invention regardless of the nature of the substrate. Evaporation can be advantageously facilitated by exposing the wet film to moderate evaporation conditions, e.g. moderate vacuum or moderate warm air flow, either of which

-19-

provides an environment having a partial pressure of water low enough to expedite evaporation but is desirably not so low as to cause boiling of water from the film surface. In most cases this can be assured by  
5 maintaining the forming film at a temperature less than 95° C. In many cases it is desirable that drying is effected at a temperature less than 80° C, say less than about 60° C. In many preferred cases it may be desirable to evaporate water by drying the film at a  
10 temperature less than 45° C or lower, for instance at a temperature less than 30° C, e.g. at room temperature. It has observed that high rates of evaporation from a tow of thousands of fibers causes the film forming polymer to be carried away from the center of the tow  
15 with the evaporating water leaving portions of the tow devoid of a catalytic metal-containing, polymeric coating, thus spreading the diameter of a tow bundle facilitates uniform film formation.

It has been observed that catalytically inert  
20 films prepared by drying film-forming solutions at such moderate temperatures exhibit advantages not found in films formed by drying at temperatures which allow water to boil from the surface. For instance catalytically inert films according to this invention exhibit  
25 uniformly dispersed catalytic metal as detectable on the surface by ESCA. On preferred films of this invention the concentration of catalytic metal on the surface, as measured by ESCA, varies less than 50 percent from the average concentration of metal on the surface. Such  
30 films are distinguished from films prepared by drying at high temperatures, e.g. above the boiling point of water, which are often not only catalytically inert but also generally exhibit large variations, e.g. 100 percent or more, in the concentration of catalytic metal  
35 on the surface. Such large variations in catalytic metal can result in undesirable variation in the catalytic activity to electroless deposition, e.g. high local concentrations of catalytic metal which may be

-20-

undesirably catalytically active on the otherwise catalytically inert film surface or low local concentrations of catalytic metal which may result in a surface which cannot, at least readily, be activated, 5 e.g. to electroless deposition.

Other advantages exhibited by catalytically inert films prepared by drying films at moderate temperature are manifest after activation of the catalytically inert films, e.g. by heat to catalyze electroless deposition 10 of metal. Catalytically inert films on substrates, e.g. substrate films or a tow of fibers, which comprise water soluble polymer and catalytic metal, can be made catalytic, e.g. receptive to effective deposition of metal such as copper or nickel from a generic 15 electroless plating bath, by exposing the catalytically inert film to heat or heat generating radiation. Such thermal activation can be provided by exposing the catalytically inert film to heated air or by exposing the surface of the film to heat generating radiation, 20 e.g. radiation which can be adsorbed to provide sufficient heat to allow activation. The method of choice for rendering a catalytically inert film catalytically active is often selected by the nature, e.g. shape and composition, of the substrate. For 25 instance, where the substrate is a textile material, e.g. a fabric of tow of fibers, it is generally advantageous to apply heat by forcing heated air through the textile material. Useful heated air temperatures can range from as low as about 100° C for substrates 30 comprising heat sensitive materials, e.g. polymeric material having a low glass transition temperature, to higher than 200° C for substrates comprising higher heat resistant material polymeric material having a higher glass transition temperature. While the time of 35 exposure to heated air depends on heat transfer principles, generally activation to a catalytic surface can be effected in shorter times at higher temperature. For instance, exposure to forced air streams heated to

-21-

about 250° C for short periods of time, e.g. 5-10 seconds, has been sufficient to activate films to catalyze electroless deposition without adverse effect on a film of water soluble polymer.

5           An advantage of the films of this invention is that after such thermal activation, e.g. after selective exposure of the surface of said film to a heat transfer agent comprising a fluid at a temperature of 240° C for up to about 10 seconds, selectively exposed surface of  
10 the film will be catalytically active so that copper and essentially no copper (I) oxide will be uniformly electrolessly deposited on said selectively exposed surfaces from an agitated Copper Bath which is maintained at pH 11.5-12.5 and 35° C. Another  
15 surprising advantage of such films according to this invention is that copper so deposited is highly ductile. Heretofore, electrolessly deposited copper has been observed to have ductility of about 3.5 percent. Electrolessly deposited copper on films according to  
20 this invention exhibits ductility of at least about 8 percent or higher, say about 12-16 percent which is in the range commonly exhibited by electrolytically deposited copper.

For many applications thermal activation is  
25 preferably effected to produce what is believed to be a large number of uniformly-distributed, small clusters of catalytic metal complex, which can be reduced to provide a polymer surface with a large number of uniformly-distributed, small clusters of catalytic metal, e.g.  
30 catalytic metal clusters of about 10 Angstrom nominal diameter. In this regard another advantage of the films of this invention is that, after such activation, e.g. selective exposure of the surface of said film to a heat transfer agent comprising a fluid at a temperature of  
35 240° C for up to about 10 seconds and immersion in a 2 wt percent caustic/formaldehyde solution for about 2 minutes, selectively exposed surface of said film will comprise clusters of reduced catalytic metal wherein

-22-

more than about 80 percent of the catalytic metal will be present in clusters which are not visible by transmission electron microscopy capable of detecting palladium clusters as small as  $14 \pm 4$  Angstroms. In many cases analysis of catalytically active films according to this invention by transmission electron microscopy has failed to detect clusters of catalytic metal leading to a conclusion that the catalytic metal was present in clusters generally smaller than about 10 Angstroms.

The catalytically inert, catalytically activatable films of this invention are advantageously useful in providing articles comprising electrolessly deposited metal on a film formed from an aqueous solution of polymer and a Group 8 metal. The interface of such electrolessly deposited metal and said film is surprisingly essentially devoid of oxide of the electrolessly deposited metal, especially when the electrolessly deposited metal is copper. Because such electrolessly deposited metal is unique, e.g. exhibits surprisingly high ductility, environmental resistance to oxidation and strong adhesion, such articles can exhibit surprising tensile properties over extended periods of time. For instance in the case of articles comprising a substrate, which, when uncoated, exhibits tensile failure at a strain higher than the strain for tensile failure of said electrolessly deposited metal, the electrolessly deposited metal-coated substrate can exhibit tensile failure at a strain less than said strain for tensile failure of said substrate when uncoated, e.g. at about the strain for tensile failure of the electrolessly deposited metal.

Although electrolessly deposited copper on articles according to this invention is exceptionally oxidation resistant, it is often desirable to protect such electrolessly deposited copper from oxidation with a material, e.g. a metal such as nickel, tin, silver, gold or iron or a polymer coating. Certain metal



-23-

coatings, e.g. nickel, can be applied by electroless or electrolytic deposition; other metal coatings, e.g. tin, can be applied by substitution of the outer layer of copper.

5 Preferred articles according to this invention comprise textile substrates, e.g. monofilament, yarn or fabric of acrylic, nylon, polyaramide or glass fiber, which is provided with a uniform coating of metal, e.g. copper, nickel, silver, platinum or palladium, about  
10 0.5-5 microns thick. Alternatively, a textile material substrate can be provided with a metal coating, e.g. of the same or different metals, over selective thermally activated intervals along the length of the fibrous substrate. Because of the unique properties imparted to  
15 the electrolessly deposited metal, e.g. strong adhesion, and ductility, such metal coated fibrous materials are advantageously processable in conventional textile operations without adverse effect on the mechanical and/or electrical properties of the metal coated  
20 article.

The following examples serve to illustrate certain embodiments and aspects of this invention but are not intended to imply any limitation of the scope of the invention.

-24-

## EXAMPLE 1

This example serves to illustrate the preparation of catalytically inert films of this invention wherein catalytic metal complex is uniformly distributed on the surface of said film such that the concentration of metal on the surface varies less than a 50 percent from the average concentration of metal on the surface.

A solution of water soluble polymer and catalytic metal comprising about 0.05 parts of palladium chloride and about 0.25 parts of polyvinyl alcohol (PVOH) in 100 parts of water was prepared by stirring 300 g of a 1 percent aqueous solution of PVOH (125,000 molecular weight, 88 mole percent hydrolyzed), 0.6 g palladium dichloride and 0.24 g of 37 percent hydrochloric acid in about 900 g of distilled water. Polyethylene terephthalate (PET) film sheets were washed with ethanol to provide a clean surface. The solution of water soluble polymer and catalytic metal was coated onto the PET sheets with a wet film applicator having a 1 mil (25 micron) gap. The solution was dried to a film in air (18 percent relative humidity) at room temperature. Immersion of one of the sheets in a Nickel Bath for about 3 minutes resulted in an absence of electroless deposition of nickel onto the sheet indicating that the film was catalytically inert. After the catalytically inert film was heated for 10 minutes in a 150°C convective oven and then immersed in a Nickel Bath, the previously catalytically inert film became coated with electrolessly deposited nickel in less than 30 seconds, illustrating a method of catalytically activating a catalytically inert film according to this invention.

One of the sheets having a catalytically activated film was analyzed by Electron Spectroscopy for Chemical Analysis (ESCA) a technique involving irradiating the surface with X-rays and measuring the kinetic energy of the emitted electrons which have not undergone any inelastic event as generally described by Siegbahn et al. in "Electron Spectroscopy for Chemical

-25-

Analysis", Technical Report AFML-TR-68-189, NTIS: U.S. Dept. of Commerce (1968). ESCA analysis showed that palladium was uniformly distributed on the surface of the film in the range from 0.8 to 1.1 atom percent  
5 palladium, i.e. a variation of about 40 percent from the baseline value of 0.8 atom percent. ESCA analysis also indicated that more than 50 percent (typically 66 percent) of the palladium on the surface was reduced palladium, i.e. Pd(0).

10 Another sheet coated and activated essentially as indicated above in this Example 1 was immersed in a Copper Bath to deposit a bright layer of electrolessly deposited copper. Observation of a transmission electron micrograph (TEM) of the interface of the  
15 electrolessly deposited copper and PVOH layer showed a copper layer about 3000 Angstroms thick on the PVOH layer which contains palladium clusters to a depth of about 400 Angstroms. Energy dispersive X-ray analysis (EDS) showed a uniform copper layer with no intermediate  
20 layer comprising copper (I) oxide.

#### COMPARATIVE EXAMPLE 1

A PET sheet was washed and coated with the solution of water soluble polymer and catalytic metal according to the method of Example 1, except the  
25 solution was dried for 10 minutes in a convective oven heated to 150° C, resulting in a film with brown spots. ESCA analysis showed that palladium was non-uniformly distributed on the surface of the film ranging from 0.8 to 2.1 atom percent palladium, i.e. a variation of about  
30 160 percent from the baseline value of 0.8 atom percent. ESCA analysis also indicated that less than 50 percent (typically 42 percent) of the palladium on the surface was reduced palladium, i.e. Pd(0). The film as prepared was immersed in a Nickel Bath for less than 30 seconds  
35 resulting in electroless deposition of nickel onto the film, indicating that the film as prepared was not catalytically inert.

-26-

Another sheet coated essentially as indicated above in this comparative Example 1 was immersed in a Copper Bath to deposit a bright layer of electrolessly deposited copper. Observation of a TEM of the interface of the electrolessly deposited copper and PVOH layer showed an outer copper layer over an intermediate layer on the layer of PVOH which contains palladium clusters. EDS showed that the intermediate layer comprised substantial amounts of copper (I) oxide.

10

## EXAMPLE 2

This example further illustrates methods of using heat to activate catalytically inert films. The procedure of Example 1 for preparing catalytically inert films was repeated except that the solutions were dried to produce films by exposing the wet sheets to air heated to 50° C, 75° C and 100° C, resulting in catalytically inert films which became catalytically active upon further heating, e.g. for 10 minutes at 150° C.

20

## EXAMPLE 3

This example illustrates the preparation of catalytically inert films on a tow of filaments. A three foot (0.9 meter) long tow of 360,000 filaments of acrylic fiber (2.2 denier) was immersed for 5 minutes in the solution of water soluble polymer and catalytic metal prepared in Example 1. After excess solution was removed by passing the tow through squeeze rollers, the tow was cut into two approximately equal lengths. One length was allowed to dry at room temperature for 24 hours to provide the filaments with a catalytically inert film; the other length was dried as set forth in Comparative Example 3. The tow was then heated in a forced air heated oven at 150° C for 30 minutes. The heated tow weighed 90 g. The tow was immersed for 2 minutes in a caustic/formaldehyde solution (2 percent sodium hydroxide, 2 percent formaldehyde) to reduce catalytic metal; the wet tow was rinsed in deionized water and dried in a forced air chamber at room

-27-

temperature. The tow was immersed for 50 minutes in an agitated Nickel Bath; nickel sulfate solution, sodium hypophosphite and ammonium hydroxide were added over the 50 minutes to maintain bath concentrations as plating depleted bath components. The tow was removed from the Nickel Bath, rinsed with water, damp dried by centrifugation and then dried overnight in a 60° C air oven; the dried tow weighed 113 g, i.e. 23 g of nickel was plated onto the tow.

10

## COMPARATIVE EXAMPLE 3

The other half of the tow coated with the solution of water soluble polymer and catalytic metal in Example 3 was treated to provide a tow coated with a dry film by immediately drying the wet tow for 30 minutes in a 150° C forced air oven. The dried tow weighed 95 g and was catalytically active. After immersion in the Nickel Bath for 50 minutes and dried, the tow weighed 97 g, i.e. 2 g of nickel was plated onto the tow.

## EXAMPLE 4

20 This example illustrates the utility of a variety of water soluble polymers in preparing the catalytically inert films of this invention. Such polymers include a vinyl polymer, e.g. PVOH; polyoxyolefins, e.g. Triton X-100 polyoxyethylene surfactant from Rohm & Haas (POE-1) and Zonyl FSK polyoxyethylene surfactant from DuPont (POE-2); a polysilica, e.g. Syton X-30 colloidal silica from Monsanto (SYTON); a mixture of a water soluble polymer and an emulsion of a water insoluble polymer at a temperature of less than 200° C from an aqueous emulsion, e.g. a polyethylene latex emulsion containing a polyoxyethylene surfactant (PE latex); polyethyl-oxazoline (PEOX), solutions of water soluble polymers which do not form films on the substrate and a polyoxyolefin which allows film formation on the substrate, e.g. a mixture of polyacrylic acid (PAA) and POE-1, a mixture of starch and POE-1 and a mixture of a sugar and POE-1; and a water soluble polymer having strong nucleophilic groups which will not allow the film

-28-

to be activated, e.g. gelatin. Aqueous solutions were prepared comprising 0.03 percent palladium and 0.25 percent water soluble polymer by mixing the water soluble polymer in a solution containing 0.063 percent  
 5 palladium acetate, 7.9 percent acetonitrile and 0.063 percent sodium acetate. Wet films about 25 microns thick solutions were cast onto a PET sheet and dried in room temperature air to provide dry films which were heated in an air oven at 180° C for 3 minutes, then  
 10 immersed in a Copper Bath. The quality of any copper deposited is reported in Table 1.

Table 1

	<u>polymer</u>	<u>quality of deposited copper</u>
	PVOH	3
15	POE-1	3
	POE-2	3
	SYTON	2
	PE latex	2+
	PEOX	1+
20	starch	film did not form on PET
	starch and POE-1	1+
	PAA	film did not form on PET
	PAA and POE-1	3
	sugar	film did not form on PET
25	sugar and POE-1	2
	gelatin	0
	gelatin and POE-1	0

---

\*3 indicates bright, shiny uniform copper

30 2 indicates uniform copper with low gloss

1 indicates non-uniform/dark copper

0 indicates no copper

## EXAMPLE 5

This example illustrates the minimum amount of  
 35 catalytic metal required in a catalytically activatable, catalytically inert film can vary depending on the concentration of water soluble polymer in the film forming solution.

-29-

Varying amounts of catalytic metal solution containing 0.17 g palladium (II) acetate, 0.185 g sodium acetate, 9 g of water and 7.5 g acetonitrile were mixed with varying amounts of water soluble polymer solution

5 containing 10 g of polyvinyl alcohol solution (1 percent PVOH, 125,000 M.W., 88 mole percent hydrolyzed), 88 g of water and 0.15 g Triton x-100 polyoxyethylene as a surfactant to prepare film forming solutions having 0.1, 0.2, 0.3, 0.4, 0.5 and 0.6 weight percent of PVOH and

10 varying concentrations of palladium. Film forming solutions were cast as 25 micron wet films onto PET sheets; the wet films were dried to catalytically inert films at room temperature, then heat activated at 180° C for 3 minutes to provide catalytically active films onto

15 which bright copper would deposit from a Copper Bath with generally better adhesion of the metal at lower polymer concentration. The experimental procedure was repeated with each of the following water soluble polymers having weak nucleophilic groups:

20 polyoxyethylene (POE), methylcellulose (MC), hydroxypropyl methylcellulose (HPMC) and ethylene-vinyl acetate polymer (EVA). The results reported in Table 2 A and shown in Figure 1 were the minimum concentration of palladium in the film forming solution required to

25 provide catalytically inert, catalytically activatable films of the water soluble polymer and palladium acetate as determined by about 50 percent surface coverage by electrolessly deposited copper. The results reported in Table 2 B and shown in Figure 2, similarly determined,

30 were the maximum weight ratio of water soluble polymer to palladium required to provide catalytically inert, catalytically activatable films of the water soluble polymer and palladium acetate.

-30-

TABLE 2 A

Minimum palladium concentration ( $\times 10^{-4}$  wt %)  
for activatable film

		<u>Wt % polymer in film forming solution</u>				
5	<u>Polymer</u>	<u>0.1</u>	<u>0.2</u>	<u>0.3</u>	<u>0.4</u>	<u>0.6</u>
	PVOH/POE	58	63	70	72	84
	POE	58	67	90	-	-
	MC/POE	37	41	-	40	38
	HPMC/POE	40	46	46	51	42
10	EVA/POE	36	42	-	38	40

TABLE 2 B

Maximum weight ratio of polymer/palladium  
for activatable film

		<u>Wt % polymer in film forming solution</u>				
15	<u>Polymer</u>	<u>0.1</u>	<u>0.2</u>	<u>0.3</u>	<u>0.4</u>	<u>0.6</u>
	PVOH/POE	17	32	46	56	71
	POE	17	30	33	-	-
	MC/POE	27	49	-	100	158
20	HPMC/POE	25	43	65	78	143

## COMPARATIVE EXAMPLE 5

This example illustrates catalytically active films of the prior art comprising a water soluble polymer and excess palladium such that the films when  
25 dried at room temperature are not catalytically inert.

Film forming solutions of 0.1 and 0.2 weight percent PVOH and HPMC with varying amounts of palladium were used to prepare films as in Example 5, except that the films were dried at room temperature and not heated  
30 or otherwise activated according to this invention; the dry films were immersed in a Copper Bath to determine the amount of palladium required to provide films that are catalytically active, i.e. not catalytically inert. The results reported in Table 3 indicate a determined  
35 threshold for prior art films which were sufficiently active to electrolessly deposit at least 50 percent surface coverage of poorly adhesive, dark copper from a Copper Bath.



-31-

TABLE 3

Weight ratio of polymer/palladium for  
forming catalytically active (not inert) film  
Wt % polymer in film forming solution

5	<u>Polymer</u>	<u>0.1</u>	<u>0.2</u>
	HPMC/POE	0.95	1.67
	PVOH/POE	0.95	1.11

## EXAMPLE 6

This example illustrates the use of alkali metal  
10 salts to effect changes in the minimum concentration of  
palladium required to provide catalytically inert films.

Film forming solutions of PVOH and HPMC,  
palladium acetate both with and without sodium acetate  
were used to prepare films as in Example 5. The results  
15 reported in Table 4 and shown in Figure 3 indicate the  
effect of sodium acetate on the minimum amount of  
palladium required for a catalytically inert,  
catalytically activatable films according to this  
invention.

20

TABLE 4

Minimum palladium concentration ( $\times 10^{-4}$  wt %)  
for activatable film

		<u>Wt % polymer in film forming solution</u>				
<u>Polymer</u>		<u>0.1</u>	<u>0.2</u>	<u>0.3</u>	<u>0.4</u>	<u>0.6</u>
25	HPMC w/NaAc	40	46	46	51	42
	HPMC w/o	68	65	-	-	36
	PVOH w/NaAc	58	63	65	72	84
	PVOH w/o	80	72	-	-	35

30

## EXAMPLE 7

This example illustrates the preparation of  
catalytically inert films of a cellulosic polymer and  
catalytic metal which can be activated to provide  
strongly adhering electrolessly deposited metal on films  
35 of PET.

A catalytic metal solution was prepared from 0.08  
g palladium (II) acetate, 0.096 g potassium acetate, 2.0  
ml water and 10 ml acetonitrile. A water soluble

-32-

polymer solution was prepared from 0.6 g hydroxypropyl methylcellulose, 0.5 ml triethylamine and about 137 ml water. The catalytic metal solution, followed by 50 ml of rinse water, was mixed with the water soluble polymer solution to provide a film forming solution which was cast as a 25 micron thick wet film onto a PET sheet which was dried in room temperature air to provide a dry film which is catalytically inert to electroless deposition in a Copper Bath and a Nickel Bath. The catalytically inert film was heat activated for 10 minutes in a 160 °C forced air oven to provide a catalytically active film onto which strongly adhering electrolessly deposited copper deposits from a Copper Bath and strongly adhering electrolessly deposited nickel deposits from a Nickel Bath.

## EXAMPLE 8

This example illustrates the preparation of catalytically inert films of a vinyl alcohol polymer and catalytic metal which can be activated to provide strongly adhering electrolessly deposited metal on films of PET.

A catalytic metal solution was prepared from 0.0633 g palladium (II) acetate, 0.0633 g sodium acetate, 2.0 ml water and 10 ml acetonitrile. A water soluble polymer solution was prepared from 0.25 g polyvinylalcohol (125,000 M.W., 88 mole percent hydrolyzed) and 0.1 g Triton X-100 polyoxyethylene surfactant and about 38 ml water. The catalytic metal solution, followed by 50 ml of rinse water, was mixed with the water soluble polymer solution to provide a film forming solution which was cast as a 25 micron thick wet film onto a PET sheet which was dried in room temperature air to provide a dry film which is catalytically inert to electroless deposition in a Copper Bath and a Nickel Bath. The catalytically inert film was heat activated for 10 minutes in a 160°C forced air oven to provide a catalytically active film onto which strongly adhering electrolessly deposited copper

-33-

deposits from a Copper Bath and strongly adhering electrolessly deposited nickel deposits from a Nickel Bath.

## EXAMPLE 9

5           This example serves to illustrate the selective catalytic activation of catalytically inert films of this invention on a fibrous substrate. This example also illustrates that useful films according to this invention can be prepared using stabilizers such as  
10 ammonia without adverse effect on the electroless deposition of metal.

          A catalytic metal solution was prepared from 0.1 g palladium (II) acetate, 0.066 g potassium acetate, 2.5 ml water and 10 ml acetonitrile. A water soluble  
15 polymer solution was prepared from 0.4 g polyvinyl-alcohol (125,000 M.W., 88 percent mole hydrolyzed) and about 137 ml water. The catalytic metal solution, followed by 50 ml of rinse water and 1 ml of concentrated aqueous ammonia, was mixed with the water  
20 soluble polymer solution to provide a film forming solution. A tow of about 2000 glass filaments of about 13 micron diameter (obtained from Owens-Corning and identified as 107B-AD-675-267) was passed through the film forming solution leaving the solution at a vertical  
25 rate of about 2 cm/second. The wet tow was dried in a 30° C air to form a catalytically inert film on the filaments.

          The tow was cut into several shorter lengths of catalytically inert polymer coated glass fibers which  
30 were selectively heat activated by about 10 seconds exposure to 240°C air emitting from a 6 mm wide nozzle. One length was immersed in a Copper Bath to selectively electrolessly deposit strongly adhering copper on those sections of the filaments which were exposed to heat  
35 activation; another length was immersed in a Nickel Bath to selectively electrolessly deposit strongly adhering nickel on those sections of the filaments which were exposed to heat activation.

-34-

## COMPARATIVE EXAMPLE 9

This example serves to illustrate the adverse effect on electroless deposition on films prepared according to prior art practices, e.g. Examples 3 and 7 of U.S. Patent 3,719,490.

Following Example 3 of U.S. Patent 3,719,490, a palladium tetraamine chloride solution was prepared by dissolving 0.7 g palladium (II) chloride in a stirred solution of 10 ml concentrated aqueous ammonia and 70 ml distilled water; concentrated hydrochloric acid was added to adjust the solution to pH 6; water was added to provide 193.8 g of a 0.5 percent solution of palladium tetraamine chloride. A piece of paper was dipped into the solution and dried in room temperature air. One side of the paper was exposed for 2 minutes at 1 cm to a 450 watt mercury lamp then immersed in a Nickel Bath. Nickel was electrolessly deposited only on the light exposed side of the paper, indicating that palladium tetraamine chloride is photoactivatable.

Following Example 7 of U.S. Patent 3,719,490 a film forming solution was prepared by combining 10 g of 5 percent aqueous solution of polyvinyl alcohol (2,000 M.W., 75 mole percent hydrolyzed), 10 ml of the 0.5 percent solution of palladium tetraamine chloride and 1 ml of 1 percent solution of boric acid. Wet films (25 microns and 250 microns thick) of the film forming solution were cast onto PET sheets and dried in room temperature air. Films exposed for 15 minutes at about 25 cm to a 450 watt mercury lamp were immersed in a Copper Bath or a Nickel Bath for about 4 minutes; no metal was deposited on any of the films. Films were heated in 160° C air for 10 minutes and immersed in a Copper Bath or a Nickel Baths for about 4 minutes; blistered (i.e. nonadhering) metal was deposited on the films.

## EXAMPLE 10

This example illustrates the preparation of films according to this invention at the same high weight

-35-

ratio of polymer/palladium, i.e. about 23:1, employed in comparative Example 9.

A catalytic metal solution was prepared from 0.063 g palladium (II) acetate, 0.07 g potassium acetate, 2 ml water and 10 ml acetonitrile. A water soluble polymer solution was prepared from 0.68 g polyvinyl alcohol (2000 M.W., 75 mole percent hydrolyzed) 0.1 g Triton X-100 polyoxyethylene and about 36 g water. The catalytic metal solution, followed by 50 ml rinse water and 0.1 ml triethylamine was mixed with the water soluble polymer solution to provide a film forming solution which was cast as 25 micron thick films onto a sheet of PET and dried in room temperature air. When such films were exposed for 45 seconds or 15 minutes at about 25 cm from a 450 watt mercury lamp and immersed in a Copper Bath or a Nickel Bath, no metal was deposited onto the films. Another such film was heated in 160 °C air for 10 minutes and immersed in a Nickel Bath for about 4 minutes; a strongly adhering (unblistered) layer of nickel was deposited on the film.

#### EXAMPLE 11

This example illustrates the utility of a variety of Group 8 metals in the practice of this invention.

A catalytic metal solution was prepared from 0.098 g platinum (II) bis(acetonitrile) dichloride, 0.03 g sodium acetate, 2 ml of water and 17.7 ml of acetonitrile. A water soluble polymer solution was prepared from 0.25 g hydroxypropyl methylcellulose, 0.075 g triethylamine and about 38 g water. The catalytic metal solution, followed by 42 ml of rinse water, was mixed with the water soluble polymer solution to provide a film forming solution which was cast as a 25 micron thick wet film onto a PET sheet which was dried in room temperature air to provide a dry film which was catalytically inert to electroless deposition in a Copper Bath and a Nickel Bath. After heat activation for 3 minutes in a forced air oven at 180 °C, the film

-36-

was immersed in a Copper Bath providing bright electrolessly deposited copper on the surface.

Another catalytic metal solution was prepared from 1 g iridium (III) chloride hydrate, 0.64 g sodium acetate, 2 ml of water and 10 ml of acetonitrile. A water soluble polymer solution was prepared from 0.25 g hydroxypropyl methylcellulose, 0.075 g triethylamine and about 25 g water. The catalytic metal solution, followed by 15 ml of rinse water, was mixed with the water soluble polymer solution to provide a film forming solution which was cast as a 25 micron thick wet film onto a PET sheet which was dried in room temperature air to provide a dry film which was catalytically inert to electroless deposition in a Copper Bath and a Nickel Bath. After heat activation for 3 minutes in a forced air oven at 180° C, the film was immersed in a Copper Bath providing bright electrolessly deposited copper on the surface.

#### EXAMPLE 12

This example illustrates the preparation of a catalytically inert crosslinked polymeric film according to this invention.

A catalytic metal solution was prepared from 0.03 g palladium (II) acetate, 0.02 g potassium acetate, 1.5 ml water, 10 ml acetonitrile and 0.2 g terephthalic aldehyde, a crosslinking agent for cellulosic polymer. A water soluble polymer solution was prepared from 0.3 g hydroxypropyl methylcellulose, 0.09 g triethylamine and about 80 ml water. The catalytic metal solution was mixed with the water soluble polymer solution to provide a film forming solution which was cast as a 25 micron thick wet film onto a PET sheet which was dried in room temperature air to provide a dry, crosslinked cellulosic film which was catalytically inert to electroless deposition in a Copper Bath and a Nickel Bath. The catalytically inert film was catalytically activated by heating for 10 minutes in a 160° C forced air oven. The catalytically active film was immersed for 90 seconds in a 3 percent sodium hypophosphite solution to reduce the

-37-

catalytic metal; then immersed for 4 minutes in a 60° C Nickel Bath resulting in an adherent coating of electrolessly deposited nickel over the entire surface of the film.

5

## COMPARATIVE EXAMPLE 12

The procedure of Example 12 was repeated except that the terephthalic aldehyde was not included in the film forming solution. The catalytically active cellulosic film was half immersed in the hypophosphite  
10 catalytic metal reducing solution, then immersed in a Nickel Bath resulting in electrolessly deposited nickel on that part of the film which was not immersed in the hypophosphite solution. Nickel was not electrolessly deposited on that part of the film which was immersed in  
15 the hypophosphite solution indicating the tendency of a non-crosslinked water soluble polymer to wash away from a substrate.

## EXAMPLE 13

This example illustrates the preparation of a  
20 copper coated polymeric fiber using the films of this invention.

A catalytic metal solution was prepared from 1.25 g palladium (II) acetate, 1.25 g sodium acetate, 10 ml water and 50 ml acetone. A water soluble polymer  
25 solution was prepared from 2 g polyvinyl alcohol (2,000 M.W., 75 percent hydrolyzed) and about 900 ml water. The catalytic metal solution, followed by 20 ml of rinse water, 2.5 ml triethylamine and 1 ml of Triton X-100 polyoxyethylene surfactant, was mixed with the water  
30 soluble polymer solution to provide a film forming solution comprising about 0.2 percent PVOH and about 0.06 percent palladium.

A 1.2 m long tow of about 960,000 acrylic fiber (1 denier per filament) was washed in surfactant water  
35 (1/8 ml Triton X-100 polyoxyethylene surfactant/liter), rinsed in water and dried in room temperature air. The tow was immersed in the film forming solution for 5 minutes, passed through a wringer to remove excess

-38-

solution and hung to dry in room temperature air. The dried tow was activated by exposure to 120° C air for 30 minutes. The activated tow was immersed in a 2 percent caustic/formaldehyde solution for 2 minutes, then  
5 immersed in a Copper Bath for 2.5 hours providing copper coated fiber (56 percent copper). The Copper Bath was replenished with copper, base and formaldehyde periodically over the duration of the immersion.

## EXAMPLE 14

10 This example illustrates the unique properties of metal coatings electrolessly deposited on films according to this invention.

A 2200 filament tow of 2.2 denier acrylic fiber was washed in acidic methanol, immersed in a film  
15 forming solution comprising PVOH and palladium, dried at room temperature, and heated at 150° C and immersed in a caustic/formaldehyde solution to provide acrylic fibers coated with a PVOH film having catalytically active palladium on the surface (Sample 14A). A portion of the  
20 tow immersed in a Copper Bath for 20 minutes provided 18 wt percent copper coated fibers (SAMPLE 14B); another portion immersed for 40 minutes provided 30 wt percent copper coated fibers (SAMPLE 14C); and another portion immersed for 60 minutes provided 37 wt percent copper  
25 coated fibers (SAMPLE 14D). The results of tensile analysis reported in Table 5 show strong adhesion of an exceptionally ductile copper coating on the acrylic fiber substrate with fiber rupture originating in the copper coating and propagating to the fiber substrate  
30 through the metal/substrate interface causing the fiber substrate to fail at a lower elongation than non-coated fiber. Such strong adhesion of electrolessly deposited copper on a non-etched substrate is unexpected in view of the general quality of adhesion commonly observed  
35 with metal electrolessly deposited according to prior art practices. The results also show an unexpectedly high ductility of the electrolessly deposited copper, e.g. about 12-16 percent, which is in the range of



-39-

ductility for electrolytically deposited copper. This is surprising in view of published values of the ductility of electrolessly deposited copper being about 3.5 percent and the ductility of electrolytically deposited copper being about 12.6-16.5 percent; see Nakahara et al., "Microstructure and Ductility of Electroless Copper Deposits", Acta Metall. Vol. 31, No. 5, pp. 713-724 (1983).

TABLE 5

10			<u>Load at</u>	<u>Elongation</u>
	<u>SAMPLE</u>	<u>WT% Cu</u>	<u>Failure</u>	<u>at Failure</u>
	14A	0%	9.26 g	18.1%
	14B	18%	8.04 g	15.8%
	14C	30%	7.71 g	15.3%
15	14D	37%	7.19 g	12.3%

To confirm the strong adhesion of the electrolessly deposited copper a confirming tensile analysis was conducted on two 40 mm lengths of electrolessly deposited copper coated acrylic fiber prepared according to this invention (37 and 54 weight percent copper and exhibiting an initial electrical resistance of 11 ohm/cm and 14 ohm/cm, respectively). The fibers were subjected to tensile analysis at 4 mm/min strain rate (10 percent strain/min). The copper coated fibers experienced electrical conductivity failure at 8.4-10.6 percent strain and mechanical failure at 11.6-11.2 percent strain, respectively. This indicated that the electrolessly deposited copper on these fibers exhibited a ductility of about 8.4-10.6 percent.

## EXAMPLE 15

This example illustrates the utility of metal coated textile articles according to this invention. Non-woven fabric of nylon, acrylic and graphite fiber, woven nylon ripstop fabric and polyester taffeta fabric were scoured, e.g. with alcohol to remove processing oils, and immersed in an aqueous solution of PVOH and palladium according to this invention. The fabrics were

-40-

air dried to provide fabrics with catalytically inert films which were thermally activated and immersed in a depleted Copper Bath containing only about 1-2 g/l copper and maintained at room temperature or a depleted

5 Nickel Bath containing only about 2-3 g/l nickel and maintained at 55° C to provide electrolessly deposited metal coatings of about less than 1 micron, e.g. 0.2-0.7 microns thick. As indicated in Table 6, the metal on certain of the fabrics was overcoated with a second

10 layer of metal, e.g. tin by replacement of copper in a stannous chloride solution promoted by thiourea, nickel and copper by electrolessly deposition and silver by replacement of copper. Certain of the fabrics were tested for environmental resistance of the metal coating

15 by exposure to weathering according to ASTM G26 for between 322 and 450 hours. The surface resistivities reported in Table 6 illustrate the superior electrical properties of the metal coatings of this invention, including the surprisingly high resistance to

20 environmental oxidation especially for copper. The range of resistivities is generally proportional to the relative conductivity of the outer metal layer.

TABLE 6

25	<u>Textile</u>	<u>Metal Coating</u> <u>inner/outer</u>	<u>Surface Resistivity</u>	
			<u>initial</u>	<u>weathered</u>
	nylon, nonwoven	Cu	0.04 ohm	0.29 ohm
	nylon, nonwoven	Cu/Sn	0.1	--
	nylon, nonwoven	Cu/Ni	0.23	--
	acrylic, nonwoven	Cu/Ni	0.3	0.7
30	acrylic, nonwoven	Cu/Sn	0.3	3.1
	acrylic, nonwoven	Ni	1.3	15
	graphite, nonwoven	Cu/Ni	0.09	--
	nylon, ripstop	Cu	0.04	0.43
	nylon, ripstop	Cu/Ni	0.13	--
35	nylon, ripstop	Cu/Ag	0.07	0.41
	polyester, taffeta	Cu/Ni	0.04	--

The utility of such metal coated textiles in electromagnetic radiation shielding applications, e.g.

40 in equipment housings or on walls as a wallpaper backing, is illustrated in the results of far field shielding testing conducted between 0.1-10 gigahertz in

-41-

accordance with MIL-STD-285 using a 60x60 cm port. Each sample was prepared by gluing with conventional wallpaper paste three strips of metal coated nylon non-woven fabric resulting in a sample having two  
5 overlapping seams (about 4 cm wide). Shielding effectiveness was in proportion to the relative conductivity of the metal coating with copper coated fabric exhibiting shielding of 80-90 dB; tin over copper coating, 70-80 dB; and nickel over copper coating, 60-  
10 70 dB. The copper coated fabric comprised about 15 g/m<sup>2</sup> copper, exhibited air permeability, high strength, good adhesion, e.g. to a backing such as wallpaper, and about 95 percent of the shielding effectiveness of a foil containing the same amount of metal per unit area; the  
15 equivalent metal foil would be 1.7 microns thick which is too fragile to handle, would not adhere well to a backing and would not be permeable to air.

## EXAMPLE 16

This example illustrates the invention using an  
20 aqueous solution of catalytic metal and a dispersed ionomer. The procedure of the above Example 1 was essentially repeated except that an aqueous solution (1 weight percent polymer) was prepared mixing a catalytic metal solution (prepared by adding 0.05 g palladium  
25 acetate to a mixture of 2 drops of water and 2 ml of acetone) and a polymer solution (prepared by adding 21 g water and 0.05 g of 25 percent Triton X-100 polyoxyethylene to 1.79 g of a 28 weight percent dispersion of Eastman AQ 55D polyester ionomer  
30 containing sulfonimide units obtained from Eastman Chemical Company), followed by 25 ml of rinse water. The aqueous solution was coated onto a PET sheet using a 1 mil film applicator, air dried at ambient temperature, thermally activated in an air oven at 160° C for 10  
35 minutes, then immersed in a diluted Copper Bath for 2 minutes. In a test of copper adhesion using common adhesive tape, the adhesive was pulled off the tape and transferred onto the copper.

-42-

## EXAMPLE 17

This example illustrates the utility of the solutions of this invention in providing printed metal on substrates. An aqueous solution according to this invention containing 0.28 weight percent HPMC and 0.09 weight percent palladium was prepared by mixing a catalytic metal solution (prepared by adding 14.4 g palladium acetate to a mixture of 120 ml of water and 908 ml of acetone) and a polymer solution (prepared by adding 4732 g water and 8.25 g of 25 percent polyoxyethylene obtained from Texaco as Surfonic N95 to 2240 g of a aqueous solution 1 weight percent of HPMC obtained from Dow as J75MS and 0.3 weight percent of triethanolamine as a solubilizing aid). The aqueous solution was coated onto a gravure roll (engraved with a printed circuit test pattern identified as IPC-A-42) and printed onto a PET film, the coating of aqueous solution was dried to a catalytically inert film which was thermally activated by exposure to 290 °C air for about 12 seconds and then immersed in a depleted Copper Bath containing about 1.5 g/l copper and maintained at about 30 °C, resulting in good quality copper printed circuits on the PET sheet.

While specific embodiments have been described, it should be apparent to those skilled in the art that various modifications thereof can be made without departing from the true spirit and scope of the invention. Accordingly, it is intended that the following claims cover all such modifications within the full inventive concept.

-43-

## WHAT IS CLAIMED IS:

1. A catalytically inert film formed from an aqueous solution comprising polymer and catalytic metal of Group 8; wherein said film can be selectively  
5 activated to catalyze electroless deposition by application of heat.
2. A film according to claim 1 wherein uniformly dispersed catalytic metal is detectable on the surface of said film by ESCA and the concentration of metal on  
10 the surface as measured by ESCA varies less than 50 percent from the average concentration of metal on the surface.
3. A film according to claim 1 adapted to be selectively activated to catalyze electroless deposition  
15 by impinging selected surface areas of said film with air having a temperature of about 240° C at a velocity of about 10 meters/second for up to about 10 seconds; whereby, after immersion in a solution comprising 2 wt percent sodium hydroxide and 2 wt percent formaldehyde  
20 for about 2 minutes, said selected areas will comprise clusters of reduced catalytic metal wherein more than about 80 percent of the catalytic metal will be present in clusters which are not detectable by transmission electron microscopy capable of detecting palladium  
25 clusters as small as 14 +/- 4 Angstroms; and whereby said selected areas will be catalytically active so that copper having ductility greater than 8 percent and essentially no copper (I) oxide will be uniformly electrolessly deposited on said selectively exposed  
30 surfaces from an agitated solution comprising about 8 grams/liter formaldehyde, about 4 grams/liter copper, and about 0.12 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and about 35° C.
4. A film according to claim 1 wherein said  
35 polymer is water soluble and has nucleophilic groups that form weaker coordinate bonds with said metal than coordinate bonds between palladium and polyethyleneimine or gelatin.

-44-

5. A film according to claim 5 wherein said polymer comprises units selected from the group consisting of vinylalcohol units, cellulosic units, oxyethylene units, oxypropylene units or mixtures thereof or mixtures of such polymers; said metal is palladium; and said polymer and said metal are in the weight ratio of at least about 3:1.

6. A catalytically inert film according to claim 1 formed from an aqueous solution comprising polymer and palladium in the weight ratio of said polymer to palladium of at least 3:1; wherein said polymer is selected from the group consisting essentially of

(i) a water soluble polymer selected from the group consisting of a cellulosic polymer, a vinyl alcohol polymer, an oxyolefin polymer or mixtures thereof;

(ii) an aqueous emulsion comprising a surfactant and a water insoluble polymer capable of forming a coherent film at a temperature of less than about 200° C from said aqueous emulsion;

(iii) a polysilicon; and

(iv) a mixture of a group (i) water soluble polymer and a crosslinking agent for said group (i) water soluble polymer;

wherein said film is essentially devoid of visible light-sensitive compounds such that a catalytic surface is not provided by exposure to radiation equivalent of 8 hours of exposure at a distance of 1 meter from four 40 watt standard fluorescent lamps; and wherein selected areas of said film can be activated to electroless deposition by applying heat such that uniformly dispersed catalytic metal is detectible on the surface of said selected areas by ESCA and such that the concentration of catalytic metal on the surface as measured by ESCA varies less than a 50 percent from the average concentration of said metal on the surface; and wherein, when heat is applied by impinging said film with air at a temperature of about 240° C at a velocity

-45-

of about 10 m/sec for about 10 seconds, heated areas of said film will be so catalytically active that copper having ductility greater than 8 percent and essentially no copper (I) oxide will be uniformly electrolessly deposited on said selectively exposed areas from an agitated solution comprising about 8 grams/liter formaldehyde, about 4 grams/liter copper, and about 6.12 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and 35° C; and wherein, after said exposure and immersion of said film in a solution of 2 wt percent sodium hydroxide and 2 wt percent formaldehyde for about 2 minutes, exposed areas of said film will comprise clusters of reduced catalytic metal wherein more than about 80 percent of the catalytic metal will be present in clusters which are not detectable by transmission electron microscopy capable of detecting palladium clusters as small as 14 +/- 4 Angstroms.

7. A film comprising catalytically activated surface area formed from an aqueous solution comprising polymer and catalytic metal of Group 8 in a weight ratio of at least about 3:1; wherein said area was activated to catalyze electroless deposition by applying heat to a catalytically inert area; and wherein uniformly dispersed catalytic metal is detectible on the surface of said area by ESCA and the concentration of metal on said area as measured by ESCA varies less than 50 percent from the average concentration of metal on said area.

8. A film according to claim 8 wherein, after immersion of said film in a solution comprising 2 wt percent sodium hydroxide and 2 wt percent formaldehyde for about 2 minutes, catalytically activated surface area will comprise clusters of reduced catalytic metal wherein more than about 80 percent of the catalytic metal will be present in clusters which are not detectable by transmission electron microscopy capable of detecting palladium clusters as small as 14 +/- 4

-46-

Angstroms; and wherein copper exhibiting ductility greater than 8 percent and essentially no copper (I) oxide will be uniformly electrolessly deposited on said catalytically active surface area from an agitated  
5 solution comprising about 8 grams/liter formaldehyde, about 4 grams/liter copper, and about 0.12 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and about 35° C.

9. An article comprising metal electrolessly  
10 deposited on areas of a film, wherein said film was formed as a catalytically inert film from an aqueous solution of polymer and Group 8 metal in the weight ratio of polymer to Group 8 metal of at least 3:1 and which has been catalytically activated to electroless  
15 deposition, wherein the interface of said electrolessly deposited metal and said film is essentially devoid of oxide of said electrolessly deposited metal.

10. An article according to claim 9 comprising copper or nickel electrolessly deposited on a film  
20 formed from an aqueous solution of palladium and water soluble polymer comprising units selected from the group consisting of vinylalcohol units, cellulosic units, oxyethylene units, oxypropylene units or mixtures thereof or mixtures of such polymers.

25 11. An article according to claim 9 comprising a fibrous substrate, which, when uncoated, exhibits tensile failure at a strain higher than the strain for tensile failure of said electrolessly deposited metal, wherein said electrolessly deposited metal is so adhered  
30 to said substrate that said electrolessly deposited metal-coated substrate exhibits tensile failure at a strain less than said strain for tensile failure of said substrate when uncoated; said tensile failure being determined at strain of 10 percent per minute.

35 12. An article according to claim 9 wherein said electrolessly deposited metal is copper exhibiting ductility greater than about 8 percent.



-47-

13. An article according to claim 12 wherein said ductility is at least about 10 percent.

14. A metal-coated textile article comprising metal electrolessly deposited on a fibrous substrate,  
5 wherein said metal exhibits a surface resistivity not greater than 0.1 ohms.

15. An article according to claim 14 wherein, after exposure to 300 hours of weathering according to ASTM Standard Practice G-26, said metal exhibits surface  
10 resistivity of not more than 15 ohms.

16. An article according to claim 15 wherein said surface resistivity is not more than 3 ohms.

17. An article according to claim 16 wherein said electrolessly deposited metal is copper, nickel or  
15 silver and said fibrous substrate is fiber, yarn, tow, sliver, woven fabric or non-woven fabric.

18. An article according to claim 17 wherein said metal is copper which is coated with at least one outer layer of nickel, tin, silver, gold, palladium, platinum,  
20 iron or zinc.

19. An aqueous catalyst solution for forming catalytically inert films which can be selectively activated to catalyze electroless deposition of metal comprising (a) water soluble polymer or an emulsion of a  
25 water-insoluble polymer, (b) a water soluble compound of a Group 8 metal and (c) non-catalytic compound providing a Group 8 metal coordination ligand; wherein said polymer and Group 8 metal are in proportions such that the weight ratio of polymer to metal is at least 3:1;  
30 wherein said solution is adapted to forming catalytically inert, dry films which can be activated to catalyze electroless deposition of bright copper from an agitated solution comprising about 8 grams/liter formaldehyde, about 4 grams/liter copper, and about 0.12  
35 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and about 35° C.

20. A solution according to claim 19 comprising not more than 1 percent by weight of said polymer

-48-

comprising units selected from the group consisting of vinylalcohol units, cellulosic units, oxyethylene units, oxypropylene units or mixtures thereof or mixtures of such polymers.

- 5           21. A solution according to claim 20 wherein said Group 8 metal is palladium and said non-catalytic compound comprises acetone, acetonitrile, or Group 1 or Group 2 metal salt of coordinating ligand which is acetate, chloride or nitrate.
- 10           22. A solution according to claim 19 further comprising ammonia, a primary, secondary or tertiary amine or an inorganic hydroxide.
23. A solution according to claim 19 having a viscosity of at least 50 centipoises at 25° C when  
15 measured with a Brookfield No. 1 spindle rotating at 100 rpm.
24. A solution according to claim 19 having a viscosity less than 50 centipoises at 25 °C when  
20 measured with a Brookfield No. 1 spindle rotating at 100 rpm.
25. A method of preparing a catalytically inert, catalytically activatable film comprising:
- (a) depositing on a substrate a film-forming aqueous solution comprising polymer and a water soluble  
25 compound of a catalytic metal of Group 8 in the weight ratio of polymer to Group 8 metal of at least 3:1;
- (b) drying said solution to form a catalytically inert film comprising said polymer and said metal;  
wherein said film can be selectively activated by heat  
30 to catalyze electroless deposition of metal.
26. A method according to claim 25 wherein said drying is effected at a temperature less than the boiling point of water in said solution to provide  
uniformly dispersed catalytic metal detectible on the  
35 surface of said film by ESCA wherein the concentration of said metal on the surface as measured by ESCA which varies less than 50 percent from the average concentration of metal on the surface.

-49-

27. A method of preparing catalytically active film comprising:

(a) depositing on a substrate a film-forming aqueous solution comprising polymer and water soluble  
5 compound of a catalytic metal of Group 8 in the weight ratio of polymer to metal of at least 3:1;

(b) drying said solution to form a catalytically inert film comprising said polymer and said metal;

(c) activating at least selective areas of said  
10 film to catalyze electroless deposition of metal.

28. A method according to claim 27 wherein said activating comprises exposing the surface of said film to a fluid at a temperature in the range of about 150° C to about 500° C for sufficient time to catalytically  
15 activate portions of said film exposed to said fluid so that copper having ductility greater than 8 percent and essentially no copper (I) oxide will be uniformly electrolessly deposited on said exposed surfaces from an agitated solution comprising about 8 grams/liter  
20 formaldehyde, about 4 grams/liter copper, and about 0.12 M ethylenediaminetetraacetic acid and which is maintained at pH 11.5-12.5 and 35° C; wherein said activating is effected so that, after said activating and immersing the film in a solution comprising 2 wt  
25 percent sodium hydroxide and 2 wt percent formaldehyde for about 2 minutes, selectively exposed areas of said film will comprise clusters of reduced catalytic metal wherein more than about 80 percent of the catalytic metal will be present in clusters which are not  
30 detectable by transmission electron microscopy capable of detecting palladium clusters as small as 14 +/- 4 Angstroms.

29. A method according to claim 27 wherein said drying is effected at a temperature less than the  
35 boiling point of water from said solution.

30. A method according to claim 29 wherein said drying is effected at less than about 30° C.

1/3

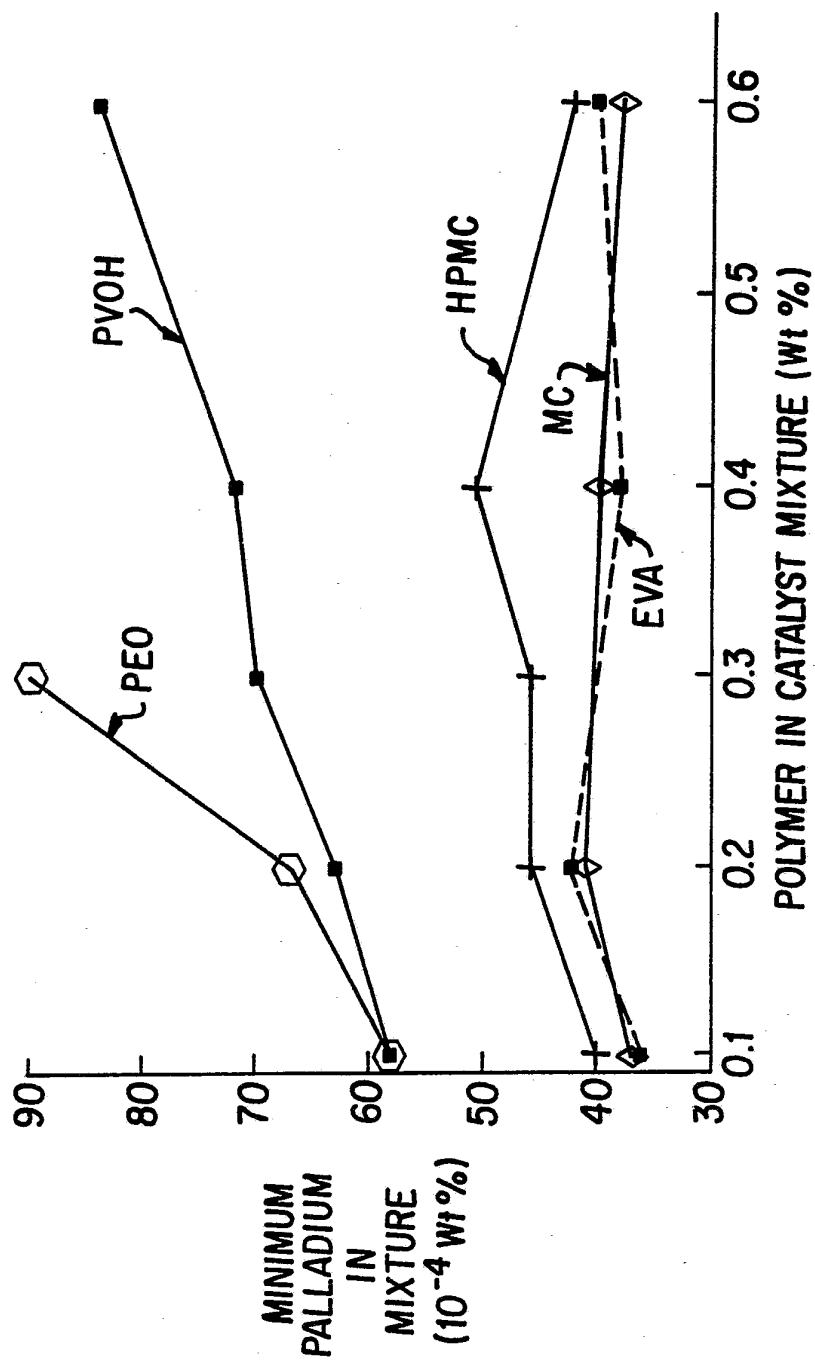


FIG. 1

2/3

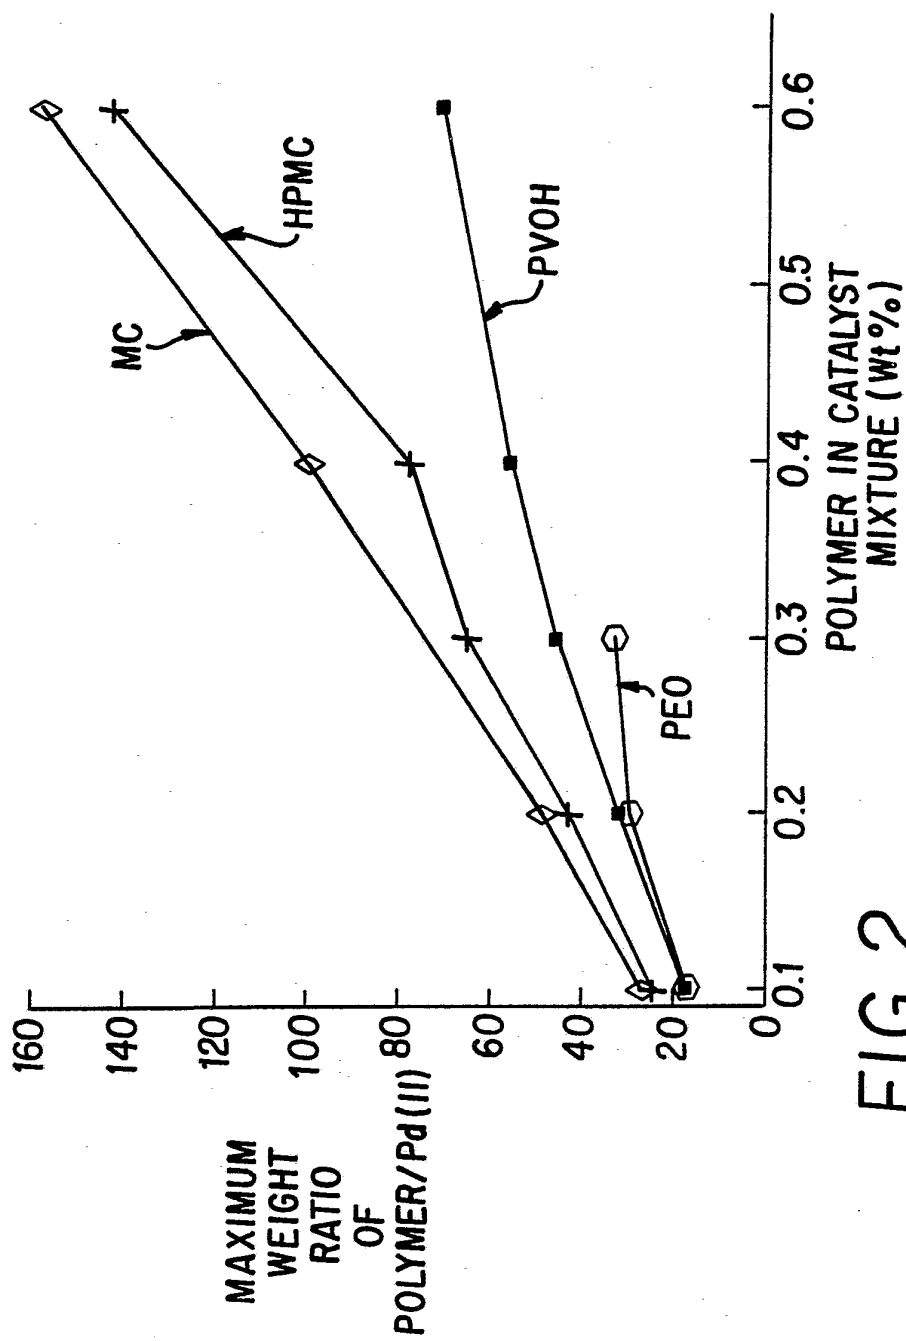


FIG. 2

3/3

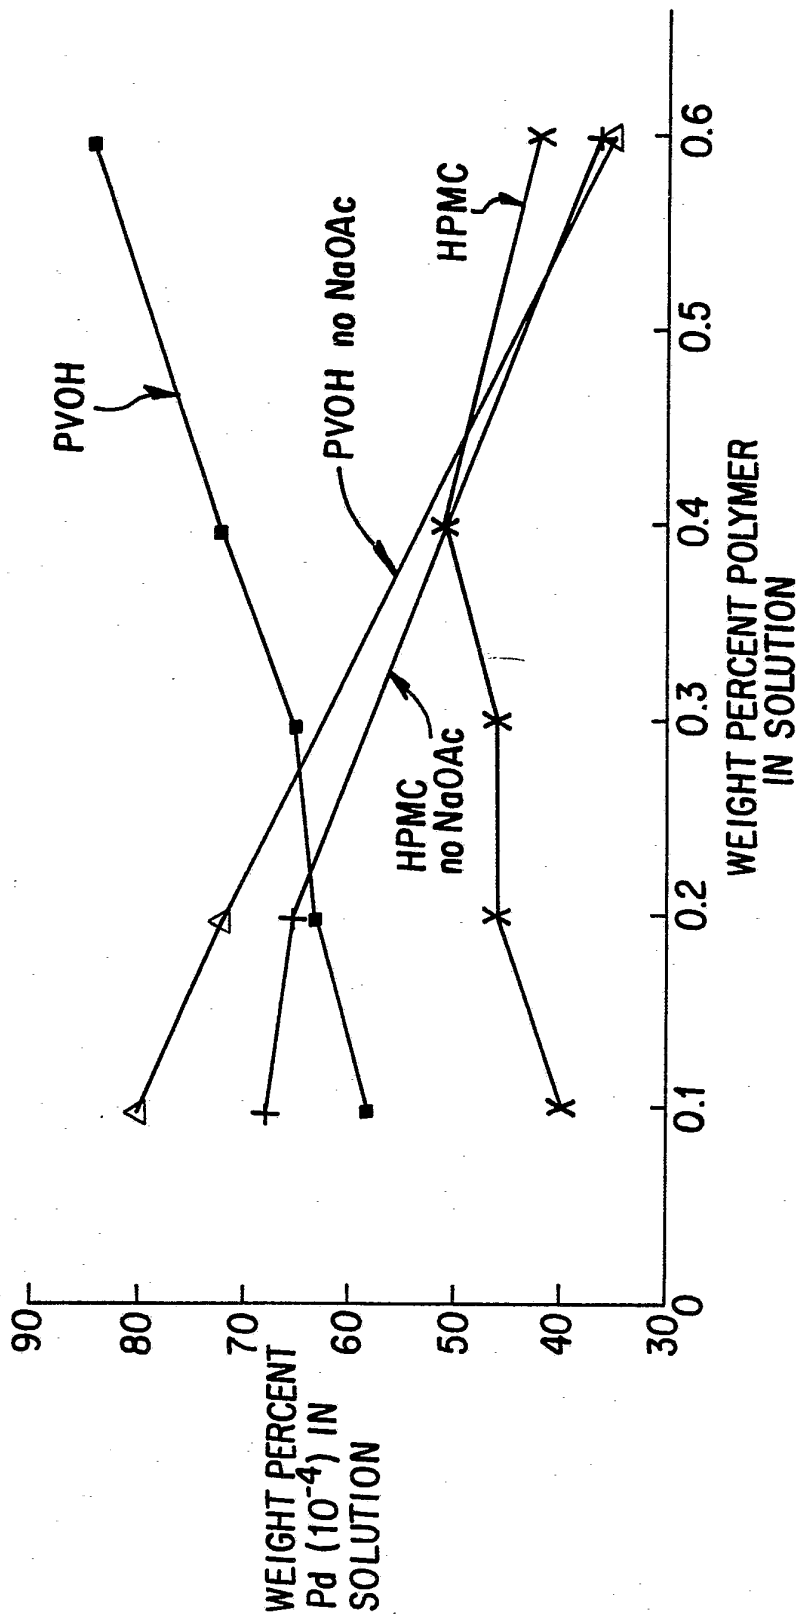


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 90/07340

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC IPC <sup>5</sup> : C 23 C 18/30														
<b>II. FIELDS SEARCHED</b> <div style="text-align: right; font-size: small;">Minimum Documentation Searched <sup>7</sup></div> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none; vertical-align: top;">IPC<sup>5</sup></td> <td style="border: none; vertical-align: top;">C 23 C, D 06 Q</td> </tr> </table> <div style="text-align: center; font-size: x-small; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched <sup>8</sup></div>			Classification System	Classification Symbols	IPC <sup>5</sup>	C 23 C, D 06 Q								
Classification System	Classification Symbols													
IPC <sup>5</sup>	C 23 C, D 06 Q													
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>9</sup> <table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th style="width: 10%;">Category <sup>9</sup></th> <th style="width: 70%;">Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup></th> <th style="width: 20%;">Relevant to Claim No. <sup>13</sup></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>           US, A, 4701351 (JACKSON)            20 October 1987            see column 1, lines 52-54; column 3, example 3  <div style="text-align: center;">--</div> </td> <td style="text-align: center; vertical-align: top;">1,9,25,27</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>           IBM Technical Disclosure Bulletin,            vol. 11, no. 8, January 1969,            T.F. Saunders et al.: "Mask for palladium chelate polymer use in circuits",            see page 1024  <div style="text-align: center;">--</div> </td> <td style="text-align: center; vertical-align: top;">1,9,25,27</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>           US, A, 3930109 (BRANDT)            30 December 1975            see column 9, example 5  <div style="text-align: center;">--</div> <div style="text-align: right;">./.</div> </td> <td style="text-align: center; vertical-align: top;">1,9,25,27</td> </tr> </tbody> </table>			Category <sup>9</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	X	US, A, 4701351 (JACKSON) 20 October 1987 see column 1, lines 52-54; column 3, example 3 <div style="text-align: center;">--</div>	1,9,25,27	X	IBM Technical Disclosure Bulletin, vol. 11, no. 8, January 1969, T.F. Saunders et al.: "Mask for palladium chelate polymer use in circuits", see page 1024 <div style="text-align: center;">--</div>	1,9,25,27	X	US, A, 3930109 (BRANDT) 30 December 1975 see column 9, example 5 <div style="text-align: center;">--</div> <div style="text-align: right;">./.</div>	1,9,25,27
Category <sup>9</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>												
X	US, A, 4701351 (JACKSON) 20 October 1987 see column 1, lines 52-54; column 3, example 3 <div style="text-align: center;">--</div>	1,9,25,27												
X	IBM Technical Disclosure Bulletin, vol. 11, no. 8, January 1969, T.F. Saunders et al.: "Mask for palladium chelate polymer use in circuits", see page 1024 <div style="text-align: center;">--</div>	1,9,25,27												
X	US, A, 3930109 (BRANDT) 30 December 1975 see column 9, example 5 <div style="text-align: center;">--</div> <div style="text-align: right;">./.</div>	1,9,25,27												
<div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p>* Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"Z" document member of the same patent family</p> </div> </div>														
<b>IV. CERTIFICATION</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;">           Date of the Actual Completion of the International Search  <b>9th April 1991</b> </td> <td style="width: 50%; border: none; vertical-align: top;">           Date of Mailing of this International Search Report  <div style="text-align: center; font-size: large;"><b>30.05.91</b></div> </td> </tr> <tr> <td style="border: none; vertical-align: top;">           International Searching Authority  <div style="text-align: center;"><b>EUROPEAN PATENT OFFICE</b></div> </td> <td style="border: none; vertical-align: top;">           Signature of Authorized Officer  <div style="display: flex; align-items: center;"> <div> <b>Mme Dagmar FRANK</b> </div> </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <b>9th April 1991</b>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: large;"><b>30.05.91</b></div>	International Searching Authority <div style="text-align: center;"><b>EUROPEAN PATENT OFFICE</b></div>	Signature of Authorized Officer <div style="display: flex; align-items: center;"> <div> <b>Mme Dagmar FRANK</b> </div> </div>								
Date of the Actual Completion of the International Search <b>9th April 1991</b>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: large;"><b>30.05.91</b></div>													
International Searching Authority <div style="text-align: center;"><b>EUROPEAN PATENT OFFICE</b></div>	Signature of Authorized Officer <div style="display: flex; align-items: center;"> <div> <b>Mme Dagmar FRANK</b> </div> </div>													

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	GB, A, 1153756 (PHOTOCIRCUITS CORPORATION) 29 May 1969 see page 3  --	
A	EP, A, 0233145 (CIBA-GEIGY AG) 19 August 1987  -----	



**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9007340  
SA 43353

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the European Patent Office EDP file on 14/05/91  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4701351	20-10-87	EP-A- 0250867	07-01-88
		JP-C- 1576884	24-08-90
		JP-B- 2002949	19-01-90
		JP-A- 63004075	09-01-88
US-A- 3930109	30-12-75	BE-A- 780276	06-09-72
		CA-A- 968235	27-05-75
		CH-A- 576346	15-06-76
		DE-A- 2111136	28-09-72
		FR-A, B 2128762	20-10-72
		GB-A- 1390451	16-04-75
		LU-A- 64914	12-09-73
		NL-A- 7202554	12-09-72
		US-A- 3871903	18-03-75
GB-A- 1153756	29-05-69	DE-A, B, C 1521446	08-01-70
		SE-B- 369928	23-09-74
EP-A- 0233145	19-08-87	JP-A- 62192584	24-08-87