



(51) International Patent Classification:

B01J 20/287 (2006.01) **B01J 20/32** (2006.01)
B01D 15/32 (2006.01) **C07K 1/20** (2006.01)
B01J 20/288 (2006.01)

(21) International Application Number:

PCT/CH2013/000050

(22) International Filing Date:

21 March 2013 (21.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

439/12 28 March 2012 (28.03.2012) CH

(71) Applicant: **ZEOCHEM AG** [CH/CH]; Seestrasse 108,
CH-8707 Uetikon am See (CH).

(72) Inventors: **FORRER, Nicola**; Earhartstrasse 13/32, CH-
8152 Glattpark (Opfikon) (CH). **ERDMANN, Mandy**;
Zürcherstrasse 6, CH-8730 Uznach (CH). **GÉTAZ, David**;
Rue de la Tour 53, CH-1867 Ollon (CH). **MORBIDELLI,**
Massimo; Obsthaldenstrasse 63, CH-8046 Zürich (CH).
BERNARDI, Susanna; Via Sicilia 5 - frazione porto, I-
62018 Potenza Picena (Macerata) (IT). **KHALAF, Rushd**;
Schaffhauserstrasse 453, CH-8052 Zürich (CH).

(74) Agent: **E. BLUM & CO. AG**; Vorderberg 11, CH-8044
Zürich (CH).

(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DOPED MATERIALS FOR REVERSE PHASE CHROMATOGRAPHY

(57) **Abstract:** A material for reverse phase chromatography comprises surface modifying apolar and charged groups bound to a solid support, said charged groups being present in amounts of about 0,25 to about 22 % of the surface modifying groups, or in amounts of about 0,01 $\mu\text{mol}/\text{m}^2$ to 0.8 $\mu\text{mol}/\text{m}^2$ referred to the surface of the solid support for a material with a total amount of surface modifying groups of 3.6 $\mu\text{mol}/\text{m}^2$. Such material and suitable purification conditions for active pharmaceutical ingredients (APIs) like peptides can be evaluated by (a) determining the isoelectric point (pI) of the API of interest, (b) choosing a pH in a range where the solid phase material is stable, (c) determining the difference pI-pH and (d) if the difference pI-pH is positive, choosing an anion exchange (AIEX) material, or if the difference pI-pH is negative, choosing a cation exchange (CIEX) material.



Doped materials for reverse phase chromatography

Cross References to Related Applications

5

This application claims the priority of Swiss patent application no. 0439/12, filed March 28, 2012, the disclosure of which is incorporated herein by reference in its entirety.

10

Technical Field

The present invention regards the field of purification of active pharmaceutical ingredients like peptides by means of chromatography, in particular silica gel based materials for reverse phase chromatography.

Background Art

20

Reverse phase chromatography is a broadly used purification method for peptides. Several materials to be used as the stationary phase in liquid chromatography comprise a support or carrier and thereon attached functional groups. Such material is also known as bonded phase. A commonly used carrier is silica gel that may suitably be surface modified by means of suitable silanes. The chemistry of silanes with various surfaces is well studied. A general discussion of the reaction of silanes with the surface of siliceous chromatographic support materials is provided in HPLC Columns: Theory Technology, and Practice, U. D. Neue, Wiley-VCH, Inc., New York (1997). Additional details on the reaction of silanes with porous silicas are disclosed in Characterization and Chemical Modification of the Silica Surface, E. F. Vansant, et al., Elsevier Science B.V. New York (1995). A broad description of the reactions of silanes

with a variety of materials is given in Silica Gel and Bonded Phases, Their Production, Properties and Use in LC, R. P. W. Scott, John Wiley & Sons, New York (1993).

The preparation of bonded phases can be made
5 using monofunctional, bifunctional and trifunctional silanes resulting in differently strong bonded layers.

Irrespective of whether mono- bi- or trifunctional silanes are used, it is not possible to react all the silanol groups with the silylating reagents, due to
10 equilibrium reactions and steric hindrance. Almost complete coverage is only obtained if the silylating reagents are horizontally polymerised. It is reported that even with the most aggressive silanization reactions no more than 50% of the silanol groups can be converted to
15 silylated derivatives.

Most commercially available bonded phases are based on monofunctional silanes because of difficulties in the reproducibility in preparing bonded phases using bi- and trifunctional silanes.

20 Since a significant portion of the original silanol groups remain, these may interact with silanophilic analytes unless they are shielded. A commonly used method to reduce these interactions is the so-called end-capping. Here a small monofunctional silane (e.g.
25 trimethylchloro silane) is reacted with the silicagel surface to provide an additional coverage of the silicagel surface.

US 7,125,488 B2 teaches to solve the hitherto existing problems by providing a polar modified stationary phase material, said material having an inorganic
30 support such as silica gel that is modified with a specific silane providing the polar modification. The polar modifications comprise groups like -O-, -C(O)NH-, -OC(O)NH-, and -(CH₂CH₂O)_n-.

35 Recently, a strong focus on the development of stationary phases with bimodal chemical surface character has been made. Reversed-phase/ion-exchange (RP/IEX)

mixed-mode stationary phases are known and promise great versatility and capability for retaining and separating a variety of charged polar compounds, in addition to more nonpolar, ionic and nonionic analytes. According to the arrangement of functional groups, RP/IEX bimodal columns can be classified into four categories. One type of materials is a mixture of RP and IEX beads. Another type of materials comprises apolar groups and polar groups like amines and carboxylic acids in similar amounts attached to the same bead, a third type of materials comprises apolar chains tipped with polar groups, and a fourth type of mixed-mode materials comprises an anionically or cationically charged group embedded within an apolar chain.

GB 2 074 892 A describes materials with mixed surfaces wherein one kind of ligands is selected from ionic or reversed phase ligands and the second kind is a hydrophilic group like a diol, a diol precursor or an amide.

Also GB 2 431 399 A discloses mixed surfaces with 2 different silyl moieties bonded thereto. Each of these silyl moieties comprises 2 C1-C6 alkyl chains and one further group. In a preferred embodiment said further group is an apolar group on one of the silyl groups and a polar group embedded in apolar chains on the other silyl group.

Also already known are trimodal columns based on nanopolymer silica hybrid technology. Such columns comprise Acclaim® Trinity™ P1 of Dionex. This material consists of high-purity porous spherical silica gel coated with charged (e.g. such as to have cation-exchange functionality) nanopolymer particles and with inner pore areas of the silica gel modified with an organic layer that provides RP and IEX properties.

Other mixed mode materials have been developed and are described under the trademark Kromasil™ (belonging to Akzo Nobel). These one particle-multiple res-

ins stationary phases are described to comprise 50 % or 25 % of a different functionality like polar functionality (CN, NH₂, diol). Although these phases provide better separation in several cases, they are still not satisfactory for a multitude of applications.

CN 101829551 A discloses chromatographic materials bonded with apolar ligands and anionic ligands for use in the separation of melamine from a milk sample and of several phytohormones. The density of anionic groups is disclosed to be 33 to 66 %.

Also already known are materials with enhanced ligand density due to horizontal polymerization. These materials have been found to have much higher ligand density than merely grafted materials. First horizontally polymerized materials were described by Fairbank and Wirth, *Role of surface-adsorbed water in the horizontal polymerization of trichlorosilanes*, Journal of Chromatography A, 830 (1999) 285-291, and further investigated by Li, Carr and Evans, *Studies of retention and stability of a horizontally polymerized bonded phase for reversed-phase liquid chromatography*, Journal of Chromatography A, 868 (2000) 153-167. Adaptation of this technique to different kinds of ligands, i.e. apolar and polar ligands or apolar and ionic ligands is described in WO 2011/012019 and Wei et al., *A new reversed-phase/strong anion-exchange mixed-mode stationary phase based on polar-copolymerized approach and its application in the enrichment of aristolochic acids*, Journal of Chromatography A, 1246 (2012) 129-136.

The problem with such horizontally polymerized materials is that a successful production is dependent on the adsorbed water and thus they have to be produced using a quite complicated procedure that renders them very expensive and thereby unsuitable for preparative applications. In addition, although such materials were successfully applied in the analytical enrichment of

specific aristolochic acids, they failed in preparative application (Wei et al.)

Since the materials of the state of the art are either not satisfactory with regard to the quality of the separation and/or with regard to the retention time and/or - in particular if desired for preparative applications - with regard to their production costs, there still exists a need for improved materials.

Disclosure of the Invention

Hence, it is a general object of the invention to provide a stationary phase material for reverse phase chromatography that is adapted to the purification or separation of specific active pharmaceutical ingredients (API), in particular to the preparative purification or separation of specific API.

It is another object of the present invention to provide a method that enables to choose a suitable stationary phase material and/or suitable elution conditions for API purification by reverse phase chromatography.

Now, in order to implement these and still further objects of the invention, which will become more readily apparent as the description proceeds, the material for reverse phase chromatography is manifested by the features that it comprises surface modifying groups bound to a solid support, said surface modifying groups are not horizontally polymerized and comprise apolar uncharged groups and polar groups, wherein said polar groups are charged groups, said charged groups are either positively charged or negatively charged, and said charged groups are present in amounts of about 0.25 to about 22 % of the surface modifying groups, or in amounts of about 0.01 $\mu\text{mol}/\text{m}^2$ to 0.8 $\mu\text{mol}/\text{m}^2$ referred to the surface of the solid support for a material with a total

amount of surface modifying groups (i.e. apolar uncharged groups and charged groups) of $3.6 \mu\text{mol}/\text{m}^2$.

The total amount of surface modifying groups is determined by standard techniques like elemental analysis and the amounts of charged groups can be determined by ionic titration.

A material for reverse phase chromatography according to the present invention is also termed a doped material or a doped material for reverse phase chromatography or a doped reverse phase material, because it comprises the charged groups in small (doping) amounts of at most 22%, preferably at most 20% or 15% or 10%.

The doping effect seems best if the total surface coverage with apolar and charged groups is not too high, i.e. not as high as obtained with horizontal polymerization. This high surface coverage obtained with horizontal polymerization is assumed to possibly be responsible for the bad results in preparative separation experiments reported in Wei et al.

The term API as used herein designates molecules with apolar and charged groups, in particular peptides, preferably peptides with up to about 50 amino acids (aa).

Since the solid support as such is substantially shielded, any solid support known for chromatographic purposes can be used. Preferred, however, is silica gel due to the silanol groups on the surface that allow easy attaching of the modifying groups via reaction with e.g. silanes. Suitable silanes are e.g. monofunctional silanes like mono-chloro substituted silanes or trifunctional silanes like trimethoxy silanes. Presently, trimethoxy silanes are preferred since they are able to react with up to three neighboring silanol groups thereby shielding the silanol groups and simultaneously strengthening the anchoring of the modifying substituent. In addition, the surface proved to be sufficiently covered with substituents/surface modifying groups even if tri-

functional silanes were used. In addition, hitherto reproducibility problems reported in the state of the art for trifunctional silanes were not observed.

Suitable silica gels are high purity silicagel with porosity of 50 to 300 Å, preferably about 100 Å, and particle sizes from 5 to 100 µm, preferably from 10 to 20 µm.

Preferred apolar uncharged groups are linear C4 to C18 alkyl groups, in particular C8 alkyl groups, although alkenyl and alkynyl groups can also be used. Alkyl groups are preferred since they have maximum freedom of movement.

The charged groups are preferably placed on aliphatic chains of shorter or similar length as the apolar groups to ensure that the charged groups do not dominate the uncharged, apolar groups. Shorter chains may e.g. be shorter for up to 6 CH₂ groups, usually up to 5 CH₂ groups, preferably 3 to 5 CH₂ groups. Therefore, the hydrocarbon chains carrying a charged group may be C1 to C18 chains. Although it is known to embed charged groups into the hydrocarbon chain, presently terminal position or position at the tip of the hydrocarbon chain, respectively, of the substituents is preferred.

The charged substituents have the effect that they repel identically charged amino acids and attract oppositely charged amino acids. While the charge of the charged substituents is not critical, presently singly-charged substituents, like -NR₃⁺ with R = hydrogen or C1-C2 alkyl, or -SO₃⁻ are preferred over multiply charged substituents. Already singly charged substituents have sufficient effect in low amounts.

Dependent on the API to be purified and the separation conditions differently doped reversed phase materials may be suitable. The best material and API purification conditions can be selected by

(a) determining the isoelectric point (pI) of the API of interest,

(b) choosing a pH in a range where the solid phase material is stable,

(c) determining the difference $pI-pH$ and

(d) if the difference $pI-pH$ is positive ($pI > pH$), choosing an anion exchange (AEX) material, or
5 if the difference $pI-pH$ is negative ($pI < pH$), choosing a cation exchange (CEX) material.

Thus the present invention also encompasses

(i) the use of a material for reverse
10 phase chromatography comprising surface modifying groups bound to a solid support, said surface modifying groups comprising apolar uncharged groups and polar groups, wherein said polar groups are positively charged groups, in particular a positively charged material as defined
15 above for reversed phase purification of an API, in particular a protein under conditions wherein $pI > pH$, and

(ii) the use of a material for reverse
phase chromatography comprising surface modifying groups bound to a solid support, said surface modifying groups
20 comprising apolar uncharged groups and polar groups, wherein said polar groups are negatively charged groups, in particular a negatively charged material as defined above for reversed phase purification of an API, in particular a protein, under conditions wherein $pI < pH$.

25 Determining the isoelectric point encompasses the experimental determination, the calculation from the amino acid (aa) sequences, but also the search for respective information in literature or other sources comprising personal knowledge.

30 The pH should be chosen such that the lifetime of the material is not affected. For silica gel a pH between 3 and 9 is preferred, even more preferred is a pH between 4 and 7.

If a material has been chosen, a desired retention time can be fixed and then the eluting conditions
35 can be adapted thereto by determining the ionic strength

of the buffer and/or by determining the solvent system of the mobile phase (eluent system) and the gradient.

Possible eluent systems comprise or consist of at least one polar solvent, preferably a combination of water, such as water of a specific pH, and at least one further polar solvent having a polarity that is lower than the polarity of water. Such less polar solvents may e.g. be chosen from the group comprising or consisting of methanol, ethanol, isopropanol, tetrahydrofuran (thf), acetonitrile and combinations thereof. In a preferred embodiment, not simply water of a specific pH is used but a buffered aqueous solution.

One eluent system that has proved to be suitable for different separation applications is an aqueous buffer and acetonitrile. The starting composition and the end composition of the eluent system as well as the gradient can be found by usual routine methods.

Brief Description of the Drawings

The invention will be better understood and objects other than those set forth above will become apparent when consideration is given to the following detailed description thereof. Such description makes reference to the annexed drawings, wherein:

Figure 1 shows a correlation between anionic functional group ($-\text{SO}_3^-$) in the reaction mixture and anionic functional group attached to the silica gel.

Figure 2 shows a correlation between cationic functional group ($-\text{NR}_3^+$) in the reaction mixture and cationic functional group attached to the silica gel.

Figure 3 shows the effect of buffer concentration (Fig. 3a for 300 mM acetate, Fig. 3b for 500 mM acetate, Fig. 3c for 800 mM acetate) on the retention time of a positively charged API on various columns.

Figure 4 shows the effect of modified acetonitrile gradient on retention time, wherein Fig. 4a shows the retention time of the specific columns using identical elution conditions while Fig. 4b shows that the retention times can be brought together by varying the initial composition and/or the gradient.

Figure 5 shows the selectivity for the separation of insulin/desamido-insulin (insulin $pI=5.3$) on different column materials and at two different pH.

Figure 6 shows preparative purification of synthetic peptide 1 according to Example 5.

Figure 7: shows preparative purification of synthetic peptide 2 according to Example 6.

Figure 8: shows preparative purification of synthetic peptide 3 according to Example 7.

Modes for Carrying Out the Invention

According to the presently preferred method for surface modification, all surface modifying groups are attached simultaneously from a liquid solution comprising the apolar groups and the polar charged groups. Dependent on the substituents used it has been found that the reaction may more or less favor the charged or the apolar groups. Therefore the actually obtained material has to be determined by e.g. ionic titration.

It is also possible to perform the reaction in several steps, i.e. attachment of the apolar groups first, followed by the charged groups or vice versa. In this procedure, however, the reaction conditions have to be selected such that in the first step some available silanol groups are not reacted. In any case, also in a two (or more) step procedure the actually attached ionic groups have to be determined, e.g. by ionic titration.

The preferred and/or obtainable ranges of charged groups may vary from charged group to charged

group. For $-\text{SO}_3^-$ the usual range is from $0.01 \mu\text{mol}/\text{m}^2$ to $0.04 \mu\text{mol}/\text{m}^2$ and for $-\text{NR}_3^+$ the usual range is from $0.01 \mu\text{mol}/\text{m}^2$ to $0.8 \mu\text{mol}/\text{m}^2$ although higher amounts can easily be produced (see examples below). Higher $-\text{NR}_3^+$ -doped materials with e.g. $\text{R} = \text{CH}_3$, however, have been found to be less good (see Figures 3 and 4). The lower limit of the amount of ionic groups is the minimal number of doping ionic groups that has to be present for a visible effect. The upper limit is given by the strength or weakness, respectively, of the adsorption. Thus, higher than the indicated amounts of ionic groups might be used but with possibly worse separation and/or inadequate retention times.

The effect of the doping is that in case of a API that is positively charged (isoelectric point ($\text{pI}-\text{pH}$ = positive, or $\text{pI} > \text{pH}$, respectively) the adsorption on an AIEEX material, e.g. $-\text{NR}_3^+$ doped material, is weak (repulsion) and on a CIEEX material, e.g. $-\text{SO}_3^-$ doped material, strong (attraction) and vice versa.

As indicated above, the apolar groups are preferably at least C4 groups and usually not larger than C18 groups with C8 groups being presently preferred. The charged groups encompass any charged substituent, preferably a charged substituent attached to a C1 to C18 hydrocarbon, more preferred a charged substituent attached to a hydrocarbon having slightly smaller or about the same length as the apolar chain. Due to the fact that the substituent is larger than a hydrogen, the charged substituent carrying group usually and preferably have a slightly shorter chain, e.g. C3 compared to C8 of the apolar group. Without wanting to reduce the scope of the invention by any interpretation, the inventors assume that attaching the ionic groups via a shorter hydrocarbon chain results in a weak shielding of the ionic groups and thus in a lower attraction or repulsion of the molecules in the analyte.

The invention is now further described by means of some examples:

Example 1

Several CIEX and AIEX materials have been prepared by subjecting them to compositions comprising the C8-compound octyltrimethoxysilane and (0%), 5%, 10%, 15% or 50 % of -SO_3^- -charged or -NR_3^+ -charged C3-compound according to standard procedures.

The -NR_3^+ materials (R = methyl) were produced by combining the desired amount of silicagel, octyltrimethoxysilane, N-trimethoxysilylpropyl-N,N,N-trimethylammonium chloride, and p-toluensulfonic acid (catalyst) and boiling under reflux in toluene for 6 hours.

The desired amounts were as follows:

Octyltrimethoxysilane in a concentration of $(1-x) \cdot 5.6 \cdot 10^{-6} \text{ mol/m}^2 \cdot \text{S} \cdot \text{M} \cdot \text{MWt}$, wherein

x is the desired weight percentage of -NR_3^+ groups,

S the specific surface of the silicagel [m^2/g],

M the mass of the silicagel used [g] and

MWt the molecular weight of octyltrimethoxysilane [g/mol].

N-trimethoxysilylpropyl-N,N,N-trimethylammonium chloride was used as a solution of 50% by weight of the silane in methanol and the amount solution used was

$x \cdot 2 \text{ g/g} \cdot \text{M} = x \cdot 2 \cdot \text{M}$, wherein

x is the percentage of the -NR_3^+ groups as described above and

M is the mass of silicagel [g].

p-Toluensulfonic acid (catalyst) was used in a concentration of $8.6 \cdot 10^{-3} \text{ g/g}$ of octyltrimethoxysilane

and N-trimethoxysilylpropyl-N,N,N-trimethylammonium chloride

After 6 hours the material was endcapped, i.e. not reacted, still accessible silanol groups, were reacted with trimethylchloro silane by a standard technique and washed with a series of solvents with different polarities.

The $-\text{SO}_3^-$ -materials were produced by combining the desired amount of silicagel, octyltrimethoxysilane, mercaptopropyltrimethoxysilane, and p-toluensulfonic acid, in toluene and boiling under reflux for 6 hours.

The desired amounts were as follows:

Octyltrimethoxysilane in a concentration of $(1-x) \cdot 5.6 \cdot 10^{-6} \text{ mol/m}^2 \cdot S \cdot M \cdot \text{MWt}$, wherein x is the desired weight percentage of $-\text{SO}_3^-$ groups,

S is the specific surface of the silicagel $[\text{m}^2/\text{g}]$,
M is the mass of silicagel used [g] and
MWt the molecular weight of the silane $[\text{g/mol}]$.

Mercaptopropyltrimethoxysilane was used in a concentration of $x \cdot 5.6 \cdot 10^{-6} \text{ mol/m}^2 \cdot S \cdot M \cdot \text{MWt}$, wherein x is the desired weight percentage of $-\text{SO}_3^-$ groups,

S the specific surface of the silicagel $[\text{m}^2/\text{g}]$,
M the mass of silicagel used [g] and
MWt the molecular weight of the silane $[\text{g/mol}]$.

p-Toluensulfonic acid was used in a concentration of $8.6 \cdot 10^{-3} \text{ g/g}$ of the total amount of octyltrimethoxysilane and mercaptopropyltrimethoxysilane used.

The material was then endcapped by the use of standard techniques and washed with a series of solvent with different polarity.

$-\text{SO}_3^-$ groups were created by oxydizing the mercapto group as follows: The material was put in a solution of 30% by volume acetone in H_2O_2 (30% by weight in water) and kept in the solution for 12 hours at room temperature. Finally the material was washed with water and methanol.

The amount of charged groups attached as a function of the concentration in solution and determined by ionic titration is shown in Figure 1 for the anionic functional group $-\text{SO}_3^-$ and in Figure 2 for the cationic functional group $-\text{NR}_3^+$.

The CIEEX columns thus prepared have been termed C5 (5% anionic groups in solution), C10 (10% anionic groups in solution), C15 (15% anionic groups in solution), C50 (50% anionic groups in solution), and C100 (100% anionic groups in solution), the neutral column RP (0% ionic groups in solution), and the AIEEX columns A5 (5% cationic groups in solution), A10 (10% cationic groups in solution), A15 (15% cationic groups in solution), and A50 (50% cationic groups in solution). The amount of attached charged groups (found by titration) can be derived from Figures 1 and 2.

Example 2

A peptide (synthetic peptide 1) with pI between 11 and 12 was subjected to separation with different columns and different ionic strength of the used acetate buffer of pH 4.8 and identical acetonitrile (AcN) gradient of 0.51 % by volume/minute, starting at about 19 % AcN.

As can be seen from each of the Figures 3a to 3c, the adsorption of a positively charged peptide on $-\text{NR}_3^+/\text{C8}$ materials is low (repulsion) while it is strong on $-\text{SO}_3^-/\text{C8}$ materials (attraction). Several columns were

tested under identical conditions and the retention times compared with each other. As can be seen, the column A15 has almost no adsorption or strong repulsion, respectively, while the material C15 has strong adsorption and thus long retention time. The A15 material is not usable since the peptide of interest does not adsorb while the C15 material is not so good in economic view because the purification process is too slow and requires substantial amount of solvent.

10 As can be seen from a comparison of Figures 3a to 3c, column A15 with about 1 $\mu\text{mol}/\text{m}^2$ has not only an undesirably short retention time of less than 5 minutes but it does also not react to the changes in the ionic strength (buffer concentration). This is another piece of
15 evidence that this material is not suitable for the intended use.

Contrary thereto, the less doped materials reacted quite sensitive to the changed reaction conditions making all of them valuable reversed phase materials. By enhancing the buffer concentration from 300mM
20 acetate to 800mM acetate the retention time on C15 could be reduced from more than 30 minutes to less than 25 minutes. In addition, at high buffer concentration the retention times of all columns came closer indicating that
25 the salt (acetate) shields the charges such that the doped materials behave similar to the not doped RP material.

As already indicated above, only for column A15 no effect was found. Without wanting to be limited by
30 any interpretation, the inventors assume that this unexpected behaviour may indicate that this material is so repulsing that the buffer concentrations used are not sufficient to overcome this repulsion.

35 Example 3

In this example the effect of a changed starting concentration and gradient on the retention

times of the different columns was investigated. In order to minimize the effect of the buffer salt, only 100mM acetate buffer was used. Also in this example the API was synthetic peptide 1 with pI of 11 to 12.

5 The AcN gradient was 0.25 % by volume/minute.

In one experiment, the AcN initial concentration was 22 % AcN (see Figure 4a), in a second experiment the AcN initial concentration was changed to insure retention time $t_R=30 \pm 3$ min (Figure 4b).

10 As can be seen from a comparison of Figure 4a with Figure 4b, the retention times are highly dependent from the initial AcN concentration.

The conditions leading to the results shown in Fig. 4b for all columns are listed in Table 1 below:

15

Table 1:

Column	AcN Start [v%]	AcN End [v%]	gradient time [min]	gradient [v%/min]	retention time [min]
C15	31.7	47.3	61.2	0.25	28.5
C10	29.5	45.1	61.2	0.25	29.8
C5	24.2	39.8	61.2	0.25	32.8
RP	21.9	37.5	62.4	0.25	28.0
A5	14.8	30.4	61.3	0.25	27.2
A10	10.8	26.4	61.2	0.25	28.6
A15	6.3	21.9	61.3	0.25	dead time

20

Example 4

The selectivity of the different columns in the separation of insulin/desamido-insulin (insulin pI=5.3) at pH 4.8 and pH 6.8 was investigated. The results are shown in Figure 5.

25

The experimental conditions were:

- eluent: 240mM acetate (pH 4.8 or 6.8, respectively) and AcN in an amount to ensure a retention time t_R of insulin of about 32 minutes; and

30

- isocratic elution.

The insulin/desamido-insulin selectivity at pH 4.8 was

- $S < 1$ on a CIEX material
- $S > 1$ on the RP
- 5 - $S \approx 1$ on the CIEX-RP materials
- $S \gg 1$ on the AIEX-RP materials

As can be seen from Figure 5, at pH 4.8 (---◆---) the $-NR_3^+/C8$ materials show much enhanced selectivity compared to the pure C8 material. At higher pH (---■---) the selectivity is inversed. Thus, the repulsing materials are better than the attracting materials, i.e. $-SO_3^-/C8$.

Example 5

15 This example describes the purification of a synthetic peptide 1 that was selected for a pI between 11 and 12. The pH of the mobile phase was below the peptide pI, i.e. the peptide was positively charged.

The mobile phase was pH=4.8, 500mM sodium acetate buffer + acetonitrile

The starting concentration and the gradient information is listed in Table 2:

Table 2:

25

Column	AcN Start [v%]	AcN End [v%]	gradient time [min]
C50	28.6	33	80
C5	17	33	80
RP	15.9	32.2	80
A5	13.9	30	80
A10	11.7	26.4	80

Result: As can be seen from Figure 6, by using an AIEX-RP material (A10) the yield could be raised for 25 % at a fixed purity of 94%.

30

Example 6

This example describes the purification of a synthetic peptide 2 that was selected for a pI between 9 and 10. The pH of the mobile phase below the peptide pI, i.e. the peptide was positively charged.

The mobile phase was pH=4.8, 120mM sodium acetate buffer + acetonitrile

The starting concentration and the gradient information are listed in Table 3.

Table 3:

Column	AcN Start [v%]	AcN End [v%]	gradient time [min]
C5	28.6	48.6	80
RP	21.9	39.3	80
A5	17.5	35.7	80
A10	14.8	32.2	80

Result: As can be seen from Figure 7, by using an AIEX-RP material (A10) the yield could be raised for 7.4 % at a fixed purity of 94%.

Example 7

This example describes the purification of a synthetic peptide 3 that was selected for a pI between 4.5 and 5.5. The pH of the mobile phase was above the peptide pI, i.e. the peptide was negatively charged.

The mobile phase was pH=6.5, 100mM ammonium acetate buffer + acetonitrile.

The starting concentration and the gradient information are listed in Table 4.

Table 4:

Column	AcN Start [v%]	AcN End [v%]	gradient time [min]
15C	20.2	34.7	60
10C	20.2	34.7	60
5C	20.7	35.2	60
RP	21.7	36.2	60
A5	24.6	39.1	60
A10	28.4	42.9	60

5 Result: As can be seen from Figure 8, in this case, due to the negative charge of the API the $-SO_3^-/C8$ materials show better performance. Also here the repulsing materials are better. By using a CIEX-RP material (C10) the yield could be raised for 5.9 % at a fixed pu-
10 rity of 87%.

Conclusion:

 All experiments show that repulsingly doted materials have improved performance. This is in contra-
15 diction to the general opinion that for improved performance additional adsorption positions have to be created. The present results show that the performance of the materials is improved by creating repulsing positions.

20 While there are shown and described presently preferred embodiments of the invention, it is to be distinctly understood that the invention is not limited thereto but may be otherwise variously embodied and practiced within the scope of the following claims.

Claims

1. A material for reverse phase chromatography comprising surface modifying groups bound to a solid support, said surface modifying groups are not horizontally polymerized, said surface modifying groups comprising apolar uncharged groups and polar groups, wherein said polar groups being charged groups, said charged groups being either positively charged or negatively charged, and said charged groups being present in amounts of about 0.25 to about 22 % of the surface modifying groups, or in amounts of about 0.01 $\mu\text{mol}/\text{m}^2$ to 0.8 $\mu\text{mol}/\text{m}^2$ referred to the surface of the solid support for a material with a total amount of surface modifying groups of 3.6 $\mu\text{mol}/\text{m}^2$.

2. The material of claim 1, wherein the apolar uncharged groups are linear C4 to C18 alkyl groups, preferably C8-groups, and the charged groups are terminal substituents of aliphatic C1 to C18 groups, such as C3 groups.

3. The material of claim 1 or 2, wherein the aliphatic groups of the charged groups have a shorter or similar length compared to the length of the apolar groups, such as charged C3 groups combined with apolar C8 groups.

4. The material of any of the preceding claims, wherein the charged groups are selected from - NR_3^+ , preferably - NR_3^+ with R being hydrogen, or C1 C2 alkyl like methyl, or - SO_3^- .

5. The material of any of the preceding claims, wherein the solid support is a silicagel, preferably a high purity silicagel with porosity of 50 to 300 Å, preferably about 100 Å, and pore sizes from 5 to 100 μm , preferably from 10 to 20 μm .

6. A method for a reversed phase chromatographic separation of active pharmaceutical ingredients (APIs), preferably peptides, said method comprising

evaluating the suitable reversed phase material, in particular a reversed phase material of any of claims 1 to 5, and API purification conditions by

(a) determining the isoelectric point (pI) of
5 the API of interest,

(b) choosing a pH in a range where the solid phase material is stable,

(c) determining the difference pI-pH and

(d) if the difference pI-pH is positive (pI >
10 pH), choosing an anion exchange (AEX) material, or
if the difference pI - pH is negative (pI
< pH), choosing a cation exchange (CEX) material.

7. The method of claim 6 further comprising
the step of

15 (e) evaluating a desired retention time by
adapting the eluting conditions.

8. The method of claim 7 wherein the eluting
conditions comprise determining the ionic strength of a
buffer.

20 9. The method of claim 7 or 8 wherein the
eluting conditions comprise determining the eluent sys-
tem, the initial eluent composition and the gradient.

10. The method of any of claims 6 to 9,
wherein the eluent is an aqueous buffer and acetonitrile.

25 11. The method of any of claims 6 to 10,
wherein the pH is chosen between 3 and 9, preferably be-
tween 4 and 7.

12. Use of a material for reverse phase chro-
matography comprising surface modifying groups bound to a
30 solid support, said surface modifying groups comprising
apolar uncharged groups and polar groups, wherein said
polar groups are positively charged groups, in particular
a positively charged material of any of claims 1 to 5 for
reversed phase purification of a protein under conditions
35 wherein pI > pH.

13. Use of a material for reverse phase chro-
matography comprising surface modifying groups bound to a

solid support, said surface modifying groups comprising apolar uncharged groups and polar groups, wherein said polar groups are negatively charged groups, in particular a negatively charged material of any of claims 1 to 5 for
5 reversed phase purification of a API under conditions wherein $pI < pH$.

14. A method for producing a material for reverse phase chromatography of any of claims 1 to 5, comprising attaching all surface modifying groups simultaneously from a liquid solution comprising the apolar groups
10 and the polar charged groups and optionally determining the amount of apolar and ionic groups attached.

15. A method for producing a material for reverse phase chromatography of any of claims 1 to 5, comprising a first step, wherein the apolar groups are attached followed by a second step wherein the charged
15 groups are attached or vice versa, wherein the first step is performed such that some available silanol groups are not reacted, and wherein optionally the actually attached
20 ionic groups are determined.

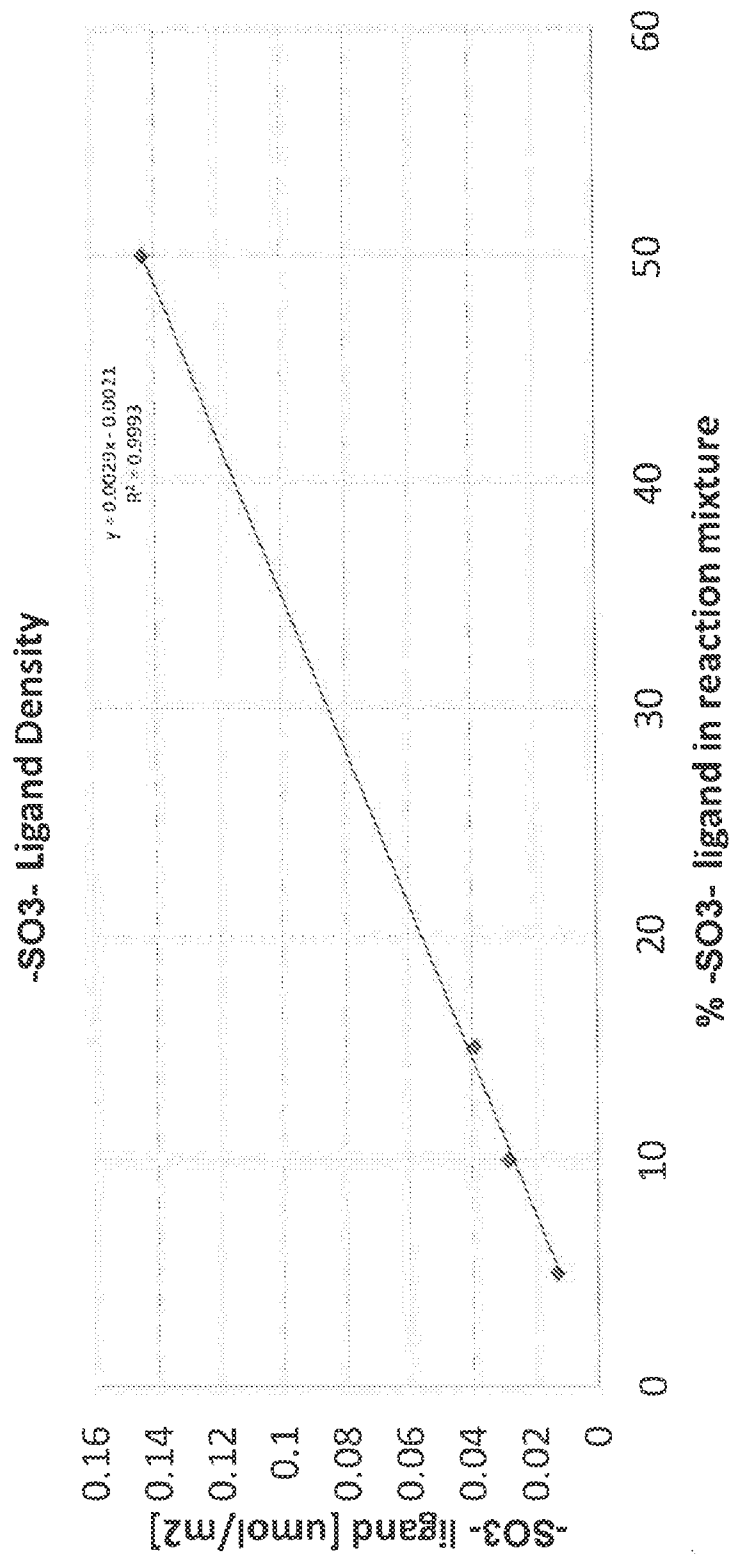


Figure 1

2/11

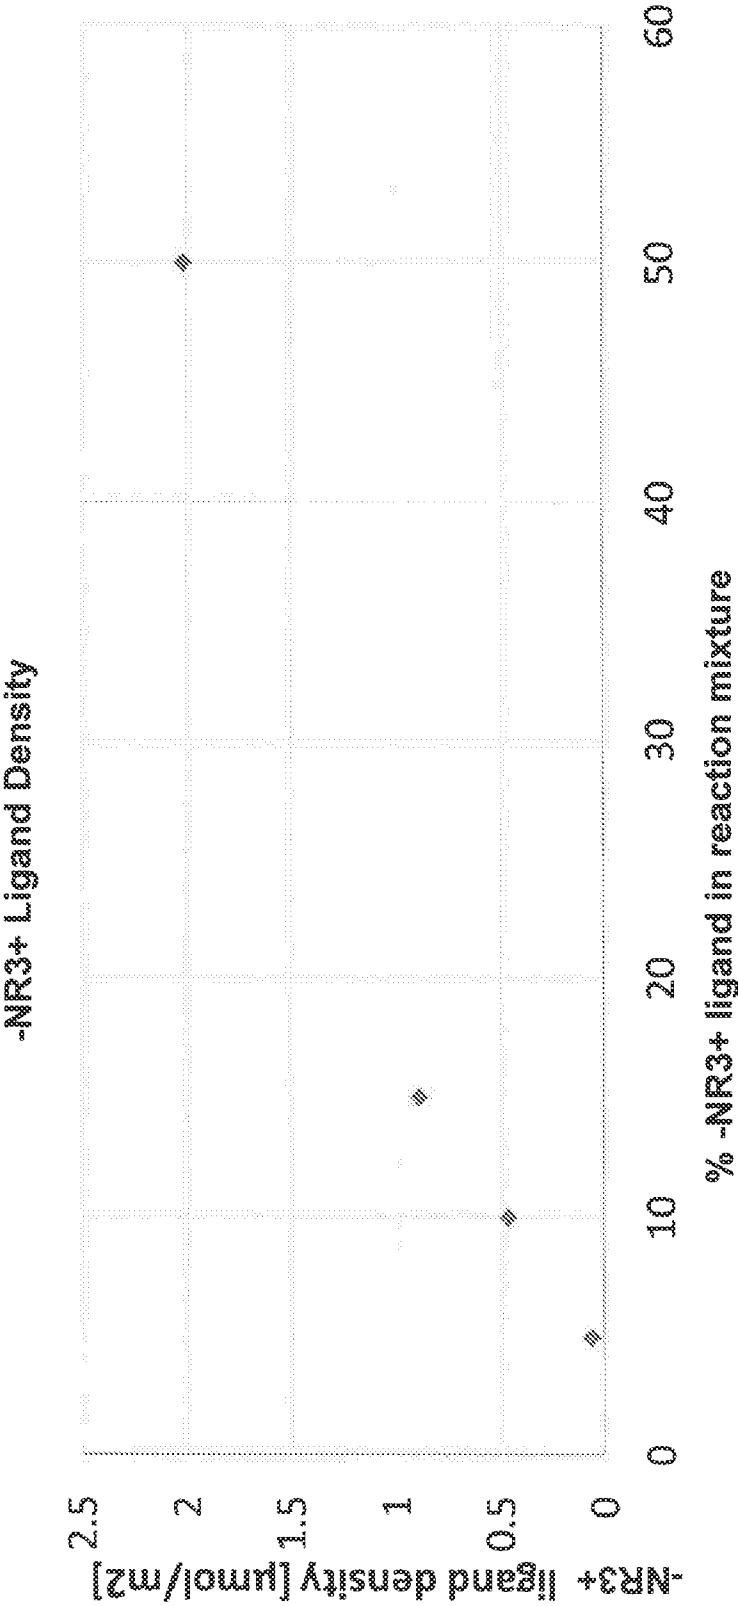


Figure 2

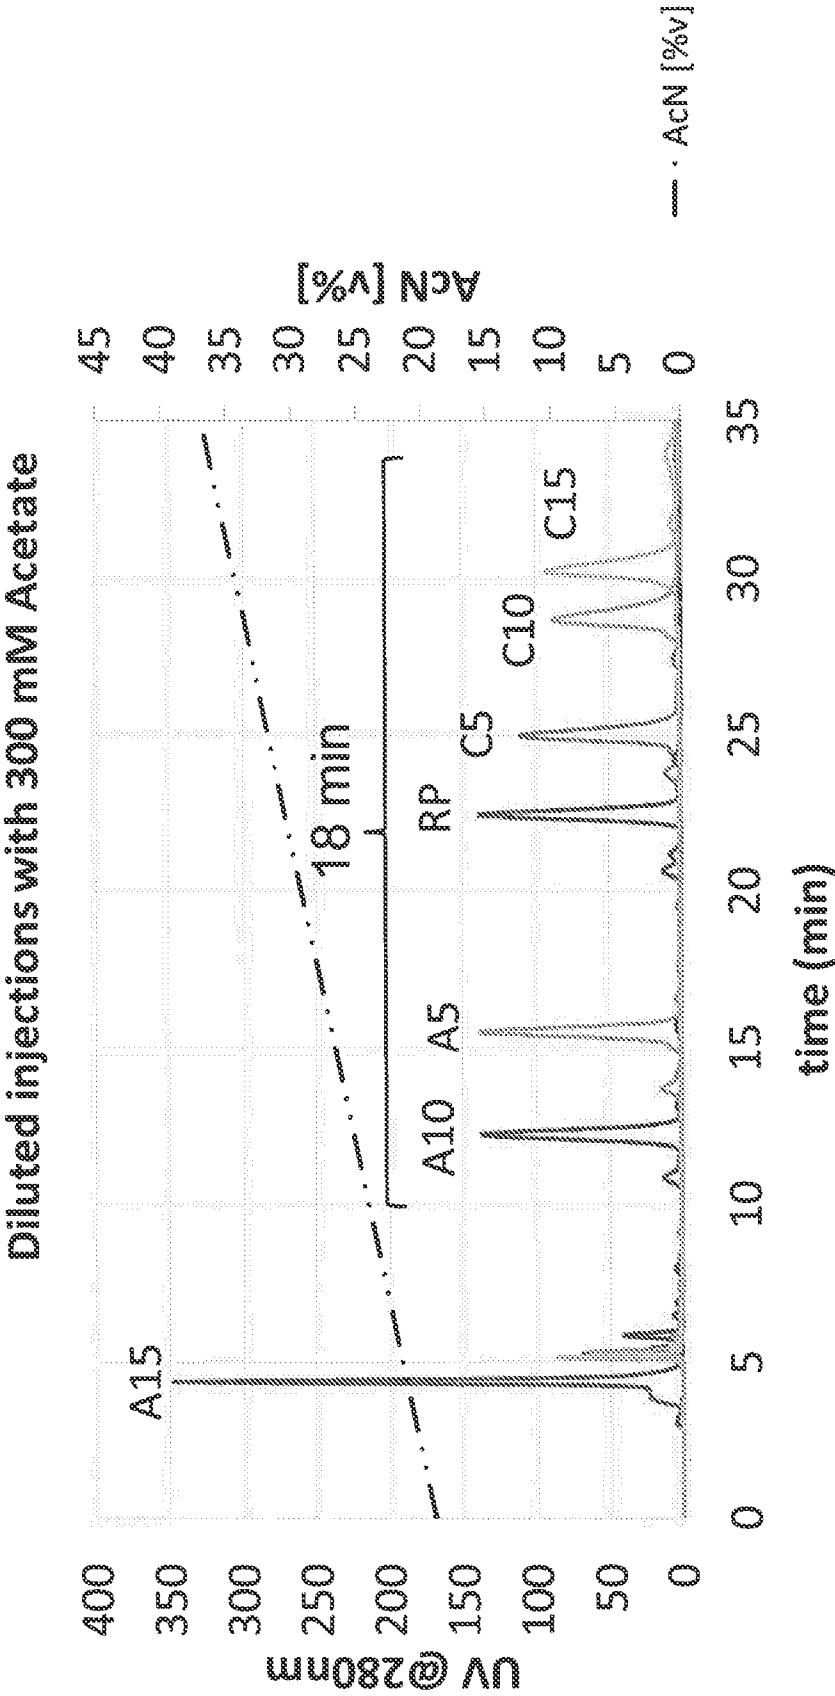


Figure 3a

4/11

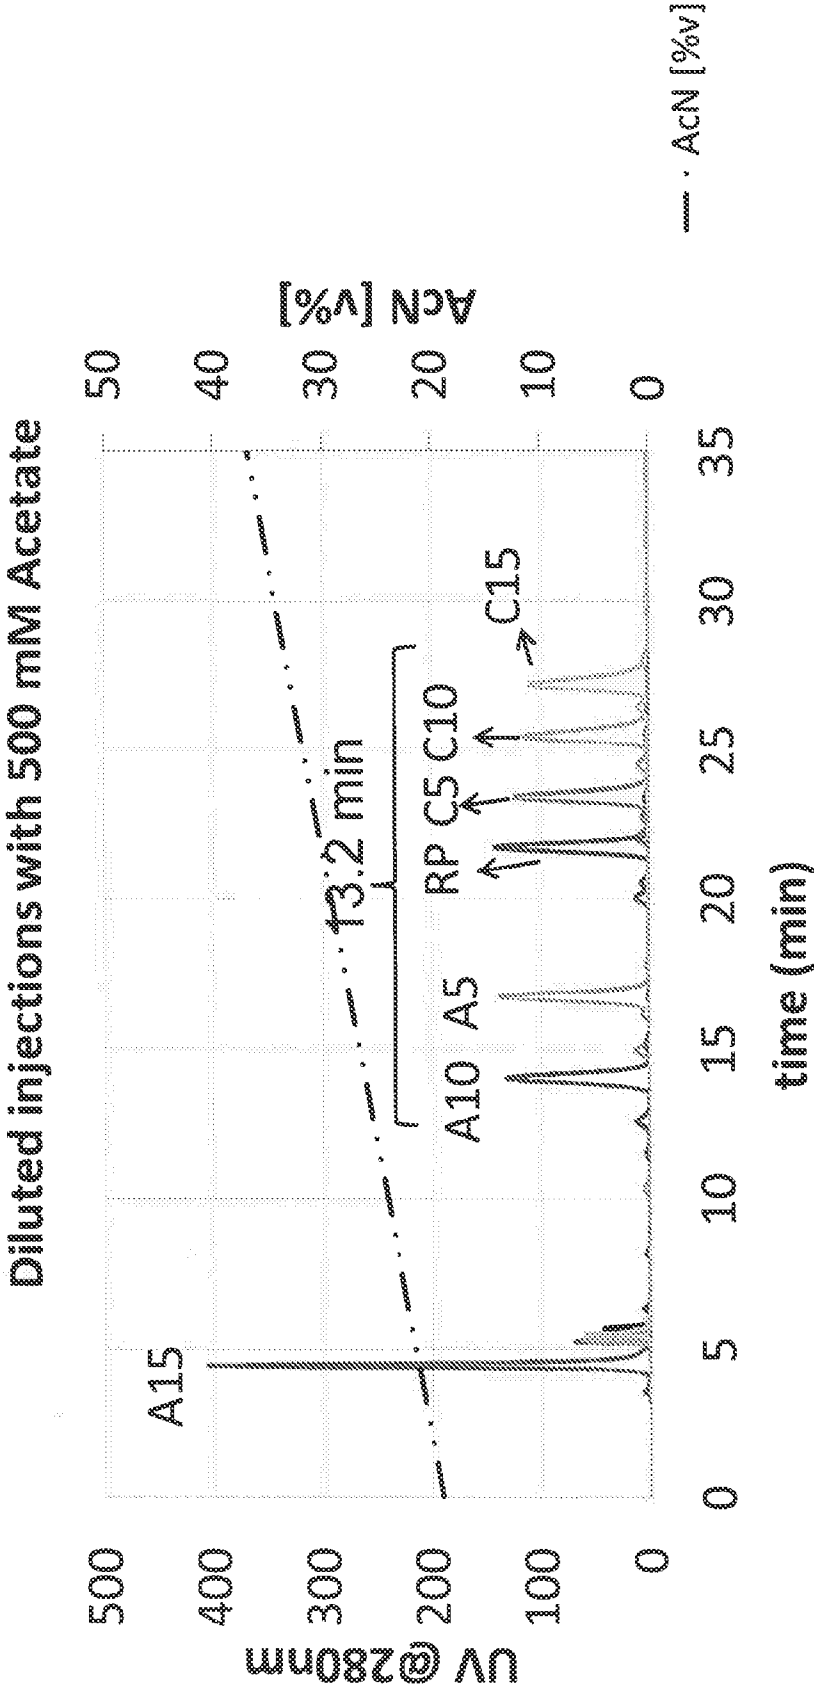


Figure 3b

5/11

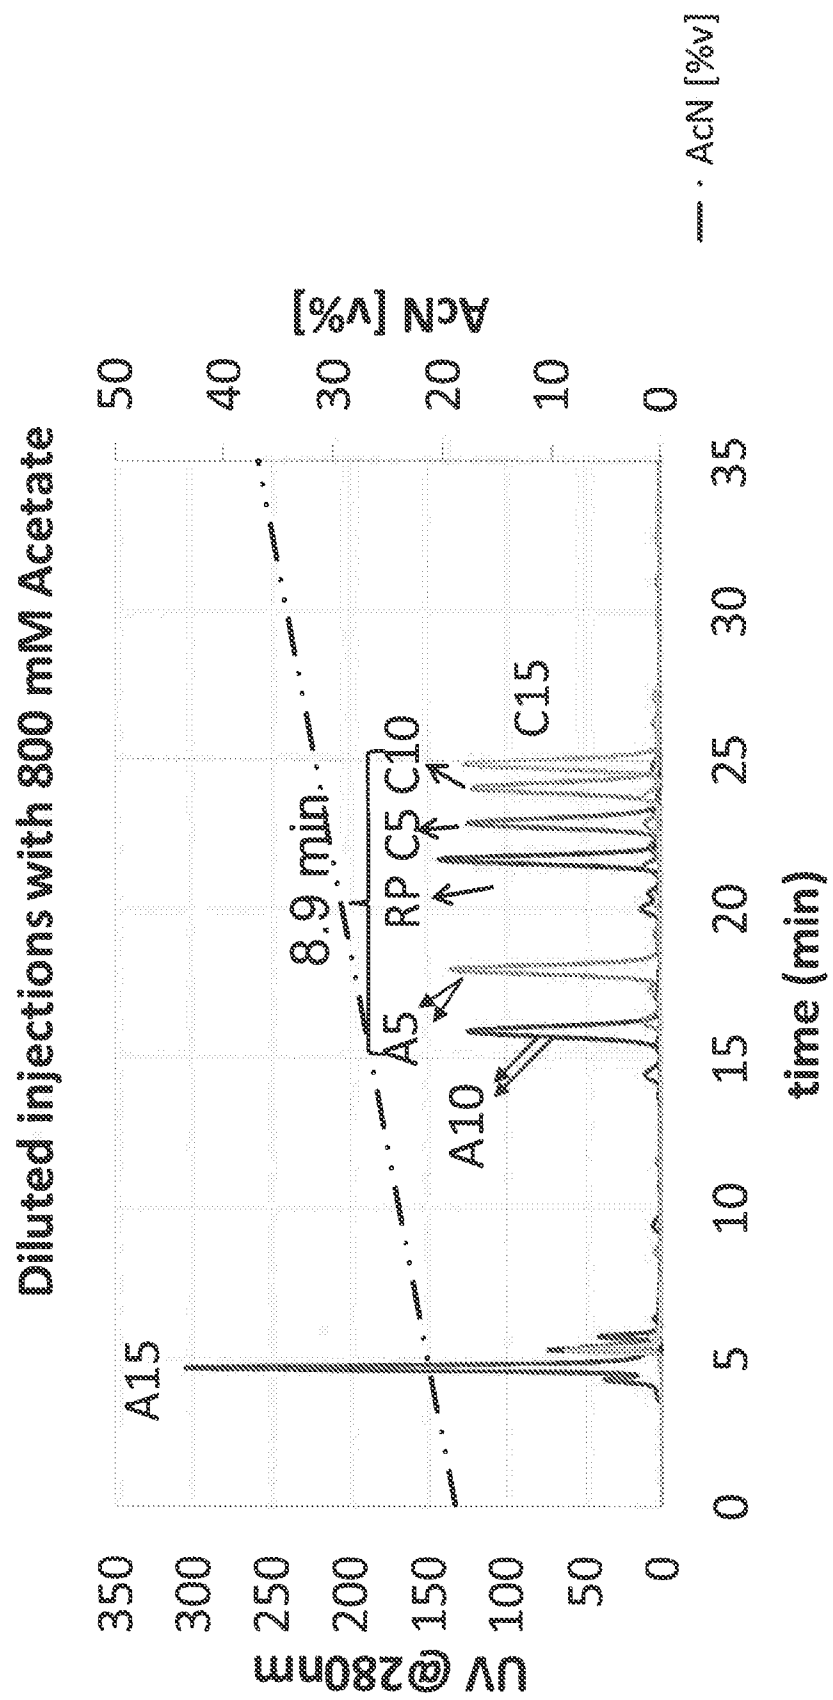


Figure 3c

6/11

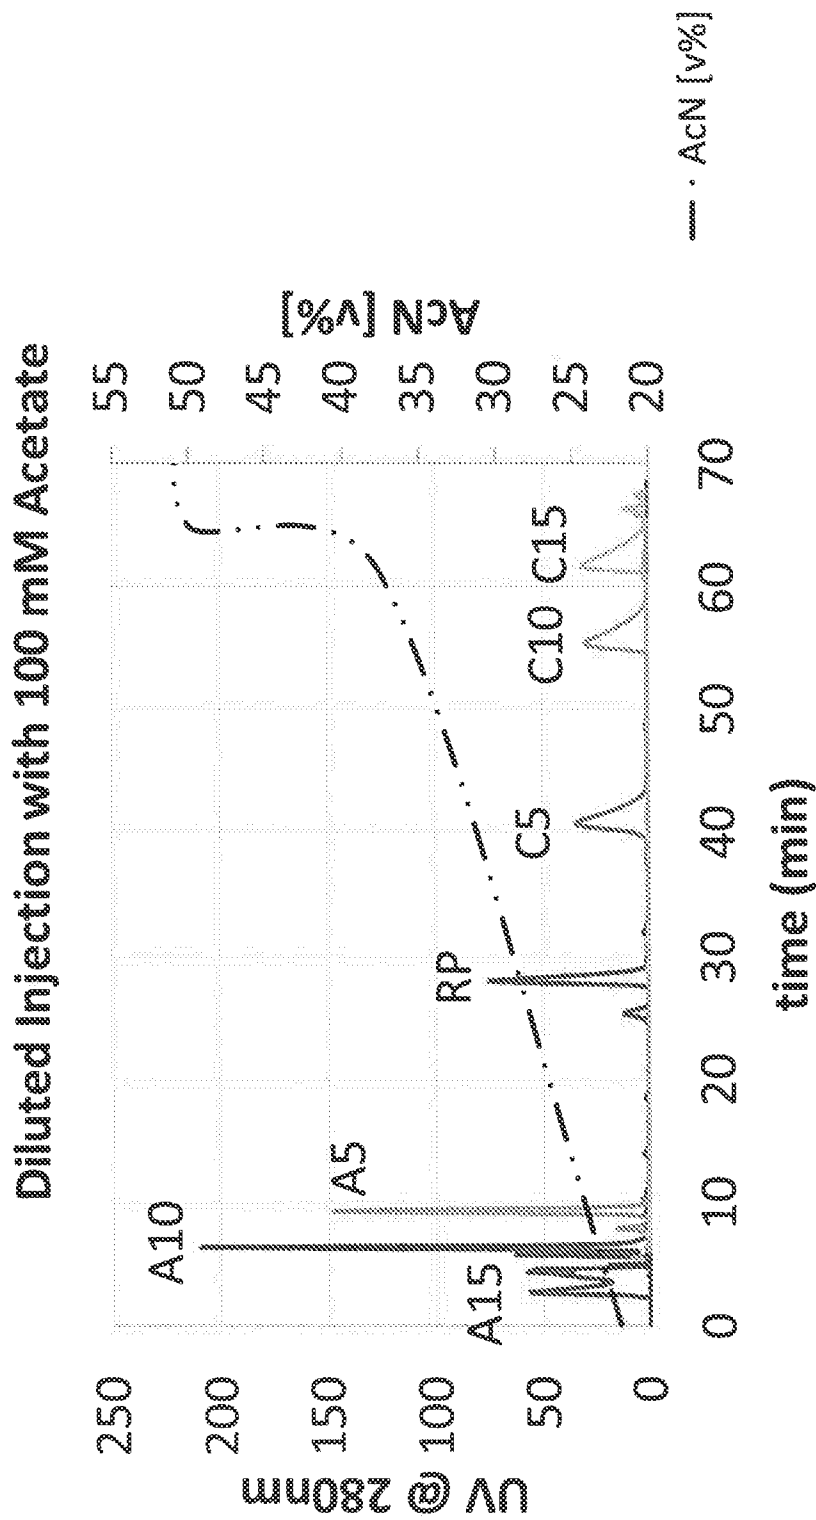


Figure 4a

7/11

Diluted Injection with 100 mM Acetate

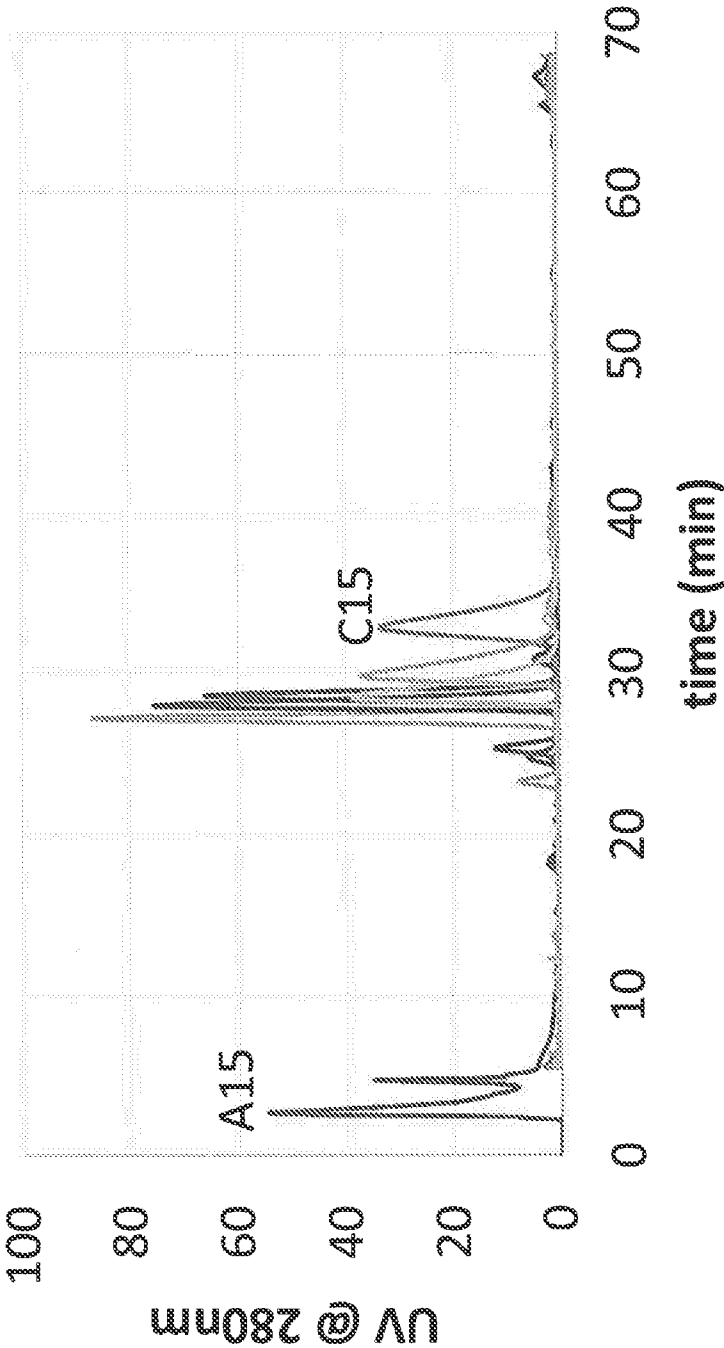


Figure 4b

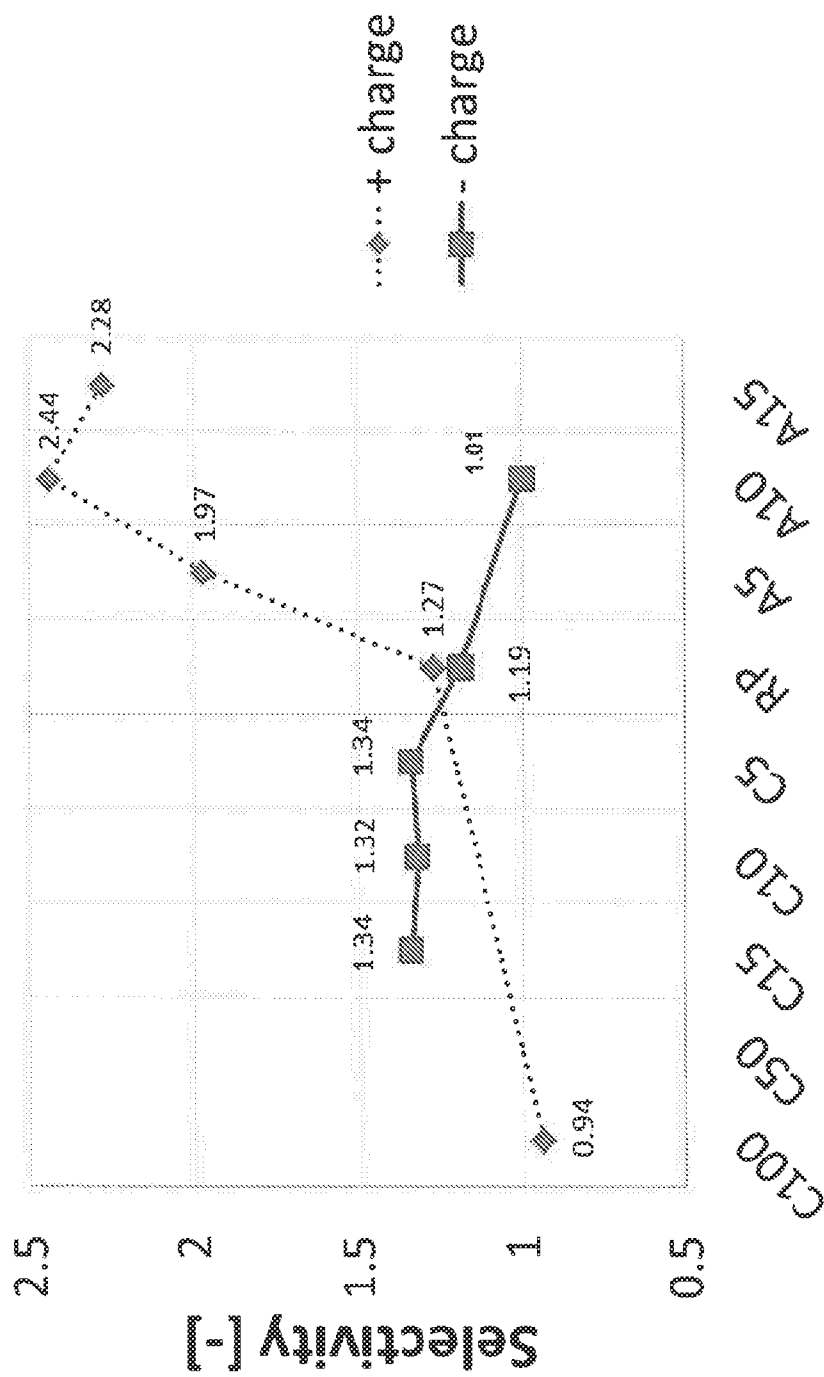


Figure 5

9/11

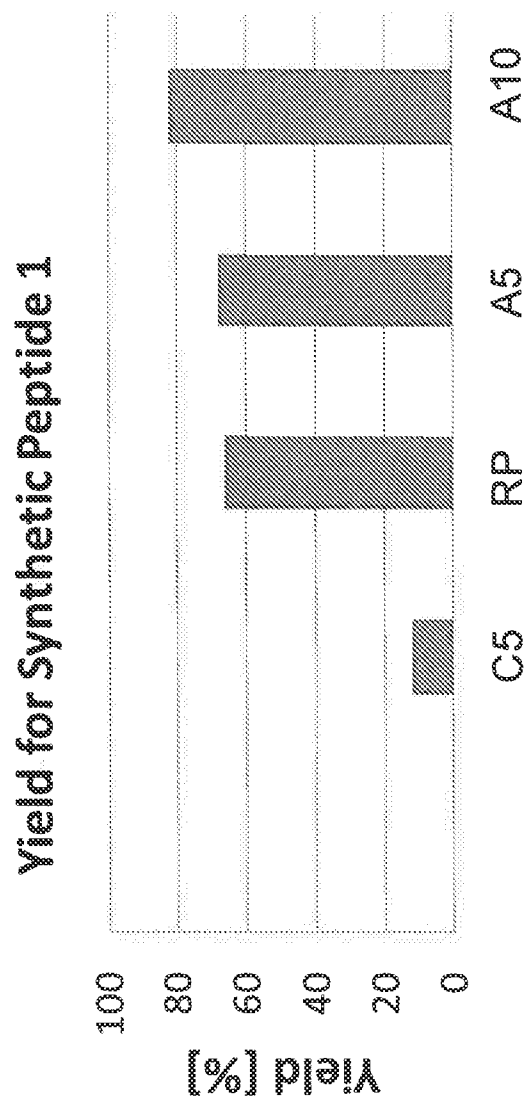


Figure 6

10/11

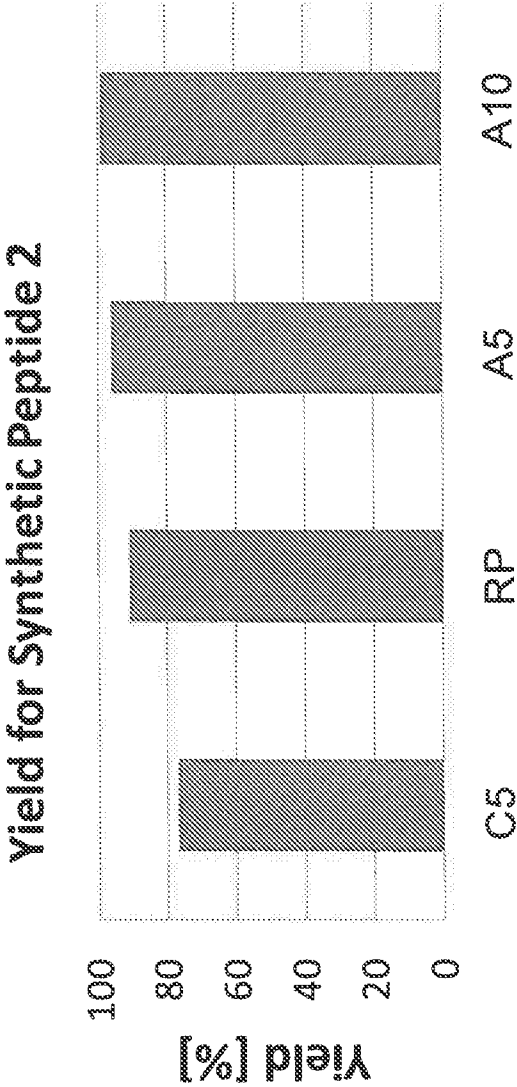


Figure 7

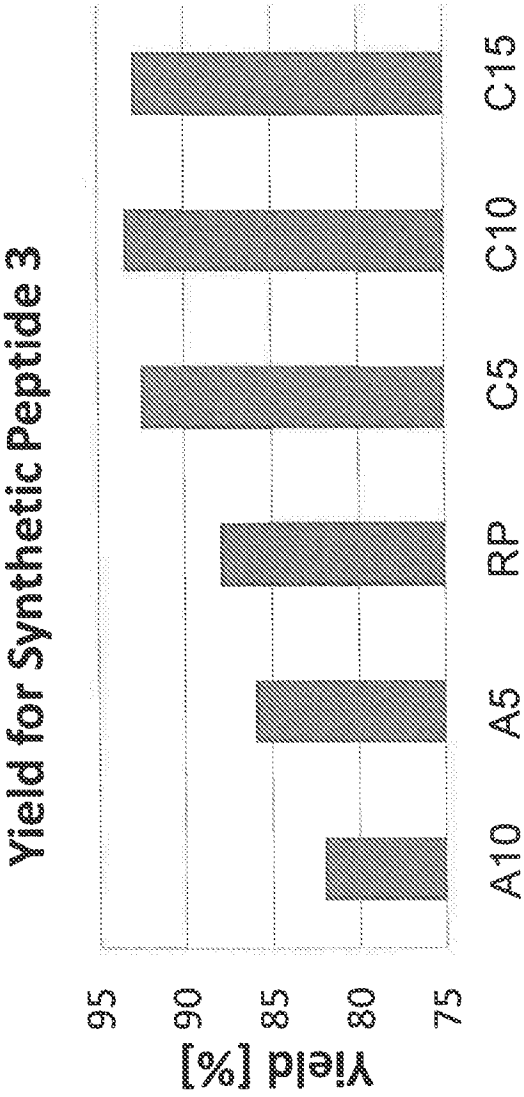


Figure 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/CH2013/000050

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01J20/287 B01D15/32 B01J20/288 B01J20/32 C07K1/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01J B01D C07K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JIE WEI ET AL: "A new reversed-phase/strong anion-exchange mixed-mode stationary phase based on polar-copolymerized approach and its application in the enrichment of aristolochic acids", JOURNAL OF CHROMATOGRAPHY, vol. 1246, 22 March 2012 (2012-03-22), pages 129-136, XP028494990, ISSN: 0021-9673, DOI: 10.1016/J.CHROMA.2012.03.047 [retrieved on 2012-03-22] cited in the application Sections: "2.1. Chemicals and materials", "2.3. Synthesis of the stationary phase and column packing"; page 130, right-hand column - page 131, left-hand column; figure 1c abstract -/--	1-5, 12, 15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 June 2013

Date of mailing of the international search report

09/07/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Klemps, Christian

INTERNATIONAL SEARCH REPORT

International application No

PCT/CH2013/000050

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	----- WO 2011/046494 A1 (GE HEALTHCARE BIO SCIENCES AB [SE]; AXEN ANDREAS [SE]; BREKKAN EGGERT) 21 April 2011 (2011-04-21) page 13, line 13 - page 14, line 20; example 1 page 14 - page 15; examples 2, 3 -----	1-4, 13, 15
X	----- WO 90/09238 A1 (BIOPROCESSING LTD [GB]) 23 August 1990 (1990-08-23) examples 2,3 -----	1,3, 13-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/CH2013/000050

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011046494	A1	21-04-2011	
		CN 102574101 A	11-07-2012
		EP 2488295 A1	22-08-2012
		JP 2013507237 A	04-03-2013
		US 2012202976 A1	09-08-2012
		WO 2011046494 A1	21-04-2011

WO 9009238	A1	23-08-1990	NONE
