

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau

(43) International Publication Date
07 March 2019 (07.03.2019)



(10) International Publication Number
WO 2019/042875 A1

(51) International Patent Classification:

C08F 210/16 (2006.01) C08L 23/16 (2006.01)

(21) International Application Number:

PCT/EP2018/072846

(22) International Filing Date:

24 August 2018 (24.08.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17188122.0 28 August 2017 (28.08.2017) EP

(71) Applicant: **BOREALIS AG** [AT/AT]; IZD Tower, Wagramer Str. 17-19, 1220 Vienna (AT).

(72) Inventors: **GAHLEITNER, Markus**; Kohlwinkel 4, 4501 Neuhofen/Krems (AT). **BERNREITNER, Klaus**; Zaubertalstraße 1, 4010 Linz (AT). **WANG, Jingbo**; Buchenweg 15, 4209 Engerwitzdorf (AT).

(74) Agent: **MAIWALD PATENTANWALTS- UND RECHTSANWALTSGESELLSCHAFT MBH**; Melanie Boos, Elisenstr. 3 / Elisenhof, 80335 Munich (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: POLYPROPYLENE COMPOSITION WITH LOW SHRINKAGE AT WIDE APPLICATION TEMPERATURE RANGE

(57) Abstract: The present application relates to a polypropylene composition having a melt flow rate MFR.2 (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min, to a composition comprising the polypropylene composition and one or more additive(s) in an amount of up to 4 wt.-%, based on the total weight of the composition, to a process for the preparation of the polypropylene composition and an article comprising the polypropylene composition as well as the use of the polypropylene composition for decreasing the brittle-to-ductile transition temperature.



WO 2019/042875 A1

5

Polypropylene composition with low shrinkage at wide application temperature range

10

The present application relates to a polypropylene composition having a melt flow rate MFR_2 (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min, to a composition comprising the polypropylene composition and one or more additive(s) in an amount of up to 4 wt.-%, based on the total weight of the composition, to a process for the preparation of the polypropylene composition and an article comprising the polypropylene composition as well as the use of the polypropylene composition for decreasing the brittle-to-ductile transition temperature.

15

Polypropylenes are used in many applications and are for instance the material of choice in the field of automotive applications because they can be tailored to specific purposes needed. In automotive applications, it is specifically desired to provide low shrinkage in processing combined with a wide application temperature range. Conventional heterophasic polypropylene polymers are based on a matrix phase and an elastomer phase and are typically produced with heterogeneous Ziegler Natta catalysis. These polymers, however, suffer from a number of design problems. First of all, increasing the elastomer content (i.e. the EPR phase), the presence of which is required in a certain concentration to thereby improve impact strength will necessarily reduce the stiffness or tensile modulus of the polymer and thus also the heat resistance of the material. Furthermore, the C_3/C_2 -ratio in the disperse elastomer phase defines both the glass transition point T_g of the elastomer (EPR) phase and the compatibility with the matrix component, the latter co-defining the particle size. In addition thereto, a certain molecular weight limit (frequently expressed as intrinsic viscosity (IV(EPR))) has to be overcome for the elastomer phase to effectively increase the impact strength, whilst too high molecular weight will both reduce the overall flowability of the composition and again increase the particle size. Finally, low shrinkage is required in a lot of applications. This parameter is strongly influenced by the elastomer composition and

20

25

30

35

molecular weight ratio between the elastomer phase and matrix phase. In general, low molecular weight with high propylene (C₃) content (and hence low ethylene (C₂) content) in the elastomer phase is preferred. However, this creates a dilemma between the impact strength and shrinkage as it is very difficult to reduce the shrinkage without sacrificing the impact strength.

As a result, polypropylene compositions providing a good balance between shrinkage and mechanical properties, such as expressed by the brittle-to-ductile transition temperature, are still desired.

10

The finding of the present invention is that a polypropylene composition having a good balance between shrinkage and mechanical properties, such as expressed by the brittle-to-ductile transition temperature, can be obtained with a specific polypropylene composition having a C₃ rich crystalline fraction which has been produced in the presence of a single-site catalyst.

15

Therefore the present invention is directed to a polypropylene composition having a melt flow rate MFR₂ (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min, the polypropylene composition comprising

20

(a) 55 to 75 wt.-%, based on the total weight of the polypropylene composition, of a crystalline fraction (CF) as determined in the CRYSTEX QC method, the crystalline fraction (CF) having

25

i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, and

ii) an ethylene content of ≤ 1.0 wt.-%, based on the total weight of the crystalline fraction (CF); and

(b) 25 to 45 wt.-%, based on the total weight of the polypropylene composition, of a soluble fraction (SF) as determined in the CRYSTEX QC method, the soluble fraction (SF) having

30

i) an intrinsic viscosity (IV) in the range of 1.0 to 2.0 dl/g, and

ii) an ethylene content in the range of 18 to 40 wt.-%, based on the total weight of the soluble fraction (SF),

wherein said polypropylene composition has a ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic viscosity of the crystalline fraction (IV(CF)) $[(IV(SF))/IV(CF)]$ in the range from 0.7 to < 1.2.

- 5 According to one embodiment of the present invention, the polypropylene composition comprises a polypropylene homopolymer matrix (M) and an ethylene-propylene copolymer (EPC) dispersed in the polypropylene homopolymer matrix (M).

- 10 According to another embodiment of the present invention, the polypropylene composition comprises 60 to 72 wt.-%, based on the total weight of the polypropylene composition, of the crystalline fraction (CF), and 28 to 40 wt.-%, based on the total weight of the polypropylene composition, of the soluble fraction (SF).

- 15 According to yet another embodiment of the present invention, the polypropylene composition has i) an ethylene content in the range of 4.0 to 15.0 wt.-%, based on the total weight of the polypropylene composition, and/or ii) a melt flow rate MFR₂ (230 °C) measured according to ISO 1133 in the range of 8 to 40 g/10min, preferably in the range of 8 to 30 g/10min.

- 20 According to one embodiment of the present invention, the polypropylene composition has i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, and/or ii) a crystallization temperature (T_c) measured by differential scanning calorimetry (DSC) between 105°C and 135°C.

- 25 According to another embodiment of the present invention, the ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic viscosity of the crystalline fraction (IV(CF)) $[(IV(SF))/IV(CF)]$ is in the range from 0.8 to 1.1.

- 30 According to yet another embodiment of the present invention, the polypropylene composition is polymerized in the presence of a single-site catalyst.

According to yet another embodiment of the present invention, the polypropylene composition has been produced in a multi-stage process.

According to one embodiment of the present invention, the crystalline fraction (CF) has i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 148°C and 156°C, and/or ii) an ethylene content in the range from 0.1 to 0.8 wt.-%, based on the total weight of the crystalline fraction, and/or iii) an intrinsic viscosity (IV) in the range of 0.9 to 2.2 dl/g, and/or iv) an isotacticity determined as pentad regularity from ^{13}C -NMR spectroscopy of at least 98%, and/or v) a content of <2,1> erythro regiodefects as determined from ^{13}C -NMR spectroscopy of equal or less than 0.2 mol.-%.

According to another embodiment of the present invention, the soluble fraction (SF) has i) an intrinsic viscosity (IV) in the range of 1.1 to 1.9 dl/g, and/or ii) an ethylene content in the range of 18 to 30 wt.-%, based on the total weight of the soluble fraction (SF).

According to yet another embodiment of the present invention, the relative content of isolated to block ethylene sequences (I(E)) i) of the polypropylene composition is at most 30 %, and/or ii) of the xylene cold soluble fraction (XCS) is at least 30%, wherein the I(E) content is defined by equation (I)

$$I(E) = \frac{f_{\text{PEP}}}{(f_{\text{EEE}} + f_{\text{EEP}} + f_{\text{PEP}})} \times 100 \quad (I)$$

wherein I(E) is the relative content of isolated to block ethylene sequences [in %]; f_{PEP} is the mol fraction of propylene/ethylene/propylene sequences (PEP) in the sample; f_{EEP} is the mol fraction of ethylene/ethylene/ propylene sequences (EEP) and of propylene/ethylene/ethylene sequences (PEE) in the sample; f_{EEE} is the mol fraction of ethylene/ethylene/ethylene sequences (EEE) in the sample wherein all sequence concentrations being based on a statistical triad analysis of ^{13}C - NMR data.

According to a further aspect, the present invention refers to a process for the preparation of a polypropylene composition as defined herein, wherein a polypropylene homopolymer matrix (M) is prepared in a first stage and an ethylene-propylene copolymer (EPC) is prepared in a second stage in the presence of the polypropylene homopolymer matrix (M).

According to another aspect, the present invention refers to a composition comprising the polypropylene composition as defined herein and one or more additive(s) in an amount of up to 4 wt.-%, based on the total weight of the composition.

- 5 According to a still further aspect, the present invention refers to an article comprising the polypropylene composition as defined herein or the composition comprising the polypropylene composition.

- 10 According to an even further aspect, the present invention refers to the use of the polypropylene composition as defined herein for decreasing the brittle-to-ductile transition temperature, wherein the brittle-to-ductile transition temperature is derived from the Charpy instrumented impact strength at an impact velocity of 1.5 m/s as a function of temperature and represents the temperature at the inflexion point of the obtained curve. It is preferred that the brittle-to-ductile transition temperature (BDTT) as measured in an instrumented Charpy
15 notched impact strength test in line with ISO 179 1eA is in the range from -10 to +5°C.

In the following, the invention is defined in more detail.

The polypropylene composition

- 20 The polypropylene composition according to this invention is a heterophasic ethylene/propylene copolymer. By heterophasic is meant that the polymer contains both a crystalline fraction and a soluble fraction. It must be made using a single site catalyst material, e.g. one as herein defined.
- 25 The polypropylene composition as a whole has a melt flow rate MFR_2 (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min. It is preferred that the polypropylene composition has a melt flow rate MFR_2 (230 °C) measured according to ISO 1133 in the range of 8 to 40 g/10min, preferably in the range of 8 to 30 g/10min.
- 30 In one embodiment, the polypropylene composition has an ethylene content in the range of 4.0 to 15.0 wt.-%, based on the total weight of the polypropylene composition. Preferably, the polypropylene composition has an ethylene content in the range of 5.0 to 14.0 wt.-% and most preferably in the range of 6.0 to 13.0 wt.-%, based on the total weight of the polypropylene composition.

Thus, it is appreciated that the polypropylene composition preferably has

- 5 i) a melt flow rate MFR_2 (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min, more preferably in the range of 8 to 40 g/10min, and most preferably in the range of 8 to 30 g/10min, and
- ii) an ethylene content in the range of 4.0 to 15.0 wt.-%, preferably in the range of 5.0 to 14.0 wt.-%, and most preferably in the range of 6.0 to 13.0 wt.-%, based on the total weight of the polypropylene composition.

- 10 Additionally or alternatively, the polypropylene composition has a melting temperature (T_m) measured by differential scanning calorimetry (DSC) according to ISO 11357 between 147°C and 162°C, preferably between 148 and 158°C.

- 15 It is appreciated that the polypropylene composition may also have a crystallization temperature (T_c) measured by differential scanning calorimetry (DSC) between 105°C and 135°C, preferably between 108 and 128°C.

Thus, it is preferred that the polypropylene composition has

- 20 i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, preferably between 148 and 158°C, and/or
- ii) a crystallization temperature (T_c) measured by differential scanning calorimetry (DSC) between 105°C and 135°C, preferably between 108 and 128°C.

For example, the polypropylene composition has

- 25 i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, preferably between 148 and 158°C, or
- ii) a crystallization temperature (T_c) measured by differential scanning calorimetry (DSC) between 105°C and 135°C, preferably between 108 and 128°C.

30 Alternatively, the polypropylene composition has

- i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, preferably between 148 and 158°C, and
- ii) a crystallization temperature (T_c) measured by differential scanning calorimetry (DSC) between 105°C and 135°C, preferably between 108 and 128°C.

Furthermore the inventive polypropylene composition preferably has at least a first glass transition temperature $T_g(1)$ and a second glass transition temperature $T_g(2)$, wherein said first glass transition temperature $T_g(1)$ is above the second glass transition temperature $T_g(2)$.

- 5 The glass transition temperatures $T_g(1)$ and $T_g(2)$ are determined by dynamic mechanical thermal analysis (DMTA) according to ISO 6721 -7.

Accordingly, the polypropylene composition has a first glass transition temperature $T_g(1)$ in the range from +10 to -10°C, preferably from +5 to -5°C and a second glass transition
10 temperature $T_g(2)$ in the range from -30 to -50°C, more preferably from -32 to -48°C.

The polypropylene composition has a multiphase structure, which can be identified by the presence of at least two distinct glass transition temperatures. The higher first glass transition temperature ($T_g(1)$) represents the crystalline fraction (CF), i.e. the crystalline polypropylene
15 homopolymer, whereas the lower second glass transition temperature ($T_g(2)$) reflects the soluble fraction (SF) of the polypropylene composition.

It is required that the polypropylene composition comprises from 55 to 75 wt.-%, based on the total weight of the polypropylene composition, of a crystalline fraction (CF) and from 25
20 to 45 wt.-%, based on the total weight of the polypropylene composition, of a soluble fraction (SF) as determined in the CRYSTEX QC method.

It is appreciated that the sum of the percentage amounts of the crystalline fraction (CF) and the soluble fraction (SF) is 100 wt.-%, based on the total weight of the polypropylene
25 composition.

In one embodiment, the polypropylene composition comprises 60 to 72 wt.-%, based on the total weight of the polypropylene composition, of the crystalline fraction (CF), and 28 to 40
30 wt.-%, based on the total weight of the polypropylene composition, of the soluble fraction (SF) as determined in the CRYSTEX QC method. Most preferably, the polypropylene composition comprises 61 to 69 wt.-%, based on the total weight of the polypropylene composition, of the crystalline fraction (CF), and 31 to 39 wt.-%, based on the total weight of the polypropylene composition, of the soluble fraction (SF) as determined in the CRYSTEX QC method.

As already mentioned above, the polypropylene composition of the present invention is a heterophasic ethylene/propylene copolymer which are generally well known in the art. Such heterophasic ethylene/propylene copolymers comprise a matrix (M) being either a propylene
5 homopolymer or a random propylene copolymer in which an ethylene-propylene copolymer (EPC), i.e. elastomeric copolymer, is dispersed. Thus the polypropylene matrix contains (finely) dispersed inclusions being not part of the matrix and said inclusions contain the elastomer. The term inclusion indicates that the matrix and the inclusion form different
10 phases within the heterophasic ethylene/propylene copolymer, said inclusions are for instance visible by high resolution microscopy, like electron microscopy or scanning force microscopy or atomic force microscopy, or by dynamic mechanical thermal analysis (DMTA).

It is thus appreciated that the polypropylene composition of the present invention preferably
15 comprises a polypropylene homopolymer matrix (M) and an ethylene-propylene copolymer (EPC) dispersed in the polypropylene homopolymer matrix (M).

It is one requirement of the present invention that the intrinsic viscosity (IV) of the soluble fraction (IV(SF)) and the intrinsic viscosity of the crystalline fraction (IV(CF)) are in a well-
20 defined range in order to obtain a good balance between shrinkage and mechanical properties, such as expressed by the brittle-to-ductile transition temperature. In particular, it has been found that the polypropylene composition must have a ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic viscosity of the crystalline fraction (IV(CF))
25 $[(IV(SF))/ (IV(CF))]$ in the range from 0.7 to < 1.2 . Preferably, the ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic viscosity of the crystalline fraction (IV(CF))
 $[(IV(SF))/ (IV(CF))]$ is in the range from 0.8 to 1.1. It is appreciated that advantageous results are obtained if the intrinsic viscosity of the soluble fraction (IV(SF)) and the intrinsic
viscosity of the crystalline fraction (IV(CF)) are about the same, i.e. differ by not more than 0.3 dl/g, preferably by not more than 0.2 dl/g and most preferably by not more than 0.1 dl/g.
30

The polypropylene composition preferably has a xylene cold soluble (XCS) fraction measured according to ISO 16152 (25 °C) of 25.0 to 45.0 wt.-%. The xylene cold soluble portion of the polypropylene composition as a whole is preferably in the range of 28.0 to

40.0 wt.-%, even more preferably in the range of 31.0 to 39.0 wt.-%.

It is appreciated that the polypropylene composition has a specific relative content of isolated to blocky ethylene sequences (I(E)).

5

The I(E) content is defined by equation (I)

$$I(E) = \frac{f_{PEP}}{(f_{EEE} + f_{EEP} + f_{PEP})} \times 100 \quad (I)$$

10

wherein

I(E) is the relative content of isolated to blocky ethylene sequences [in %];

fPEP is the mol fraction of propylene/ethylene/propylene sequences (PEP) in the sample;

fEEP is the mol fraction of ethylene/ethylene/ propylene sequences (EEP) and of

15 propylene/ethylene/ethylene sequences (PEE) in the sample;

fEEE is the mol fraction of ethylene/ethylene/ethylene sequences (EEE) in the sample

wherein all sequence concentrations being based on a statistical triad analysis of ¹³C- NMR data.

20 The I(E) content of the polypropylene composition, which can also be called normalized PEP value (nPEP), is preferably at most 30 %, more preferably in the range from 15 to 30 % and most preferably in the range from 18 to 27 %.

The polypropylene composition of the present invention has a low shrinkage in the
25 longitudinal (in flow) and/or transverse (across flow) direction. Preferably, the shrinkage in the longitudinal (in-flow) direction is less than 1.25 %, more preferably less than 1.10 %, even more preferably less than 0.95 %.

30 Additionally or alternatively, the shrinkage in the transverse (across flow) direction is less than 1.30 %, more preferably less than 1.20 %, even more preferably less than 1.10 %.

Thus, the polypropylene composition has a shrinkage

- i) in the longitudinal (in-flow) direction of less than 1.25 %, more preferably less than 1.10 %, even more preferably less than 0.95 %, and

- ii) in the transverse (across flow) direction of less than 1.30 %, more preferably less than 1.20 %, even more preferably less than 1.10 %.

The flexural modulus of the polypropylene composition of the invention measured according to ISO 178 is preferably at least 500 MPa, such as at least 550 MPa. More preferably, the flexural modulus of the polypropylene composition measured according to ISO 178 is in the range from 500 to 1100 MPa, preferably from 550 to 1000 MPa, and most preferably from 600 to 950 MPa.

- 10 The polypropylene composition of the invention has an excellent brittle to ductile transition temperature (BDTT) at a temperature of +25°C or less, such as +10°C or less, more preferably +5°C or less, determined from Charpy instrumented impact strength according to ISO 179-2:2000. A reasonable lower limit for the BDTT is -10°C. In one embodiment, the brittle-to-ductile transition temperature (BDTT) as measured in an instrumented Charpy
15 notched impact strength test in line with ISO 179 1eA is in the range from -10 to +5°C

All parameters described in the present application can be determined by the methods as described in the example section below.

20 **Crystalline fraction (CF)**

It is appreciated that the polypropylene composition comprises a crystalline fraction (CF).

- The crystalline fraction (CF) is preferably made up of a propylene homopolymer or propylene ethylene copolymer. The ethylene content in this component is low. In particular,
25 it is required that the ethylene content is of ≤ 1 wt.-%, based on the total weight of the crystalline fraction (CF). Even more preferably there is ≤ 0.8 wt.-% ethylene in the crystalline fraction (CF), such as ≤ 0.5 wt.-% or less. For example, the crystalline fraction (CF) has an ethylene content in the range from 0.1 to 1.0 wt.-%, such as from 0.1 to 0.8 wt.-% or from 0.1 to 0.5 wt.-%, based on the total weight of the crystalline fraction. In one
30 embodiment, the crystalline fraction (CF) contains propylene units only.

The polypropylene composition comprises the crystalline fraction (CF) as determined in the CRYSTEX QC method in an amount ranging from 55 to 75 wt.-%, based on the total weight of the polypropylene composition. Preferably, the polypropylene composition comprises the

crystalline fraction (CF) as determined in the CRYSTEX QC method in an amount ranging from 60 to 72 wt.-%, and most preferably from 61 to 69 wt.-%, based on the total weight of the polypropylene composition.

- 5 The crystalline fraction (CF) has a melting temperature T_m determined by DSC analysis according to ISO 11357 in the range of 147°C to 162°C, more preferably in the range of 148 °C to 158°C and most preferably in the range of 148°C to 156°C.

The glass transition temperature of the crystalline fraction (CF) is preferably in the range of
10 +10 to -10°C, e.g. +5 to -5°C.

The crystalline fraction (CF) is ideally an isotactic propylene matrix component. The crystalline fraction (CF) may consist of a single propylene homopolymer but may also comprise a mixture of different propylene homopolymers.

15

In one embodiment, the crystalline fraction (CF) has an intrinsic viscosity of 0.9 to 2.2 dl/g, preferably 1.0 to 2.0 dl/g, more preferably 1.1 to 1.9 dl/g. The intrinsic viscosity is measured according to DIN ISO 1628/1, October 1999 (in Decalin at 135 °C).

- 20 Preferably, the crystalline fraction (CF) is isotactic. Accordingly, it is appreciated that the crystalline fraction (CF) has a rather high pentad concentration, i.e. higher than 98 %, more preferably higher than 98.5 %, and preferably higher than 99 %.

Preferably, the crystalline fraction (CF) has low amount of regio defects. Accordingly it is
25 preferred that the crystalline fraction (CF) has 2,1 erythro regio-defects of below 0.2 %, preferably below 0.15 %, more preferably below 0.1 % determined by ^{13}C -NMR spectroscopy. In one specific embodiments no 2,1-erythro regio-defects are detectable.

Wherever in the instant invention the amount of defects, i.e. 2,1 erythro regio-defects and
30 stereo-defects (mmmm pentad), are indicated by "%" the average percentage of propylene units in the polymer chain is meant.

Soluble fraction (SF)

It is appreciated that the polypropylene composition further comprises a soluble fraction (SF).

5 The ethylene content in the soluble fraction (SF) is moderately high. In particular, it is required that the ethylene content is from 18 to 40 wt.-%, based on the total weight of the soluble fraction (SF). Even more preferably there is 18 to 30 wt.-% ethylene in the soluble fraction (SF). For example, the soluble fraction (SF) has an ethylene content in the range from 18 to 28 wt.-%, such as from 19 to 25 wt.-%, based on the total weight of the soluble fraction (SF).

10

The soluble fraction (SF) preferably consists of a propylene-ethylene copolymer.

15 The polypropylene composition comprises the soluble fraction (SF) as determined in the CRYSTEX QC method in an amount ranging from 25 to 45 wt.-%, based on the total weight of the polypropylene composition. Preferably, the polypropylene composition comprises the soluble fraction (SF) as determined in the CRYSTEX QC method in an amount ranging from 28 to 40 wt.-%, and most preferably from 31 to 39 wt.-%, based on the total weight of the polypropylene composition.

20 It is one requirement of the present invention that the soluble fraction (SF) has an intrinsic viscosity of 1.0 to 2.0 dl/g, preferably 1.1 to 1.9 dl/g, more preferably 1.2 to 1.8 dl/g. The intrinsic viscosity is measured according to DIN ISO 1628/1, October 1999 (in Decalin at 135 °C).

25 It is appreciated that the xylene cold soluble fraction (XCS) of the polypropylene composition has a specific content of isolated to blocky ethylene sequences (I(E)).

The I(E) content is defined by equation (I)

30

$$I(E) = \frac{f_{PEP}}{(f_{EEE} + f_{EEP} + f_{PEP})} \times 100 \quad (I)$$

wherein

I(E) is the relative content of isolated to block ethylene sequences [in %];

fPEP is the mol fraction of propylene/ethylene/propylene sequences (PEP) in the sample;
 fEEP is the mol fraction of ethylene/ethylene/ propylene sequences (EEP) and of
 propylene/ethylene/ethylene sequences (PEE) in the sample;
 fEEE is the mol fraction of ethylene/ethylene/ethylene sequences (EEE) in the sample
 5 wherein all sequence concentrations being based on a statistical triad analysis of ¹³C- NMR
 data.

The I(E) content of the XCS, which can also be called normalized PEP value (nPEP), is
 preferably at least 30 %, more preferably in the range from 30 to 60 % and most preferably
 10 in the range from 35 to 50 %.

It is furthermore preferred that the xylene cold soluble fraction (XCS) of the polypropylene
 composition has a specific content of blocky to isolated ethylene sequences (B(E)).

15 The B(E) content is defined by equation (Ia)

$$B(E) = \frac{f_{EEE}}{(f_{EEE} + f_{EEP} + f_{PEP})} \times 100 \quad (Ia)$$

20 wherein

B(E) is the relative content of blocky to isolated ethylene sequences [in %];

fPEP is the mol fraction of propylene/ethylene/propylene sequences (PEP) in the sample;

fEEP is the mol fraction of ethylene/ethylene/ propylene sequences (EEP) and of
 propylene/ethylene/ethylene sequences (PEE) in the sample;

25 fEEE is the mol fraction of ethylene/ethylene/ethylene sequences (EEE) in the sample
 wherein all sequence concentrations being based on a statistical triad analysis of ¹³C- NMR
 data.

The B(E) content of the XCS, which can also be called normalized EEE value (nEEE), is
 30 preferably at most 25 %, more preferably in the range from 10 to 25 % and most preferably
 in the range from 12 to 23 %.

Additionally it is preferred that the ethylene content of the xylene cold soluble (XCS)
 fraction as determined in ¹³C- NMR spectroscopy is in the range from 18 to 40 wt.-%, more

preferably from 18 to 30 wt.-%, even more preferably from 18 to 28 wt.-%, based on the total weight of the xylene cold soluble (XCS) fraction.

5 In one preferred embodiment, the comonomer in the xylene cold soluble (XCS) fraction is ethylene only.

Catalyst

The polypropylene composition of the present invention is polymerized in the presence of a single-site catalyst.

10

The catalyst used in the invention can be used in non-supported form or in solid form. The catalyst of the invention should however be used as a heterogeneous (solid) catalyst.

15

Generally the quantity of catalyst will depend upon the nature of the catalyst, the reactor types and conditions and the properties desired for the polypropylene composition.

20

The catalyst of the invention in solid form, preferably in solid particulate form, can be either supported on an external carrier material, like silica or alumina, or, in a particularly preferred embodiment, is free from an external carrier, however still being in solid form. For example, the solid catalyst is obtainable by a process in which

(a) a liquid/liquid emulsion system is formed, said liquid/liquid emulsion system comprising a solution of the catalyst components (i) a complex and (ii) a cocatalyst; dispersed in a solvent so as to form dispersed droplets; and

(b) solid particles are formed by solidifying said dispersed droplets.

25

The catalyst is ideally manufactured by obtaining (i) a complex e.g. of formula (I) and (ii) a cocatalyst; forming a liquid/liquid emulsion system, which comprises a solution of catalyst components (i) and (ii) dispersed in a solvent, and solidifying said dispersed droplets to form solid particles.

30

By free from an external carrier is meant that the catalyst does not contain an external support, such as an inorganic support, for example, silica or alumina, or an organic polymeric support material.

In the definitions which follow, the term C₁₋₂₀hydrocarbyl group therefore includes C₁₋₂₀alkyl, C₂₋₂₀alkenyl, C₂₋₂₀alkynyl, C₃₋₂₀cycloalkyl, C₃₋₂₀cycloalkenyl, C₆₋₂₀aryl groups, C₇₋₂₀alkylaryl groups or C₇₋₂₀arylalkyl groups or of course mixtures of these groups such as cycloalkyl substituted by alkyl. Linear and branched hydrocarbyl groups cannot contain cyclic units. Aliphatic hydrocarbyl groups cannot contain aryl rings.

Unless otherwise stated, preferred C₁₋₂₀hydrocarbyl groups are C₁₋₂₀alkyl, C₄₋₂₀cycloalkyl, C₅₋₂₀cycloalkyl-alkyl groups, C₇₋₂₀alkylaryl groups, C₇₋₂₀arylalkyl groups or C₆₋₂₀aryl groups, especially C₁₋₁₀alkyl groups, C₆₋₁₀aryl groups, or C₇₋₁₂arylalkyl groups, e.g. C₁₋₈alkyl groups.

Most especially preferred hydrocarbyl groups are methyl, ethyl, propyl, isopropyl, tertbutyl, isobutyl, C₅₋₆cycloalkyl, cyclohexylmethyl, phenyl or benzyl.

The term halo includes fluoro, chloro, bromo and iodo groups, especially chloro groups, when relating to the complex definition.


The oxidation state of the metal ion is governed primarily by the nature of the metal ion in question and the stability of the individual oxidation states of each metal ion.

It is appreciated that in the complexes, the metal ion M is coordinated by ligands X so as to satisfy the valency of the metal ion and to fill its available coordination sites. The nature of these σ -ligands can vary greatly.

Catalyst activity is defined in this application to be the amount of polymer produced/g catalyst/h. The term productivity is also sometimes used to indicate the catalyst activity although herein it designates the amount of polymer produced per unit weight of catalyst.

The single site catalyst is preferably a metallocene. The preparation of the metallocene catalyst can be carried out according to or analogously to the methods known from the literature and is within the skills of an art skilled person. Said metallocenes typically bear at least one organic ligand, generally 1, 2 or 3, e.g. 1 or 2, which is η -bonded to the metal, e.g. a η^{2-6} -ligand, such as a η^5 -ligand. Preferably, a metallocene is a Group 4 to 6 transition metal, suitably titanocene, zirconocene or hafnocene, which contains at least one η^5 -ligand, which is e.g. an optionally substituted cyclopentadienyl, an optionally substituted indenyl, an optionally substituted tetrahydroindenyl or an optionally substituted fluorenyl.

The metallocene compound may have a formula I:



wherein:

- 5 each Cp independently is an unsubstituted or substituted and/or fused homo- or heterocyclopentadienyl ligand, e.g. substituted or unsubstituted cyclopentadienyl, substituted or unsubstituted indenyl or substituted or unsubstituted fluorenyl ligand; the optional one or more substituent(s) being selected preferably from halogen, hydrocarbyl (e.g. C₁-C₂₀-alkyl, C₂-C₂₀-alkenyl, C₂-C₂₀-alkynyl, C₃-C₁₂-cycloalkyl, C₆-C₂₀-aryl or C₇-C₂₀-arylalkyl), C₃-C₁₂-cycloalkyl which contains 1, 2, 3 or 4 heteroatom(s) in the ring moiety, C₆-C₂₀-heteroaryl, C₁-C₂₀-haloalkyl, -SiR³₃, -OSiR³, -SR³, -PR²₂ or -NR²₂, each R³ is independently a hydrogen or hydrocarbyl, e.g. C₁-C₂₀-alkyl, C₂-C₂₀-alkenyl, C₂-C₂₀-alkynyl, C₃-C₁₂-cycloalkyl or C₆-C₂₀-aryl; or e.g. in case of -NR²₂, the two substituents R² can form a ring, e.g. five- or six-membered ring, together with the nitrogen atom wherein they are attached to.

- 15 T is a bridge of 1-3 atoms, e.g. a bridge of 1-2 C-atoms or 1-2 heteroatoms, wherein the heteroatom(s) can be e.g. Si, Ge and/or O atom(s), whereby each of the bridge atoms may bear independently substituents, such as C₁-C₂₀-alkyl, tri(C₁-C₂₀-alkyl)silyl, tri(C₁-C₂₀-alkyl)siloxy or C₆-C₂₀-aryl substituents); or a bridge of 1-3, e.g. one or two, hetero atoms, such as silicon, germanium and/or oxygen atom(s), e.g. -SiR¹₂, wherein each R¹ is independently C₁-C₂₀-alkyl, C₆-C₂₀-aryl or tri(C₁-C₂₀-alkyl)silyl- residue, such as a trimethylsilyl-residue.

- 25 M is a transition metal of Group 4 to 6, such as Group 4, e.g. Ti, Zr or Hf.

- Each A is independently a sigma-ligand, such as H, halogen, C₁-C₂₀-alkyl, C₁-C₂₀-alkoxy, C₂-C₂₀-alkenyl, C₂-C₂₀-alkynyl, C₃-C₁₂-cycloalkyl, C₆-C₂₀-aryl, C₆-C₂₀-aryloxy, C₇-C₂₀-arylalkyl, C₇-C₂₀-arylalkenyl, -CH₂-Y, wherein Y is C₆₋₂₀-aryl, C₆₋₂₀-heteroaryl, C₁₋₂₀-alkoxy, C₆₋₂₀-aryloxy, -NR²₂, -SiR³₃ or OSiR³₃, -SR³, -PR³₃, -SiR³₃, -OSiR³₃ or -NR²₂; each R² is independently hydrogen or hydrocarbyl, e.g. C₁-C₂₀-alkyl, C₂-C₂₀-alkenyl, C₂-C₂₀-alkynyl, C₃-C₁₂-cycloalkyl or C₆-C₂₀-aryl; or e.g. in case of -NR²₂, the two substituents R² can form a ring, e.g. five- or six-membered ring, together with the nitrogen atom wherein they are

attached to.

Each of the above mentioned ring moieties alone or as a part of a moiety as the substituent for Cp, A, R" or R<1> can further be substituted e.g. with C₁-C₂₀-alkyl which may contain Si

5 and/or O atoms;


n is 1 or 2, e.g. 1,

m is 1, 2 or 3, e.g. 1 or 2,

q is 1, 2 or 3, e.g. 2 or 3, wherein m+q is equal to the valency of M.

10 Whilst therefore the invention is generally applicable to a stereospecific single site catalyst, the polypropylene composition is preferably prepared in the presence of a metallocene of formula (II). It is understood that the complex used in the invention consists of its racemic mixture.

15 Metallocenes of formula (II) therefore include:

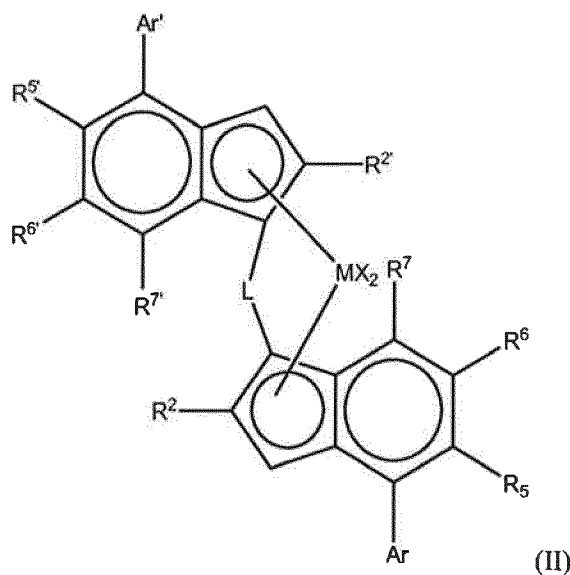

wherein

M is zirconium or hafnium;

20 each X is a sigma ligand;

L is a divalent bridge selected from -R'₂C-, -R'₂C-CR'₂-, -R'₂Si-, -R'₂Si-SiR'₂-, -R'₂Ge-, wherein each R' is independently a hydrogen atom, C₁-C₂₀-hydrocarbyl, tri(C₁-C₂₀-alkyl)silyl, C₆-C₂₀-aryl, C₇-C₂₀-arylalkyl or C₇-C₂₀-alkylaryl;

R² and R^{2'} are each independently a C₁-C₂₀hydrocarbyl radical optionally containing one or more heteroatoms from groups 14-16;

5 R⁵ and R^{5'} are each independently hydrogen, C₁₋₂₀hydrocarbyl group optionally containing one or more heteroatoms from groups 14-16 and optionally substituted by one or more halo atoms;

R⁶ and R^{6'} are each independently hydrogen or a C₁₋₂₀hydrocarbyl group optionally containing one or more heteroatoms from groups 14-16; or

R⁵ and R⁶ taken together can form a 5 or 6 membered saturated or unsaturated carbon ring fused to the 6-membered ring of the indenyl group; or

10 R^{5'} and R^{6'} taken together can form a 5 or 6 membered saturated or unsaturated carbon ring fused to the 6-membered ring of the indenyl group;

R⁷ and R^{7'} are each independently hydrogen or C₁₋₂₀hydrocarbyl group optionally containing one or more heteroatoms from groups 14-16;


15 Ar is independently an aryl or heteroaryl group having up to 20 carbon atoms optionally substituted by one or more groups R¹;

Ar' is independently an aryl or heteroaryl group having up to 20 carbon atoms optionally substituted by one or more groups R¹;

20 each R¹ is a C₁₋₂₀hydrocarbyl group or two R<1>groups on adjacent carbon atoms taken together can form a fused 5 or 6 membered non aromatic ring with the Ar group, said ring being itself optionally substituted with one or more groups R⁴; and

each R⁴ is a C₁₋₂₀hydrocarbyl group.

More preferably, the complex is of formula (III)

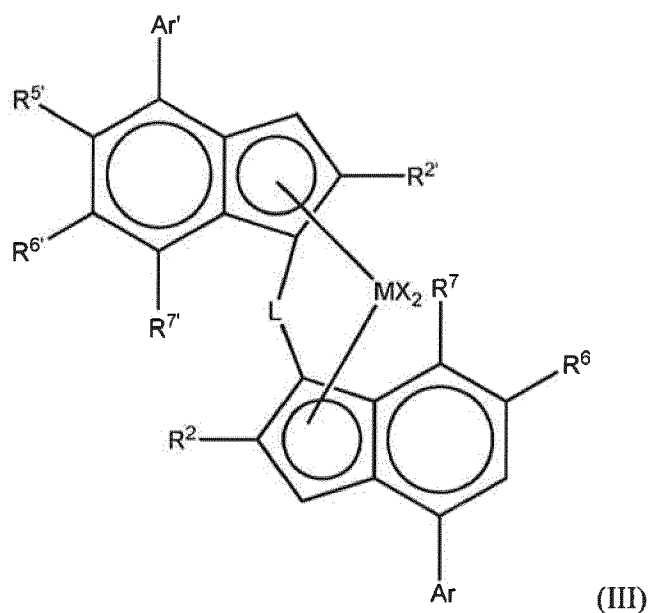

wherein


M is zirconium or hafnium;

each X is a sigma ligand;

- 5 L is a divalent bridge selected from $-R'_2C-$, $-R'_2C-CR'_2-$, $-R'_2Si-$, $-R'_2Si-SiR'_2-$, $-R'_2Ge-$, wherein each R' is independently a hydrogen atom, C_1-C_{20} -hydrocarbyl, tri(C_1-C_{20} -alkyl)silyl, C_6-C_{20} -aryl, C_7-C_{20} -arylalkyl or C_7-C_{20} -alkylaryl;
- R^2 and $R^{2'}$ are each independently a C_1-C_{20} hydrocarbyl radical optionally containing one or more heteroatoms from groups 14-16;
- 10 $R^{5'}$ is a C_1-C_{20} hydrocarbyl group optionally containing one or more heteroatoms from groups 14-16 and optionally substituted by one or more halo atoms;
- R^6 and $R^{6'}$ are each independently hydrogen or a C_1-C_{20} hydrocarbyl group optionally containing one or more heteroatoms from groups 14-16;
- R^7 and $R^{7'}$ are each independently hydrogen or C_1-C_{20} hydrocarbyl group optionally
- 15 containing one or more heteroatoms from groups 14-16;
- Ar is independently an aryl or heteroaryl group having up to 20 carbon atoms optionally substituted by one or more groups R^1 ;
- Ar' is independently an aryl or heteroaryl group having up to 20 carbon atoms optionally substituted by one or more groups R^1 ;
- 20 each R^1 is a C_1-C_{20} hydrocarbyl group or two R^1 groups on adjacent carbon atoms taken together can form a fused 5 or 6 membered non aromatic ring with the Ar group, said ring being itself optionally substituted with one or more groups R^4 ; and

each R¹ is a C₁-C₂₀hydrocarbyl group.

The complexes are symmetrical or asymmetrical, preferably asymmetrical. That means simply that the two indenyl ligands forming the metallocene are different, that is, each indenyl ligand bears a set of substituents that are either chemically different, or located in different positions with respect to the other indenyl ligand. More precisely, they are chiral, racemic bridged bisindenyl metallocenes. Whilst the complexes may be in their syn configuration ideally, they are in their anti configuration. For the purpose of this invention, racemic-anti means that the two indenyl ligands are oriented in opposite directions with respect to the cyclopentadienyl-metal-cyclopentadienyl plane, while racemic-syn means that the two indenyl ligands are oriented in the same direction with respect to the cyclopentadienyl-metal-cyclopentadienyl plane, as shown in the Figure below.

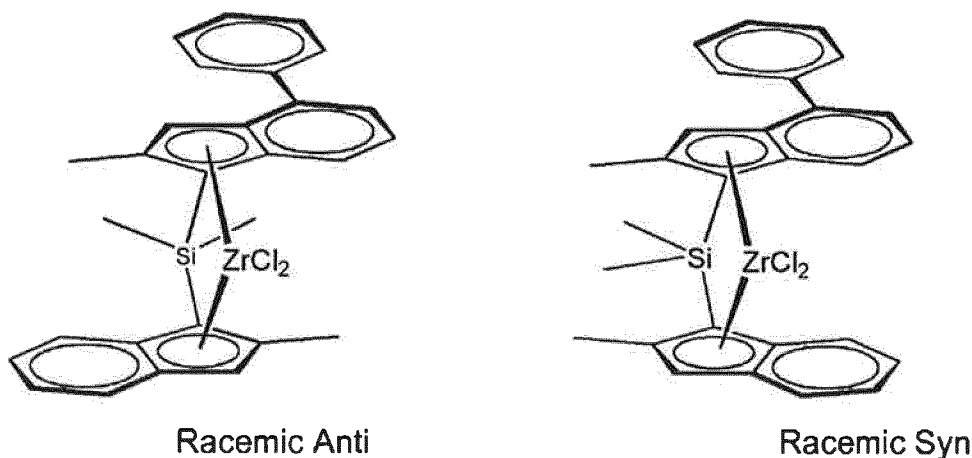

Formula (III) is intended to cover both syn and anti configurations, preferably anti. It is required in addition in compounds of formula (III), that the group R^{5'} is not hydrogen where the 5-position in the other ligand carries a hydrogen.

In fact, the metallocenes of the invention are ideally C₁-symmetric but they maintain a pseudo-C₂-symmetry since they maintain C₂-symmetry in close proximity of the metal center, although not at the ligand periphery. As will be seen, the use of two different indenyl ligands as described in this invention allows for a much finer structural variation, hence a more precise tuning of the catalyst performance, compared to the typical C₂-symmetric catalysts. By nature of their chemistry, both anti and syn enantiomer pairs are formed during

the synthesis of the complexes. However, by using the ligands of this invention, separation of the preferred anti isomers from the syn isomers is straightforward.

It is preferred if the metallocenes are employed as the rac anti isomer. Ideally therefore at least 95% mol, such as at least 98% mol, especially at least 99% mol of the metallocene is in the racemic anti isomeric form.

In the catalysts of the invention: M is preferably Zr.

10 Each X, which may be the same or different, is preferably a hydrogen atom, a halogen atom, a R, OR, OSO₂CF₃, OCOR, SR, NR₂ or PR₂ group wherein R is a linear or branched, cyclic or acyclic, C₁₋₂₀alkyl, C₂₋₂₀alkenyl, C₂₋₂₀alkynyl, C₆₋₂₀aryl, C₇₋₂₀alkylaryl or C₇₋₂₀arylalkyl radical; optionally containing heteroatoms belonging to groups 14-16. R is preferably a C₁₋₆alkyl, phenyl or benzyl group.

15 Most preferably each X is independently a hydrogen atom, a halogen atom, C₁₋₆alkoxy group or an R group, e.g. preferably a C₁₋₆alkyl, phenyl or benzyl group. Most preferably, X is chlorine or a methyl radical. Preferably, both X groups are the same.

20 L is preferably an alkylene linker or a bridge comprising a heteroatom, such as silicon or germanium, e.g. -SiR⁸₂-, wherein each R⁸ is independently C₁₋₂₀alkyl, C₃₋₁₀cycloalkyl, C₆₋₂₀aryl or tri(C₁₋₂₀alkyl)silyl, such as trimethylsilyl. More preferably R⁸ is C₁₋₆alkyl, especially methyl or C₃₋₇cycloalkyl, such as cyclohexyl. Most preferably, L is a dimethylsilyl or a methylcyclohexylsilyl bridge (i.e. Me-Si-cyclohexyl). It may also be an ethylene bridge.

25 R² and R^{2'} can be different but they are preferably the same. R² and R^{2'} are preferably a C₁₋₁₀hydrocarbyl group such as C₁₋₆hydrocarbyl group. More preferably, it is a linear or branched C₁₋₁₀alkyl group. More preferably, it is a linear or branched C₁₋₆alkyl group, especially linear C₁₋₆alkyl group such as methyl or ethyl.

30 The R² and R^{2'} groups can be interrupted by one or more heteroatoms, such as 1 or 2 heteroatoms, e.g. one heteroatom, selected from groups 14 to 16 of the periodic table. Such a heteroatom is preferably O, N or S, especially O. More preferably however the R² and R^{2'} groups are free from heteroatoms. Most especially R² and R^{2'} methyl, especially both methyl.

The two Ar groups Ar and Ar' can be the same or different. It is preferred however if the Ar groups are different. The Ar' group may be unsubstituted. The Ar' is preferably a phenyl based group optionally substituted by groups R¹, especially an unsubstituted phenyl group.

5

The Ar group is preferably a C₆₋₂₀aryl group such as a phenyl group or naphthyl group. Whilst the Ar group can be a heteroaryl group, such as carbazolyl, it is preferable that Ar is not a heteroaryl group. The Ar group can be unsubstituted or substituted by one or more groups R¹, more preferably by one or two R¹ groups, especially in position 4 of the aryl ring bound to the indenyl ligand or in the 3,5-positions.

10

In one embodiment both Ar and Ar' are unsubstituted. In another embodiment Ar' is unsubstituted and Ar is substituted by one or two groups R¹.

15 R¹ is preferably a C₁₋₂₀hydrocarbyl group, such as a C₁₋₂₀alkyl group. R¹ groups can be the same or different, preferably the same. More preferably, R¹ is a C₂₋₁₀alkyl group such as C₃₋₈alkyl group. Highly preferred groups are tert butyl or isopropyl groups. It is preferred if the group R¹ is bulky, i.e. is branched. Branching might be alpha or beta to the ring. Branched C₃₋₈alkyl groups are also favoured therefore.

20

In a further embodiment, two R¹ groups on adjacent carbon atoms taken together can form a fused 5 or 6 membered non aromatic ring with the Ar group, said ring being itself optionally substituted with one or more groups R⁴. Such a ring might form a tetrahydroindenyl group with the Ar ring or a tetrahydronaphthyl group.

25

If an R⁴ group is present, there is preferably only 1 such group. It is preferably a C₁₋₁₀alkyl group.

30 It is preferred if there is one or two R¹ groups present on the Ar group. Where there is one R¹ group present, the group is preferably para to the indenyl ring (4-position). Where two R¹ groups are present these are preferably at the 3 and 5 positions.

R² is preferably H.

R^{5'} is preferably a C₁₋₂₀hydrocarbyl group containing one or more heteroatoms from groups 14-16 and optionally substituted by one or more halo atoms or R^{5'} is a C₁₋₁₀alkyl group, such as methyl but most preferably it is a group Z'R^{3'}.

- 5 R⁶ and R^{6'} may be the same or different. In one preferred embodiment one of R⁶ and R^{6'} is hydrogen, especially R⁶. It is preferred if R⁶ and R^{6'} are not both hydrogen. If not hydrogen, it is preferred if each R⁶ and R^{6'} is preferably a C₁₋₂₀hydrocarbyl group, such as a C₁₋₂₀alkyl group or C₆₋₁₀aryl group. More preferably, R⁶ and R^{6'} are a C₂₋₁₀alkyl group such as C₃₋₈alkyl group. Highly preferred groups are tert-butyl groups. It is preferred if R⁶ and R^{6'} are bulky,
10 i.e. are branched. Branching might be alpha or beta to the ring. Branched C₃₋₈alkyl groups are also favoured therefore.

In a further embodiment, R⁵ and R⁶ taken together form a 5 membered carbon ring with the atoms to which they are attached.

15

In a further embodiment, R^{5'} and R^{6'} taken together form a 5 membered carbon ring with the atoms to which they are attached.

- 20 The R⁷ and R^{7'} groups can be the same or different. Each R⁷ and R^{7'} group is preferably hydrogen, a C₁₋₆alkyl group or is a group ZR³. It is preferred if R^{7'} is hydrogen. It is preferred if R⁷ is hydrogen, C₁₋₆alkyl or ZR³. The combination of both R⁷ and R^{7'} being hydrogen is most preferred. It is also preferred if ZR³ represents OC₁₋₆alkyl, such as methoxy. It is also preferred if R⁷ represents C₁₋₆alkyl such as methyl.


- 25 Z and Z' are O or S, preferably O.

R³ is preferably a C₁₋₁₀hydrocarbyl group, especially a C₁₋₁₀alkyl group, or aryl group optionally substituted by one or more halo groups. Most especially R³ is a C₁₋₆alkyl group, such as a linear C₁₋₆alkyl group, e.g. methyl or ethyl

30

R^{3'} is preferably a C₁₋₁₀hydrocarbyl group, especially a C₁₋₁₀alkyl group, or aryl group optionally substituted by one or more halo groups. Most especially R^{3'} is a C₁₋₆alkyl group, such as a linear C₁₋₆alkyl group, e.g. methyl or ethyl or it is a phenyl based radical optionally substituted with one or more halo groups such as Ph or C₆F₅.

Thus, preferred complexes of the invention are of formula (IV') or (IV)

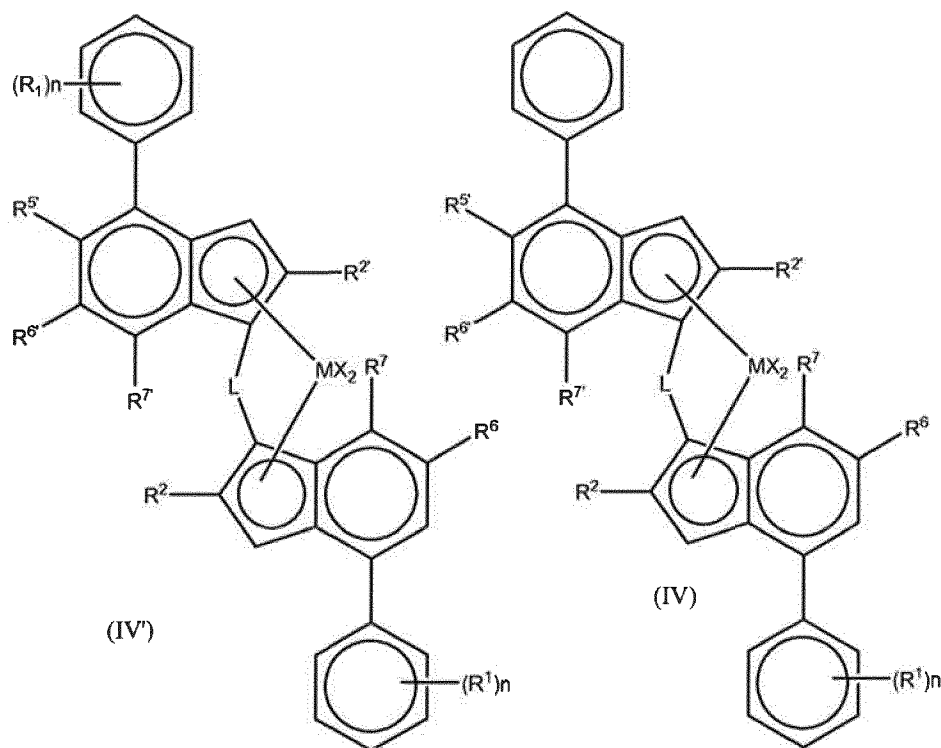

wherein


- 5 M is zirconium or hafnium;
 each X is a sigma ligand, preferably each X is independently a hydrogen atom, a halogen atom, C_{1-6} alkoxy group, C_{1-6} alkyl, phenyl or benzyl group;
 L is a divalent bridge selected from $-R'_2C-$, $-R'_2C-CR'_2-$, $-R'_2Si-$, $-R'_2Si-SiR'_2-$, $-R'_2Ge-$,
 10 wherein each R' is independently a hydrogen atom, C_{1-20} alkyl, C_{3-10} cycloalkyl, tri(C_{1-20} -alkyl)silyl, C_{6-20} aryl, C_{7-20} arylalkyl or C_{7-20} alkylaryl;
 each R^2 or $R^{2'}$ is a C_{1-10} alkyl group;
 $R^{5'}$ is a C_{1-10} alkyl group or $Z'R^{3'}$ group;
 R^6 is hydrogen or a C_{1-10} alkyl group;
 $R^{6'}$ is a C_{1-10} alkyl group or C_{6-10} aryl group;
 15 R^7 is hydrogen, a C_{1-6} alkyl group or ZR^3 group;
 $R^{7'}$ is hydrogen or a C_{1-10} alkyl group;
 Z and Z' are independently O or S;
 $R^{3'}$ is a C_{1-10} alkyl group, or a C_{6-10} aryl group optionally substituted by one or more halo groups;

R^3 is a C_{1-10} alkyl group;

each n is independently 0 to 4, e.g. 0, 1 or 2;

and each R^1 is independently a C_{1-20} hydrocarbyl group, e.g. C_{1-10} alkyl group.

- 5 In one embodiment, the metallocene is a complex of formula (V') or (V):

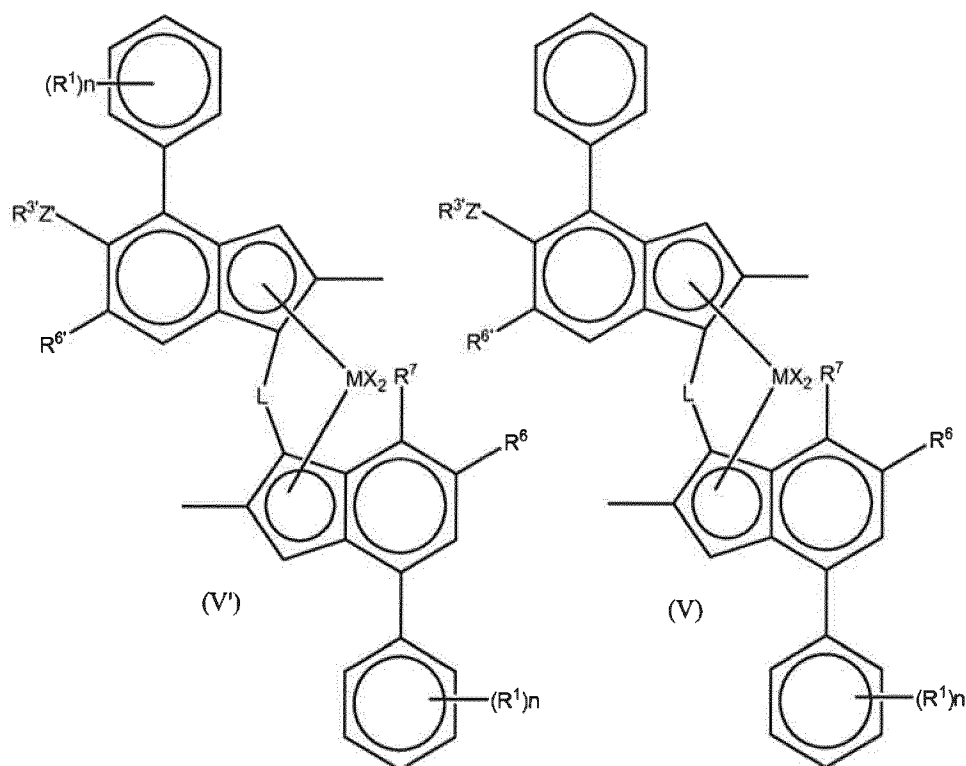

wherein M is zirconium or hafnium;

each X is a sigma ligand, preferably each X is independently a hydrogen atom, a halogen atom, C_{1-6} alkoxy group, C_{1-6} alkyl, phenyl or benzyl group;

- 10 L is a divalent bridge selected from $-R'_2C-$ or $-R'_2Si-$ wherein each R' is independently a hydrogen atom, C_{1-20} alkyl or C_{3-10} cycloalkyl;

R^6 is hydrogen or a C_{1-10} alkyl group;

$R^{6'}$ is a C_{1-10} alkyl group or C_{6-10} aryl group;

R^7 is hydrogen, C_{1-6} alkyl or OC_{1-6} alkyl;


- 15 Z' is O or S;

$R^{3'}$ is a C_{1-10} alkyl group, or C_{6-10} aryl group optionally substituted by one or more halo groups;

n is independently 0 to 4, e.g. 0, 1 or 2; and


each R^1 is independently a C_{1-10} alkyl group.

In one embodiment, the metallocene is a complex of formula (VI') or (VI):

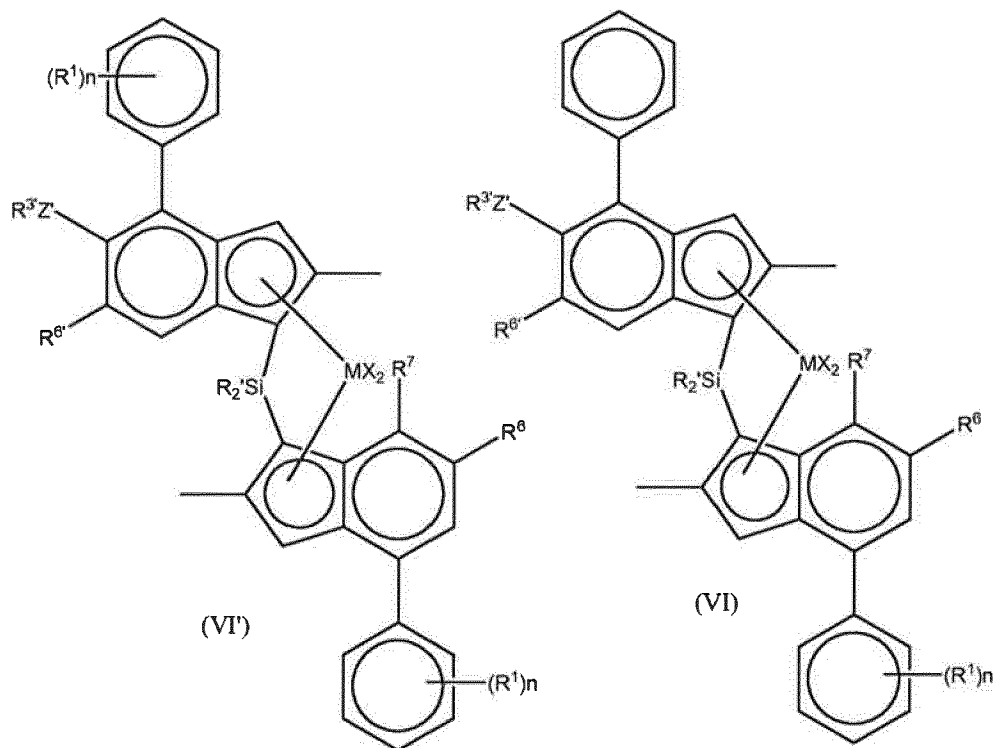

- 5 M is zirconium or hafnium;
 each X is a sigma ligand, preferably each X is independently a hydrogen atom, a halogen atom, C_{1-6} alkoxy group, C_{1-6} alkyl, phenyl or benzyl group;
 each R^1 is independently a hydrogen atom, C_{1-20} alkyl or C_{3-7} cycloalkyl;
 R^6 is hydrogen or a C_{1-10} alkyl group;
- 10 $R^{6'}$ is a C_{1-10} alkyl group or C_{6-10} aryl group;
 R^7 is hydrogen, C_{1-6} alkyl or OC_{1-6} alkyl;
 Z' is O or S;
 $R^{3'}$ is a C_{1-10} alkyl group, or C_{6-10} aryl group optionally substituted by one or more halo groups;
- 15 n is independently 0, 1 to 2; and
 each R^1 is independently a C_{3-8} alkyl group.

Most especially, the metallocene is of formula (VII') or (VII):

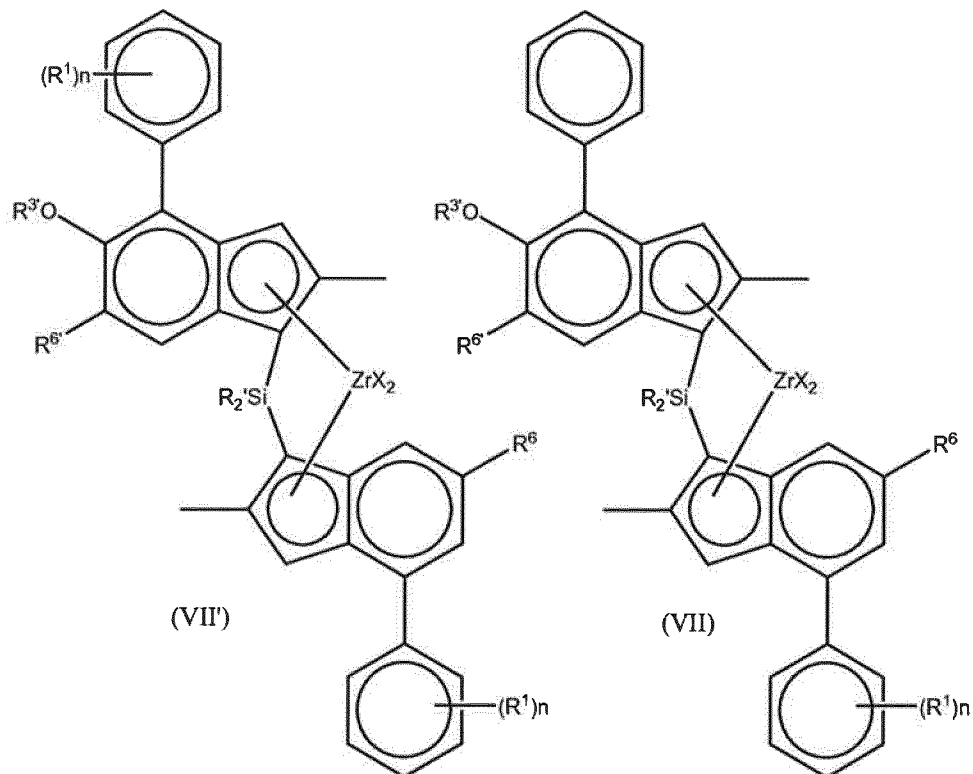

wherein each X is a sigma ligand, preferably each X is independently a hydrogen atom, a halogen atom, C₁₋₆alkoxy group, C₁₋₆alkyl, phenyl or benzyl group;

5 R' is independently a C₁₋₆alkyl or C₃₋₁₀cycloalkyl;

R¹ is independently C₃₋₈alkyl;

R⁶ is hydrogen or a C₃₋₈alkyl group;



R^{6'} is a C₃₋₈alkyl group or C₆₋₁₀aryl group;




R^{3'} is a C₁₋₆alkyl group, or C₆₋₁₀aryl group optionally substituted by one or more halo groups;



10 and

n is independently 0, 1 or 2.

Particular compounds of the invention include:

	
<p><i>rac-anti-Me₂Si(2-Me-4-(p-tBuPh)-Ind)(2-Me-4-Ph-5-OMe-6-tBu-Ind)ZrCl₂</i></p>	<p><i>rac-anti-Me₂Si(2-Me-4-(3,5-di-tBuPh)-6-tBu-Ind)(2-Me-4-Ph-5-OMe-6-tBu-Ind)ZrCl₂</i></p>

		
<p><i>rac-dimethylsilanediybis [2-methyl-4-(4-tert-butylphenyl)-1,5,6,7-tetrahydro-s-indacen-1-yl] zirconium dichloride</i></p>	<p><i>rac-dimethylsilanediybis (2-methyl-4-phenyl-5-methoxy-6-tert-butylinden-1-yl) zirconium dichloride</i></p>	<p><i>rac-anti-Me₂Si(2-Me-4-Ph-6-tBu-Ind)(2-Me-4-Ph-5-OMe-6-tBu-Ind)ZrCl₂</i></p>

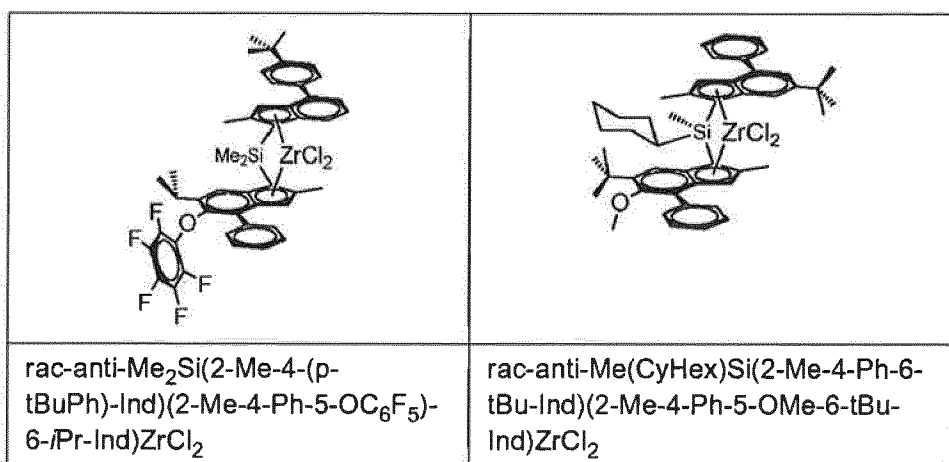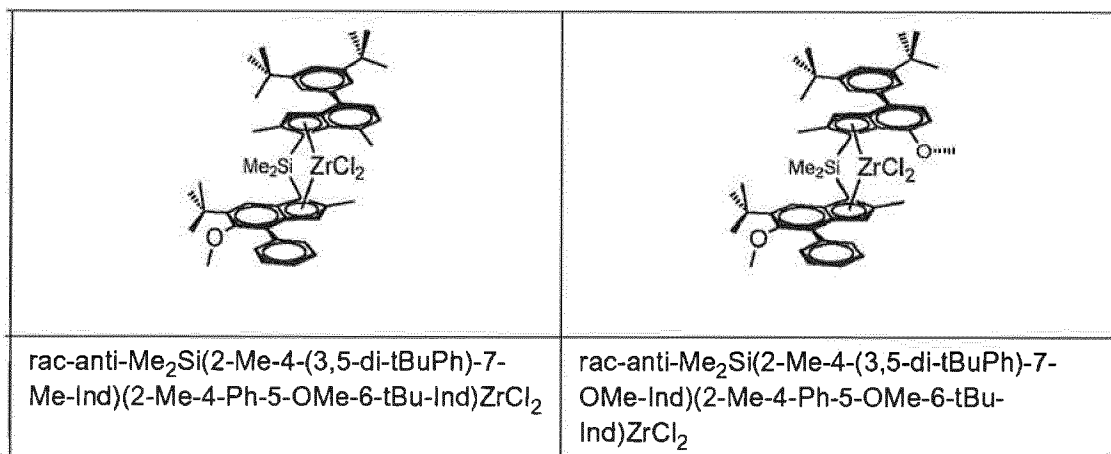

For the avoidance of doubt, any narrower definition of a substituent offered above can be
 5 combined with any other broad or narrowed definition of any other substituent.

Throughout the disclosure above, where a narrower definition of a substituent is presented,
 that narrower definition is deemed disclosed in conjunction with all broader and narrower
 definitions of other substituents in the application.

10

These catalysts can be made following the principles in WO2013/007650.

Cocatalyst

To form an active catalytic species it is normally necessary to employ a cocatalyst as is well
 15 known in the art. Cocatalysts comprising one or more compounds of Group 13 metals, like
 organoaluminium compounds or borates used to activate metallocene catalysts are suitable

for use in this invention. Thus the cocatalyst is preferably an alumoxane, like MAO. Borate cocatalysts such as $B(C_6F_5)_3$, $C_6H_5N(CH_3)_2H:B(C_6F_5)_4$, $(C_6H_5)_3C:B(C_6F_5)_4$ or $Ni(CN)_4[B(C_6F_5)_3]_4^{2-}$ are also known. Suitable cocatalysts are described in WO2013/007650 which is herewith incorporated by reference.

5

Suitable amounts of cocatalyst will be well known to the person skilled in the art.

Catalyst Manufacture

The catalyst of the invention can be used in supported or unsupported form. The particulate support material used is preferably an organic or inorganic material, such as silica, alumina or zirconia or a mixed oxide such as silica-alumina, in particular silica, alumina or silica-alumina. The use of a silica support is preferred. The skilled man is aware of the procedures required to support a metallocene catalyst.

15 Especially preferably the support is a porous material so that the complex may be loaded into the pores of the support, e.g. using a process analogous to those described in WO94/14856 (Mobil), WO95/12622 (Borealis) and WO2006/097497. The particle size is not critical but is preferably in the range 5 to 200 μm , more preferably 20 to 80 μm . The use of these supports is routine in the art.

20

In an alternative embodiment no external carrier is used but the catalyst is still presented in solid particulate form. Thus no external support material such as inert organic or inorganic carrier, such as for example silica as described above is employed.

25 In order to provide the catalyst of the invention in solid form but without using an external carrier, it is preferred if a liquid/liquid emulsion system is used. The process involves forming dispersing catalyst components (i) and (ii) in a solvent, and solidifying said dispersed droplets to form solid particles.

30 In particular, the method involves preparing a solution of one or more catalyst components; dispersing said solution in an solvent to form an emulsion in which said one or more catalyst components are present in the droplets of the dispersed phase; immobilising the catalyst components in the dispersed droplets, in the absence of an external particulate porous support, to form solid particles comprising the said catalyst, and optionally recovering said

particles.

This process enables the manufacture of active catalyst particles with improved morphology, e.g. with a predetermined spherical shape, surface properties and particle size and without
5 using any added external porous support material, such as an inorganic oxide, e.g. silica. By the term "preparing a solution of one or more catalyst components" is meant that the catalyst forming compounds may be combined in one solution which is dispersed to the immiscible solvent, or, alternatively, at least two separate catalyst solutions for each part of the catalyst forming compounds may be prepared, which are then dispersed successively to the solvent.

10

In a preferred method for forming the catalyst at least two separate solutions for each or part of said catalyst may be prepared, which are then dispersed successively to the immiscible solvent.

15 More preferably, a solution of the complex comprising the transition metal compound and the cocatalyst is combined with the solvent to form an emulsion wherein that inert solvent forms the continuous liquid phase and the solution comprising the catalyst components forms the dispersed phase (discontinuous phase) in the form of dispersed droplets. The droplets are then solidified to form solid catalyst particles, and the solid particles are
20 separated from the liquid and optionally washed and/or dried. The solvent forming the continuous phase may be immiscible to the catalyst solution at least at the conditions (e. g. temperatures) used during the dispersing step.

The term "immiscible with the catalyst solution" means that the solvent (continuous phase) is
25 fully immiscible or partly immiscible i.e. not fully miscible with the dispersed phase solution.

Preferably said solvent is inert in relation to the compounds of the catalyst system to be produced. Full disclosure of the necessary process can be found in WO03/051934 which is
30 herein incorporated by reference.

All or part of the preparation steps can be done in a continuous manner. Reference is made to WO2006/069733 describing principles of such a continuous or semicontinuous preparation methods of the solid catalyst types, prepared via emulsion/solidification method.

Catalyst prepolymerisation

The use of the heterogeneous, non-supported catalysts, (i.e. "self-supported" catalysts) might have, as a drawback, a tendency to dissolve to some extent in the polymerisation media, i.e. some active catalyst components might leach out of the catalyst particles during slurry
5 polymerisation, whereby the original good morphology of the catalyst might be lost. These leached catalyst components are very active possibly causing problems during polymerisation. Therefore, the amount of leached components should be minimized, i.e. all catalyst components should be kept in heterogeneous form.

10

Furthermore, the self-supported catalysts generate, due to the high amount of catalytically active species in the catalyst system, high temperatures at the beginning of the polymerisation which may cause melting of the product material. Both effects, i.e. the partial
15 dissolving of the catalyst system and the heat generation, might cause fouling, sheeting and deterioration of the polymer material morphology.

In order to minimise the possible problems associated with high activity or leaching, it is preferred to "prepolymerise" the catalyst before using it in polymerisation process. It has to be noted that prepolymerisation in this regard is part of the catalyst preparation process,
20 being a step carried out after a solid catalyst is formed. This catalyst prepolymerisation step is not part of the actual polymerisation configuration, which might comprise a conventional process prepolymerisation step as well. After the catalyst prepolymerisation step, a solid catalyst is obtained and used in polymerisation. Such a catalyst prepolymerisation step is also denoted "off-line prepolymerisation step" or "off-line prepolymerisation".

25

Catalyst "prepolymerisation" takes place following the solidification step of the liquid-liquid emulsion process hereinbefore described. Prepolymerisation may take place by known methods described in the art, such as that described in WO 2010/052263, WO 2010/052260
or WO 2010/052264 which are all herewith incorporated by reference in their entirety.

30 Preferable embodiments of this aspect of the invention are described herein.

As monomers in the catalyst prepolymerisation step preferably alpha-olefins are used. Preferable C₂-C₁₀ alpha olefins, such as ethylene, propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-heptene, 1-octene, 1-nonene 1-decene, styrene and vinylcyclohexene

are used. Most preferred alpha-olefins are ethylene and propylene. The catalyst prepolymerisation may be carried out in gas phase or in an inert diluent, typically oil or fluorinated hydrocarbon, preferably in fluorinated hydrocarbons or mixture of fluorinated hydrocarbons. Preferably perfluorinated hydrocarbons are used. The melting point of such (per)fluorinated hydrocarbons is typically in the range of 0 to 140°C, preferably 30 to 120°C, like 50 to 110 °C.

Where the catalyst prepolymerisation is done in fluorinated hydrocarbons, the temperature for the prepolymerisation step is below 70°C, e.g. in the range of -30 to 70°C, preferably 0-65°C and more preferably in the range 20 to 55°C.

Pressure within the prepolymerisation vessel is preferably higher than atmospheric pressure to minimize the eventual leaching of air and/or moisture into the catalyst vessel. Preferably the pressure is in the range of at least 1 to 15 bar, preferably 2 to 10 bar. The prepolymerisation vessel is preferably kept in an inert atmosphere, such as under nitrogen or argon or similar atmosphere.

Prepolymerisation is continued until the prepolymerisation degree defined as weight of polymer matrix/weight of solid catalyst before prepolymerisation step is reached. The degree is below 25, preferably 0.5 to 10.0, more preferably 1.0 to 8.0, most preferably 2.0 to 6.0.

Use of the catalyst prepolymerisation step offers the advantage of minimizing leaching of catalyst components and thus local overheating.

After prepolymerisation, the catalyst can be isolated and stored.

Polymerisation

The present invention is furthermore directed to a process for the preparation of the polypropylene composition according to the present invention.

30

The polymers of the invention can be prepared by blending the necessary components that have been formed separately. However, the polymers are typically and preferably made in a multistep process well known in the art. A preferred multistage process is a "loop-gas

phase"-process, such as developed by Borealis A/S, Denmark (known as BORSTAR(R) technology) described e.g. in patent literature, such as in EP-A-0887379 or in WO 92/12182.

5 The invention preferably relates to the copolymerisation of propylene and ethylene as defined above and below, in at least a two step process so as to form the polypropylene composition. Preferably, propylene and ethylene are the only monomers used.

10 Polymerization in the process of the invention may be effected in two or more, e.g. 2 or 3, polymerization reactors. The process may also involve a prepolymerisation reaction. This prepolymerisation step is a conventional step used routinely in polymer synthesis and is to be distinguished from the catalyst prepolymerisation step discussed above.

15 Ideally, the process of the invention employs three main reactors, a first reactor operating in bulk, a first gas phase reactor and a second gas phase reactor. As outlined above, the process may also utilize a prepolymerisation step. This prepolymerisation step may be effected in the first reactor or maybe effected in a prepolymerisation reactor which is not one of the afore-mentioned main reactors. In case of bench-scale polymerisation prepolymerisation is frequently effected in the first (bulk) reactor whereas in production at a larger scale the prepolymerisation is usually effected in a prepolymerisation reactor which is not one of the
20 afore-mentioned main reactors.

The inventive process of the invention forms the polypropylene composition. In that polymer, it is preferred that the first component, the matrix component (M) is a propylene homopolymer or random copolymer, preferably propylene homopolymer, and is
25 subsequently combined with a ethylene-propylene copolymer (EPC) to form the polypropylene composition of the invention. The EPC fraction is preferably formed after formation of the matrix component and is preferably formed in the gas phase.

30 Thus, it is appreciated that the propylene homopolymer or random copolymer, preferably propylene homopolymer, as matrix component (M) is prepared in a first stage and the ethylene-propylene copolymer (EPC) is prepared in a second stage in the presence of the matrix component (M).

Ideally therefore a propylene homopolymer or random copolymer, preferably propylene homopolymer, as matrix component (M) is formed in a bulk step and a first gas phase step, and the ethylene-propylene copolymer (EPC) is formed in the second gas phase step.

- 5 It is thus appreciated that the polypropylene composition is preferably produced in a multi-stage process.

For bulk and gas phase copolymerisation reactions, the reaction temperature used will generally be in the range 60 to 115°C (e.g. 70 to 110°C), the reactor pressure will generally
10 be in the range 10 to 40 bar for gas phase reactions with bulk polymerisation operating at slightly higher pressures. The residence time will generally be 0.25 to 8 hours (e.g. 0.3 to 3 hours). The gas used will be the monomer optionally as mixture with a non-reactive gas such as nitrogen or propane. It is a particular feature of the invention that polymerisation takes
15 place at temperatures of at least 60°C.

Generally, the quantity of catalyst used will depend upon the nature of the catalyst, the reactor types and conditions and the properties desired for the polymer product. As is well known in the art hydrogen can be used for controlling the molecular weight of the
20 polypropylene composition.

Composition

The present invention is furthermore directed to a composition comprising the polypropylene composition, as defined herein, and one or more additive(s) in an amount of up to 4 wt.-%, based on the total weight of the composition.

25 In one embodiment, the composition comprises a nucleating agent (NA). Additionally or alternatively, the composition may further comprise an inorganic filler, which, however, is not preferred.

30 Usually the polypropylene composition makes up at least 96.0 wt.% of the composition, preferably at least 97.0 wt.% of the composition and most preferably at least 97.5 wt.% of the composition.

Generally, nucleating agents promote the formation of crystallization nuclei when a melt of polypropylene is solidified and are thus increasing the crystallization speed and temperature of nucleated polypropylene compared to non-nucleated polypropylene.

- 5 The nucleating agent is preferably an alpha-nucleating agent.

The composition usually contains up to 2 wt.-% of at least one alpha-nucleating agent. A lower limit of 0.001 wt.-% of alpha-nucleating agent is preferred. Preferably the polyolefin composition comprises 0.005 to 0.5 wt.-%, more preferably 0.01 to 0.3 wt.-%, most
10 preferably 0.04 to 0.25 wt.-% of at least one alpha-nucleating agent. The weight percent in the afore paragraph refers to the total amount of alpha-nucleating agents present.

Preferred examples of the alpha nucleating agents include sodium-2,2'-methylene-bis(4,6-di-
t-butyl-phenyl)phosphate, sodium-2,2'-ethylidene-bis(4,6-di-t-butylphenyl)-phosphate,
15 lithium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate, lithium-2,2'-ethylidene-bis(4,6-
di-t-butylphenyl)phosphate, sodium-2,2'-ethylidene-bis(4-i-propyl-6-t-
butylphenyl)phosphate, lithium-2,2'-methylene-bis(4-methyl-6-t-butylphenyl)phosphate,
lithium-2,2'-methylene-bis(4-ethyl-6-t-butylphenyl)phosphate, calcium-bis[2,2'-thiobis(4-
methyl-6-t-butyl-phenyl)-phosphate], calcium-bis[2,2'-thiobis(4-ethyl-6-t-butylphenyl)-
20 phosphate], calcium-bis[2,2'-thiobis(4,6-di-t-butylphenyl)phosphate], magnesium-bis[2,2'-
thiobis(4,6-di-t-butylphenyl)phosphate], magnesium-bis[2,2'-thiobis(4-t-
octylphenyl)phosphate], sodium-2,2'-butylidene-bis(4,6-dimethylphenyl)phosphate, sodium-
2,2'-butylidene-bis(4,6-di-t-butyl-phenyl)-phosphate, sodium-2,2'-t-octylmethylene-bis(4,6-
dimethyl-phenyl)-phosphate, sodium-2,2'-t-octylmethylene-bis(4,6-di-t-butylphenyl)-phos-
25 phate, calcium-bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)-phosphate], magnesium-
bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)-phosphate], barium-bis[2,2'-methylene-bis(4,6-
di-t-butylphenyl)-phosphate], sodium-2,2'-methylene-bis(4-methyl-6-t-butylphenyl)-
phosphate, sodium-2,2'-methylene-bis(4-ethyl-6-t-butylphenyl)phosphate, sodium(4,4'-
dimethyl-5,6'-di-t-butyl-2,2'-biphenyl)phosphate, calcium-bis-[(4,4'-dimethyl-6,6'-di-t-
30 butyl-2,2'-biphenyl)phosphate], sodium-2,2'-ethylidene-bis(4-m-butyl-6-t-butyl-
phenyl)phosphate, sodium-2,2'-methylene-bis-(4,6-di-methylphenyl)-phosphate, sodium-
2,2'-methylene-bis(4,6-di-t-ethyl-phenyl)phosphate, potassium-2,2'-ethylidene-bis(4,6-di-t-
butylphenyl)-phosphate, calcium-bis[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)-phosphate],
magnesium-bis[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)-phosphate], barium-bis[2,2'-

ethylidene-bis-(4,6-di-t-butylphenyl)-phosphate], aluminium-hydroxy-bis[2,2'-methylene-bis(4,6-di-t-butyl-phenyl)phosphate], aluminium-tris[2,2'-ethylidene-bis(4,6-di-t-butylphenyl)-phosphate].

- 5 A second group of phosphorous based nucleating agents includes for example aluminium-hydroxy-bis[2,4,8,10-tetrakis(1,1-dimethylethyl)-6-hydroxy-12H-dibenzo-[d,g]-dioxaphosocin-6-oxidato] and blends thereof with Li-myristate or Li-stearate.

Of the phosphorous based nucleating agents sodium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate or aluminium-hydroxy-bis[2,2'-methylene-bis(4,6-di-t-butylphenyl)-phosphate] or aluminium-hydroxy-bis-[2,4,8,10-tetrakis(1,1-dimethylethyl)-6-hydroxy-12H-dibenzo-[d,g]-dioxaphosocin-6-oxidato] or blends thereof with Li-myristate or Li-stearate are especially preferred.

- 15 Also sorbitol-based nucleating agents, i.e. di(alkylbenzylidene)sorbitols like 1,3:2,4-25 dibenzylidene sorbitol, 1,3:2,4-di(4-methylbenzylidene) sorbitol, 1,3:2,4-di(4-ethylbenzylidene) sorbitol and 1,3:2,4-Bis(3,4-dimethylbenzylidene) sorbitol or pine rosin can be used as nucleating agents, as well as nonitol derivatives, like 1,2,3-trideoxy-4,6;5,7-20 bis-O-[(4-propylphenyl)methylene] nonitol, and benzene-trisamides like substituted 1,3,5-benzenetrisamides as N,N',N''-tris-tert-butyl-1,3,5- benzenetricarboxamide, N,N',N''-tricyclohexyl-1,3,5-benzene-tricarboxamide and N-[3,5-bis-(2,2-dimethyl-propionylamino)-phenyl]-2,2-dimethyl-propionamide, wherein 1,3:2,4-di(4-methylbenzylidene) sorbitol and N-[3,5-bis-(2,2-dimethyl-propionylamino)-phenyl]-2,2-dimethyl-propionamide

- 25 Further suitable alpha-nucleating agents are polymeric nucleating agents selected from the group consisting of vinylcycloalkane polymers and vinylalkane polymers. Nucleation with these polymeric nucleating agents is either accomplished by a special reactor technique, where the catalyst is prepolymerised with monomers like e.g. vinylcyclohexane (VCH), or by blending the propylene polymer with the vinyl(cyclo)alkane polymer. These methods are 30 described in greater detail in e.g. EP 0 316 187 A2 and WO 99/24479, the disclosure of which is incorporated herein by reference.

Suitable alpha-nucleating agents for the polypropylene composition of the invention are in addition nucleating agents, as described for example in *Macromolecules* 2005, 38, 3688-3695, the disclosure of which is incorporated herein by reference.

5 Nucleating agents such as ADK NA-11 (Methylen-bis(4,6-di-t-butylphenyl)phosphate sodium salt) and ADK NA-21 (comprising aluminium hydroxy-bis[2,4,8,10-tetrakis(1,1-dimethylethyl)-6-hydroxy-12H-dibenzo-[d,g]-dioxaphosphocin-6-oxidato]) are commercially available from Asahi Denka Kokai and are among those which are preferably added to the polyolefin composition of the invention. Millad 3988 1,3 : 2,4 Bis(3,4-dimethylbenzylidene)
10 sorbitol, Millad 3905 and Millad 3940 available from Milliken & Company are other examples of nucleating agents that can be utilised in the invention.

Further commercial available alpha-nucleating agents, which can be used for the composition of the invention are, for example, Irgaclear XT 386 (N-[3,5-bis-(2,2-dimethylpropionylamino)-phenyl]-2,2-dimethylpropionamide) from Ciba Speciality Chemicals,
15 Hyperform HPN-68L and Hyperform HPN-20E from Milliken & Company.

Among all alpha-nucleating agents mentioned above, aluminium hydroxy-bis[2,4,8,10-tetrakis(1,1-dimethylethyl)-6-hydroxy-12H-dibenzo-[d,g]-dioxaphosphocin-6-oxidato] based
20 nucleating agents like ADK NA-21, NA-21 E, NA-21 F, etc., sodium-2,2'-methylene-bis(4,6-di-t-butylphenyl)phosphate (ADK NA-11), aluminium-hydroxy-bis[2,2'-methylene-bis(4,6-di-t-butyl-phenyl)-phosphate], sorbitol-based nucleating agents, i.e. di(alkylbenzylidene)sorbitols like 1,3:2,4-25 dibenzylidene sorbitol, 1,3:2,4-di(4-methylbenzylidene) sorbitol, 1,3:2,4-di(4-ethylbenzylidene) sorbitol and 1,3:2,4-Bis(3,4-dimethylbenzylidene) sorbitol, as well as nonitol derivatives, like 1,2,3-trideoxy-4,6;5,7-bis-O-[(4-propylphenyl)methylene] nonitol, and benzene-trisamides like substituted 1,3,5-benzenetrisamides as N,N',N''-tris-tert-butyl-1,3,5-benzenetricarboxamide, N,N',N''-tris-cyclohexyl-1,3,5-benzene-tricarboxamide and N-[3,5-bis-(2,2-dimethyl-propionylamino)-phenyl]-2,2-dimethyl-propionamide, wherein 1,3:2,4-di(4-methylbenzylidene) sorbitol and
25 N-[3,5-bis-(2,2-dimethyl-propionylamino)-phenyl]-2,2-dimethyl-propionamide and
30 polymeric nucleating agents selected from the group consisting of vinylcycloalkane polymers and vinylalkane polymers are particularly preferred.

Especially preferred are soluble nucleating agents like Millad 3988 (1,3:2,4-di(4-ethylbenzylidene) sorbitol and 1,3:2,4-Bis(3,4-dimethylbenzylidene) sorbitol) and Millad NX8000 (1,2,3-trideoxy-4,6;5,7-bis-O-[(4-propylphenyl)methylene] nonitol).

- 5 The composition is preferably having a melting temperature T_m of 148 to 162°C.

Article

The present invention is furthermore directed to an article comprising the polypropylene composition as defined herein or the composition comprising the polypropylene composition
10 as defined herein.

According to one embodiment of the invention, the polypropylene composition as defined herein or the composition comprising the polypropylene composition as defined herein are used for the production of films, extruded, blow moulded or injection moulded articles, such
15 as pouches and bags, pipes and fittings, transport packaging containers as well as components for car exteriors and interiors, like dashboards, door claddings, consoles, bumpers and trims.

The article is preferably produced by any common conversion process suitable for
20 thermoplastic polymers like injection moulding, extrusion blow moulding, injection stretch blow moulding or cast film extrusion.

According to a further aspect, the present invention refers to the use of the polypropylene composition as defined herein for decreasing the brittle-to-ductile transition temperature,
25 wherein the brittle-to-ductile transition temperature is derived from the Charpy instrumented impact strength at an impact velocity of 1.5 m/s as a function of temperature and represents the temperature at the inflexion point of the obtained curve. It is preferred that the brittle-to-ductile transition temperature as measured in an instrumented Charpy notched impact strength test in line with ISO 179 1eA is in the range from -10 to +5°C.

30

Brief description of the Figures

Fig. 1a relates to Schematic diagram of the CRYSTEX QC instrument,

Fig. 1b relates to the elution of the polypropylene composition sample and obtained soluble and crystalline fractions in the TREF column (column filled with inert material e.g. glass beads) (see Del Hierro, P.; Ortin, A.; Monrabal, B.; 'Soluble Fraction Analysis in polypropylene, The Column Advanstar Publications, February 5 2014. Pages 18-23).

Fig. 2 shows the brittle-to-ductile transition temperatures (BDTT) of the inventive example IE as well as the comparative example CE.

10 The present invention will now be described in further detail by the examples provided below.

EXAMPLES

15 1. Definitions/Measuring Methods

The following definitions of terms and determination methods apply for the above general description of the invention as well as to the below examples unless otherwise defined.

Melting temperature T_m , crystallization temperature T_c , is measured with Mettler TA820 differential scanning calorimetry (DSC) according to ISO 11357-1 on 5-10 mg samples.

20 Both crystallization and melting curves were obtained during 10 °C/min cooling and heating scans between 30 °C and 225 °C. Melting and crystallization temperatures were taken as the peaks of endotherms and exotherms.

Also the melt- and crystallization enthalpy (**H_m and H_c**) were measured by the DSC method according to ISO 11357-1.

25 **MFR₂ (230 °C)** was measured according to ISO 1133 (230 °C, 2.16 kg load).

MFR₂ (190°C) was measured according to ISO 1133 (190°C, 2.16 kg load).

The glass transition temperature T_g was determined by dynamic mechanical analysis according to ISO 6721-7. The measurements were done in torsion mode on compression moulded samples (40x10x1 mm³) between -100 °C and +150 °C with a heating rate of 2 30 °C/min and a frequency of 1 Hz.

The xylene cold solubles (XCS, wt.-%) were determined at 25 °C according to ISO 16152; first edition; 2005-07-01.

Intrinsic viscosity is measured according to DIN ISO 1628/1, October 1999 (in Decalin at 135°C).

Quantification of microstructure by NMR spectroscopy

Quantitative nuclear-magnetic resonance (NMR) spectroscopy was used to quantify the stereo-regularity (tacticity), regio-regularity and comonomer content of the polymers. Quantitative $^{13}\text{C}\{^1\text{H}\}$ NMR spectra were recorded in the solution-state using a Bruker Advance III 400 NMR spectrometer operating at 400.15 and 100.62 MHz for ^1H and ^{13}C respectively. All spectra were recorded using a ^{13}C optimised 10 mm extended temperature probehead at 125°C using nitrogen gas for all pneumatics.

For polypropylene homopolymers approximately 200 mg of material was dissolved in 1,2-tetrachloroethane- d_2 (TCE- d_2). To ensure a homogenous solution, after initial sample preparation in a heat block, the NMR tube was further heated in a rotatory oven for at least 1 hour. Upon insertion into the magnet the tube was spun at 10 Hz. This setup was chosen primarily for the high resolution needed for tacticity distribution quantification (Busico, V., Cipullo, R., Prog. Polym. Sci. 26 (2001) 443; Busico, V.; Cipullo, R., Monaco, G., Vacatello, M., Segre, A.L., Macromolecules 30 (1997) 6251). Standard single-pulse excitation was employed utilising the NOE and bi-level WALTZ16 decoupling scheme (Zhou, Z., Kuemmerle, R., Qiu, X., Redwine, D., Cong, R., Taha, A., Baugh, D. Winniford, B., J. Mag. Reson. 187 (2007) 225; Busico, V., Carbonniere, P., Cipullo, R., Pellecchia, R., Severn, J., Talarico, G., Macromol. Rapid Commun. 2007, 28, 11289). A total of 8192 (8k) transients were acquired per spectra

For ethylene-propylene copolymers approximately 200 mg of material was dissolved in 3 ml of 1,2-tetrachloroethane- d_2 (TCE- d_2) along with chromium-(III)-acetylacetonate ($\text{Cr}(\text{acac})_3$) resulting in a 65 mM solution of relaxation agent in solvent (Singh, G., Kothari, A., Gupta, V., Polymer Testing 28 5 (2009), 475). To ensure a homogenous solution, after initial sample preparation in a heat block, the NMR tube was further heated in a rotatory oven for at least 1 hour. Upon insertion into the magnet the tube was spun at 10 Hz. This setup was chosen primarily for the high resolution and quantitatively needed for accurate ethylene content quantification. Standard single-pulse excitation was employed without NOE, using an optimised tip angle, 1 s recycle delay and a bi-level WALTZ16 decoupling scheme (Zhou, Z., Kuemmerle, R., Qiu, X., Redwine, D., Cong, R., Taha, A., Baugh, D. Winniford, B., J. Mag. Reson. 187 (2007) 225; Busico, V., Carbonniere, P., Cipullo, R., Pellecchia, R., Severn, J., Talarico, G., Macromol. Rapid Commun. 2007, 28, 11289). A total of 6144 (6k) transients were acquired per spectra.

Quantitative $^{13}\text{C}\{^1\text{H}\}$ NMR spectra were processed, integrated and relevant quantitative properties determined from the integrals using proprietary computer programs.

For ethylene-propylene copolymers all chemical shifts were indirectly referenced to the central methylene group of the ethylene block (EEE) at 30.00 ppm using the chemical shift
5 of the solvent. This approach allowed comparable referencing even when this structural unit was not present.

For polypropylene homopolymers all chemical shifts are internally referenced to the methyl isotactic pentad (mmmm) at 21.85 ppm.

Characteristic signals corresponding to regio defects (Resconi, L., Cavallo, L., Fait, A.,
10 Piemontesi, F., Chem. Rev. 2000, 100, 1253; Wang, W-J., Zhu, S., Macromolecules 33 (2000), 1157; Cheng, H. N., Macromolecules 17 (1984), 1950) or comonomer were observed.

The tacticity distribution was quantified through integration of the methyl region between 23.6-19.7 ppm correcting for any sites not related to the stereo sequences of interest (Busico,
15 V., Cipullo, R., Prog. Polym. Sci. 26 (2001) 443; Busico, V., Cipullo, R., Monaco, G., Vacatello, M., Segre, A.L., Macromolecules 30 (1997) 6251).

Specifically the influence of regio defects and comonomer on the quantification of the tacticity distribution was corrected for by subtraction of representative regio defect and comonomer integrals from the specific integral regions of the stereo sequences.

20 The isotacticity was determined at the pentad level and reported as the percentage of isotactic pentad (mmmm) sequences with respect to all pentad sequences:

$$[\text{mmmm}] \% = 100 * (\text{mmmm} / \text{sum of all pentads})$$

The presence of 2,1 erythro regio defects was indicated by the presence of the two methyl sites at 17.7 and 17.2 ppm and confirmed by other characteristic sites.

25 Characteristic signals corresponding to other types of regio defects were not observed (Resconi, L., Cavallo, L., Fait, A., Piemontesi, F., Chem. Rev. 2000, 100, 1253).

The amount of 2,1 erythro regio defects was quantified using the average integral of the two characteristic methyl sites at 17.7 and 17.2 ppm:

$$P_{21e} = (I_{e6} + I_{e8}) / 2$$

30 The amount of 1,2 primary inserted propene was quantified based on the methyl region with correction undertaken for sites included in this region not related to primary insertion and for primary insertion sites excluded from this region:

$$P_{12} = I_{\text{CH}_3} + P_{12e}$$

The total amount of propene was quantified as the sum of primary inserted propene and all other present regio defects:

$$P_{\text{total}} = P_{12} + P_{21e}$$

The mole percent of 2,1 erythro regio defects was quantified with respect to all propene:

5 $[21e] \text{ mol\%} = 100 * (P_{21e} / P_{\text{total}})$

For copolymers characteristic signals corresponding to the incorporation of ethylene were observed (Cheng, H. N., *Macromolecules* 17 (1984), 1950).

With regio defects also observed (Resconi, L., Cavallo, L., Fait, A., Piemontesi, F., *Chem. Rev.* 2000, 100, 1253; Wang, W-J., Zhu, S., *Macromolecules* 33 (2000), 1157; Cheng, H. N.,

10 *Macromolecules* 17 (1984), 1950) correction for the influence of such defects on the comonomer content was required.

The mole fraction of ethylene in the polymer was quantified using the method of Wang et.

al. (Wang, W-J., Zhu, S., *Macromolecules* 33 (2000), 1157) through integration of multiple signals across the whole spectral region of a $^{13}\text{C}\{^1\text{H}\}$ spectra acquired using defined

15 conditions. This method was chosen for its accuracy, robust nature and ability to account for the presence of regio-defects when needed. Integral regions were slightly adjusted to increase applicability to a wider range of comonomer contents.

The mole percent comonomer incorporation in the polymer was calculated from the mole fraction according to:

20 $E [\text{mol\%}] = 100 * fE$

The weight percent comonomer incorporation in the polymer was calculated from the mole fraction according to:

$$E [\text{wt\%}] = 100 * (fE * 28.05) / ((fE * 28.05) + ((1-fE) * 42.08))$$

The comonomer sequence distribution at the triad level was determined using the method of

25 Kakugo et al. (Kakugo, M., Naito, Y., Mizunuma, K., Miyatake, T. *Macromolecules* 15 (1982) 1150) through integration of multiple signals across the whole spectral region of a

$^{13}\text{C}\{^1\text{H}\}$ spectra acquired using defined conditions. This method was chosen for its robust nature. Integral regions were slightly adjusted to increase applicability to a wider range of comonomer contents.

30 The mole percent of a given comonomer triad sequence in the polymer was calculated from the mole fraction determined by the method of Kakugo et al. (Kakugo, M., Naito, Y.,

Mizunuma, K., Miyatake, T. *Macromolecules* 15 (1982) 1150) according to:

$$\text{XXX} [\text{mol\%}] = 100 * f\text{XXX}$$

The mole fraction comonomer incorporation in the polymer, as determined from the comonomer sequence distribution at the triad level, were calculated from the triad distribution using known necessary relationships (Randall, J. Macromol. Sci., Rev. Macromol. Chem. Phys. 1989, C29, 201):

$$5 \quad f_{XEX} = f_{EEE} + f_{PEE} + f_{PEP}$$

$$f_{XPX} = f_{PPP} + f_{EPP} + f_{EPE}$$

where PEE and EPP represents the sum of the reversible sequences PEE/EEP and EPP/PPE respectively.

The randomness of the comonomer distribution was quantified as the relative amount of
10 isolated ethylene sequences as compared to all incorporated ethylene. The randomness was calculated from the triad sequence distribution using the relationship:

$$R(E) [\%] = 100 * (f_{PEP} / f_{XEX})$$

Crystalline and soluble fractions and their respective properties

The crystalline (CF) and soluble fractions (SF) of the polypropylene compositions as well as
15 the comonomer content and intrinsic viscosities of the respective fractions were analyzed by the CRYSTEX QC, Polymer Char (Valencia, Spain).

A schematic representation of the CRYSTEX QC instrument is shown in Figure 1a. The crystalline and amorphous fractions were separated through temperature cycles of
20 dissolution at 160°C, crystallization at 40°C and re-dissolution in 1,2,4-trichlorobenzene (1,2,4-TCB) at 160°C as shown in Figure 1b. Quantification of SF and CF and determination of ethylene content (C2) were achieved by means of an infrared detector (IR4) and an online 2-capillary viscometer was used for determination of the intrinsic viscosity (IV).

The IR4 detector was a multiple wavelength detector detecting IR absorbance at two
25 different bands (CH3 and CH2) for the determination of the concentration and the Ethylene content in Ethylene-Propylene copolymers. IR4 detector was calibrated with series of EP copolymers with known Ethylene content in the range of 2 wt.-% to 69 wt.-% (determined by 13C-NMR).

The amount of Soluble Fraction (SF) and Crystalline Fraction (CF) were correlated through
30 the XS calibration to the "Xylene Cold Soluble" (XCS) quantity and respectively Xylene Cold Insoluble (XCI) fractions, determined according to standard gravimetric method as per ISO16152. XS calibration was achieved by testing various EP copolymers with XS content in the range of 2-31 wt.-%.

Intrinsic viscosity (IV) of the parent EP copolymer and its soluble and crystalline fractions were determined with a use of an online 2-capillary viscometer and were correlated to

corresponding IV's determined by standard method in decalin according to ISO 1628.

Calibration was achieved with various EP PP copolymers with IV = 2-4 dL/g.

A sample of the polypropylene composition to be analyzed was weighed out in concentrations of 10mg/ml to 20mg/ml. After automated filling of the vial with 1,2,4-TCB containing 250 mg/l 2,6-tert-butyl-4-methylphenol (BHT) as antioxidant, the sample was dissolved at 160°C until complete dissolution is achieved, usually for 60 min, with constant stirring of 800 rpm.

As shown in a Figure 1a and b, a defined volume of the sample solution was injected into the column filled with inert support where the crystallization of the sample and separation of the soluble fraction from the crystalline part is taking place. This process was repeated two times. During the first injection, the whole sample was measured at high temperature, determining the IV[dl/g] and the C2[wt.-%] of the polypropylene composition. During the second injection, the soluble fraction (at low temperature) and the crystalline fraction (at high temperature) with the crystallization cycle were measured (wt.-% SF, wt.-% C2, IV).

Shrinkage (SH) was determined by injection moulding of the resin with an injection moulding machine into a mould having a cavity to form a plate of 60 x 60 x 2 mm³ in line with ISO 1873. After cooling at room temperature for 96 hours, the length and the width of the plate were determined to calculate the longitudinal (in flow) and the transversal (across flow) shrinkage in percent.

Flexural Modulus was determined in 3-point-bending according to ISO 178 on 80x10x4 mm³ test bars injection moulded at 23°C in line with EN ISO 1873-2.

Brittle-to-ductile transition temperature (BDTT) was measured based on the a(cN) values as determined from Charpy instrumented impact strength according to ISO 179-2:2000 on V-notched specimen with a geometry of 80x10x4 mm³ as required in ISO 179-1eA. The a(cN) values were determined in intervals of 3°C from -40°C to +41°C with an impact velocity of 1.5 m/s and plotted over temperature, calculating the BDTT as the average value of the step increase. For a detailed description of the determination of the BDTT reference is made to Grein, C. et al, Impact Modified Isotactic Polypropylene with Controlled Rubber Intrinsic Viscosities: Some New Aspects About Morphology and Fracture, J Appl Polymer Sci, 87 (2003), 1702-1712.

The coefficient of linear thermal expansion (CLTE) was determined in accordance with ISO 11359-2: 1999 on 10 mm long pieces cut from the same injection molded specimens as used for the flexural modulus determination. The measurement was performed in a

temperature range from +23 to +80°C and from -30 to +80°C, respectively, at a heating rate of 5 °C/min.

DSC analysis, melting temperature (T_m), crystallization temperature (T_c), heat of fusion (H_m) and heat of crystallization (H_c): measured with a TA Instrument Q2000 differential scanning calorimetry (DSC) on 5 to 7 mg samples. DSC is running according to ISO 11357 / part 3 / method C2 in a heat / cool / heat cycle with a scan rate of 10 °C/min in the temperature range of -30 to +225°C. Crystallization temperature (T_c) and heat of crystallization (H_c) are determined from the cooling step, while melting temperature (T_m) and heat of fusion (H_m) are determined from the second heating step.

10 Number average molecular weight (M_n) and weight average molecular weight (M_w) were determined by Gel Permeation Chromatography (GPC) according to ISO 16014-4:2003 and ASTM D 6474-99. A PolymerChar GPC instrument, equipped with infrared (IR) detector was used with 3x Olexis and 1x Olexis Guard columns from Polymer Laboratories and 1,2,4-trichlorobenzene (TCB, stabilized with 250 mg/L 2,6-Di tert butyl-4-methyl-phenol) as solvent at 160 °C and at a constant flow rate of 1 mL/min. 200 µL of sample solution were injected per analysis. The column set was calibrated using universal calibration (according to ISO 16014-2:2003) with at least 15 narrow MWD polystyrene (PS) standards in the range of 0.5 kg/mol to 11 500 kg/mol. Mark Houwink constants for PS, PE and PP used are as described per ASTM D 6474-99. All samples were prepared by dissolving 5.0 –
15 9.0 mg of polymer in 8 mL (at 160 °C) of stabilized TCB (same as mobile phase) for 2.5
20 hours for PP or 3 hours for PE at max. 160°C under continuous gentle shaking in the autosampler of the GPC instrument.

2. Examples

25 All the chemicals and chemical reactions were handled under an inert gas atmosphere using Schlenk and glovebox techniques, with oven-dried glassware, syringes, needles or cannulas.

MAO was purchased from Albermarle and used as a 30 wt-% solution in toluene.

30 Perfluoroalkylethyl acrylate ester mixture (CAS number 65605-70-1) was purchased from the Cytonix corporation, dried over activated molecular sieves (2 times) and degassed by argon bubbling prior to use.


Hexadecafluoro-1,3-dimethylcyclohexane (PFC) (CAS number 335-27-3) was obtained from commercial sources and dried over activated molecular sieves (2 times) and degassed by

argon bubbling prior to use.

Triethylaluminum was purchased from Aldrich and used as a 1 M solution in n-hexane. Hydrogen is provided by Air Liquide and purified before use. Propylene is provided by
5 Borealis and purified before use.

Complex:

As metallocene complex was used the racemic *anti*-dimethylsilanediyl[2-methyl-4-(4-tert-butylphenyl)-inden-1-yl] [2-methyl-4-(4-tert-butylphenyl)-5-methoxy-6-tert-butyl-inden-1-yl]zirconium dichloride (MC1) according to the following formula
10

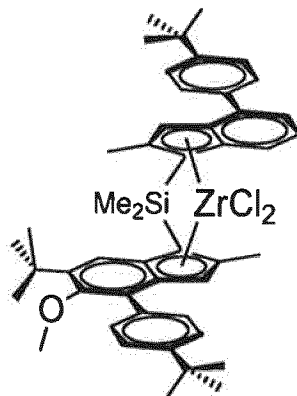

Synthesis of racemic *anti*-dimethylsilanediyl[2-methyl-4-(4-tert-butylphenyl)-inden-1-yl] [2-methyl-4-(4-tert-butylphenyl)-5-methoxy-6-tert-butyl-inden-1-yl]zirconium dichloride can
15 be found in WO2013/007650.

Catalyst preparation:

Inside the glovebox, 54 μ L of dry and degassed mixture of perfluoroalkylethyl acrylate ester (used as surfactant) were mixed with 2 mL of MAO in a septum bottle and left to react
20 overnight. The following day, 44.50 mg of metallocene MC1 (0.051 mmol, 1 equivalent) were dissolved with 4 mL of the MAO solution in another septum bottle and left to stir inside the glovebox.

After 60 minutes, 1 mL of the surfactant solution and the 4 mL of the MAO-metallocene
25 solution were successively added into a 50mL emulsification glass reactor containing 40mL of PFC at -10°C and equipped with an overhead stirrer (stirring speed = 600 rpm). Total

amount of MAO is 5 mL (450 equivalents). A red emulsion formed immediately and stirred during 15 minutes at -10°C / 600 rpm. Then the emulsion was transferred via a 2/4 teflon tube to 100mL of hot PFC at 90°C, and stirred at 600 rpm until the transfer is completed, then the speed was reduced to 300 rpm. After 15 minutes stirring, the oil bath was removed and the stirrer turned off. The catalyst was left to settle up on top of the PFC and after 35 minutes the solvent was siphoned off. The remaining catalyst was dried during 2 hours at 50°C over an argon flow. 1,0 g of a red solid catalyst was obtained.

Pre-activation procedure:

10 The catalyst as prepared above (MC1-Cat) was pre-polymerised according to the following procedure Off-line pre-polymerisation experiments were done in a 125 mL pressure reactor equipped with gas-feeding lines and an overhead stirrer. Dry and degassed perfluoro-1,3-dimethylcyclohexane (PFC)(15 ml) and the desired amount of the catalyst MC1-Cat (604.6 mg) to be pre-polymerised were loaded into the reactor inside a glove box and the reactor was sealed. The reactor was then taken out from the glove box and placed inside a water cooled bath kept at 25°C. The overhead stirrer and the feeding lines were then connected. The experiment was started by opening the propylene feed into the reactor and setting the stirrer speed at 450 rpm. The propylene feed was left open and the monomer consumption was compensated by keeping the total pressure in the reactor constant (about 5 barg). The experiment was continued for the polymerisation time (17.5 min) sufficient to provide the desired degree of polymerisation (DP). The reactor was then taken back inside the glove box before opening and the content was poured into a glass vessel. PFC was evaporated until a constant weight was obtained to yield 2.90 g of the pre-polymerised catalyst. The degree of polymerisation (DP) was determined gravimetrically and/or by analysis of the ash and/or aluminium content of the catalyst. Pre-polymerization degree is 3.8 g(PP)/g(cat). 25 Prepolymerised MC1-Cat is marked as PMC1-Cat.

The catalyst used and its composition is listed in table 1:

30 Table 1: used catalyst

Catalyst type	DP	MC1
	g/g	wt.-%
PMC1-Cat	3.8	0.65

Polymerisation

The polypropylene composition has been prepared by means of a 3-step polymerization (bulk homopolymerisation + gas phase (GP1) homopolymerisation + gas phase (GP2) C₂/C₃ copolymerisation) in a 20-L reactor, as described below.

5

Step1: Bulk propylene homopolymerization

A stirred autoclave (double helix stirrer) with a volume of 21.2 dm³ containing 0.2 bar-g propylene, was filled with additional 3.97 kg propylene plus the amount of H₂ indicated in table 2. After adding 0.73 mmol triethylaluminium (Aldrich, 1 molar solution in n-hexane) using a stream of 250 g propylene, the solution was stirred at 20 °C and 250 rpm for 20 min. Then the catalyst was injected as described in the following. The solid, pre-polymerized catalyst (type as listed in the tables) was loaded into a 5-mL stainless steel vial inside the glovebox, the vial was attached to the autoclave, then a second 5-mL vial containing 4 ml n-hexane and pressurized with 10 bars of N₂ was added on top, the valve between the two vials was opened and the solid catalyst was contacted with hexane under N₂ pressure for 2 s, then flushed into the reactor with 250 g propylene. Stirring speed was increased to 250 rpm and pre-polymerisation was run for 10 min at 20 °C. At the end of the prepolymerization step, the stirring speed was increased to 350 rpm and the polymerisation temperature increased to 80°C. When the internal reactor temperature reached 71°C, the amount of H₂ indicated in table 2 was added with a defined flow via thermal mass flow controller. The reactor temperature was held constant throughout the polymerization. The polymerization time was measured starting when the temperature was 2 °C below the set polymerization temperature.

10

15

20

Step 2: Gas Phase: propylene homopolymerization (GP1)

After the bulk step was finished, the stirrer speed was adjusted to 50 rpm and the reactor pressure was reduced to 0.5 bar below the set pressure by venting. Then the stirrer speed was set to 250 rpm, the reactor temperature to 80°C and the amount of H₂ indicated in table 2 was dosed via MFC. Then the reactor P and T were held constant by propylene feed via MFC until the target split had been reached.

30

Step 3: Gas Phase: ethylene/propylene copolymerization (GP2)

When the GP1 had been finished, the stirrer speed was reduced to 50 rpm. The reactor pressure was lowered to 0.3 barg by venting, the temperature and control device was set to

70°C. Then the reactor was filled with 200 g propylene at a flow of 70 g/min and flushed again to 0.3 barg.

5 Afterwards the stirrer speed was adjusted to 250 rpm. Then the reactor was filled with the chosen C_3/C_2 monomer ratio (transition feed, see table 2). The speed of the reactor filling during the transition was limited by the max. flow of the gas flow controllers. When the reactor temperature reached 69 °C and the reactor pressure reached the set value, the composition of the fed C_3/C_2 mixture was changed to the target copolymer composition and temperature and pressure were held constant until the amount of C_3/C_2 gas mixture required
10 to reach the target rubber split had been consumed.

The reaction was stopped by setting the stirrer speed to 20 rpm, cooling the reactor to 30 °C and flashing the volatile components.

15 After flushing the reactor twice with N_2 and one vacuum/ N_2 cycle, the product was taken out and dried overnight in a fume hood. 100 g of the polymer was additivated with 0.2 wt.-% ionol and 0.1 wt.-%PEPQ (dissolved in acetone) and then dried overnight in a hood plus 2 hours in a vacuum drying oven at 60°C. Table 2 summarizes the relevant polymerization parameters.

20

Table 2: Polymerisation parameters of the inventive example (IE)

		IE
catalyst		PMCI-Cat
Prepolymerisation		
res. time	min	10
H ₂	Nl	0
Bulk polymerisation		
Total H ₂	Nl	2
res. time	min	40
GP1 (homopolymerisation)		
H ₂	Nl	2
res. time	min	40
GP2 (copolymerisation)		
H ₂	Nl	0
res. time	min	90
C ₂ /C ₃ ratio transition	wt/wt	0.56
GP2 C ₃ feed	g	215
GP2 C ₂ feed	g	53
GP2 C ₂ /C ₃ ratio	wt/wt	0.25

- The comparative example was polymerized in a Borstar PP pilot plant with a prepolymerisation reactor, one loop and three gas phase reactors using the commercial catalyst Avant ZN104 of LyondellBasell with Triethylaluminium (TEAL) as co-catalyst and
- 5 Dicyclopentylidimethoxysilane (donor D) as external donor. Table 3 summarizes the relevant polymerization parameters.

Table 3: Polymerisation parameters of the comparative example (CE)

Co/ED ratio	mol/mol	18
Co/TC ratio	mol/mol	220
Prepolymerization		
Residence time	h	0.1
Temperature	°C	30
Loop Reactor (LR)		
Split	wt.-%	32.5
Temperature	°C	70

Pressure	kPa	5355
H2/C3	mol/kmol	14
MFR	g/10min	35
1st Gas Phase Reactor (GPR1)		
Split	wt.-%	34.5
Temperature	°C	78
Pressure	kPa	2214
H2/C3	mol/kmol	78
MFR2	g/10min	35
2nd Gas Phase Reactor (GPR2)		
Split	wt.-%	21
Temperature	°C	71
Pressure	[kPa	2202
H2/C2 ratio	mol/kmol	219
C2/C3 ratio	mol/kmol	715
C2	mol%	12
MFR	g/10min	12
XCS	wt%	19
3rd Gas Phase Reactor (GPR3)		
Temperature	°C	83
Pressure	kPa	1383
C2/C3 ratio	mol/kmol	747
H2/C2 ratio	mol/kmol	203
MFR	g/10min	13
split	wt%	12

The resulting polymer powders were compounded in a co-rotating twin-screw extruder Prism TSE16 (for IE) resp. Coperion ZSK 57 (for CE) at 220°C with 0.2 wt.-% of Irganox B225 (1:1-blend of Irganox 1010 (Pentaerythrityl-tetrakis(3-(3',5'-di-tert.butyl-4-hydroxytoluyl)-propionate and tris (2,4-di-t-5 butylphenyl) phosphate) phosphite) of BASF AG, Germany) and 0.05 wt.-% calcium stearate. The characteristics of the inventive example IE and of the comparative example CE are indicated in tables 4a and 4b below.

Table 4a: General polymer characteristics

		IE	CE
MFR	g/10min	14	12
Catalyst		SSC	ZN
Tm	°C	149	163
Hm	J/g	68	73
Tc	°C	113	113
SF	wt.-%	32,4	32,5
C2(total)	wt.-%	6,5	15,8
C2(SF)	wt.-%	21,0	37,2
C2(CF)	wt.-%	0,5	6,2
IV(total)	dl/g	1,7	1,8
IV(SF)	dl/g	1,7	2,2
IV(CF)	dl/g	1,7	1,6
IV(SF)/IV(CF)	n.a.	1,0	1,3
G'	MPa	367	410
Tg1	°C	0	2
Tg2	°C	-38	-54
SH-in flow	%	0,89	0,97
SH-across flow	%	1,03	1,21
Flexural modulus	MPa	611	671
BDTT Charpy NIS	°C	-2	12
CLTE(-30 - 80°C)	µm/m/°C	111	110

Table 4b: Polymer characteristics determined by NMR

		IE	CE
C2 total (NMR)	wt.-%	6,5	15,8
EEE	mol%	1,87	8,77
EEP	mol%	4,33	8,55
PEP	mol%	3,52	4,76
I(E)	%	36	22
C2 XCS (NMR)	wt.-%	20,7	52,6
EEE	mol%	4,07	18,34
EEP	mol%	12,37	29,75
PEP	mol%	11,58	18,28
I(E)	%	41	28
B(E)	%	15	28
XCS	wt.-%	32,5	30,4
IV(XCS)	dl/g	1,7	2,1

From tables 4a and 4b, it can be gathered that the inventive example has an improved shrinkage, even if compared to a polypropylene composition that has been prepared in the presence of a Ziegler-Natta catalyst.

- 5 In Fig. 2, the brittle-to-ductile transition temperatures (BDTT) are shown for the inventive example IE as well as for the comparative example CE. It can be gathered that the inventive example IE has a lower brittle-to-ductile transition temperatures (BDTT) than the comparative example CE and thus a broader application temperature range.

CLAIMS

1. A polypropylene composition having a melt flow rate MFR₂ (230 °C) measured according to ISO 1133 in the range of 5 to 50 g/10min, the polypropylene composition comprising
- 5
- (a) 55 to 75 wt.-%, based on the total weight of the polypropylene composition, of a crystalline fraction (CF) as determined in the CRYSTEX QC method, the crystalline fraction (CF) having
- 10
- i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC) between 147°C and 162°C, and
- ii) an ethylene content of ≤ 1 wt.-%, based on the total weight of the crystalline fraction (CF); and
- (b) 25 to 45 wt.-%, based on the total weight of the polypropylene composition, of a soluble fraction (SF) as determined in the CRYSTEX QC method, the soluble fraction (SF) having
- 15
- i) an intrinsic viscosity (IV) in the range of 1.0 to 2.0 dl/g, and
- ii) an ethylene content in the range of 18 to 40 wt.-%, based on the total weight of the soluble fraction (SF),
- 20
- wherein said polypropylene composition has a ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic viscosity of the crystalline fraction (IV(CF)) $[(IV(SF))/ (IV(CF))]$ in the range from 0.7 to < 1.2.
2. The polypropylene composition according to claim 1, wherein the polypropylene composition comprises a polypropylene homopolymer matrix (M) and an ethylene-propylene copolymer (EPC) dispersed in the polypropylene homopolymer matrix (M).
- 25
3. The polypropylene composition according to claim 1 or 2, wherein the polypropylene composition comprises 60 to 72 wt.-%, based on the total weight of the polypropylene composition, of the crystalline fraction (CF), and 28 to 40 wt.-%, based on the total weight of the polypropylene composition, of the soluble fraction (SF).
- 30

4. The polypropylene composition according to any one of the preceding claims,
wherein the polypropylene composition has
 - i) an ethylene content in the range of 4.0 to 15.0 wt.-%, based on the total weight
of the polypropylene composition, and/or
 - 5 ii) a melt flow rate MFR_2 (230 °C) measured according to ISO 1133 in the range of
8 to 40 g/10min, preferably in the range of 8 to 30 g/10min.

5. The polypropylene composition according to any one of the preceding claims,
wherein the polypropylene composition has
 - 10 i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC)
between 147°C and 162°C, and/or
 - ii) a crystallization temperature (T_c) measured by differential scanning calorimetry
(DSC) between 105°C and 135°C.

- 15 6. The polypropylene composition according to any one of the preceding claims,
wherein the ratio of intrinsic viscosity of the soluble fraction (IV(SF)) to intrinsic
viscosity of the crystalline fraction (IV(CF)) $[(IV(SF))/ (IV(CF))]$ is in the range
from 0.8 to 1.1.

- 20 7. The polypropylene composition according to any one of the preceding claims,
wherein the polypropylene composition is polymerized in the presence of a single-
site catalyst.

8. The polypropylene composition according to any one of the preceding claims,
25 wherein the polypropylene composition has been produced in a multi-stage process.

9. The polypropylene composition according to any one of the preceding claims,
wherein the crystalline fraction (CF) has
 - 30 i) a melting temperature (T_m) measured by differential scanning calorimetry (DSC)
between 148°C and 156°C, and/or
 - ii) an ethylene content in the range from 0.1 to 0.8 wt.-%, based on the total weight
of the crystalline fraction, and/or
 - iii) an intrinsic viscosity (IV) in the range of 0.9 to 2.2 dl/g, and/or

- iv) an isotacticity determined as pentad regularity from ¹³C-NMR spectroscopy of at least 98%, and/or
- v) a content of <2,1> erythro regiodefects as determined from ¹³C-NMR spectroscopy of equal or less than 0.2 mol.-%.

5

10. The polypropylene composition according to any one of the preceding claims, wherein the soluble fraction (SF) has
- i) an intrinsic viscosity (IV) in the range of 1.1 to 1.9 dl/g, and/or
 - ii) an ethylene content in the range of 18 to 30 wt.-%, based on the total weight of the soluble fraction (SF).

10

11. The polypropylene composition according to any one of the preceding claims, wherein the relative content of isolated to block ethylene sequences (I(E))
- i) of the polypropylene composition is at most 30 %, and/or
 - ii) of the xylene cold soluble fraction (XCS) is at least 30 %,
- wherein the I(E) content is defined by equation (I)

15

$$I(E) = \frac{f_{PEP}}{(f_{EEE} + f_{EEP} + f_{PEP})} \times 100 \quad (I)$$

20

wherein I(E) is the relative content of isolated to block ethylene sequences [in %];
f_{PEP} is the mol fraction of propylene/ethylene/propylene sequences (PEP) in the sample;

25

f_{EEP} is the mol fraction of ethylene/ethylene/ propylene sequences (EEP) and of propylene/ethylene/ethylene sequences (PEE) in the sample;

f_{EEE} is the mol fraction of ethylene/ethylene/ethylene sequences (EEE) in the sample wherein all sequence concentrations being based on a statistical triad analysis of ¹³C- NMR data.

30

12. A process for the preparation of a polypropylene composition according to any one of the preceding claims, wherein a polypropylene homopolymer matrix (M) is prepared in a first stage and an ethylene-propylene copolymer (EPC) is prepared in a second stage in the presence of the polypropylene homopolymer matrix (M).

13. A composition comprising the polypropylene composition according to any one of the claims 1 to 11 and one or more additive(s) in an amount of up to 4 wt.-%, based on the total weight of the composition.
- 5 14. Article comprising the polypropylene composition according to any one of the claims 1 to 11 or the composition comprising the polypropylene composition according to claim 13.
- 10 15. Use of a polypropylene composition as defined in any one of claims 1 to 11 for decreasing the brittle-to-ductile transition temperature, wherein the brittle-to-ductile transition temperature is derived from the Charpy instrumented impact strength at an impact velocity of 1.5 m/s as a function of temperature and represents the temperature at the inflexion point of the obtained curve.
- 15 16. Use according to claim 14, wherein the brittle-to-ductile transition temperature (BDTT) as measured in an instrumented Charpy notched impact strength test in line with ISO 179 1eA is in the range from -10 to +5°C.

FIGURES

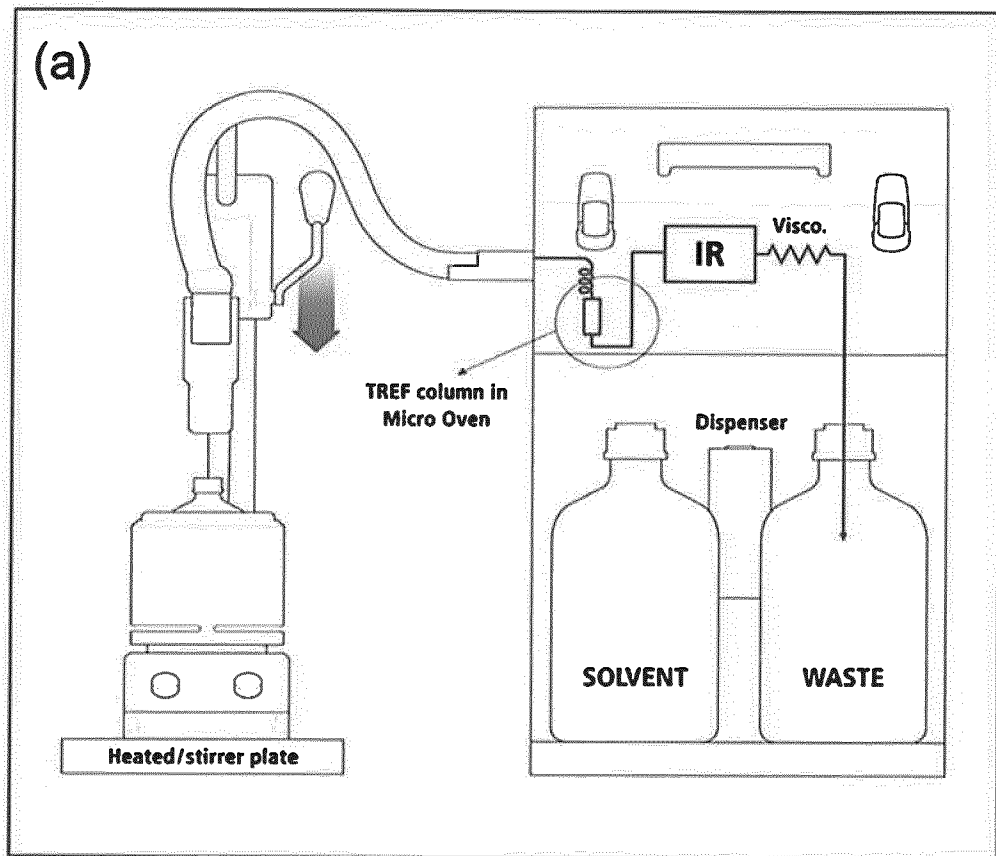


Fig. 1a

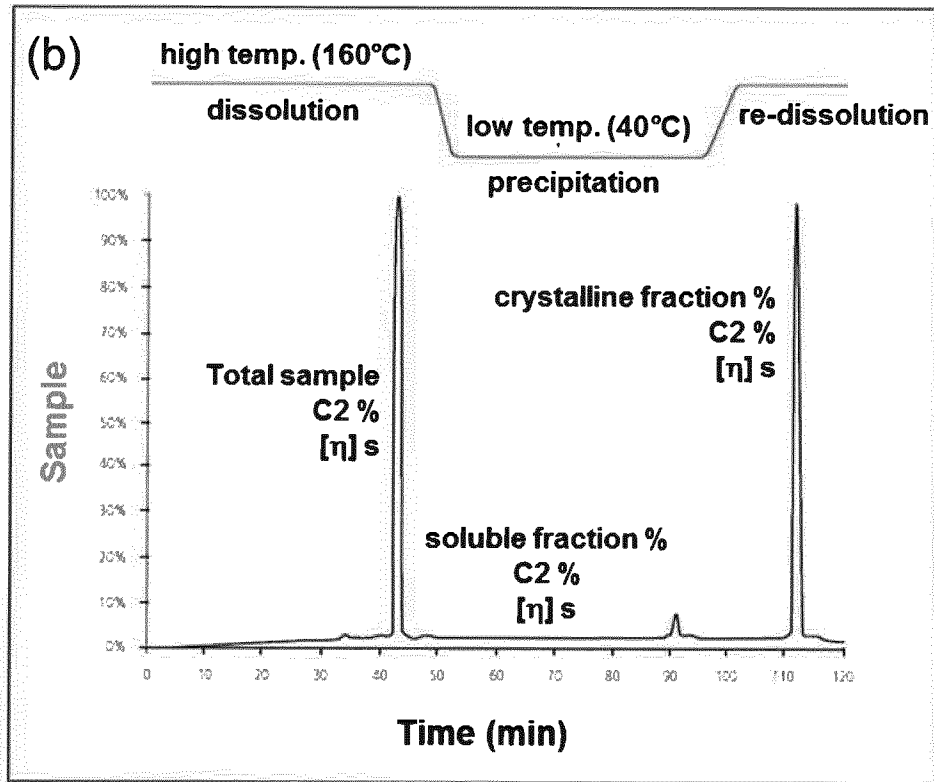


Fig. 1b

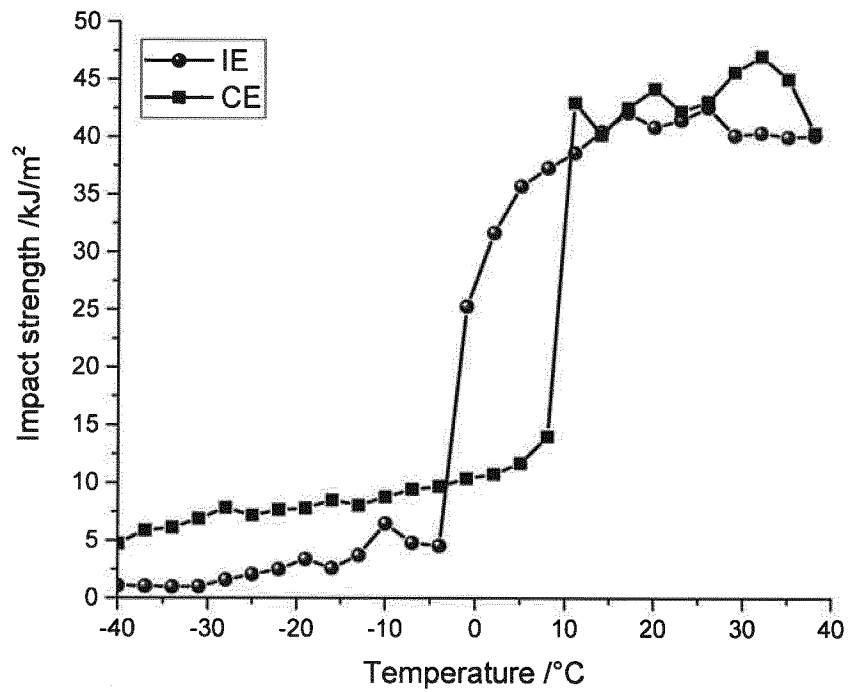


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/072846

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08F210/16 C08L23/16
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C08F C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 426 171 A1 (BOREALIS AG [AT]) 7 March 2012 (2012-03-07) tables 3,4	1-16
A	----- WO 2013/150057 A1 (BOREALIS AG [AT]) 10 October 2013 (2013-10-10) table 1	1-16
A	----- EP 2 891 667 A1 (BOREALIS AG [AT]) 8 July 2015 (2015-07-08) cited in the application paragraph [0147] - paragraph [0169] table 4	1-16
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Date of the actual completion of the international search 17 September 2018	Date of mailing of the international search report 09/10/2018
---------------------------------------------------------------------------------------	-------------------------------------------------------------------------

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Nikolai, Joachim
----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/072846

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 2013/007650 A1 (BOREALIS AG [AT]; HAFNER NORBERT [AT]; CASTRO PASCAL [FI]; KULYABIN PA) 17 January 2013 (2013-01-17) page 88 page 117 - page 121 table 5</p> <p style="text-align: center;">-----</p>	1-16
A	<p>B Monrabal ET AL: "Soluble Fraction Analysis Characterization of the whole polymer, amorphous and a Quality Control Laboratory", 1 February 2014 (2014-02-01), XP055419691, Retrieved from the Internet: URL:https://polymerchar.com/pdf/Article_Automated_Soluble_fraction_analysis_in_PP_(CRYSTEX_QC).pdf [retrieved on 2017-10-27] the whole document</p> <p style="text-align: center;">-----</p>	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/072846

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
EP 2426171	A1	07-03-2012	CN 103080210 A	01-05-2013	
			EP 2426171 A1	07-03-2012	
			EP 2611862 A1	10-07-2013	
			ES 2527640 T3	27-01-2015	
			KR 20130049799 A	14-05-2013	
			US 2013197153 A1	01-08-2013	
			WO 2012028252 A1	08-03-2012	

WO 2013150057	A1	10-10-2013	CN 104204069 A	10-12-2014	
			EP 2834300 A1	11-02-2015	
			ES 2610902 T3	04-05-2017	
			KR 20140130236 A	07-11-2014	
			MX 352811 B	08-12-2017	
			US 2015057408 A1	26-02-2015	
			WO 2013150057 A1	10-10-2013	

EP 2891667	A1	08-07-2015	CN 105899553 A	24-08-2016	
			EP 2891667 A1	08-07-2015	
			ES 2622299 T3	06-07-2017	
			JP 2017502163 A	19-01-2017	
			KR 20160106690 A	12-09-2016	
			PL 2891667 T3	31-07-2017	
			RU 2016127547 A	13-02-2018	
			US 2016333175 A1	17-11-2016	
			WO 2015104266 A1	16-07-2015	

WO 2013007650	A1	17-01-2013	BR 112014000465 A2	21-02-2017	
			CN 103649101 A	19-03-2014	
			CN 103649209 A	19-03-2014	
			CN 108409895 A	17-08-2018	
			EP 2729479 A1	14-05-2014	
			EP 2729529 A1	14-05-2014	
			ES 2572507 T3	31-05-2016	
			ES 2643158 T3	21-11-2017	
			JP 6140152 B2	31-05-2017	
			JP 2014525950 A	02-10-2014	
			KR 20140045513 A	16-04-2014	
			KR 20140053992 A	08-05-2014	
			US 2014206819 A1	24-07-2014	
			US 2014221584 A1	07-08-2014	
			US 2016024123 A1	28-01-2016	
			WO 2013007650 A1	17-01-2013	
			WO 2013007664 A1	17-01-2013	
