




- (51) **International Patent Classification:**
A61B 17/11 (2006.01) *A61B 5/00* (2006.01)
- (21) **International Application Number:**
PCT/IL2016/050771
- (22) **International Filing Date:**
14 July 2016 (14.07.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/192,395 14 July 2015 (14.07.2015) US
- (71) **Applicant:** MOR RESEARCH APPLICATIONS LTD
[IL/IL]; 38 Habarzel Street, 6971054 Tel Aviv (IL).
- (72) **Inventors:** BEN DAVID, Matan; Vitkin 21, 6347423 Tel Aviv (IL). KRAITZER, Amir; 2/51 Tzamarot Street, 4642402 Hertzelia (IL).
- (74) **Agents:** GEYRA, Assaf et al.; GEYRA GASSNER, 55 Yigal Alon, 6789115 Tel Aviv (IL).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** DEVICE, SYSTEM AND METHOD FOR MONITORING A SURGICAL SITE

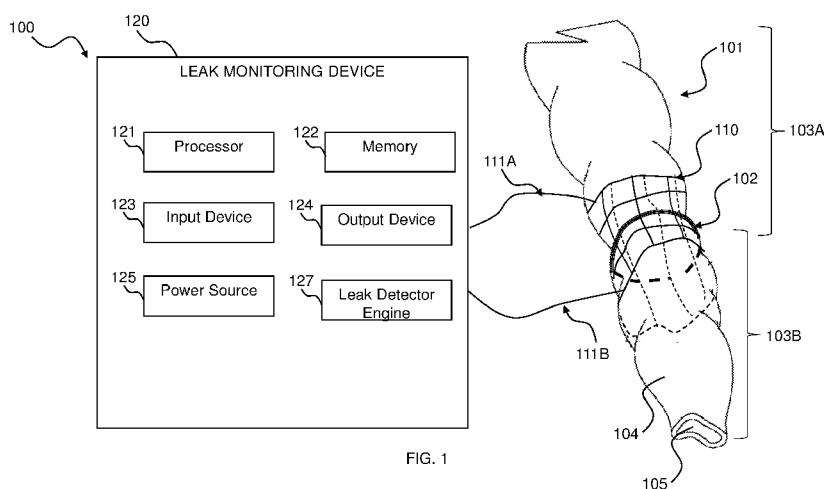

(57) **Abstract:** Embodiments relate to an implantable device for detecting leakage of matter from a mammalian lumen, the device comprising a mesh structure that is attachable to a lumen of a mammalian. The mesh structure comprises a material or a material composition that is electrically conductive and which is measurably responsive in terms of its electrical conductivity when being subjected to leakage of matter from the lumen.

DEVICE, SYSTEM AND METHOD FOR MONITORING A SURGICAL SITE

[0001] This application claims the benefit of priority from U.S. Provisional Patent Application No. 62/192,395, filed on July 14, 2015. The content of the above document is incorporated by reference in its entirety as if fully set forth herein.

FIELD

[0002] Embodiments disclosed herein relate in general to the detection of leakage from the gastrointestinal system.

BACKGROUND

[0003] Various surgical procedures involve removal of a tissue section from the gastrointestinal tract. The removal of a tissue section is followed by re-connecting the remaining tissue portions as in Bariatric surgery or by reconnecting a first tubular tissue portion with another tubular tissue portion, also known as anastomosis, to re-establish tissue continuity of the gastrointestinal tract. The reconnection of tissue portions can be performed using surgical staplers or suturing material. The quality of such tissue reconnection and thus the occurrence of leaks is, in general, not surgeon dependent.

[0004] As is well known, the presence of leaks at sites where gastrointestinal tissue portions were reconnected can result in significant health problems and be potentially devastating. Early diagnosis of the presence of leaks in a post-surgical setting is thus of paramount importance to minimize morbidity and mortality rates. However, as these sites are internal to the body, early detection is difficult and/or costly.

[0005] The description above is presented as a general overview of related art in this field and should not be construed as an admission that any of the information it contains constitutes prior art against the present patent application.

SUMMARY

[0006] Aspects of disclosed embodiments relate to an implantable device for monitoring a site of biological tissue like, e.g., a surgical site inside a living body of, e.g., mammalian body such as without limitation, a human body, for example, to detect leakage of body matter (e.g., body fluid) from an organ inside the body. Accordingly, such device may be employed for monitoring the integrity of an organ, for example, for detecting leakage of body fluid from a lumen or cavity of the organ.

[0007] According to example 1, the device comprises a wire or a mesh structure that is positionable around an organ (e.g., around a lumen) of a mammalian body. The mesh structure comprises a material or a material composition that is electrically conductive and which is measurably responsive in terms of its electrical conductivity when being subjected to leakage of body matter from the body organ.

[0008] Example 2 includes the subject matter of example 1 and, optionally, allows direct measurement of changes of an electrical property of biological tissue of the body organ.

[0009] Example 3 includes the subject matter of examples 1 or 2 and, optionally, wherein the body organ is any one of: the stomach, the small intestine, the large intestine and/or the esophagus.

[0010] Example 4 includes the subject matter of any of the examples 1 to 3 and, optionally, wherein the mesh structure comprises conductive material and biocompatible and, further optionally, biodegradable material.

[0011] Example 5 includes the subject matter of example 4 and, optionally, wherein the biodegradable conductive material is a biodegradable conductive polymer and/or a biodegradable conductive metal.

[0012] Example 6 includes the subject matter of example 4 and, optionally, wherein the biodegradable polymer comprises Polypyrrole or any derivatives thereof.

[0013] Example 7 includes the subject matter of example 4 and, optionally, wherein the biodegradable conductive metal comprises magnesium, or a combination thereof.

[0014] Example 8 includes a system for monitoring a site within a mammalian body, comprising an implantable device according to any of the examples 1 to 7 and which is configured to be operably attachable to an organ inside the mammalian body; and a leak monitoring device which is operably coupled with the implant and which comprises: a power source for delivering electrical energy to the implant; and a detector engine for measuring changes in the electrical properties of the implantable device.

[0015] According to an aspect of some embodiments of the present invention, there is provided an implantable device comprising at least two wires, wherein at least one wire is configured to attach along a site of an organ, and wherein the at least one wire comprises a biodegradable conductive polymer and/or a biodegradable conductive metal.

[0016] In some embodiments, the implantable device is for monitoring biological tissue leakage of body matter from an organ (e.g., a body organ or a lumen thereof) of a mammalian body.

[0017] In some embodiments, the at least two wires are in the form of mesh structure.

[0018] In some embodiments, at least one wire is positioned external to the body organ.

[0019] In some embodiments, the biodegradable conductive metal comprises a metal selected from the group consisting of magnesium, iron, zinc and calcium, or any combination thereof.

[0020] In some embodiments, the body organ is the stomach, the small intestine, or the large intestine.

[0021] In some embodiments, the biodegradable conductive polymer or the biodegradable conductive metal is characterized as being measurably responsive in terms of its electrical conductivity when being subjected to body matter leaking from the body organ.

[0022] In some embodiments, the body matter is a cytokine or an enzyme.

[0023] In some embodiments, the enzyme is metalloproteinase.

[0024] In some embodiments, the metalloproteinase is selected from the group consisting of MMP-8 and MMP -9.

[0025] In some embodiments, the body matter is characterized by a pH value that varies within ± 0.5 .

[0026] In some embodiments, the biodegradable conductive polymer or the biodegradable conductive metal is characterized by a conductivity (S/cm) having a value of 100 to 7,500 S/cm.

[0027] According to an aspect of some embodiments of the present invention, there is provided a system for monitoring a site within a mammalian body, comprising an implantable device according to any of the preceding claims which is configured to be operably attachable to an organ inside the mammalian body; and a leak monitoring device which is operably coupled with the implant and which comprises a power source for delivering electrical energy to the implant; and a detector engine for measuring changes in the electrical properties of the implantable device.

[0028] According to an aspect of some embodiments of the present invention, there is provided a method comprising attaching at least one wire along a site of an organ, wherein the at least one wire is configured to attach to along a site of an organ, and wherein the at least one wire comprises a biodegradable conductive polymer and/or a biodegradable conductive metal, the method further comprising monitoring biological tissue leakage of body matter from a body organ.

[0029] This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE FIGURES

[0030] For simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity of presentation. Furthermore, reference numerals may be repeated among the figures to indicate corresponding or analogous elements. The figures are listed below.

[0031] **FIG. 1** schematically illustrates a system for the monitoring of a surgical site of a body organ, according to an embodiment;

[0032] **FIG. 2A** schematically illustrates a plan view illustration of an implantable device of the system in an operable position adjunct to a tissue reconnection site of the GI tract;

[0033] **FIG. 2B** schematically illustrates the implantable device of **FIG. 2A** where the implantable device's physical properties has undergone changes due to leakage of body matter from the organ, according to an embodiment; and

[0034] **FIG. 3** is a flow chart illustration of a method for monitoring the integrity of an organ, according to an embodiment.

[0035] **FIG. 4** schematically illustrates the implantable device of **FIG. 2A** where the implantable device is implanted in the colon, according to an embodiment.

DETAILED DESCRIPTION OF EMBODIMENTS

[0036] The description is given with reference to particular examples, with the understanding that such device, system and method are not limited to these examples.

[0037] Aspects of embodiments disclosed in this description relate to a device, system and method for monitoring the integrity of an organ inside a body, e.g., to detect leakage of body matter from the organ (e.g., the gastrointestinal or GI tract). Such leakage may include post-operative leakage.

[0038] In some embodiments, the device has at least two wires.

[0039] In some embodiments, at least one wire is configured to attach along a site of an organ.

[0040] In some embodiments, at least wire comprises a biodegradable conductive polymer and/or a biodegradable conductive metal.

[0041] Non-limiting examples of the organ may include any one of the following: the stomach, the small intestine, the large intestine, the esophagus, and/or any other, for example, hollow tubular organ.

[0042] It is further noted that the term “detection” as well as grammatical variations thereof may encompass any processes that enable such “detection”, including sensing and/or monitoring.

[0043] Reference is made to **FIG. 1**. Generally, a system **100** for monitoring an organ **101** inside the body, e.g., for detecting leakage of body matter from organ **101** through reconnection site **102** at which a first and second tubular tissue portion **103B** and **103A** of the organ were reconnected in a surgical procedure, comprises an implantable device **110** and a leak monitoring device **120** operatively coupled with implantable device **110**.

[0044] The term “operatively coupled” may encompass the meanings of the terms “responsively coupled”, “communicably coupled”, and the like.

[0045] In an embodiment, implantable device **110** may have electrical properties (e.g., conductivity) allowing the device to be employed to monitor changes in an environment occurring at and/or in the vicinity of reconnection site **102**.

[0046] Such environmental change might be indicative of leakage of matter from the organ of, e.g., gastrointestinal (GI) tract **101** through reconnection site **102** to the outside of the tract or organ, and may for example include a decrease or increase in pH value, increase in lactate concentration and/or enzymatic activity, which may for example result in an increase to the implantable device’s exposure to inflammatory response, e.g., increase of matrix metalloproteinase enzymes (MMP), interleukin (IL)-6, and/or any other change(s) in an environmental parameter as further described below. Accordingly, implantable device **110** exposed to such environmental changes when being set in an operable position (for example, topically, e.g., when engaging a biological tissue region to overlay a reconnection site) may allow detection of leakage of body matter from organ **101**.

[0047] In some embodiments, the term “gastrointestinal tract”, as used herein, is defined as the part of the body which includes the esophagus, stomach and small and large intestines. In some embodiments, the term “topical”, or any grammatical variation thereof, is defined as application to the mucosal surfaces of the body and include applications to areas of the gastrointestinal tract.

[0048] In some embodiments, the term “metalloproteinase”, or “metalloprotease”, as used herein, may refer to protease enzyme whose catalytic mechanism may involve a metal.

[0049] The term “metalloproteinases” includes, but is not limited to, the collagenases, gelatinases, stromelysins, matrilysin (MMP-7); enamelysin (MMP- 20), macrophage metalloelastase (MMP12), MMP-19 and membrane-type metalloproteinases (MT-MMP-1 to 4, stromelysin-3, and MMP-11).

[0050] Environmental changes at reconnection site **102** may cause changes to the biological tissue to which implantable device **110** is attached and, as a result thereof, correspondingly impact the electrical properties of the tissue.

[0051] According to an embodiment, changes in an electrical property of biological tissue may be read out and monitored by leak monitoring device **120** via implantable device **110** covering a region of the impacted biological tissue, as outlined in the following.

[0052] For instance, implantable device **110** may exhibit at least one electrical property which is responsive to body matter or overall inflammatory response that may flow and/or be stored, e.g., in GI tract **101** or in any other organ and which is measurable by leak monitoring device **120**. For example, implantable device **110** may comprise material or materials that are electrically conductive and responsive to body matter that is known to be flowing within the lumen of a body organ **101** (e.g. GI tract). For example, implantable device **110** may undergo structural change(s) when being subjected to or engaging with body matter. These structural changes may, for example, include at least partial or full material degradation comprised in implantable device **110**. Responsive to such structural changes, the electrical properties of implantable device **110** may be altered. Changes in the electrical properties of implantable device **110** may be measured by leak monitoring device **120** using, e.g., DC or AC current. Such readout or measurement of environmental changes may herein be referred to as "indirect measurement".

[0053] In some embodiments, the electric property refers to current density. In some embodiments, the current density is calculated from electrode potential curve(s), i.e. polarization curve(s).

[0054] In some embodiments, from such curves it is possible to calculate the number of ions per unit time liberated into the tissue as well as the depth of the metal removed by corrosion for a given time (referred to as "corrosion rate").

[0055] As further described hereinbelow, the corrosion rate can be calculated and compared with an electrode that is placed outside the region suspected to undergo an environmental change, due to e.g., inflammation. The higher the current difference between the electrodes, the higher the chance that inflammation has caused more pronounced degradation and thus may predict leakage.

[0056] In some embodiments, implantable device **110** has a biodegradable portion and an unchanged portion (also referred to herein as: "reference portion"). In some embodiments, the unchanged portion is used to provide a common reference from which structural changes can

be measured and/or calculated. That is, in some embodiments, the measurement refers to changes in the structure profile of the biodegradable portion.

[0057] In some embodiments, the changes measured in the structure profile are calculated without reference to an area of unchanged topography.

[0058] The reference portion may be implanted in the body.

[0059] The reference portion and the biodegradable portion may be both located within the same organ.

[0060] The reference may be implanted outside the body. The reference portion may comprise a metal coated with a polymer.

[0061] In some embodiments, detection of leakage is performed by a sequence of individual measurements. In some embodiments, the results of several measurements are stored in logic circuit until a desired number of "n" of individual measurements have been accumulated, whereupon an average measured or test value is formed.

[0062] Direct measurement may relate to measuring changes of an electrical property of biological tissue of an organ, e.g., by operably positioning at least two electrodes (not shown) distantly from one another for allowing electrical DC or AC current to flow from one electrode to the other electrode via the biological tissue.

[0063] To simplify the discussion that follows, the monitoring of the integrity of an organ may herein be construed as to comprise indirect and, optionally, direct measurement of the electrical properties of biological tissue.

[0064] An electrical property (whether acquired through direct or indirect measurement) may for example comprise impedance, conductivity, electric potential difference, capacitance, or any other suitable parameter. An electrical property may be measured as function of time.

[0065] A change in the electrical property as measured by leak monitoring device **120** via implantable device **110** may be indicative of leakage from organ **101**. For example, if the measured impedance of implantable device **110** is above or below an impedance threshold value for a certain period of time, it may be inferred that leakage is occurring.

[0066] While the discussion that follows relates to the detection of leakage through tissue reconnection site **102** connecting between tubular tissue portions **103A** and **103B**, also known as "Anastomosis", this should by no means be construed as limiting. The system, device and method disclosed herein is thus not only suitable to detect anastomotic leakage but also leakage which may be the result of a surgical procedure including, for example, Bariatric surgeries like, e.g., sleeve gastrectomy; and/or esophagectomy (for generating a gastric conduit by the stomach in place of the esophagus).

[0067] Reconnection site **102** comprises tissues of either tissue portions **103A** and **103B** and a surgical tissue connector assembly for securing opposing ends of tissue portions **103A** and **103B** in a position to bring them in fluid communication with each other such to re-establish tissue continuity of the mammalian body organ. Such connector assembly may comprise, for example, surgical staples and/or one or more suture threads.

[0068] Implantable device **110** may have a wire-like structure.

[0069] Implantable device **110** may have two or more wires. In some embodiments, at least one wire is the reference portion, as defined hereinabove. In some embodiments, at least one wire may undergo biodegradation upon a defined physiological condition.

[0070] In some embodiments, the term "biodegradation" is used to denote hydrolytic, enzymatic and other metabolism-induced decomposition processes in the living organism, which result in a gradual dissolution of at least large parts of the implant.

[0071] Implantable device **110** may be fixedly attachable to the outer surface **104** of the tissue portions **103A** and **103B** such to cover, at least partially, or fully, reconnection site **102** using, for example, various fixation elements, e.g., glue, adhesives and/or sutures.

[0072] Implantable device **110** may have the form of a mesh-structure.

[0073] The term "mesh", as used herein, may refer to a two- or multidimensional semi-permeable structure of closely-spaced holes, which is composed of a plurality of elongated and interconnected elements, such as fibers, strands, struts, spokes, rungs made of a flexible/ductile material, which are arranged in an ordered (matrix, circular, spiral) or random fashion to form e.g., a two-dimensional sheet or a three-dimensional object.

[0074] In some embodiments, by "closely-spaced holes" it is meant to refer to a spacing of e.g., 1 mm, 2 mm, 5 mm, 10 mm, 15 mm, 20 mm, 30 mm, 40 mm, 50 mm, 60 mm, 70 mm, 80 mm, 90 mm, 100 mm, 110 mm, 120 mm, 130 mm, 140 mm, 150 mm, 160 mm, 170 mm, 180 mm, 190 mm, or 200 mm, including any value and range therebetween.

[0075] According to some embodiments, certain meshes may be composed of fibrous elements which come in direct physical contact with each other at each intercrossing junction constituting the mesh.

[0076] In some embodiments, the mesh structure comprises or is made of conductive, biocompatible and/or biodegradable material(s) as described hereinthroughout.

[0077] In some embodiments, the mesh or the wire structure comprises a core structure coated with conductive, biocompatible and/or biodegradable material(s) as described hereinthroughout.

[0078] In some embodiments, the core comprises one or more metals.

[0079] In some embodiments, the mesh structure comprises non-conductive polymer fibers that are interwoven with conductive, biocompatible and/or biodegradable material(s) as described hereinthroughout.

[0080] In some embodiments, the wire (or the mesh) has a uniformly porous architecture so that the degradation can be progressed uniformly.

[0081] In some embodiments, the term “mesh” is intended to include an element having an openwork fabric or structure, and may include but is not limited to, an interconnected network of wire-like segments, a sheet of material having numerous apertures and/or portions of material removed, or the like. Accordingly, the term “mesh” may also refer to a matrix or a net structure. A wire-like segment may for example comprise monofilaments and/or braided fibers.

[0082] In some embodiments, the mesh has a dimension of 0.1 to 20 mm x 0.1 to 20 mm, including any value and range therebetween.

[0083] The outer surface **104** refers to the tissue surface which is pointing outwardly from the cavity of organ **101**. Conversely, the inner surface **105** refers to the tissue surface which defines the boundaries of the lumen of organ **101**.

[0084] The expression “fully covering” reconnection site **102** as used herein may refer to a configuration in which implantable device **110** is installed such that matter eventually leaking from organ **101** through an opening at any position of reconnection site **102** will come into contact with one or more of the wire-like segments of implantable device **110** and cause a change in the electrical properties of implantable device **110**. Such matter may include liquids, solids and/or matter that is in a solid-fluid two-phase state.

[0085] As described hereinthroughout, in an embodiment, implantable device **110** may comprise conductive, and/or biodegradable material(s). In the event of leakage, biodegradable material(s) may, according to an embodiment, degrade quickly enough and to an extent which allows the detection of leakage from organ **101**, e.g., within 6 hours, 3 hours, 1 hour, 30 min, 15 min, 10 min, 5 min, 1 min, or 30 seconds, from the moment at which body matter starts to leak through reconnection site **102**. Further, the material(s) of implantable device **110** may be functional to allow detection of leakage for a time period that spans over, e.g., about at least e.g., 1 week, 2 weeks, 3 weeks, 4 weeks, or 6 weeks, from the time implantable device **110** was set in operable position within the mammalian body.

[0086] According to an embodiment, biodegradable material(s) employed may fully degrade within mammalian body after a few weeks, 1 month, a few months or years (e.g., after 6 months, 1 year, or two years).

[0087] Details of example biodegradable material are outlined herein below. In an embodiment, electrical wiring and/or implantable device **110** may be removable through a "port" (not shown) having an inner end and an outer end and which is provided in the mammalian body. For example, implantable device **110** may have a collapsible and meshed structure which, when being forced against the inner end from outside the mammalian body, collapses to attain a wire-like structure allowing its removal through the port. The removal may be accomplished as in the extraction of suturing material.

[0088] In an embodiment, the diameter of port may be of a magnitude to prevent infections and may for example range from 100 μm to 1mm or from 100 μm to 4 mm.

[0089] As a result of such environmental changes (e.g., changes to or in the vicinity of the biological tissue to which implantable device **110** may be attached), a change in the electrical properties of implantable device **110** may occur, which may be detected by leak monitoring device **120**. For example, and without being limited thereto, a change (e.g., drop) in pH value and/or concentration of ionic species may be detected by measuring a corresponding change (e.g., decrease) in the impedance of implantable device **110**. In some embodiments specific enzymes affect the polymeric mesh structure. In some embodiments, pH value and/or concentration of ionic species affect the biodegradable metal.

[0090] In some embodiments, the pH value, following the environmental change (e.g., leakage of body matter), varies within less than ± 0.5 . In some embodiments, the pH value, following the change, varies within less than ± 0.5 for at least 30 min, at least 1 h, at least 5 h, or at least 10 h.

[0091] In an additional non-limiting example, the environmental change refers to pH decrease. In an additional non-limiting example, the environmental change refers to an enzymatic activity increase. In an additional non-limiting example, the environmental change refers to a cytokine activity increase. In an additional non-limiting example, the environmental change refers to one or more symptoms derived from an inflammatory response e.g., pH, enzymes, oxidative stress, free radicals etc.

[0092] In some embodiments, "activity increase" refers to the increase in concentration e.g., of the corresponding enzyme or cytokine.

[0093] In some embodiments, "activity increase" refers to the increase in concentration of at least 1%, 2%, 3%, 4%, 5%, 6%, 7%, 8%, 9%, 10%, 11%, 12%, 13%, 14%, 15%, 16%, 17%, 18%, 19%, or 20%, including any value and range therebetween.

[0094] Without being bound by any particular mechanism, these changes in activity may increase the rate of wire or mesh degradation specifically at the organ site, and therefore may affect the electrical resistance of the wire or the mesh.

[0095] In some embodiments, the mesh or the wire structure comprises 2, 3, or 4 types of biodegradable conductive polymers and/or metals. Herein, by "type" it is meant to refer to a sensitivity property (e.g., degradability) of the polymer or the metal to a specific environmental change, e.g., an inflammatory disease or condition.

[0096] In some embodiments, by "inflammatory disease or condition" it is meant to refer to a local range of concentration of a specific enzyme or cytokine. In some embodiments, by "inflammatory disease or condition" it is meant to refer to a local range of concentration of a combination of factors, e.g., enzymes, cytokines, acidity etc.

[0097] In some embodiments, the term "cytokine" refers to a pro-inflammatory cytokine.

[0098] Non-limiting exemplary pro-inflammatory cytokines are selected from IL-1I, IL-3, IL-6, IL-12, p70, IL-17, MIP-1I and RANTES.

[0099] As already outlined herein, surgical site monitoring system **100** may further include leak monitoring device **120**. According to some embodiments, leak monitoring device **120** may include a processor **121**, a memory **122**, an input device **123**, an output device **124**, and a power source **125** for powering the various components of leakage detector system **100**.

[0100] The various components of surgical site monitoring system **100** may communicate with each other over one or more communication buses (not shown) and/or signal lines and/or communication links (not shown).

[0101] Leak monitoring device **120** may be operatively coupled with implantable device **110** so that changes of electrical properties of implantable device **110** are measurable by leak monitoring device **120**, as outlined herein below in greater detail.

[0102] Leak monitoring device **120** may be operative to enable the implementation of a method, process and/or operation for allowing the detection of leakage from the lumen of organ **101** through a wall to the outside of the tract. Such method, process and/or operation may herein be implemented by a "detector engine" of leak monitoring device **120**, referenced by alphanumeric label "**126**". Detector engine **126** may be realized by one or more hardware, software and/or hybrid hardware/software modules, e.g., as outlined herein. A module may be a self-contained hardware and/or software component that interfaces with a larger system (Alan Freedman, The Computer Glossary 268, (8th ed. 1998)) and may comprise a machine or machines executable instructions.

[0103] For example, a module may be implemented as a controller programmed to, or a hardware circuit comprising, e.g., custom VLSI circuits or gate arrays, off-the-shelf semiconductors such as logic chips, transistors, or other discrete components, configured to cause system **100** to implement the method, process and/or operation as disclosed herein. A module may also be implemented in programmable hardware devices such as field programmable gate arrays, programmable array logic, programmable logic devices or the like. For example, memory **122**, may include instruction which, when executed e.g. by the processor **121**, may cause the execution of the method, process and/or operation for enabling the detection of leakage from tract **101**. Such method, process and/or operation may herein be implemented by leak detector engine **126**.

[0104] According to some embodiments, an input device **123** of a leak monitoring device **120** may for example be operatively coupled with implantable device **110** e.g., through a plurality of electric wires (e.g., wires **111A** and **111B**). The plurality of electric wires may be removable from the mammalian body through the port and, as such, may be made or include non-biodegradable conductive material.

[0105] Wires or electrical wiring **111A** and **111B** may be coupled to implantable device **110** so that a sufficiently significant change in the material properties of implantable device **110** causes a change in an electrical property of the implant measurable by detector engine **126**. A detection of a change in the electrical property of implantable device **110** may be conveyed to a user (not shown) via output device **124**. In some embodiments, detector engine **126** may be configured to cause output device **124** to display values (e.g., auditory and/or visually) of the electrical properties as a function of time, e.g., within a calibrated scale.

[0106] In some embodiments, power source **125** may provide electrical energy to implantable device **110** for measuring changes of the device's electrical properties so that the magnitudes of electrical energy in the mammalian body are within physiologically tolerable values. A physiologically tolerable value may be, for example, an alternating current of 800 μA at a frequency of 50 kHz.

[0107] In some embodiments, input device **123** may be equipped with a transmitter (not shown) or a transmitter-receiver (transceiver), e.g., for allowing the transmission of signals carrying data ("electric-property-data") that is descriptive of a change of the electrical properties of implantable device **110** from input device **123** to a communication module (not shown) of leak monitoring device **120**.

[0108] It is noted that in some embodiments, one or more components of leak monitoring device **120** may be internal and one or more components may be external to the mammalian body.

[0109] For example, input device **123** may be coupled with or include a transmitter (not shown) that may be operably positionable within mammalian body. Electric-property-data may be transmitted to outside mammalian body wirelessly over a communication link (not shown) to the communication module (not shown) of leak monitoring device **120** for further processing.

[0110] Leak monitoring device **120** may include a multifunction mobile communication device also known as “smartphone”, a personal computer, a laptop computer, a tablet computer, a server (which may relate to one or more servers or storage systems and/or services associated with a business or corporate entity, including for example, a file hosting service, cloud storage service, online file storage provider, peer-to-peer file storage or hosting service and/or a cyberlocker), personal digital assistant, a workstation, a wearable device, a handheld computer, a notebook computer, a vehicular device, a stationary device and/or a home appliances control system.

[0111] The term “processor” as used herein may additionally or alternatively refer to a controller. Such processor may relate to various types of processors and/or processor architectures including, for example, embedded processors, communication processors, graphics processing unit (GPU)-accelerated computing, soft-core processors and/or embedded processors.

[0112] According to some embodiments, memory **122** may include one or more types of computer-readable storage media. Memory **122** may include transactional memory and/or long-term storage memory facilities and may function as file storage, document storage, program storage, or as a working memory. The latter may for example be in the form of a static random access memory (SRAM), dynamic random access memory (DRAM), read-only memory (ROM), cache or flash memory. As working memory, memory **122** may, for example, process temporally-based instructions. As long-term memory, memory **122** may for example include a volatile or non-volatile computer storage medium, a hard disk drive, a solid state drive, a magnetic storage medium, a flash memory and/or other storage facility. A hardware memory facility may for example store a fixed information set (e.g., software code) including, but not limited to, a file, program, application, source code, object code, and the like.

[0113] A communication module may for example include I/O device drivers (not shown) and network interface drivers (not shown). A device driver may for example, interface with a keypad or to a USB port. A network interface driver may for example execute protocols for the Internet, or an Intranet, Wide Area Network (WAN), Local Area Network (LAN) employing, e.g., Wireless Local Area Network (WLAN)), Metropolitan Area Network (MAN), Personal Area Network (PAN), extranet, 2G, 3G, 3.5G, 4G including for example Mobile WIMAX or Long Term Evolution (LTE) advanced, and/or any other current or future communication network, standard, and/or system.

[0114] Additional reference is made to **FIGs. 2A** and **2B**. In some embodiments, implantable device **110** may have, as already indicated herein, a mesh structure or body. The mesh structure may, for example, comprise an interconnected network of wire-like segments **112A** and **112B** arranged (e.g., perpendicularly) relative to each other, to form a pattern of polygons delineating voids in the structure.

[0115] Referring to **FIG. 2A**, the mesh structure of implantable device **110** is shown to be intact, indicative that there is no leakage from the lumen of organ **101** through reconnection site **102** which connects between tissue portions **103A** and **103B**. When intact, implantable device **110** may have known electrical properties such as, for example, electric conductivity. As shown schematically in **FIG. 2B**, a section **113** of reconnection site **102** is shown to be reopened, allowing the leakage of matter **114** from the lumen of organ **101**. As a result of the leakage of matter **114**, mesh-structure of implantable device may undergo structural changes (e.g., partial or full degradation) in the vicinity of section **113**. The structural change is schematically illustrated by loose ends **115** of previously continuous wire-like segments **112A** and **112B** of implantable device **110** and indicated at by dashed circles. Due to the structural changes of the mesh, the electrical properties of implantable device **110** or one of the mesh structure within implantable device **110** may change. Such change in the electrical properties of implantable device **110** (e.g., decrease in impedance) may be measurable by leakage engine **126**. With respect to such indirect measurement, electrical impedance may increase if the material degrades, or even tears or breaks. However, with respect to direct measurement, electrical impedance may drop responsive to a decrease in pH for example.

[0116] According to an embodiment, examples of materials or composition of materials of which implantable device **110** may be made of or may comprise biodegradable conductive polymers and/or metals; biodegradable conductive polymers and/or metal in combination with and/or next to biodegradable and/or non-biodegradable non-conductive polymers. In an

embodiment, the non-biodegradable residues of implantable device **110** may be removed through the port (not shown) of the mammalian body.

[0117] A combination of the employment of conductive and non-conductive materials may allow obtaining implantable devices **110** having respectively varying electrical properties. An implantable device **110** that is intact may for example exhibit an impedance ranging, e.g., up to 10^2 - 7.5×10^3 (S cm⁻¹).

[0118] A combination of biodegradable with non-biodegradable material may allow the control of the degradation products at the implantation site.

[0119] For example, as described hereinabove, change in the electrical properties of the biodegradable mesh structure within implantable device **110** may be measured with respect to a non-biodegradable wire- or mesh structure which is also positioned within implantable device **110**.

[0120] For example, as described hereinabove, change in the electrical properties of the conductive mesh structure within implantable device **110** may be measured with respect to a non-conductive structure.

[0121] The material or composition of materials of which implantable device **110** may be made of may be non-toxic, e.g., to allow for it or their degradation products to be adsorbed by blood and/or cells of the mammalian body. Otherwise stated, material(s) of implantable device **110** may exhibit biocompatibility. More specifically, both material(s) of implantable device **110** may be biocompatible, as well as the degradation products may be biocompatible.

[0122] Biodegradable Conductive Polymers:


[0123] Non-limiting exemplary polymers for use with the biodegradable conducting polymer of the present invention include but are not limited to synthetic polymers such as poly (ethylene glycol), Polyglycolic acid (PGA) poly (ethylene oxide), partially or fully hydrolyzed poly(vinyl alcohol), polythiophene poly(vinylpyrrolidone), poly(ethyloxazoline), poly(ethylene oxide)-co-poly(propylene oxide) block copolymers, (polpxamers and meroxapols), poloxamines, oxyacetylene, polyparaphenylene, polyparaphenylene sulfide, polyaniline, polyisothionaphthene, polyparavinyline, carboxymethyl cellulose, and hydroxyalkylated celluloses such as hydroxyethyl cellulose and methylhydroxypropyl cellulose, and natural polymers such as polypeptides, polysaccharides or carbohydrates, hyaluronic acid, dextran, heparan sulfate, chondroitin sulfate, heparin, or alginate, and proteins such as gelatin, collagen, albumin, ovalbumin or any copolymers or blends thereof.

[0124] An example of a conductive polymer that may exhibit desired *in-vitro* and *in-vivo* biocompatibility includes the conjugated polymer Polypyrrole (PPy) and/or any derivatives


thereof. PPy further exhibits relatively high conductivity under the desired physiological conditions ranging, for example, from 100 to 7,500 S/cm. PPy can be fabricated with high surface area such as fibers. The primary molecular structure of PPy is shown below:




[0125] Examples of secondary molecular structures of PPy are shown below, wherein a plane array of the monomers are predominantly bound by α, α' bonds and to a lesser extent by α, β' ; and β, β' bonds:



α, α'



α, β'



β, β'

[0126] In an embodiment, conductive polymers such PPy can be synthesized to form a composite together with a biodegradable polymer. For example, PPy may be synthesized together with a biodegradable polymer to arrive at erodible PPy nanoparticle–polylactide (PLA), or PPy–PLLA composites. After biodegradation of the biodegradable polymer, non-degraded material may be removed from the mammalian body, e.g., through the port (not shown). The electrical properties and rate of degradation of the degradable polymer may be designed by selecting a corresponding ratio between the two polymers.

[0127] In an embodiment, the conductive polymer may be modified, e.g., by adding ionizable (butyric acid) and/or hydrolysable (butyric ester) side groups to the backbone of PPy.

[0128] In an embodiment, small chains of PPy that can undergo gradual erosion and renal clearance due to their small size may be electrochemically synthesized.

[0129] Biodegradable conductive metals:

[0130] In an embodiment, the conductive metal is selected from, without being limited thereto, Magnesium (Mg), Palladium (Pd), and Iron (Fe).

[0131] In an embodiment, magnesium may be employed by implantable device **110** for exhibiting suitable thrombogenicity and biocompatibility.

[0132] In some embodiments, the term "conductive metal" further refers to alloy e.g., Magnesium based alloy such as LAE442 and AZ91D. In some embodiments, the alloy may further comprise one or more elements selected from, without limitation, zirconium, yttrium, and an earth element.

[0133] In some embodiments, the magnesium alloy further comprises calcium (Ca). In some embodiments, the magnesium alloy further comprises zinc (Zn). In some embodiments, the magnesium alloy further comprises manganese. In some embodiments, the magnesium alloy further comprises tin. In some embodiments, the magnesium alloy is in the form of rod or wire.

[0134] In some embodiments, the term "magnesium" refers to magnesium hydroxide. In some embodiments, the conductive metal is stable at a desired pH range.

[0135] In an embodiment, a biodegradable material may be iron, e.g. Fe > 99.8%. Iron can interconvert between ferric (Fe^{2+}) and ferrous (Fe^{3+}) ions by accepting and donating electrons quite readily, which makes it a useful component for cytochromes, oxygen-binding molecules (e.g., hemoglobin and myoglobin), and/or enzymes.

[0136] In another embodiment, the metal (or the alloy) is at least partially coated by a protective layer. In some embodiments, the protective layer comprises one or more non-metallic derivatives.

[0137] Biodegradable non-conductive polymers in conjunction with biodegradable conductive metal;

[0138] In an embodiment, a mesh structure of implantable device **110** may employ biocompatible, biodegradable, and/or non-conductive polymer fibers that are interwoven with biodegradable conductive metals.

[0139] Biodegradable implantable device **110** or a portion thereof can be degraded with time at a known, pre-designed rate until the completion of the healing process, thus, for example, circumventing the need to perform unnecessary surgical procedures to remove the supporting implant and significantly reduce the risks and costs involved.

[0140] The biodegradable polymer mesh (materials such as, for example, PGA and/or PLA) may have a profile of, e.g., 100 μm – 1 mm in diameter, while the metal fibers may have a profile ranging, for example, from 5 to 20 μm or 5 to 500 μm .

[0141] Non-biodegradable, non-conductive polymers in conjunction with biodegradable conductive metal:

[0142] In an embodiment, a mesh structure of implantable device **110** may employ biocompatible, non-biodegradable, non-conductive polymer fibers such as, without limitation, nylon, polyethylene terephthalate (PET), ultra-high-molecular-weight polyethylene

(UHMPE), etc., and may be interwoven with biodegradable conductive metal fibers. The non-biodegradable mesh polymer can serve as a mechanical carrier for the biodegradable conductive metal.

[0143] Further reference is made to **FIG. 3**. According to an embodiment, a method for detecting leakage of matter from a mammalian body organ may include, as indicated by box **310**, overlaying implantable device **110** onto tissue reconnection site **102** of a mammalian body organ.

[0144] The method may further include, as indicated by box **320**, providing electrical energy to implantable device **110**.

[0145] The method may include, as indicated by box **330**, measuring an electrical property of implantable device **110**.

[0146] The method may further include, as indicated by box **340**, providing an output if a measured electrical property is indicative of a leakage of matter through the reconnection site.

[0147] The various features and steps discussed above, as well as other known equivalents for each such feature or step, can be mixed and matched by one of ordinary skill in this art to perform methods in accordance with principles described herein. Although the disclosure has been provided in the context of certain embodiments and examples, it will be understood by those skilled in the art that the disclosure extends beyond the specifically described embodiments to other alternative embodiments and/or uses and obvious modifications and equivalents thereof. Accordingly, the disclosure is not intended to be limited by the specific disclosures of embodiments herein. For example, any digital computer system can be configured or otherwise programmed to implement a method disclosed herein, and to the extent that a particular digital computer system is configured to implement such a method, it is within the scope and spirit of the disclosure. Once a digital computer system is programmed to perform particular functions pursuant to computer-executable instructions from program software that implements a method disclosed herein, it in effect becomes a special purpose computer particular to an embodiment of the method disclosed herein. The techniques necessary to achieve this are well known to those skilled in the art and thus are not further described herein. The methods and/or processes disclosed herein may be implemented as a computer program product such as, for example, a computer program tangibly embodied in an information carrier, for example, in a non-transitory computer-readable or non-transitory machine-readable storage device and/or in a propagated signal, for execution by or to control the operation of, a data processing apparatus including, for example, one or more programmable processors and/or one or more computers. The terms “non-transitory computer-

readable storage device” and “non-transitory machine-readable storage device” encompasses distribution media, intermediate storage media, execution memory of a computer, and any other medium or device capable of storing for later reading by a computer program implementing embodiments of a method disclosed herein. A computer program product can be deployed to be executed on one computer or on multiple computers at one site or distributed across multiple sites and interconnected by a communication network.

[0148] In the discussion, unless otherwise stated, adjectives such as “substantially” and “about” that modify a condition or relationship characteristic of a feature or features of an embodiment of the invention, are to be understood to mean that the condition or characteristic is defined to within tolerances that are acceptable for operation of the embodiment for an application for which it is intended.

[0149] “Coupled with” means indirectly or directly “coupled with”.

[0150] Where applicable, although state diagrams, flow diagrams or both may be used to describe embodiments, the technique is not limited to those diagrams or to the corresponding descriptions. For example, flow need not move through each illustrated box or state, or in exactly the same order as illustrated and described.

[0151] It should be understood that where the claims or specification refer to “a” or “an” element, such reference is not to be construed as there being only one of that element.

[0152] In the description and claims of the present application, each of the verbs, “comprise” “include” and “have”, and conjugates thereof, are used to indicate that the object or objects of the verb are not necessarily a complete listing of components, elements or parts of the subject or subjects of the verb.

[0153] Unless otherwise stated, the use of the expression “and/or” between the last two members of a list of options for selection indicates that a selection of one or more of the listed options is appropriate and may be made.

[0154] All references mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual patent was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present application.

EXAMPLES

[0155] Reference is now made to the following examples, which together with the above descriptions illustrate some embodiments of the invention in a non-limiting fashion.

EXAMPLE 1**GENERAL PROCEDURE**

[0156] Reference is now made to **FIG. 4** which illustrates a colon as the surgical site **415A** and a mesh **405A** being implanted thereon.

[0157] In exemplary procedures, two meshes (detection electrode, and reference electrode) in a mesh density of 1 to 8 mm x 1 to 8 mm and at least 2 mm x 2 mm opening composed of wires (d=150 μ m) are implanted, one (**405A**) at the surgical site (**415A**) and another (**405B**) at a different location of the colon (**415B**) further from the surgical site.

[0158] In exemplary procedures, potential or current are measured between surgical site, points **410**, and/or **420** and references sites, **430**, and/or **440** and are compared.

[0159] In exemplary procedures, an inflammatory response occurs owing to GI leakage that triggers inflammatory cascade which in turn provides high corrosive environment at the surgical site.

[0160] In exemplary procedures, the mesh at the surgical site degrades faster compared to the reference mesh electrode. The potential (or current) measured between points **410**, **420** is higher compared to the potential (or current) measured between points **430**, **440**.

[0161] In exemplary procedures, the potential (or current) is measured right after surgery and 2, 3, 4 to 6 days post-surgery.

[0162] In additional exemplary procedures, the two electrodes are placed at the same site during surgery, whereas one electrode known to be less influenced by inflammatory response and its degradation would be relatively stable.

[0163] In exemplary procedures, an electrode known to be less influenced by inflammatory response is obtained by its coating thereof with slow (about a year) degradable polymer, or other type of metal/alloy.

[0164] In additional exemplary procedures alternating current (AC) electrochemical impedance is measured.

[0165] In additional exemplary procedures, the coating is 10-100 μ m thickness.

[0166] In additional exemplary procedures, the coating is permeable to the electrolyte solution so as to allow current / potential measurement in relative to the specific body fluids.

EXAMPLE 2**MMP-8 and MMP-9 MEASUREMENT BY DIRECT CURRENT POLARIZATION
TECHNIQUE*****General Concept:***

[0167] In exemplary procedures, the levels of MMP-8 and -9 are measured.

[0168] In exemplary procedures, the levels are found to be significantly higher in patients who developed anastomotic leakage, as well as biopsies from patients with impaired anastomotic healing.

[0169] In exemplary procedures, the degradation (also referred to as "corrosion") model comprises an intermetallic particle, a magnesium anodic metal, and insulation. The particle plays the role of a cathode in micro-galvanic magnesium corrosion.

[0170] In exemplary procedures, magnesium ion concentration sharply increases on the boundary between the anodic and cathodic region as the pH in the solution decreases. This shows, without being bound by any particular theory, that magnesium tends to corrode rapidly in an acid solution as compared to a neutral or alkaline solution.

Materials

- Mg 99.9%
- AZ91 magnesium alloy
- Mg-Ca alloy
- ZX50 and WZ21 alloys
- Mg-Zn-Ca
- Iron (Fe > 99.8%)
- Conductive polymers - polypyrrole (PPy), polyaniline (PANi), polythiophene.

Media

[0171] Data exist in regards to trauma or inflammation that is responsible to enzymes released by cells, such as polymorpho-nuclear leucocytes and consequently increase rate of degradation in the polymer.

[0172] In exemplary embodiments, the control solution has pH 7 and does not contain enzymes.

[0173] In exemplary procedures the test solution comprises 0.1 M NaCl (pH 6).

[0174] In additional exemplary embodiments, the test/control solution comprise phosphate buffered saline (PBS) solution.

[0175] In additional exemplary embodiments, the test solution contains MMP-1, MMP-2, MMP-8 and MMP-9 in the medium.

Method

[0176] In exemplary procedures, during direct current polarization (DCP) test the voltage is swept at a controlled rate (1 mVs^{-1}) between different pre-set potentials by regulating the current flowing between the working (Mg) and counter (inert metal) electrode.

[0177] In exemplary procedures, open circuit potential (OCP) is recorded before DCP for a set period of exposure time that allows the material to "stabilize" with the electrolyte and reach a near steady potential. The DCP initial voltage is nominally set to commence at values more negative than (i.e. cathodic to) the OCP, and the scan proceeds to increasingly positive values (that are anodic to the original OCP).

[0178] In exemplary procedures, the DCP results show as a Tafel curve, which provides thermodynamic information on corrosion potential (E_{corr}), kinetic information from the corrosion current density (i_{corr}) as well as relative anodic and cathodic reactions.

Results

[0179] In exemplary procedures, the measured E_{corr} is between -1V to 1.6V and in the control solution and E_{corr} of $\sim -1.7\text{V}$ and -2V in test solution.

[0180] In exemplary procedures, the measured i_{corr} in the control solution is between 2 to 10 $\mu\text{A}/\text{cm}^2$) and in the test solution i_{corr} is (20 to 30 $\mu\text{A}/\text{cm}^2$).

EXAMPLE 3**ELECTROCHEMICAL IMPEDANCE SPECTROSCOPEIS****Method**

[0181] In exemplary procedures, an electrochemical impedance spectroscopy (EIS) technique is used to characterize a magnesium sample using the frequency response of AC polarization of pure magnesium (99.9%) substrate.

[0182] EIS uses a range of low magnitude polarizing voltages that cycle from a peak anodic to peak cathodic voltage using a spectra of voltage frequencies. Capacitance and resistance values are obtained for each frequency and can then be used to illuminate a number of phenomena and properties of the Mg surface.

Results

[0183] In exemplary procedures, the impedance in the control solution (see Example 2) is between 20 and 100 $\text{ohm}\cdot\text{cm}^2$ compared to an impedance of between 1 and 15 at the test solution (see Example 2). This occurs in more than 50% of the frequency range measured between 10-2Hz and 105 Hz.

[0184] Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

[0185] All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

CLAIMS

1. An implantable device comprising:
at least two wires,
wherein at least one wire is configured to attach along a site of an organ, and wherein the at least one wire comprises a biodegradable conductive polymer and/or a biodegradable conductive metal.
2. The implantable device of claim 1, wherein the device is configured to monitor biological tissue leakage of body matter from the organ.
3. The implantable device of any one of claims 1 and 2, wherein said at least two wires are in the form of mesh structure.
4. The implantable device of any one of claims 1 to 3, wherein at least one wire is configured to be positioned external to the site of the body organ.
5. The implantable device of any one of claims 1 to 4, comprising a biodegradable conductive metal, wherein said biodegradable conductive metal comprises a metal selected from the group consisting of magnesium, iron, zinc and calcium, or any combination thereof.
6. The implantable device of any one of claims 1 to 5, wherein said organ is the stomach, the small intestine, or the large intestine.
7. The implantable device of any one of claims 2 to 6, wherein said biodegradable conductive polymer or said biodegradable conductive metal is characterized as being measurably responsive in terms of its electrical conductivity when being subjected to the body matter leaking from the organ.
8. The implantable device of claim 7, wherein said body matter is a cytokine or an enzyme.
9. The implantable device of claim 8 wherein said enzyme is metalloproteinase.

10. The implantable device of claim 9 wherein said metalloproteinase is selected from the group consisting of matrix metalloproteinase (MMP)-8 and MMP -9, or a combination thereof.
11. The implantable device of any one of claims 7 to 10, wherein said body matter is characterized by a pH value that varies within ± 0.5 .
12. The implantable device of any one of claims 1 to 11, wherein said biodegradable conductive polymer or said biodegradable conductive metal is characterized by a conductivity of 100 to 7,500 S/cm.
13. A system for monitoring a site within a mammalian body, comprising
an implantable device according to any one of the preceding claims which is configured to be operably attachable to an organ inside the mammalian body; and
a leak monitoring device which is operably coupled with the implant and which comprises:
a power source for delivering electrical energy to the implant; and
a detector engine for measuring changes in the electrical properties of the implantable device.
14. A method comprising:
attaching at least one wire along a site of an organ, wherein the at least one wire comprises a biodegradable conductive polymer and/or a biodegradable conductive metal, and
monitoring biological tissue leakage of body matter from an organ.
15. The method of claim 14, wherein said organ is the stomach, the small intestine, or the large intestine.
16. The method of any one of claims 14 and 15, further comprising attaching at least one second wire positioned external to the site of the organ.
17. The method of any one of claims 14 to 16, wherein said biodegradable conductive polymer or said biodegradable conductive metal is characterized by a conductivity of 100 to 7,500 S/cm.

18. The method of one of claims 14 to 17, wherein said body matter is a cytokine or an enzyme.
19. The method of claim 18, wherein said enzyme is metalloproteinase.
20. The method of claim 19, wherein said metalloproteinase is selected from the group consisting of MMP-8 and MMP -9, or a combination thereof.

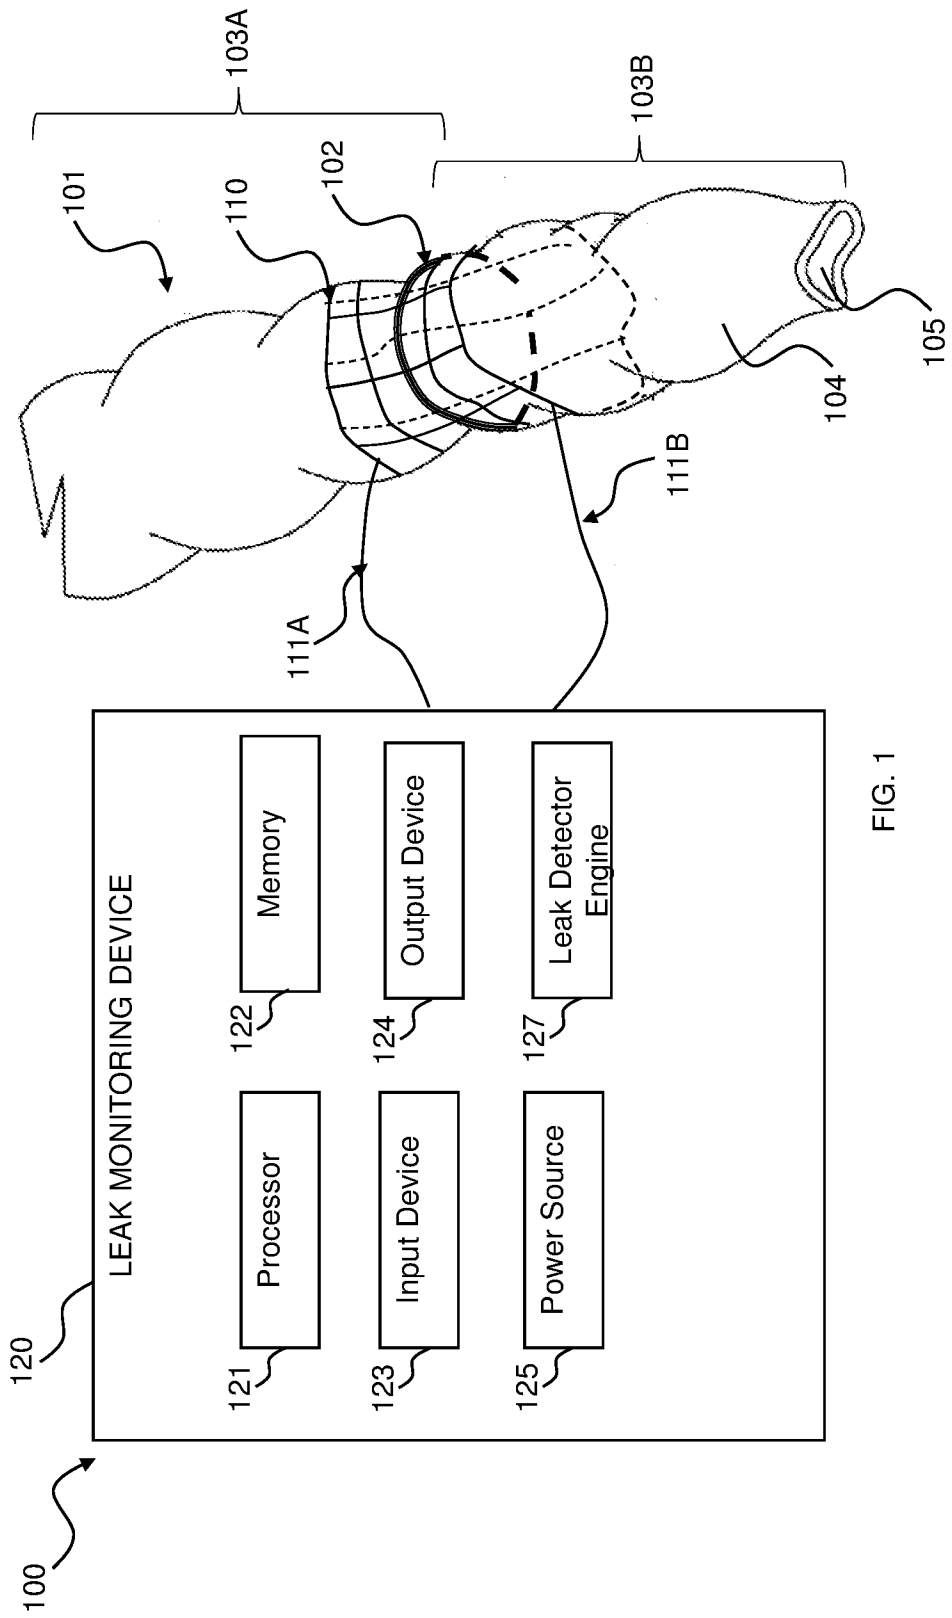


FIG. 1

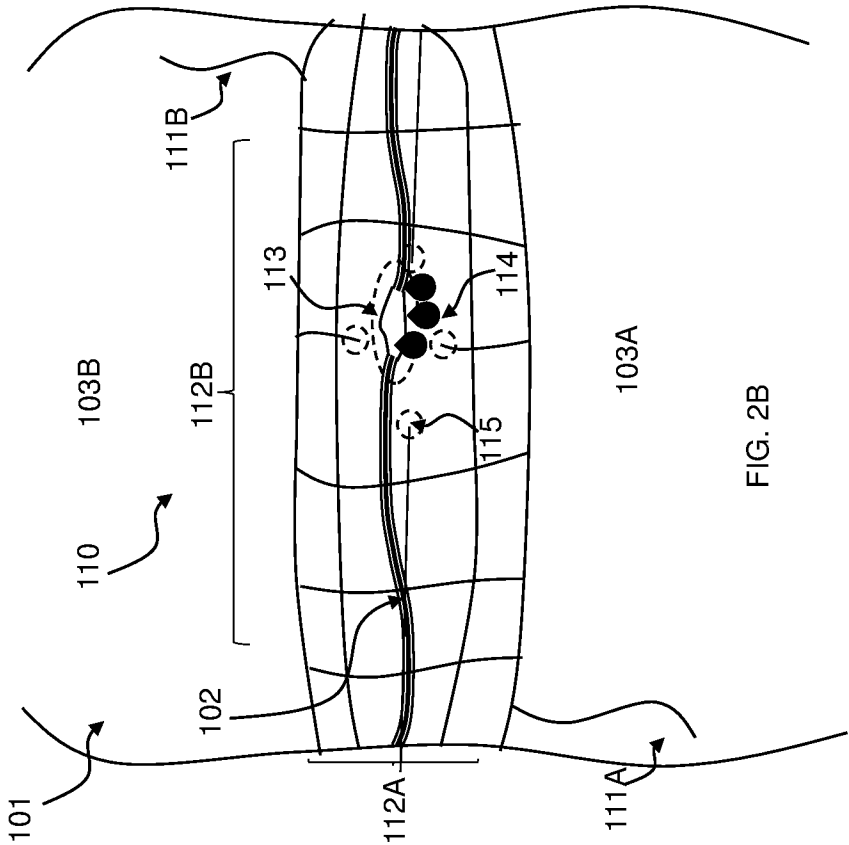


FIG. 2B

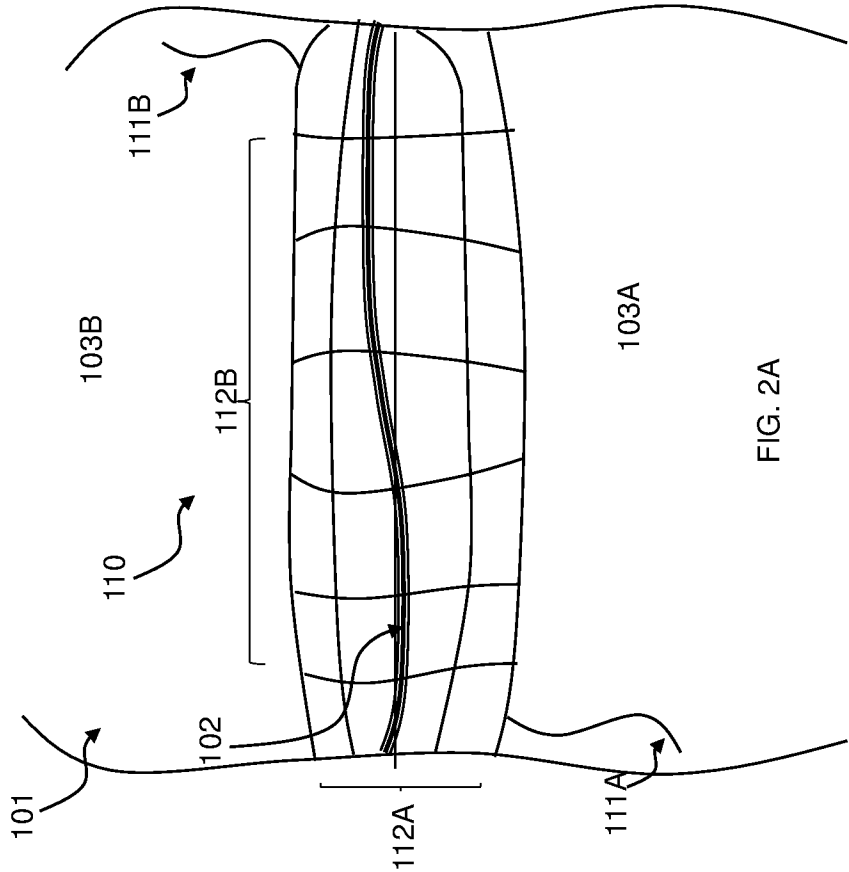


FIG. 2A

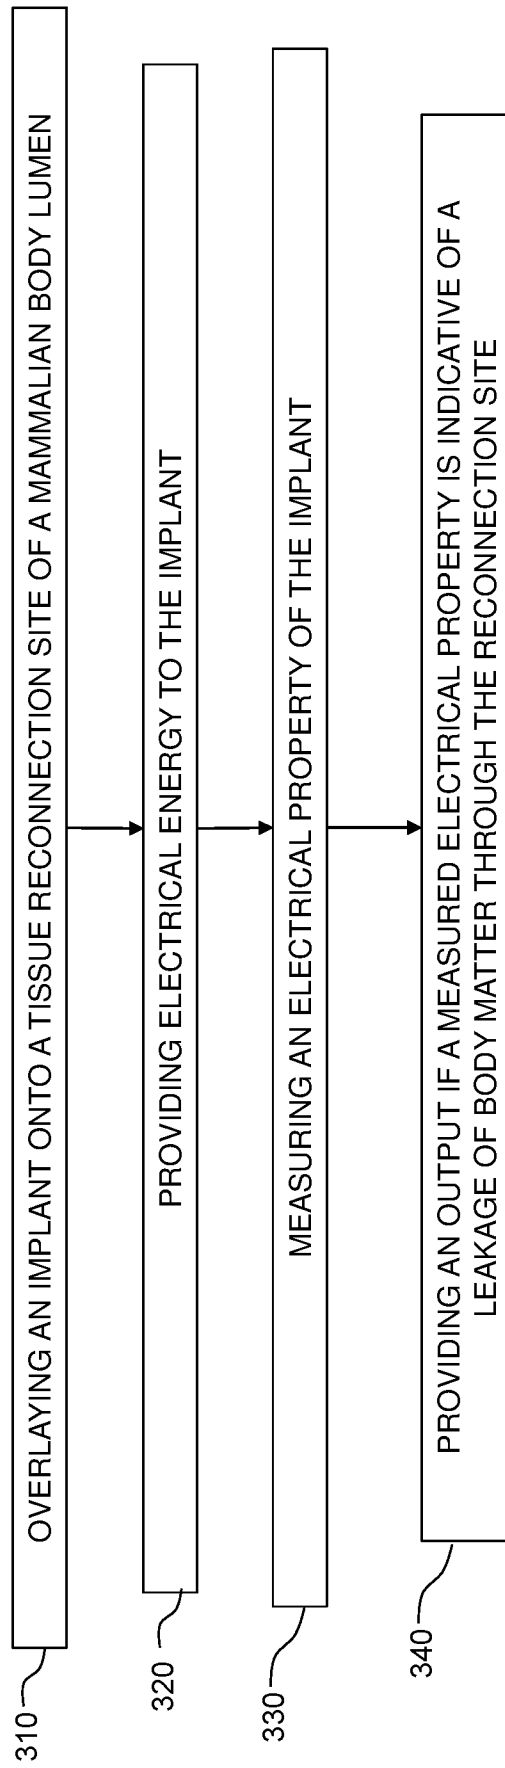


Fig. 3

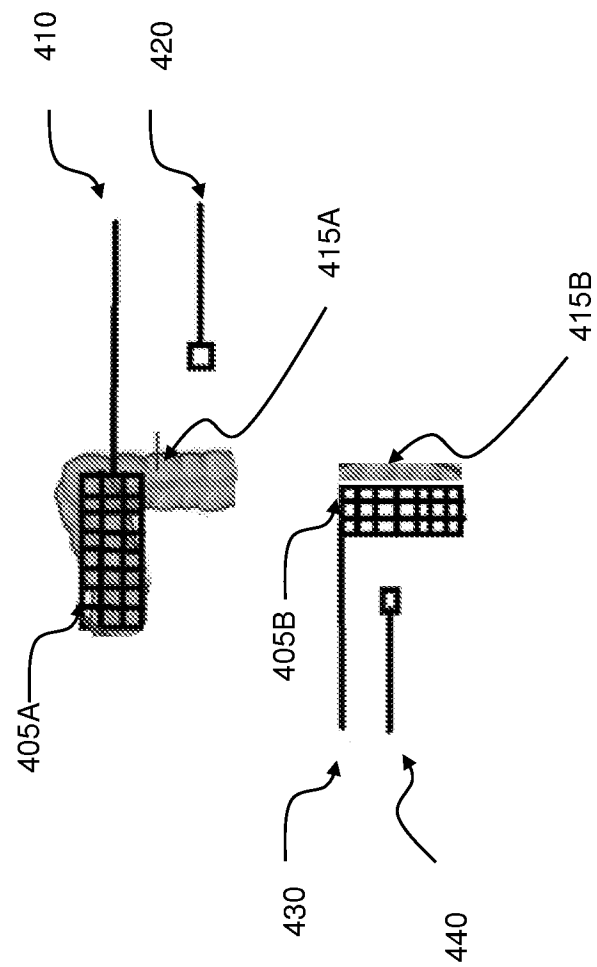


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2016/050771

A. CLASSIFICATION OF SUBJECT MATTER IPC (2016.01) A61B 17/11, A61B 5/00 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (2016.01) A61B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: FamPat database, PatBase		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/055521 A1 (AMS RESEARCH CORP.) 10 Apr 2014 (2014/04/10) Abstract; page 9, lines 18-27; figures 1, 3, 4	1,3-6,12
X	US 2012/0273548 A1 (MA ET AL.) 01 Nov 2012 (2012/11/01) Abstract; paragraphs [0029], [0036]; figures 2E, 3A	1-3,6,14-20
A	US 2005/0240093 A1 (DEARMOND T. D.) 27 Oct 2005 (2005/10/27) the whole document	1-20
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 03 Nov 2016		Date of mailing of the international search report 03 Nov 2016
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer Zozulya Irina IrinaZ@justice.gov.il Telephone No. 02-5651808

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IL2016/050771

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
WO 2014/055521 A1	10 Apr 2014	WO 2014055521 A1	10 Apr 2014
		AU 2013327478 A1	02 Apr 2015
		CA 2884764 A1	10 Apr 2014
		EP 2903559 A1	12 Aug 2015
		EP 2903559 A4	13 Apr 2016
		US 2015238300 A1	27 Aug 2015
US 2012/0273548 A1	01 Nov 2012	US 2012273548 A1	01 Nov 2012
		AU 2012202180 A1	15 Nov 2012
		AU 2012202180 B2	15 May 2014
		AU 2014210634 A1	28 Aug 2014
		CA 2775259 A1	27 Oct 2012
US 2005/0240093 A1	27 Oct 2005	US 2005240093 A1	27 Oct 2005
		US 7899508 B2	01 Mar 2011