No. 781,232. PATENTED JAN. 31, 1905.


H. A. SAKS.

HOOD.

APPLICATION FILED NOV. 11, 1904.

2 SHEETS—SHEET 1.

Fig. 1.

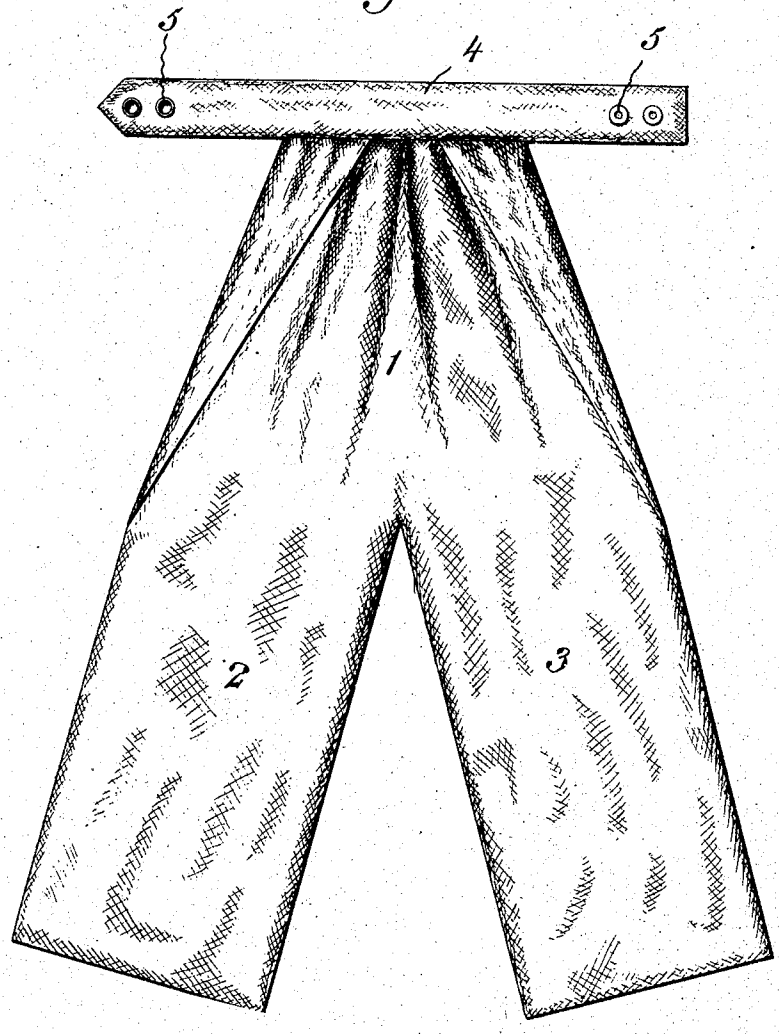

Witnesses:-
J. George Barry,
Henry G. Thieme.

Inventor:-
Horace A. Saks
by attorneys
Brown & Seward

No. 781,232. PATENTED JAN. 31, 1905.

H. A. SAKS.

HOOD.

APPLICATION FILED NOV. 11, 1904.

2 SHEETS—SHEET 2.

Fig. 2.

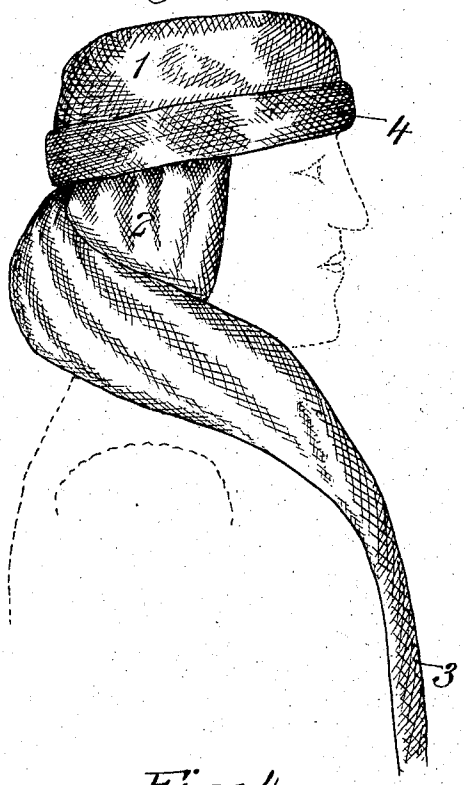


Fig. 3.



Fig. 4.


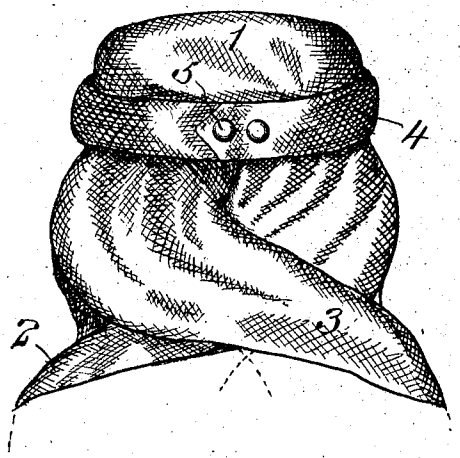


Fig. 5.

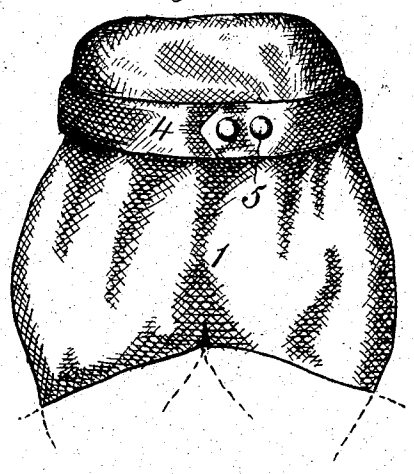

Witnesses:-
F. George Barry
Henry J. Thieme.

Inventor-
Horace A. Saks
by attorneys
Brown & Durand

No. 781,232. Patented January 31, 1905.

UNITED STATES PATENT OFFICE.

HORACE A. SAKS, OF NEW YORK, N. Y., ASSIGNOR TO SAKS & COMPANY, OF NEW YORK, N. Y., A CORPORATION OF NEW YORK.

HOOD.

SPECIFICATION forming part of Letters Patent No. 781,232, dated January 31, 1905.

Application filed November 11, 1904. Serial No. 232,269.

To all whom it may concern:

Be it known that I, HORACE A. SAKS, a citizen of the United States, and a resident of the borough of Manhattan, in the city and State of New York, have invented a new and useful Improvement in Hoods, of which the following is a specification.

The object of this present invention is to provide a hood which is so constructed as to provide an effectual head, throat, and chest protector.

In the accompanying drawings, Figure 1 represents a plan view of the hood. Fig. 2 represents a side view of the same when in use. Fig. 3 is a front view. Fig. 4 is a rear view, and Fig. 5 is another rear view in which the flaps are uncrossed at the back of the neck.

The head portion of the hood is denoted by 1, from which head portion depend flaps 2 and 3 of the length desired. A head-band 4 is secured to the top of the head portion 1 of the hood. This head portion 1 is made sufficiently full to give ample space at the back of the head for the hair of the wearer. In the form herein shown the fulled portion is made by puckering the top of the head portion and turning over the side edges of the material and permanently uniting the top of the puckered portion of the top of the hood to the head-band. This head-band 4 is made of sufficient length to pass around the head of the wearer and overlap at the back. The overlapping portions of the band may be secured together in any desired manner—such, for instance, as socket-flaps 5.

The positions of several portions of the hood when in use are clearly represented in the drawings. One way of applying the hood to the head of the wearer is to place the top of the head into the fulled portion of the hood, then pass the band 4 around the head and unite its ends at the back over the back of the head portion. The flaps 2 and 3 are then crossed at the back of the neck and brought around over the chest of the wearer, where the said flaps may be suitably united in any known manner. If desired, the flaps 2 and 3 need not be crossed at the back of the neck of the wearer, but may be led directly to the front and caused to cover the chest of the wearer.

The hood constructed as above described provides a very complete head and chest covering. It may be made of any suitable material, and the flaps may be of any length desired.

What I claim is—

1. A hood comprising a fulled head portion, flaps projecting therefrom and a head-band arranged to pass around the head of the wearer and overlap at the back and means for securing the overlapping portions of the head-band together.

2. A hood comprising a head portion, flaps projecting therefrom and a head-band, the said head portion having its top edge puckered and its side edges folded over and permanently united to the said head-band.

In testimony that I claim the foregoing as my invention I have signed my name, in presence of two witnesses, this 4th day November, 1904.

HORACE A. SAKS.

Witnesses:

F. M. MCGENNIS,

ROBERT B. SEWARD.