



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


<p>(51) International Patent Classification ⁶ : H04N 7/171</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/41911 (43) International Publication Date: 19 August 1999 (19.08.99)</p>
<p>(21) International Application Number: PCT/US99/00716 (22) International Filing Date: 13 January 1999 (13.01.99) (30) Priority Data: 60/074,291 11 February 1998 (11.02.98) US 09/034,960 4 March 1998 (04.03.98) US (71) Applicant: ICTV, INC. [US/US]; 14600 Winchester Boulevard, Los Gatos, CA 95030 (US). (72) Inventors: DOYLE, John, F.; 510 Railway Avenue, Campbell, CA 95008 (US). SNELL, Stephen, C.; 6312 Baseline Drive, Aptos, CA 95003 (US). ASKENAS, Mitchell; 507 North Cascade Terrace, Sunnyvale, CA 94087 (US). HARTSON, Ted; 10012 North 77th Street, Scottsdale, AZ 85258 (US). (74) Agents: SUNSTEIN, Bruce, D. et al.; Bromberg & Sunstein LLP, 125 Summer Street, Boston, MA 02110 (US).</p>		<p>(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>

(54) Title: ENHANCED SCRAMBLING OF SLOWLY CHANGING VIDEO SIGNALS

(57) Abstract

An enhanced scrambled video signal, method for making an enhanced scrambled video signal and apparatus for enhanced scrambling of a video signal are all characterized by a pattern added to a video signal. The pattern is formed from a pair of segments, including a black segment and a white segment which forms a high contrast transition therebetween. The transitions vary in horizontal location from one horizontal line to the next. The pattern causes an unauthorized television receiver to mistakenly lock onto the transitions in the pattern, as if the transitions represented horizontal sync signals, thus scrambling the video display. The apparatus for inserting the pattern may be formed by a sync detector, a video amplifier, a multiplexor and a control logic device. The video amplifier sets the video signal to a DC reference level. The sync detector detects the horizontal sync of the video signal which is sent from the video amplifier. The sync location is passed from the sync stripper to the control logic device which sends control pattern insertion signals to the multiplexor. The multiplexor combines the video signal with the black, white, and gray reference signals based on the control information to add the pattern to the video signal.

THIS IS AN E-MAIL
MESSAGE THAT SHOULD
REMAIN PRIVATE

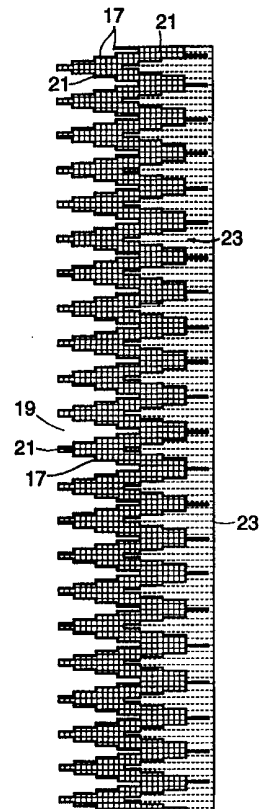

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ENHANCED SCRAMBLING OF SLOWLY CHANGING VIDEO SIGNALSField of the Invention

The present invention is related to scrambling of television video signals,
5 particularly scrambling of slowly changing video signals such as textual messages like
electronic mail or Web pages.

Background of the Invention

Scrambling of television video signals is well known. It is often used in cable
10 television systems in connection with the delivery of premium services. Those
subscribers who have paid for the premium service are given authorization and key to
decoding the scrambled video signal so that the original video image can be displayed on
their television screens. More recently, interactive television systems contemplate using
cable distribution networks to deliver services on an individualized basis. Such services
15 may include Internet access, electronic mail, catalog shopping or other services which
display still frame pictures on a television screen.

A scrambled signal is typically one in which the synchronization signals of the
television video signal have been suppressed by baseband or rf sync suppression
techniques. Conventional television sets look for the horizontal sync signals of each line
20 to locate the beginning of a line and synchronize the raster display. Horizontal sync
signals are provided at the beginning of each line outside the scope of the picture that
will be displayed on the television screen. A horizontal sync signal is typically
characterized by a negative DC voltage level below that of a voltage level representative
of a black image. When displaying a scrambled signal with suppressed horizontal sync
25 signals, the television looking for horizontal sync signals will typically settle upon a
sharp transition - from white to black, for example. With a typical moving picture that
has been scrambled, the television will lock into a variety of ever changing transitions
formed in the actual picture image thus causing the horizontal orientation of each line to
vary in space and time. The picture displayed on a television when it is playing a
30 scrambled television video signal that it cannot decode destroys the original image so

that it cannot be enjoyably viewed. When the scrambled signal is a still image such as an electronic mail message or a web page, there is a danger that the television will lock onto the beginning of the text or any other still vertical image element such as the edge of a text box or computer window or other framing graphic element. In the case of a textual message, with the transition from a light background to the blacker text remaining fixed in horizontal location over several lines and over time, the television may successfully and repeatedly lock into the same edge during each raster cycle. The danger is that the message may be quite readable even though the sync signals have been suppressed. Thus, the desired level of privacy for the scrambled signals may not be achieved.

Internet access and electronic mail may find prevalence with the advent of interactive cable systems. Aspects of such systems for providing interactive services on a demand basis are described in U.S. Patent No. 5,550,578; PCT Patent Publication No. WO 98/26595 published June 18, 1998; and PCT Patent Publication No. WO 97/16925 published May 9, 1997, all having the same assignee as the present application. The full disclosure of each of these patent references is hereby incorporated by reference herein.

Summary of the Invention

Embodiments of the present invention are directed to including a pattern on the video signal of a slowly changing video image in order to promote and enhance scrambling of the signal such that text in the image is not legible upon playback by an unauthorized television set. In order to help clarify the description of the invention as set forth herein, it should be understood that the video signal is often described herein in terms of the video image it would display with its original horizontal synchronization signals in place. The pattern is generally described herein in terms of how it would appear if the active horizontal lines were displayed in their entirety and the lines were synchronized according to the original horizontal synchronization signals. It is recognized that in order to make a video signal with the pattern, the signal need not be displayed and thus the pattern need not be viewed. A horizontal synchronization signal while typically not being displayed has a signal duration that corresponds to a length of screen image if it were displayed. Locations on a line of a video image, as used herein,

correspond with time periods on a video signal relative to the horizontal synchronization signal regardless of whether that horizontal signal is present as in an unscrambled signal or suppressed as in a scrambled signal.

The pattern may be added by conventional computing methods when the video to
5 be displayed is in computer graphics or VGA format. Alternatively, the pattern may be directly imposed upon the video signal as it is being converted to or while it is in NTSC, PAL or other like television signal format for conventional television display. The pattern is characterized by a pair of segments on each horizontal line. The pair includes a black segment having a duration at least about as long as the horizontal sync signal and
10 a white segment adjacent to each black segment to form a high contrast transition between the two. From one horizontal line to the next, the pairs of black and white segments are arranged so that the high contrast transition varies in horizontal location from one line to the next. The pattern may further include gray segments that follow each pair of black and white segments. In accordance with the presently preferred
15 embodiment of the pattern, the pairs of black and white segments form a zigzag that would appear to extend vertically within a column located along the right side of a display of the video signal (assuming its sync signals are in place).

An unauthorized television receiving such a signal with the pattern will typically tend to lock onto the black and white transitions formed by the pattern. By varying the
20 horizontal locations of these transitions from one line to the next, images such as text or indeed any image will be essentially shredded and illegible on the television screen.

Insertion of the pattern, may be performed by an apparatus including a sync stripper, DC restored video amplifier, a control logic device and a multiplexor. An optional low-pass filter may be added to the output of the multiplexor to remove
25 multiplexor switching noise. The sync stripper detects the horizontal sync signal within the video signal, and determines the back porch of the video signal. This information is passed to the DC restored video amplifier for adjusting the DC level of the video signal and to the control logic device. The multiplexor has inputs for black, white and gray DC level signals and an input for the video signal. Based on the control signal from the
30 control logic device, switching occurs for the various inputs, so that at the output of the

multiplexor, an enhanced scrambled video signal is formed. Horizontal sync suppression can be done in conjunction with the aforementioned apparatus.

Other objects and advantages of the present invention will become apparent during the following description of the presently preferred embodiments of the present invention taken in conjunction with the drawings.

Brief Description of the Drawings

FIG. 1 is an illustration of a computer screen including an embodiment of the pattern for enhanced scrambling according to the invention.

10 FIG. 2 is an illustration of a computer screen modified in accordance with a second embodiment of achieving enhanced scrambling according to the invention.

FIG. 3 is a schematic block diagram of an apparatus for inserting an enhanced scrambling pattern.

15 FIG. 4 is a schematic block diagram of an apparatus for suppressing the horizontal sync signal and inserting an enhanced scrambling pattern.

Detailed Description of Specific Embodiments

Referring now to the drawings, FIG. 1 shows a pattern **11** added to a computer display image so that it will experience enhanced scrambling on conversion to a scrambled television video signal. While the pattern **11** is being shown and described with respect to a computer graphics image, it should be understood that the pattern may be imposed on a television signal such as an NTSC or PAL signal in electronic form without being displayed. The pattern as described represents a full display of the NTSC or PAL signal if it included its original sync signals. The pattern might still not be viewed on the television set because preferably it would appear in a margin along the right hand column that extends beyond the right edge of the television screen. Theoretically, if the full image were viewed, the pattern **11** would appear in the video image.

The video image to be scrambled includes an electronic mail message **13** in the illustration of FIG. 1. It is desirable that the electronic mail message **13** be illegible upon

being converted to a scrambled television signal and displayed on an unauthorized television. The concern is that without the pattern **11**, the unauthorized television will lock onto possibly the first letter of each line of text thereby resulting in a fairly regular false horizontal synchronization resulting in a potentially readable message at the unauthorized television. The pattern **11** is designed so that the electronic mail message will be illegible at unauthorized subscriber television sets.

The pattern **11** is characterized (when synchronized and displayed) at each horizontal line by a pair of adjacent white and black segments. The duration of each black segment **17** is at least about as long as a horizontal sync signal. In other words, while the black segment is preferably about the same duration as a horizontal sync signal, it may be longer. While the term black is used herein, it should be understood that a black segment **17** for use in pattern **11** of the present invention includes any signal that could have a potential for being mistaken for a horizontal sync signal. Typically, the black segment **17** will have a zero chrominance level, in other words no color, and zero luminance level. The black segment **17** can be recognized in a video signal by its low voltage. In most current television signals, black is characterized by a negative voltage level, horizontal sync is an even lower negative voltage level and white is characterized by a highest positive voltage level. Adding chrominance or luminance to the black segment may cause a weakening of the desired shredding effect upon display of the scrambled video signal on an unauthorized television. The white segments **19**, on the other hand, are included to provide a high contrast transition **21** on each horizontal line between the white segment **19** and the black segment **17**. The term white as used herein with respect to the white segment **19** is meant to include any segment whose characteristics achieve the desired high contrast transition **21** with the adjacent black segment **17** on a horizontal line of a television signal. The transition, which is visual when displayed, is a voltage drop on a video signal. The term high contrast transition corresponds to the voltage drop as well as the visual white-black transition. The white segment **19** preferably has no chrominance and is near or equal to the reference white level for the television signal. Both the black and white segments may be color segments so long as the difference between the two segments can be mistaken for the horizontal

sync signal by a television receiver.

The black and white segment pairs are provided on at least each horizontal line of the television signal that has video image information to be scrambled. It is preferred that every horizontal line include the black and white segment pairs so that the
5 unauthorized television set does not resort to a search mode when the pairs are missing while attempting to display the television picture. It is desired that the unauthorized television set lock into the black and white transitions **21** of the pattern **11** when displaying the television signal. Thus, the pattern **11** preferably extends vertically from the top to the bottom substantially along the entire vertical length of a video image.

10 The pairs of black and white segments are arranged so that the high contrast transitions **21** vary in horizontal location (i.e., in time relative to the original horizontal sync signal) from one horizontal line to the next. It is desirable that the change in horizontal location from one line to the next line is gradual so that the unauthorized television set is more likely to accept the white-black transitions of the pattern **11** as the
15 horizontal sync signal. Thus, from one black-white pair to the next black-white pair on the next horizontal line, it is desired that the high contrast transition vary by less than the duration of the black segment and more preferably less than 1/3 the duration of the black segment. It is also desirable to have a distant maximum variance in the horizontal location of the white-black transitions **21** so that by locking into these transitions, the
20 unauthorized television set shreds the video image so that it becomes illegible. Thus, there should be at least some black segments that are horizontally separated from other of the black segments in the pattern **11** without any horizontal overlap therebetween. The pattern **11** of the presently preferred embodiment shown in FIG. 1 provides a vertical zigzag. At least the furthest left black segments and the furthest right black
25 segments are separated from each other horizontally*such that there is no horizontal overlap. The zigzag pattern advantageously permits the gradual changes in horizontal location from one horizontal line to the next and yet still provides the widely separated black segments at the extremes of the zigzag pattern. While a zigzag pattern is shown herein, it should be understood that other patterns may be used in accordance with the
30 criteria set forth herein for achieving the desired enhanced scrambling.

In accordance with an embodiment of the invention, the pattern **11** further includes gray segments **23** provided adjacent the black segments **17** opposite from their respective white segments **19**. In the pattern of FIG. 1, the gray segments **23** appear along the right edge of the video image. It is desired that the gray segments **23** extend at least to the end of an active horizontal line as defined by the video standard for the particular video signal (NTSC, PAL, etc.). It would be highly undesirable to permit an unauthorized television set to interpret the rightmost edge of the television signal as the horizontal sync transition. The gray segments are provided with characteristics in terms of voltage and luminance mid-level between the white and black segments. The gray segments have preferably no chrominance. The gray segments preclude occurrence of a large transition at the rightmost edge of the television signal. The gray segments may be color segments, so long as, the color segment is approximately mid-level between the black and white segments in terms of voltage and luminance.

While it is preferred to provide pattern **11** along the right edge of the television signal, one may also, within the scope of the present invention, flip the pattern around and provide it along the left hand edge of the television signal. Moreover, the pattern **11** of the present invention need not be provided along the edge of the television signal. However, using the pattern in the middle of the television screen would obstruct the video image with the pattern for even the authorized viewers of the television signal. Thus, it is desirable to have the pattern located inconspicuously with respect to the video image to be displayed on authorized television sets.

Referring now to FIG. 2, the effect of the present invention may be further enhanced by dimming the subject video image so that the displayable desired video image is sure to lack the high contrast transitions of the pattern **11**. Thus, for an electronic mail message **13** the message is preferably not displayed as black text on white background. The luminance levels of the white may be lowered to reduce the contrast and create a dimmed background **25**. Also, if desired, the luminance of the black may be raised. Another technique would be to add chrominance to the background and/or text.

For enhanced scrambling of video images that originate from computer graphics,

the pattern 11 may be simply added by a computer to the computerized image. The modified image will thereafter be converted into a television signal. For example, a simple program may be written to eliminate a right-hand column from a bit-mapped screen and replace it with the pattern 11. The resulting computer screen in VGA or other
5 suitable graphics format can then be converted to a television signal such as NTSC.

The television signal is scrambled thereby suppressing the synchronization signals. The resulting scrambled signal contains the pattern 11 although it will not be seen in its original form when displayed on an unauthorized television set. Such display will preferably be unrecognizable. An authorized television set, upon restoring the
10 synchronization signals, can display the original video image. The pattern may appear along an edge of the picture or it may be so far to the edge that it does not actually appear on the television screen.

Instead of modifying the VGA output from a computer, the enhanced scrambling of the invention can be accomplished by adding the pattern to a television signal.
15 Referring now to FIG. 3, apparatus is shown for inserting a pattern in accordance with an embodiment of the invention onto a television video signal. The DC restored video amplifier 30 works in conjunction with a sync stripper 32. The sync stripper 32 detects the horizontal sync signal on the television video signal and outputs a burst flag which is used by the DC restored video amplifier 30. The burst flag occurs right at the point of
20 the back porch signal portion of the television video signal. The DC restored video amplifier 30 is configured with a feedback loop so as to force the DC level of the back porch to a fixed DC reference level. The white, black and gray levels of the pattern 11 that are added into the video signal are reference levels that are fixed relative to a reference back porch DC level. The DC restored video amplifier normalizes the video
25 signal to the reference back porch DC level.

The sync stripper 32 is also used to detect vertical synchronization signals. The timing signals, vertical and horizontal, from the sync stripper 32 are provided to zigzag pulse location logic 34. The pulse location logic, or as it is otherwise referred to, the control logic device, may be formed by a programmable logic device or by a suitably
30 programmed microprocessor. The pulse location logic/control logic device 34 works in

conjunction with a clock 36. Upon receiving a horizontal timing signal, the pulse location logic counts signals from the clock 36. At time periods along the video signal, predetermined according to the desired pattern, the pulse location logic 34 instructs a multiplexer 38 to supply a reference signal level to form one of the black, white or gray segments of a pattern 11. The video multiplexer 38 is in connection with a black reference signal 42, a white reference signal 44, a gray reference signal 46 and the DC restored video signal from the DC restored video amplifier 30. A particularly efficient use of the video multiplexer chip 38 could involve connecting it with other signals to perform portions of the scrambling operation in addition to pattern insertion.

10 Alternatively, scrambling can be provided as a separate process after the pattern insertion such as horizontal sync suppression or insertion of a false horizontal sync.

In accordance with a presently preferred embodiment of the pattern insertion apparatus, the DC restored video amplifier may be an Elantec EL2090, the video multiplexer chip may be a Maxim MAX455 8-way video multiplexer chip and the pulse location logic may be an Altera EPM 7076. If desired, the signal from the multiplexer 38 may be passed through a low-pass filter 40 to remove noise on the video signal caused by the multiplexer switch.

15

The pattern insertion apparatus of FIG. 3 can be advantageously used to accurately place the pattern to the rightmost portion of the active horizontal line of a video signal. This may be far enough right on the signal to advantageously avoid appearing in a display of the video signal on an authorized television set.

20

While one system arrangement is shown for pattern insertion, it should be understood that alternative hardware may be provided for achieving a desired enhanced scrambling pattern. It is only necessary to detect the existing horizontal sync signal and add the corresponding white, black and gray segments after a measured time delay for each line. Thereafter, the horizontal sync signals may be suppressed in accordance with conventional scrambling processes.

25

One method of horizontal sync suppression is to incorporate the horizontal sync suppression into the system for pattern insertion. This may be done in the following way as shown in FIG. 4. The video signal is first split into two equal signals. Both signals

30

have the same amplitude. One of the two identical video signals is provided to a DC restored video amplifier **50** which reduces the amplitude of the signal by at least 6dB. While the signal is in the DC restored video amplifier **50** it undergoes DC adjustment to the reference back porch signal. The second video signal is sent to a second DC restored video amplifier **51**. The amplitude of this video signal is not reduce. The only processing that is done is adjusting the video signal to the DC reference back porch level. Both of the video signals, the -6dB video signal and the full amplitude video signal are sent into a multiplexer **38**. The multiplexer **38** receives these two video signals along with control information from the pulse location logic **34** which is informed by the sync stripper **32** as to where the horizontal sync signal is located within the video signal. The sync stripper **32** detects the horizontal sync signal and sends this information to the pulse control logic **34** which sends a signal to the multiplexer **38** telling it to switch between the -6dB video signal and the full amplitude video signal whenever the horizontal sync signal occurs. This way the full amplitude video signal occurs in every place where the horizontal sync signal is not, and the -6dB video signal occurs in place of the horizontal sync signal. The combined video signal which is output by the multiplexer **38** is the same as the original video signal, but with the horizontal sync signals suppressed by 6dB. 6dB suppression is not a requirement of the current invention. All that is required is that the horizontal sync signal be suppressed in some fashion so that a normal television set would not be able to lock onto the suppressed horizontal sync signal. In an alternative version it would even be possible to insert a completely false horizontal sync signal rather than suppressing the horizontal sync signal. The use of a pattern **11** to enhance the scrambling of slowly changing video signals may be incorporated into any scrambling system for television signals that involves horizontal synchronization suppression.

Of course, it should be understood that various changes and modifications to the preferred embodiments described above will be apparent to those skilled in the art. For example, the pattern could resemble a sawtooth pattern or a sine wave. Alternatively, the pattern need not be periodic nor repetitious. Moreover, the enhanced scrambling patterns of the invention are suitable for any sync suppression scrambling system for use in subscription television, interactive television and any other such systems that scramble

television signals. These and other changes can be made without departing from the spirit and scope of the invention and without diminishing its attendant advantages. It is, therefore, intended that such changes and modifications be covered by the following claims.

WE CLAIM:

1. A scrambled video signal having a series of suppressed horizontal sync signals defining therebetween horizontal lines for television display upon restoring a horizontal sync signal to each horizontal line, said scrambled video signal comprising:
5 a pair of segments, to promote enhanced scrambling, on each horizontal line that has video image information to be scrambled, each pair of segments including a black segment having a duration at least about as long as the horizontal sync signal and a white segment adjacent each black segment to form a high contrast transition therebetween, the
10 pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location from one horizontal line to the next.
2. The video signal of claim 1 wherein, upon restoration of the horizontal sync signal to each horizontal line, the pairs of segments form a pattern in a vertical
15 arrangement extending substantially along the entire vertical length of the television display.
3. The video signal of claim 1 further comprising a gray segment following each pair of black and white segments.
20
4. The video signal of claim 3 wherein each gray segment extends to an active end of its horizontal line.
5. The video signal of claim 1 wherein the pairs of black and white segments
25 are arranged so that, upon restoration of the horizontal sync signal to each horizontal line, the high contrast transitions form a vertically extending zig-zag on the television display.
6. The video signal of claim 1 wherein the pairs of black and white segments
30 vary in time duration from the suppressed horizontal sync signal on each horizontal line

from one line to the next by less than the duration of the black segment.

7. The video signal of claim 6 wherein, upon restoration of the horizontal sync signal to each horizontal line, the pairs of black and white segments includes some
5 black segments that are horizontally separated on the television display from other of said black segments without any horizontal overlap.

8. The video signal of claim 1 wherein the pairs of black and white segments vary in time duration from the suppressed horizontal sync signal on each horizontal line
10 from one line to the next by less than one-third the duration of the black segment.

9. The video signal of claim 1 wherein, upon restoration of the horizontal sync signal to each horizontal line, the pairs of segments form a pattern in a vertical column along a right edge of the television display.

15

10. A video signal for display of a video image, said video signal representing a series of horizontal lines each with a horizontal sync signal, said video signal comprising:

a pair of segments on each horizontal line that has video image information to be
20 scrambled, each pair of segments including a black segment having a duration at least about as long as the horizontal sync signal and a white segment adjacent each black segment to form a high contrast transition therebetween, the pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location upon display from one horizontal line to the next.

25

11. The video signal of claim 10 wherein upon television display the pairs of segments appear on each line of the video image in a vertical arrangement extending substantially along the entire vertical length of the video image.

30 12. The video signal of claim 10 further comprising a gray segment following

each pair of black and white segments.

13. The video signal of claim 12 wherein each gray segment extends to an active end of its horizontal line.

5

14. The video signal of claim 10 wherein upon television display the pairs of black and white segments are arranged so that the high contrast transitions form a vertically extending zig-zag.

10 15. The video signal of claim 10 wherein the high contrast transitions vary in time delay from the horizontal sync signal from one line to the next by less than the duration of the black segment.

15 16. The video signal of claim 15 wherein the pairs of black and white segments includes some black segments that upon television display are horizontally separated from other of said black segments without any horizontal overlap.

17. The video signal of claim 10 wherein the high contrast transitions vary in time delay from the horizontal sync signal from one line to the next by less than one-
20 third the duration of the black segment.

18. The video signal of claim 10 wherein upon television display the black and white segments are formed in a vertical column along the right edge of the video image.

25

19. A method for enhanced scrambling of a video signal comprising the steps of: providing an image;

transforming the image into a video signal having a series of horizontal lines each with a horizontal sync signal, wherein the video signal is characterized by being
30 representative of a display including the image and an added pattern, the pattern being

arranged such that each horizontal line, that has video image information to be scrambled, includes a pair of segments including a black segment having a duration at least about as long as the horizontal sync signal and a white segment adjacent each black segment to form a high contrast transition therebetween, the pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location from one horizontal line to the next; and

5 suppressing the horizontal sync signals in the video signal.

20. The method of claim 19 wherein the step of transforming comprises

10 adding the pattern to a computerized version of the image to produce a modified image and converting the modified image to a video signal.

21. The method of claim 19 wherein the step of transforming comprises forming the image into a video signal with horizontal sync signals and inserting black

15 and white segments into the video signal.

22. The method of claim 19 wherein the pattern appears on each line of the video signal as a vertical arrangement extending substantially along the entire vertical length of the display of the video signal.

20

23. The method of claim 19 wherein the pattern further includes a gray segment following each pair of black and white segments.

24. The method of claim 19 wherein each gray segment appears to extend to a

25 right edge of the display of the video signal.

25. The method of claim 19 wherein the pairs of black and white segments are arranged so that the high contrast transitions form a vertically extending zig-zag on the display of the video signal.

30

26. The method of claim 19 wherein the pairs of black and white segments vary in horizontal location from one line to the next by less than the length of the black segment.

5 27. The method of claim 26 wherein the pairs of black and white segments includes some black segments that are horizontally separated from other of said black segments without any horizontal overlap of the black segments.

28. The method of claim 19 wherein the pairs of black and white segments
10 vary in horizontal location from one line to the next by less than one-third the length of the black segment.

29. The method of claim 19 wherein the pattern is formed in a vertical column along the right edge of the display of the video signal.

15

30. The method of claim 19 further comprising dimming chrominance levels of the video signal outside of the pattern.

31. An enhanced scrambling pattern inserter comprising:
20 a sync detector connected to said video amplifier for detecting sync signals and a reference point on a video signal;
a video amplifier for receiving the video signal and setting the reference point on the video signal to a reference level;
a multiplexer coupled to said video amplifier, a white DC level and a black DC
25 level; and

control logic device responsive to sync signals detected by said sync detector for controlling said multiplexer so as to generate an enhanced video signal characterized by being representative of a display including an added pattern, the pattern being arranged such that each horizontal line in the pattern includes a pair of segments including a black
30 segment having a duration at least about as long as the horizontal sync signal and a white

segment adjacent each black segment to form a high contrast transition therebetween, the pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location from one horizontal line to the next.

5 32. An enhanced scrambling pattern inserter for inserting a pattern signal into a video signal containing at least one sync signal, the enhanced scrambling pattern inserter comprises:

 a video signal amplifier for receiving the video signal and setting a reference
10 point on the video signal to a reference level;

 a sync stripper for indicating the sync signal, the sync stripper coupled to the video signal amplifier;

15 a multiplexor having inputs from the video signal amplifier and at least one pattern signal input; and

 a control logic device coupled to the sync stripper, which responds to the sync signal and controls the multiplexor to selectively substitute a signal from the pattern
20 signal input for the video signal so as to insert an enhanced scrambling pattern into the video signal to create a combined signal.

 33. The enhanced pattern inserter of claim 32 further comprising:
 a low-pass filter coupled to the multiplexor output for removing noise in the
25 combined video signal and pattern signal.

 34. The enhanced pattern inserter of claim 32 wherein the multiplexor contains multiple inputs for connecting other signals to perform portions of the
30 scrambling operation.

35. The enhanced pattern inserter of claim 32 wherein the control logic device is formed by a programmable logic array.

36. The enhanced pattern inserter of claim 32 wherein the control logic
5 device is formed by a programmed microprocessor.

37. The enhanced pattern inserter of claim 32 further comprising
a clock, which works in conjunction with the control logic device for counting time
periods to be used by the control logic device to determine when to issue a control signal
10 to the multiplexor.

38. The enhanced pattern inserter of claim 32 further comprising
a voltage signal generator for producing a black reference level, a white reference level,
and a gray reference level, the reference level being connected to the at least one pattern
15 signal inputs of the multiplexor.

39. The enhanced pattern inserter of claim 32 further comprising
a sync signal remover, which removes the sync signal from the video signal, the sync
signal remover is coupled to the sync stripper and to the control logic device.
20

40. An enhanced pattern inserter for inserting a pattern signal into a video
signal, the video signal having a series of horizontal sync signals defining therebetween
horizontal lines for television display, the enhanced pattern inserter comprises:
a video signal amplifier for receiving the video signal and setting a reference
25 point on the video signal to a reference level;
a sync stripper for indicating the horizontal sync signal within the video signal,
the sync stripper coupled to the video signal amplifier;
a white reference level signal generator;
a black reference level signal generator;
30 a gray reference level signal generator;

a multiplexor having inputs from the video signal amplifier and from the black reference level signal generator, the white reference level signal generator, and the gray reference level signal generator, the multiplexor outputs a scrambled video signal; and

5 a control logic device coupled to the sync stripper, which responds to the sync signal and controls the multiplexor.

41. The enhanced pattern inserter of claim 40 wherein the scrambled video signal contains a pair of segments, to promote enhanced scrambling, on each horizontal line that has video image information to be scrambled, each pair of segments includes a
10 black segment having a duration at least about as long as the horizontal sync signal and a white segment adjacent each black segment to form a high contrast transition therebetween, the pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location from one horizontal line to the next.

15 42. The enhanced pattern inserter of claim 41 further comprising a grey segment following each pair of black and white segments.

43. The enhanced pattern inserter of claim 40 wherein the control logic device is formed by a programmable logic array.

20

44. The enhanced pattern inserter of claim 40 wherein the control logic device is formed by a programmed microprocessor.

45. The enhanced pattern inserter of claim 40 further comprising
25 a clock, which works in conjunction with the control logic device for counting time periods to be used by the control logic device to determine when to issue a control signal to the multiplexor.

46. An enhanced pattern inserter for inserting a pattern signal into a video
30 signal, the video signal representing a series of horizontal lines each with a horizontal

sync signal, the enhanced pattern inserter comprising:

a video signal amplifier for receiving the video signal and setting a reference point on the video signal to a reference level;

a sync stripper for indicating the horizontal sync signal within the video signal,
5 the sync stripper coupled to the video signal amplifier;

a white reference level signal generator;

a black reference level signal generator;

a gray reference level signal generator;

a multiplexor having inputs from the video signal amplifier and the black
10 reference level signal generator, the white reference level signal generator, and the gray reference level signal generator, the multiplexor outputs a scrambled video signal;

a control logic device coupled to the sync stripper, which responds to the sync signal and controls the multiplexor; and

a sync signal remover, which removes the horizontal sync signal from the video
15 signal, the sync signal remover is coupled to the sync stripper and to the control logic device.

47. The enhanced pattern inserter of claim 46 wherein the video signal comprises a pair of segments on each horizontal line that has video image information to be scrambled, each pair of segments including a black segment having a duration at least
20 about as long as the horizontal sync signal and a white segment adjacent each black segment to form a high contrast transition therebetween, the pairs of black and white segments being arranged so that the high contrast transitions vary in horizontal location upon display from one horizontal line to the next.

25 48. The enhanced pattern inserter of claim 47 wherein the video signal further comprises a gray segment following each pair of black and white segments.

49. The enhanced pattern inserter of claim 46 wherein, upon television display, the pairs of black and white segments are arranged so that the high contrast
30 transitions form a vertically extending zig-zag.

50. The enhanced pattern inserter of claim 46 further comprising:
a low-pass filter coupled to the multiplexor output for removing noise in the combined video signal and pattern signal.

5 51. The enhanced pattern inserter of claim 46 further comprising:
a clock, which works in conjunction with the control logic device for counting time periods to determine when to issue a control signal to the multiplexor.

10

15

20

25

30 79761

THIS IS AN E-MAIL
MESSAGE THAT SHOULD
REMAIN PRIVATE

13

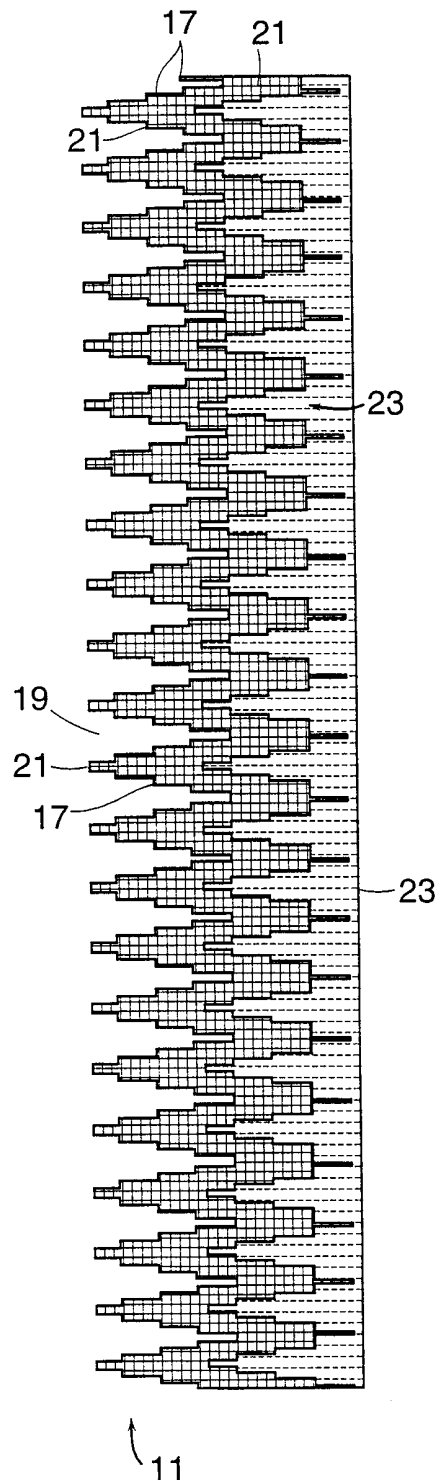


FIG. 1

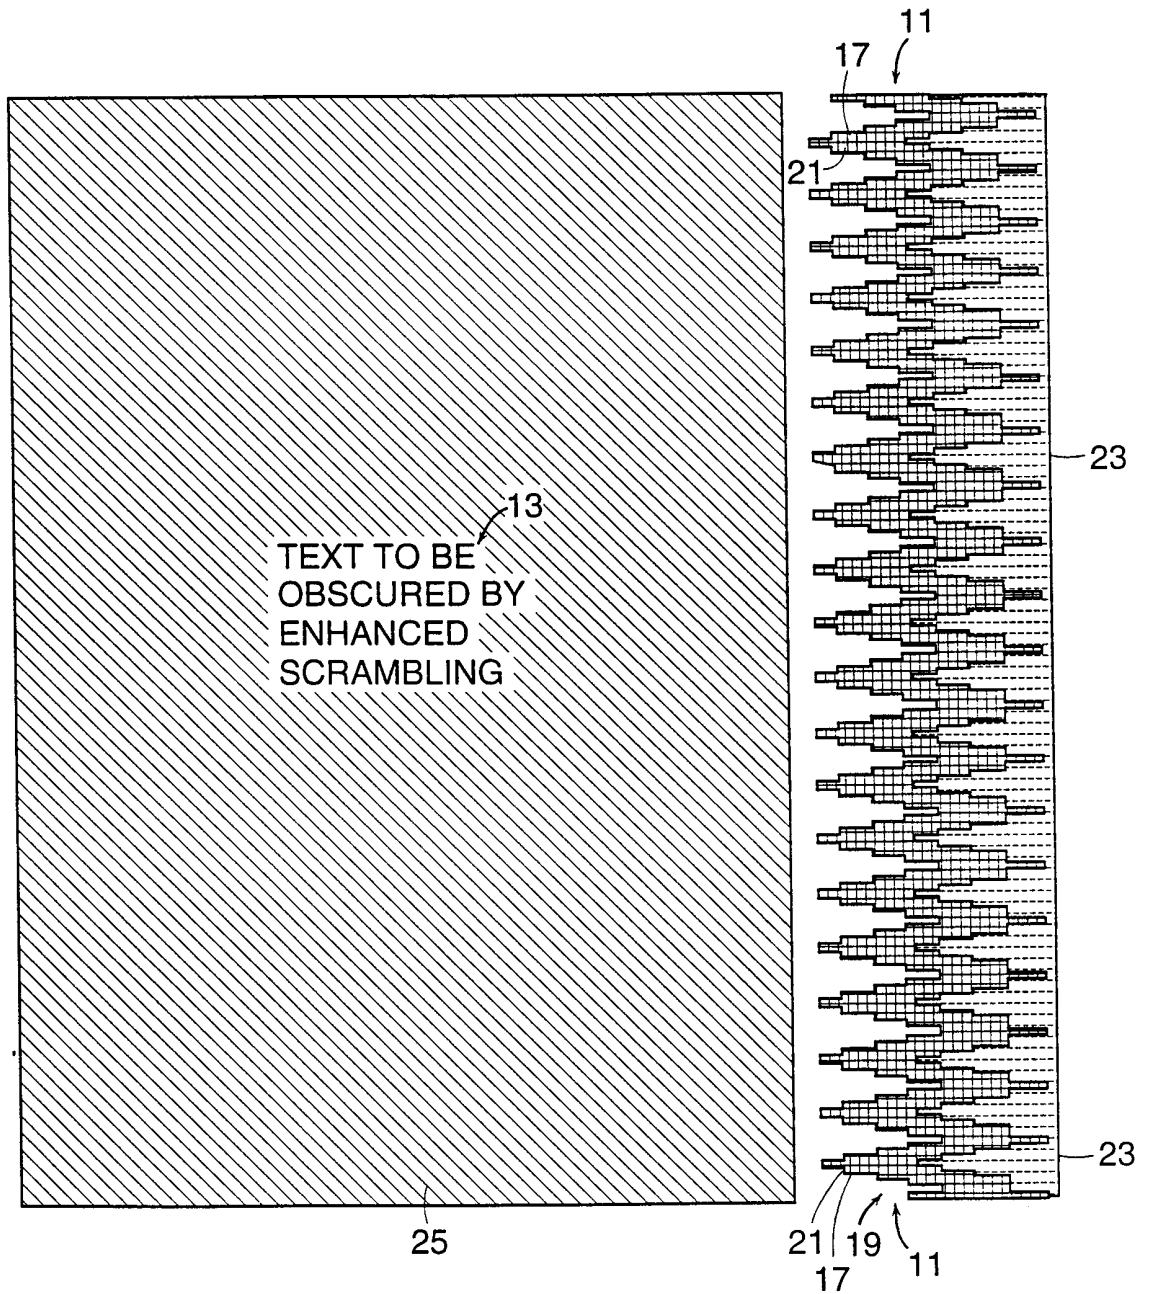


FIG. 2

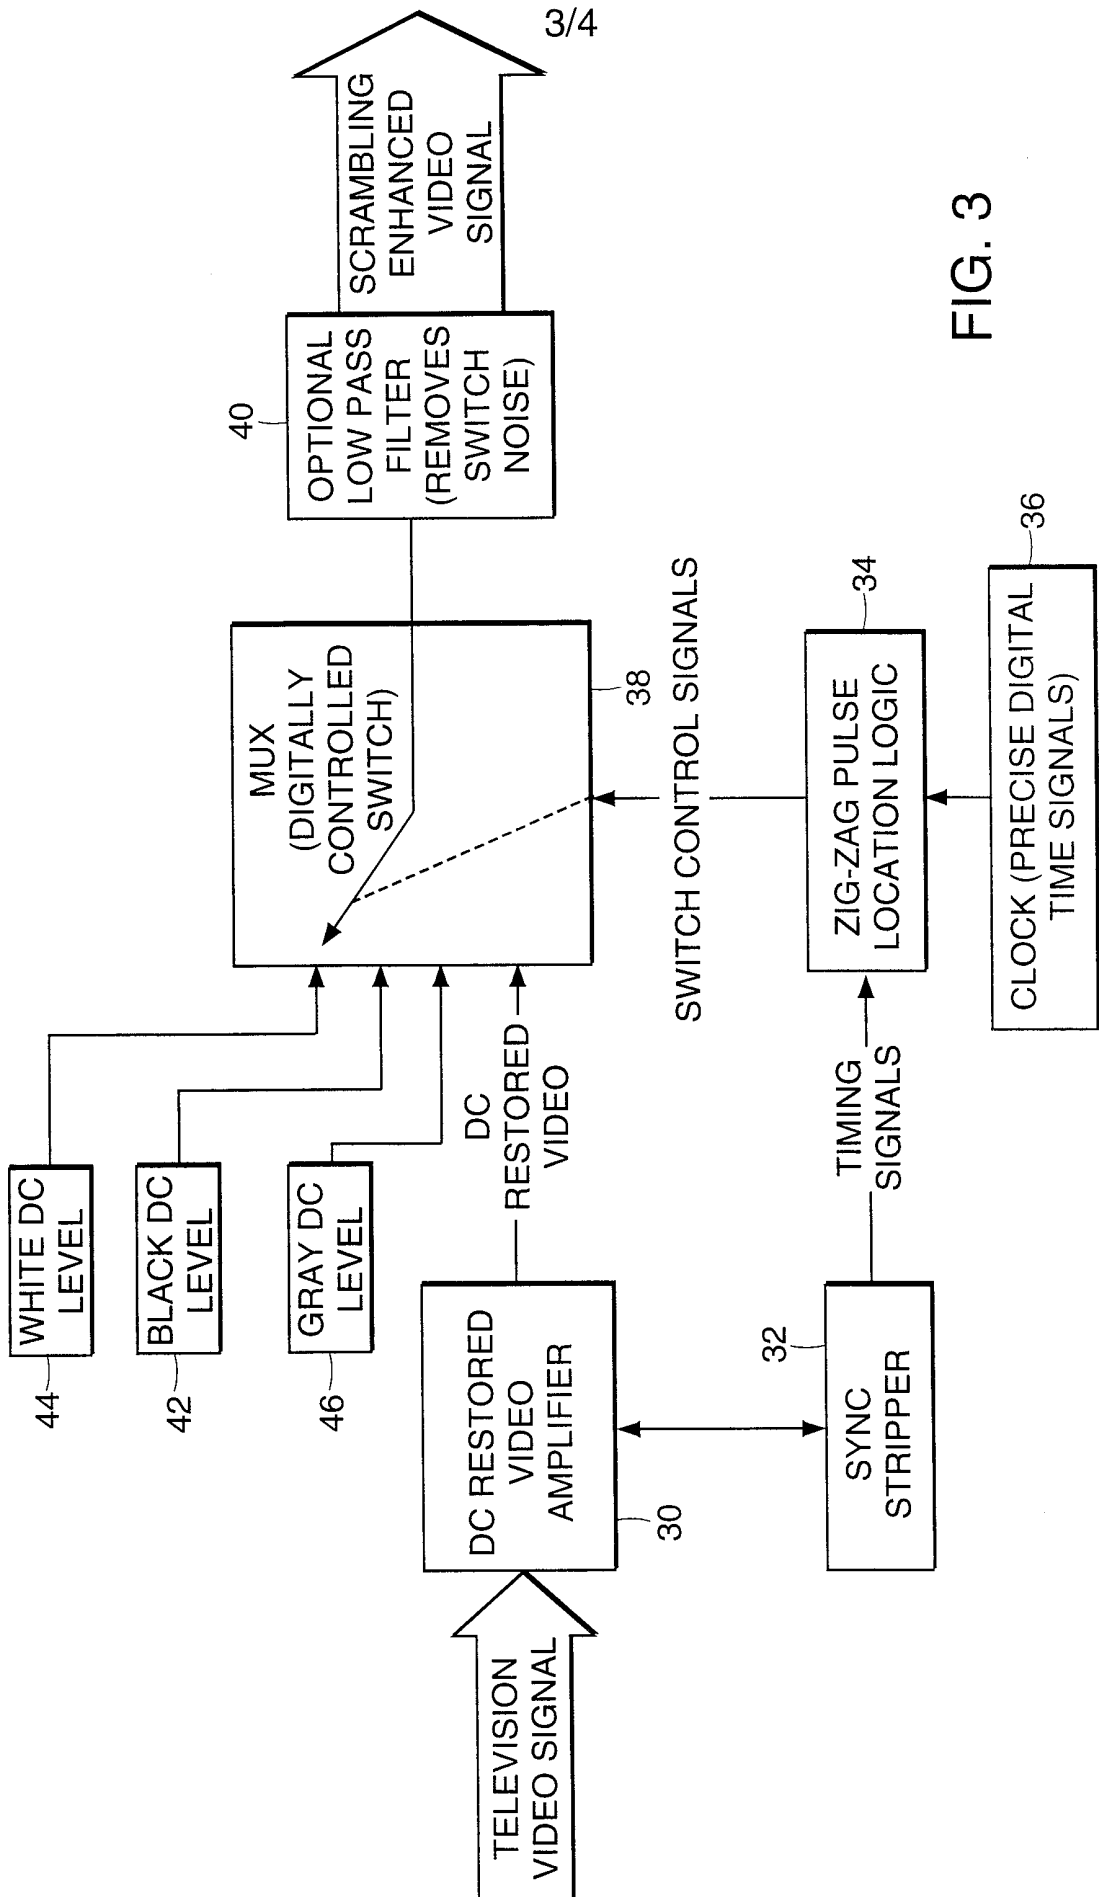


FIG. 3

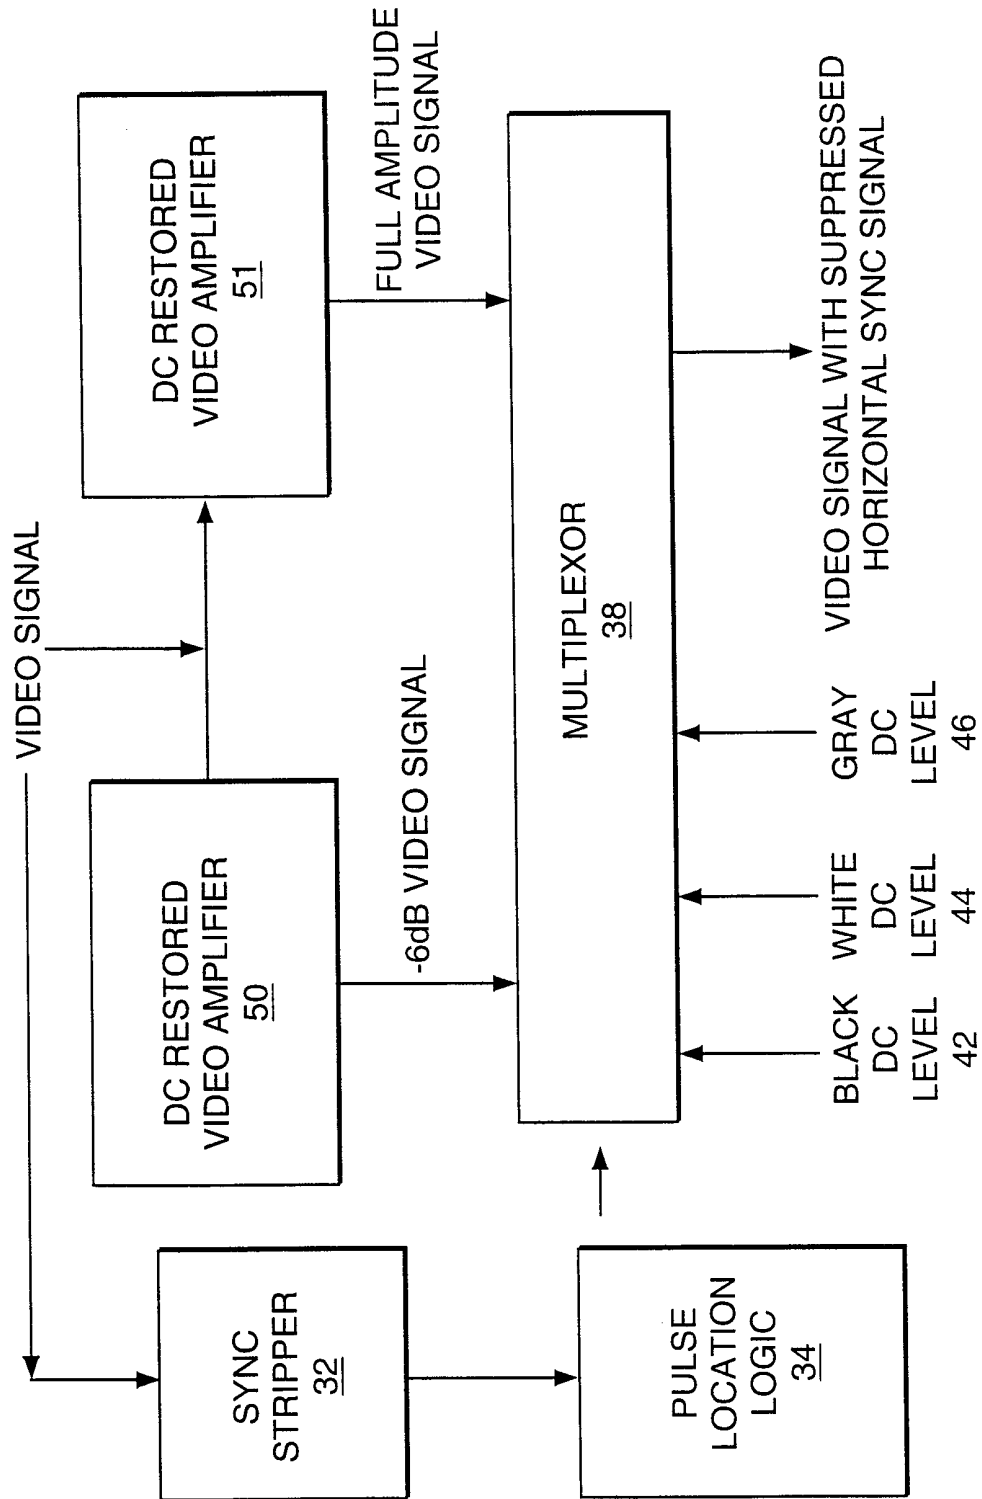


FIG. 4

INTERNATIONAL SEARCH REPORT

In. tional Application No

PCT/US 99/00716

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N7/171

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 550 578 A (HOARTY W LEO ET AL) 27 August 1996 cited in the application see column 13, line 16 - column 16, line 61 see figures 17,21-25 -----	1-51

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 1999

Date of mailing of the international search report

26/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Van der Zaal, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/00716

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5550578 A	27-08-1996	US 5526034 A	11-06-1996
		US 5412720 A	02-05-1995
		US 5220420 A	15-06-1993
		US 5093718 A	03-03-1992
		US 5594507 A	14-01-1997
		US 5442700 A	15-08-1995
		US 5485197 A	16-01-1996
		US 5557316 A	17-09-1996
		US 5587734 A	24-12-1996
		US 5883661 A	16-03-1999
		EP 0638219 A	15-02-1995
		JP 7509817 T	26-10-1996
		WO 9322877 A	11-11-1993
		AU 643828 B	25-11-1993
		AU 8483891 A	02-04-1992
		CA 2052477 A,C	29-03-1992
		CN 1063593 A	12-08-1992
		CS 9102869 A	13-05-1992
		EP 0477786 A	01-04-1992
		FI 914552 A	29-03-1992
		IL 99586 A	22-02-1998
		JP 6022315 A	28-01-1994
		NZ 239969 A	22-12-1994
		PT 99110 A	31-12-1993
		TR 25669 A	01-07-1995
		US 5361091 A	01-11-1994
		US 5319455 A	07-06-1993
