

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2003 (07.08.2003)


PCT

(10) International Publication Number
WO 03/064100 A1

- (51) International Patent Classification⁷: **B23K 20/12**
- (21) International Application Number: PCT/SE03/00186
- (22) International Filing Date: 3 February 2003 (03.02.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0200303-6 1 February 2002 (01.02.2002) SE
- (71) Applicant (for all designated States except US): **ESAB AB** [SE/SE]; Patent Department/Laxå, Box 8004, S-402 77 Göteborg (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LARSSON, Rolf** [SE/SE]; Bäverstigen 14, S-695 31 Laxå (SE).
- (74) Agent: **NILSSON, Kent**; Esab AB, Esabvägen, S-695 81 Laxå (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

[Continued on next page]

(54) Title: WELDING HEAD, WELDING SYSTEM, METHOD AND COMPUTER PROGRAM FOR FRICTION STIR WELDING

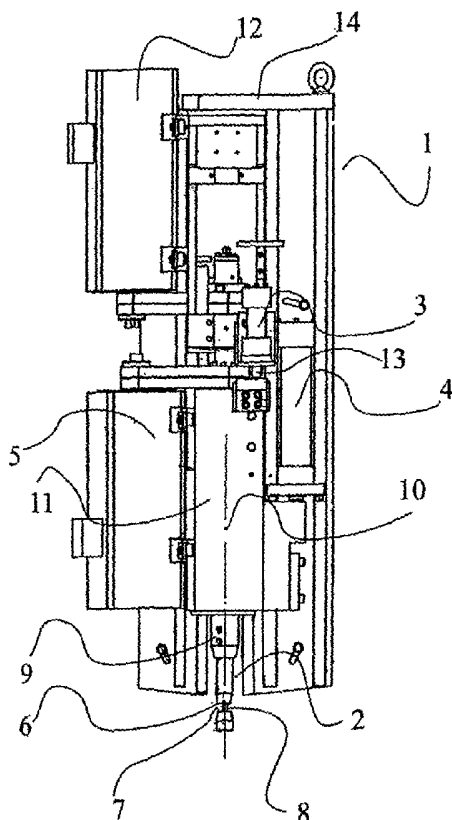

(57) Abstract: Welding head 1 for friction stir welding, adapted for connection and driving of a tool 2 intended for simultaneous friction stir welding from two opposite surfaces on an object for welding, comprising a tool holder 9, a force-generating device 3, 13 and a rotary driving device 5 which, during operation, can impart to the connected tool 2 a cyclic movement around the centre axis 10 of the tool and relative to the object for welding arranged in conjunction with the welding head. The force-generating device is controllable during operation and adapted so as, during operation, to act between a primary shoulder 6 and a secondary shoulder 7 on a tool 2 connected in the tool holder 9. The invention also comprises a welding system for friction stir welding, with the force between the shoulders of the tool being controlled depending on the current torque for rotary driving. Also indicated are a method for initiating friction stir welding and computer program for such a method.

WO 03/064100 A1



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Welding head, welding system, method and computer program for friction stir welding

Technical field

5

The present invention relates to a welding head adapted for connection of a welding tool designed for friction stir welding from two opposite sides of an object for welding and also a welding system, a starting method and computer program for this method for corresponding welding, all according to the introductory parts of the independent patent claims.

Background

15

The friction stir welding method is comprehensively described in WO 93/10935, where it emerges that a tool can consist of at least one shoulder and a probe. The probe rotates in the joint during welding, and the shoulder, which has a greater diameter than the probe, is at the same time pressed against the surface of the object for welding while cyclic movement takes place, usually rotation about the axis of symmetry. The object for welding, which in most cases consists of two workpieces which are to be welded together, is plasticized in and next to the joining line by the heat which is supplied to the object by the rotation of the probe in the joint and the rotation of the shoulder on the surface of the object for welding. As the tool is removed, the joint solidifies along the joining line, and the workpieces are joined in a strong welded joint without the material having had to be heated to melting temperature. One requirement is that the tool is made from a harder material than the object for welding. The quantity of heat supplied and the heat distribution in the object for welding are dependent on, for example, material type in the workpiece and tool and also on the geometrical design of the tool, the force applied to the shoulder and the rotation speed of the tool.

WO 93/10935 also describes a tool with double shoulders, where the two opposite sides of the object for welding are each in contact with their respective shoulder during welding, while the probe of the tool extends through the object for welding and interconnects the two shoulders. The primary shoulder can then be connected movably to the probe, while the secondary shoulder is connected firmly to the probe. It also emerges from this specification that the parts can be spring-loaded in such a way that the opposite surfaces of the object for welding are thus, via the shoulders, each subjected to a force directed at right angles in towards the surface and parallel to the rotation axis of the tool. This force is necessary in order that each shoulder will develop friction, and thus heat, when movement relative to the object for welding takes place. One disadvantage of this simple method of applying force between the shoulders and the object for welding is that the force cannot easily be controlled according to varying heat requirements - thick workpieces require more heat than thin workpieces in order to achieve a perfect welding result, and therefore greater applied force.

WO 00/02699 offers a solution to this problem by virtue of the shoulders having been provided with separate controllable force-generating devices. A control system then adjusts these forces so that they balance one another. In practice, however, it has proved to be difficult to achieve perfect welding results using this method, especially in the case of thin material for welding and when the force-generating devices have consisted of hydraulic cylinders.

35 The object of the invention

The object of the invention is to eliminate or reduce the disadvantages which, as above, are inherent in the prior art with regard to friction stir welding with a

tool with shoulders for bearing against opposite sides of an object for welding. The invention solves these problems in ways which are described in the characterizing parts of the independent patent claims.

5

In testing various solutions for the problem of inconsistent welding quality, especially in thinner material, it has been found that a solution with only one force-generating device for applying the relative
10 force between two shoulders, and thus the force acting against the opposite surfaces of the object for welding during welding, was considerably more favourable compared with previous solutions. This single device will then be connected to the parts in the welding head
15 which provide axial movement to the primary and, respectively, secondary shoulder of a connected tool. One reason for this better welding result may be that it is much easier to set low forces with accuracy and repeatability with, for example, a single hydraulic
20 cylinder than with two, the forces of which have to be balanced. Two cylinders represent, for example, greater internal friction than one, which can contribute to the difficulties associated with previously known art. The stroke of this single cylinder is moreover considerably
25 shorter than that of the one being replaced, which saves both space and costs. As far as stroke is concerned, the cylinder according to the invention is to span only the thickness variations which arise in the objects for welding concerned, while a
30 corresponding cylinder according to the prior art must have a stroke which also extends over the distance from the rest position of the welding head to its operating position, that is to say in contact with the workpiece.

35 Advantageous embodiments of the invention are described in the dependent claims.

Brief description of the drawings

Fig. 1 shows a welding head according to the prior art with tool mounted.

5 Fig. 2 shows an embodiment of the invention with tool mounted (view from the front).

Fig. 3 shows an embodiment of the invention with tool mounted (view from the left side).

10 **Description of drawings and preferred embodiments**

The drawings and examples of embodiments of the invention will now be described in greater detail with reference to the figures.

15

Fig. 1 shows a welding head for friction stir welding according to the prior art. The welding head comprises inter alia a base-plate 114 and a hydraulic cylinder 104, with associated piston rod 144, for moving the tool from rest position into operating position in contact with the object for welding. This cylinder also applies the force from the primary shoulder, which belongs to the tool which can be mounted in the welding head, to one surface of the object for welding. The welding head also comprises a second hydraulic cylinder 103, with associated piston rod 113, for moving the secondary shoulder of the tool, which is connected to the probe of the tool. The force from the secondary shoulder is applied to the opposite surface of the object for welding by means of this second cylinder 103. Both cylinders are connected firmly to the base-plate 114. The pressures from the two cylinders will normally not differ more than the object for welding can take up without being deformed.

35

Figs 2 and 3 show an embodiment of the invention in the form of a welding head 1 for friction stir welding constructed on a base-plate 14. The welding head is shown with a tool 2 for friction stir welding mounted

in a tool holder 9 belonging to the welding head. This tool comprises a primary shoulder 6 intended to be pressed, during welding, against a first surface of the object for welding at the same time as it performs a cyclic movement around the centre axis 10 of the tool. The tool also comprises a probe 8 intended to work, during welding, in the joint on the object for welding in a cyclic movement around its centre axis 10. The probe 8 is, at one of its ends, via a hole in the primary shoulder 6 of the tool and also via a spindle passing through the tool holder 9 and a spindle housing 11, connected to a device 3, 13 for axial positioning and to a device 12 for rotary driving of the probe and a secondary shoulder 7 connected to the other end of the probe.

The spindle housing 11, with the tool holder 9 mounted in it and also a rotary driving device 5 for the primary shoulder, is mounted movably in relation to the base-plate 14 via a slide. The relative movement between the base-plate and this slide is brought about by a device 4 for axial positioning of the primary shoulder 6. In this example, this device consists of a hydraulic cylinder fixed to the base-plate 14, with the piston rod fixed to the slide. Also connected to this slide is the piston rod 13 in the device for axial positioning of the probe and the secondary shoulder, while a corresponding cylinder housing 3 is connected firmly to a slide which supports the rotary driving device 12 and also an axial bearing unit for the spindle for positioning and rotary driving of the secondary shoulder in the connectable tool. This arrangement with one cylinder 4 for positioning the whole tool against the object for welding and another cylinder 3 for application of the force between the shoulders of the tool and the respective surface on the object for welding allows very fine adjustment of the force between the tool and the object for welding. This leads to it being easier to control the heat supply

during welding, which is absolutely crucial for the resulting welding quality. The devices 5 and, respectively, 12 for rotary driving of the shoulders can consist of, for example, electric motors or hydraulic motors. The main function of the device 3, 13 for axial positioning of the probe and the secondary shoulder is to generate the force between the shoulders and the surfaces of the workpiece, for which reason it is referred to below as the force-generating device.

10

The method used on starting welding is also of significance for the heat build-up in the object for welding. A suitable method is first to make the shoulders move towards the respective surfaces of the object for welding without the cyclic movement of the tool around the centre axis 10 having started. In the next step, the said cyclic movement is started, and then the force is applied between the tool and the object for welding by virtue of the force-generating device 3, 13 drawing the shoulders towards one another. After a sufficient time delay to reach the correct temperature in the joint, movement of the welding head along the length of the joint begins. This method avoids either shoulder eating into the object for welding before the correct force between the shoulders has been applied, which happens easily if the tool is rotating when it makes contact with the object for welding.

30 It is also possible to have common rotary driving of the primary and secondary shoulders and also of the probe. One of the rotary driving devices 5, 12 can then be dispensed with and is suitably replaced by a driver arrangement. It is a great advantage, however, to have
35 separate rotary driving devices as illustrated in the figures, because the heat requirement can be different from the opposite sides of the object for welding. This may be the case when, for example, the object for welding consists of two workpieces of different

thickness which are to be lap-welded. Another example may be that two different materials with different thermal conductivity are to be welded together in a lap joint. It is then highly advantageous to have separate rotary driving devices so that each shoulder can be programmed with its own speed. Different force can likewise be applied to the two shoulders. This force asymmetry is then brought about by means of the device 4 for axial positioning of the primary shoulder. The heat supply via the shoulder depends on the diameter, material, rotation speed and application force of the shoulder. The easiest of these parameters to control is the rotation speed.

15 In order to ensure that the heat supply is kept constant along the entire joint even if thickness variations are present in the material being welded, the application force between the shoulders can be controlled depending on the motor current to the rotary driving devices, which constitutes a measure of the current torque for rotary driving. When the motor current increases above a nominal value, the application force is reduced.

25 Great variation in the configuration of a welding head is of course possible within the scope of the patent claims. Cylinder-housing fastening parts and piston-rod fastening parts can thus of course be changed without functioning being altered. Likewise, for example, the driving devices for positioning and force-generating devices can be exchanged for a motor and rack or ball screw.

PATENT CLAIMS

1. Welding head (1) for friction stir welding, adapted for connection and driving of a tool (2) intended for simultaneous friction stir welding from two opposite surfaces on an object for welding, comprising a tool holder (9), a force-generating device (3, 13) and a rotary driving device (5) which, during operation, can impart to the connected tool (2) a cyclic movement around the centre axis (10) of the tool and relative to the object for welding arranged in conjunction with the welding head, characterized in that the force-generating device is controllable during operation and adapted so as, during operation, to act between a primary shoulder (6) and a secondary shoulder (7) on a tool (2) connected in the tool holder (9).

2. Welding head according to Claim 1, also comprising a device (4) for axial positioning of the tool holder (9) relative to an object for welding, where the force-generating device (3, 13) acts relative to the tool holder (9).

3. Welding head according to any one of the preceding claims, where the force-generating device consists of a hydraulic cylinder (3) with associated piston rod (13).

4. Welding head according to Claim 1 or 2, where the force-generating device consists of a motor and a ball screw.

5. Welding system for friction stir welding, comprising a welding head adapted for connection and driving of a tool (2) intended for simultaneous friction stir welding from two opposite surfaces on an object for welding, comprising a tool holder (9), a force-generating device (3, 13) and a rotary driving device (5) which, during operation, can impart to the connected tool (2) a cyclic movement around the centre

axis (10) of the tool and relative to the object for welding arranged in conjunction with the welding head, and also comprising on the one hand a movement device for advancing the said welding head along a joint line
5 on the object for welding and on the other hand a control unit for the said rotary driving device (5), force-generating device (3, 13) and movement device, characterized in that the control unit regulates the force-generating device depending on the current torque
10 to the rotary driving device.

6. Method for initiating simultaneous friction stir welding from two opposite surfaces on an object for welding with a tool (2) comprising a primary shoulder
15 (6) and a secondary shoulder (7) with an intermediate probe (8), having the following steps in sequence:

- the shoulders are positioned against respective opposite sides of the object for welding without
20 movement around the centre axis (10) of the tool
- a cyclic movement around the centre axis (10) of the tool is started
- 25 ▪ a force is applied between the shoulders and the object for welding
- after a sufficient time delay for heating the object for welding to a suitable working
30 temperature, movement of the tool along the joint line on the object for welding is started.

7. Computer program for implementing the method according to Claim 6.

1/2

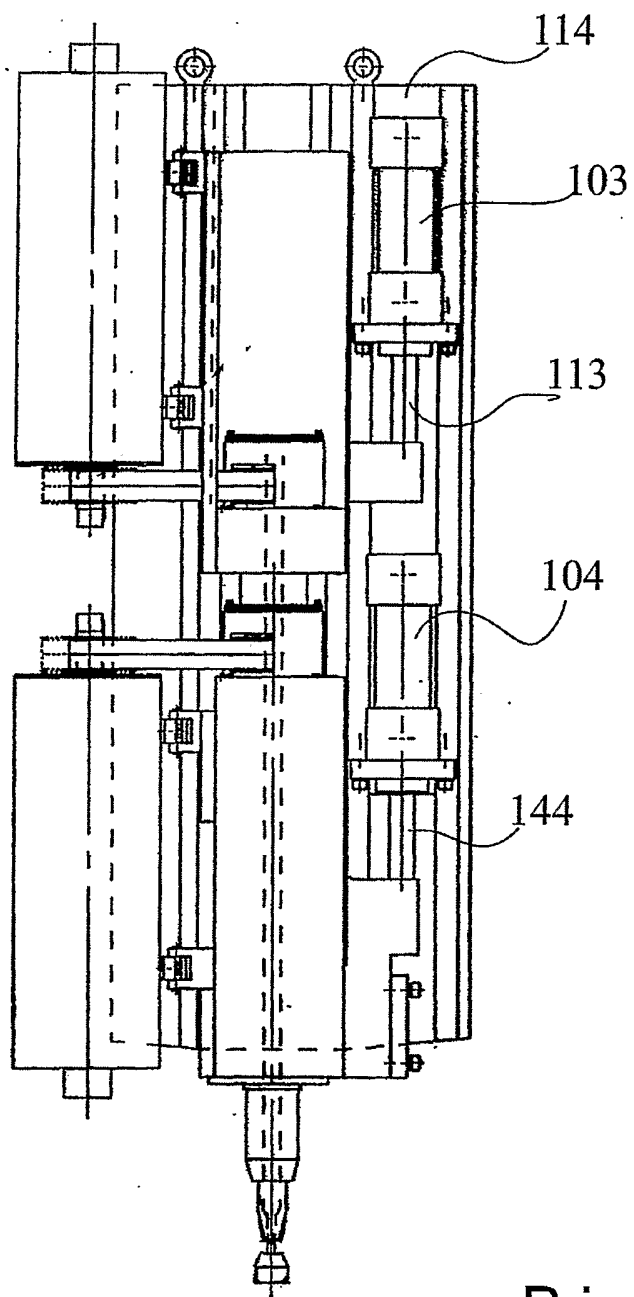


Fig. 1

Prior art

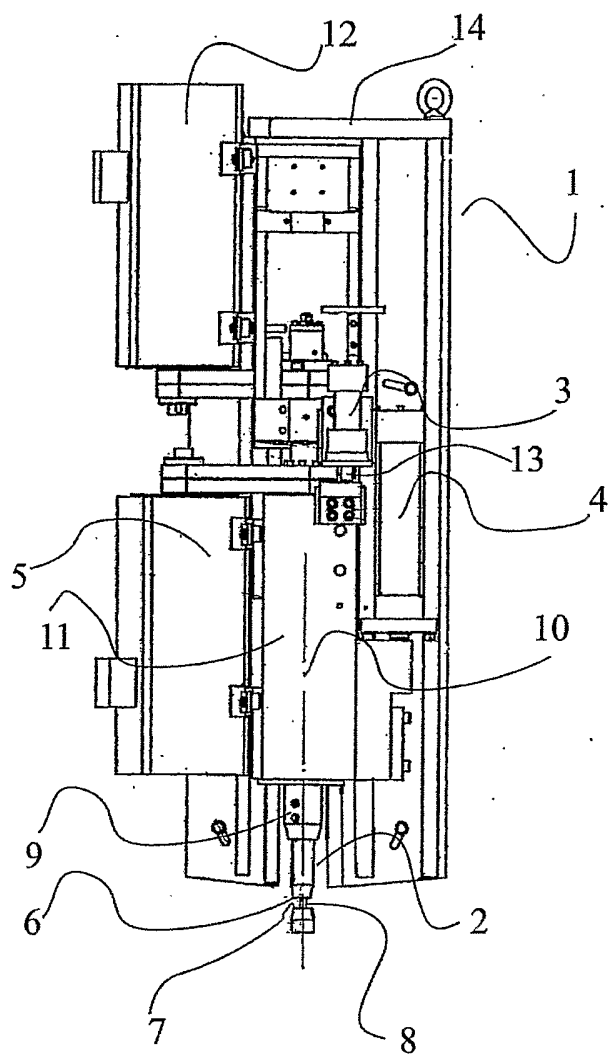


Fig. 2

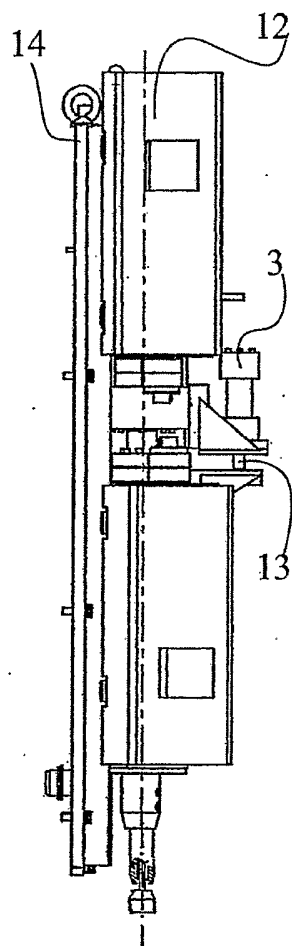


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00186

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B23K 20/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0002699 A1 (MTS SYSTEMS CORPORATION), 20 January 2000 (20.01.00), abstract --	1-7
A	File Epodoc/EPO, HITACHI LTD: "Method and device for friction-stir-welding", JP,A,2001287053, 20011016 -- -----	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 April 2003

Date of mailing of the international search report

29-04-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Mats Raidla/Eö
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

29/03/03

International application No.

PCT/SE 03/00186

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0002699 A1	20/01/00	CA 2336828 A	20/01/00
		EP 1105246 A	13/06/01
		US 6199745 B	13/03/01
		US 6297798 B	02/10/01
		WO 0002704 A	20/01/00