



US 20250089807A1

(19) **United States**

(12) **Patent Application Publication**  
AOYAMA et al.

(10) **Pub. No.: US 2025/0089807 A1**

(43) **Pub. Date: Mar. 20, 2025**

(54) **FLAVOR INHALER OR AEROSOL GENERATION DEVICE, AND OPERATION METHOD AND PROGRAM FOR SAME**

(52) **U.S. Cl.**  
CPC ..... *A24F 40/53* (2020.01); *A24F 40/20* (2020.01); *A24F 40/57* (2020.01)

(71) Applicant: **Japan Tobacco Inc.**, Tokyo (JP)

(72) Inventors: **Tatsunari AOYAMA**, Tokyo (JP); **Toru NAGAHAMA**, Tokyo (JP); **Junji MINATO**, Tokyo (JP)

(57) **ABSTRACT**

(73) Assignee: **Japan Tobacco Inc.**, Tokyo (JP)

(21) Appl. No.: **18/967,916**

(22) Filed: **Dec. 4, 2024**

The present invention provides a flavor inhaler or similar configured such that when heating for generating a flavor or similar using power from a power supply is restricted, the restriction is not released if the remaining capacity of the power supply is insufficient. Provided is a device that is a flavor inhaler or an aerosol generation device comprising a heater that is configured to heat one or both of a flavor source and an aerosol source, a power supply that supplies power to the heater, and a control unit that is configured to restrict the heating by the heater when the remaining capacity of the power supply is insufficient, wherein the control unit is further configured such that, when the heating by the heater is restricted, the control unit releases the restriction on the basis of a prescribed condition being fulfilled after the start of charging of the power supply.

**Related U.S. Application Data**

(63) Continuation of application No. PCT/JP2022/023042, filed on Jun. 8, 2022.

**Publication Classification**

(51) **Int. Cl.**  
*A24F 40/53* (2020.01)  
*A24F 40/20* (2020.01)  
*A24F 40/57* (2020.01)

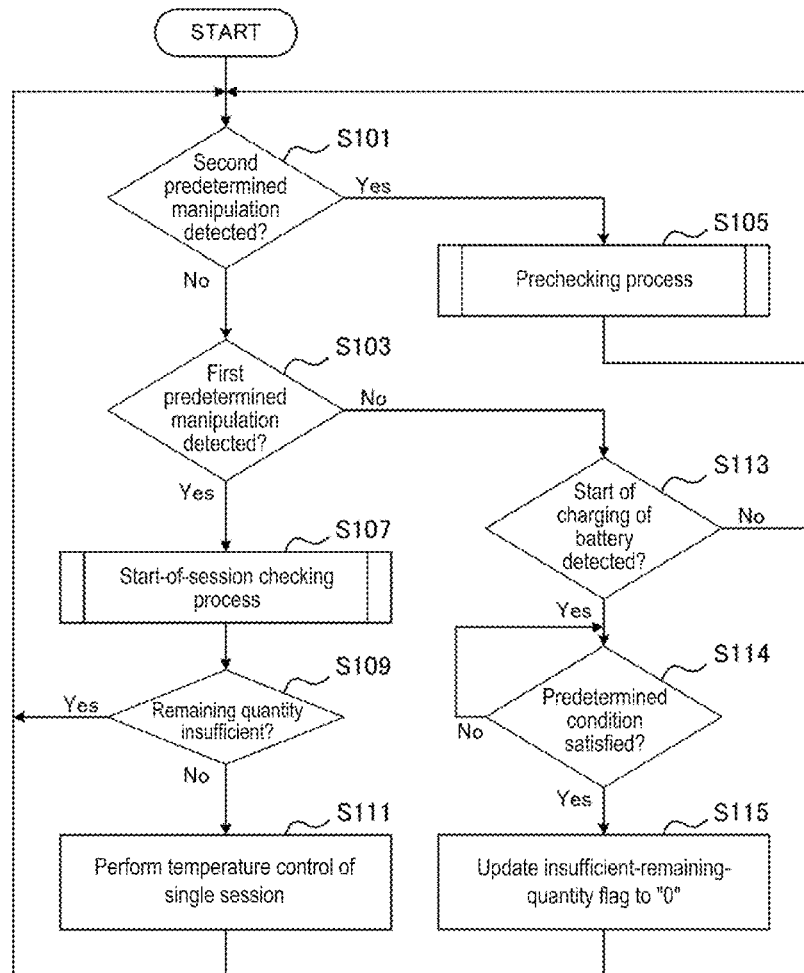


Fig. 1

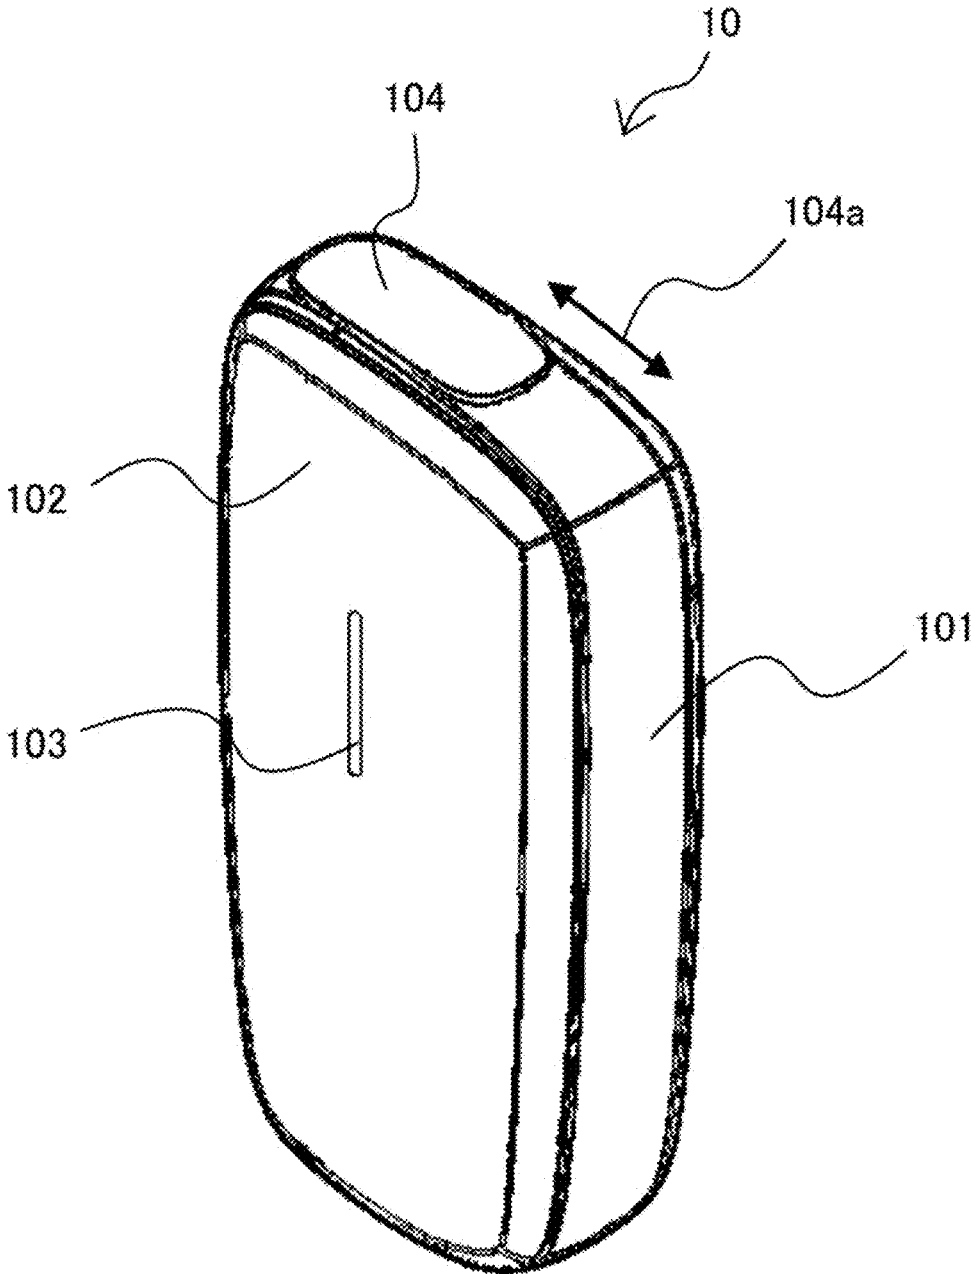
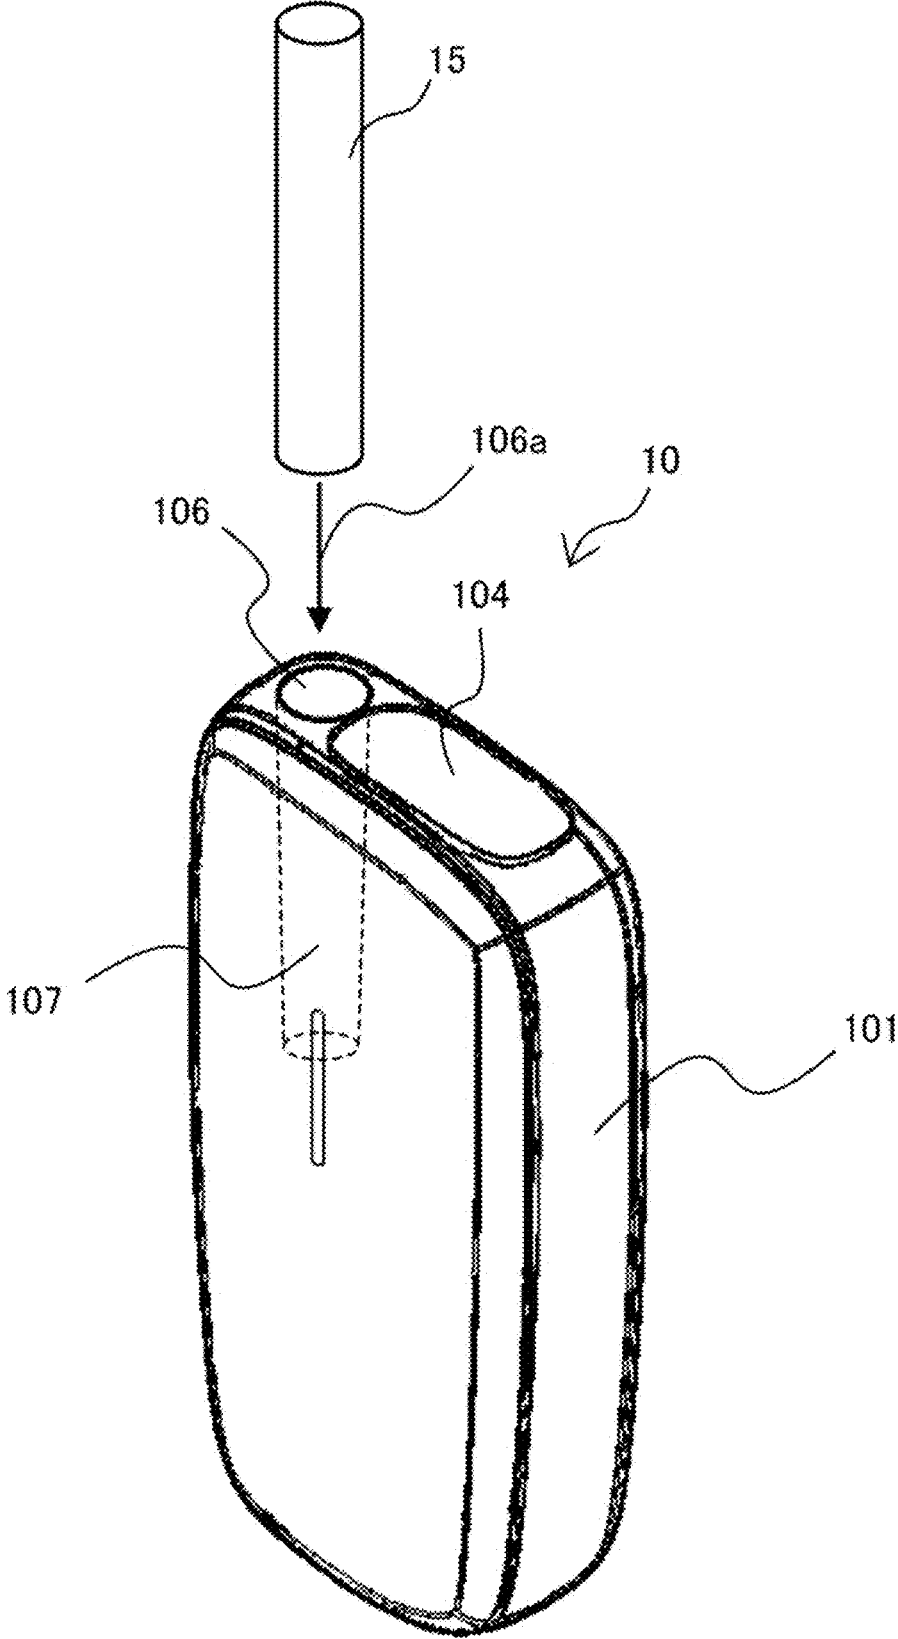


Fig. 2



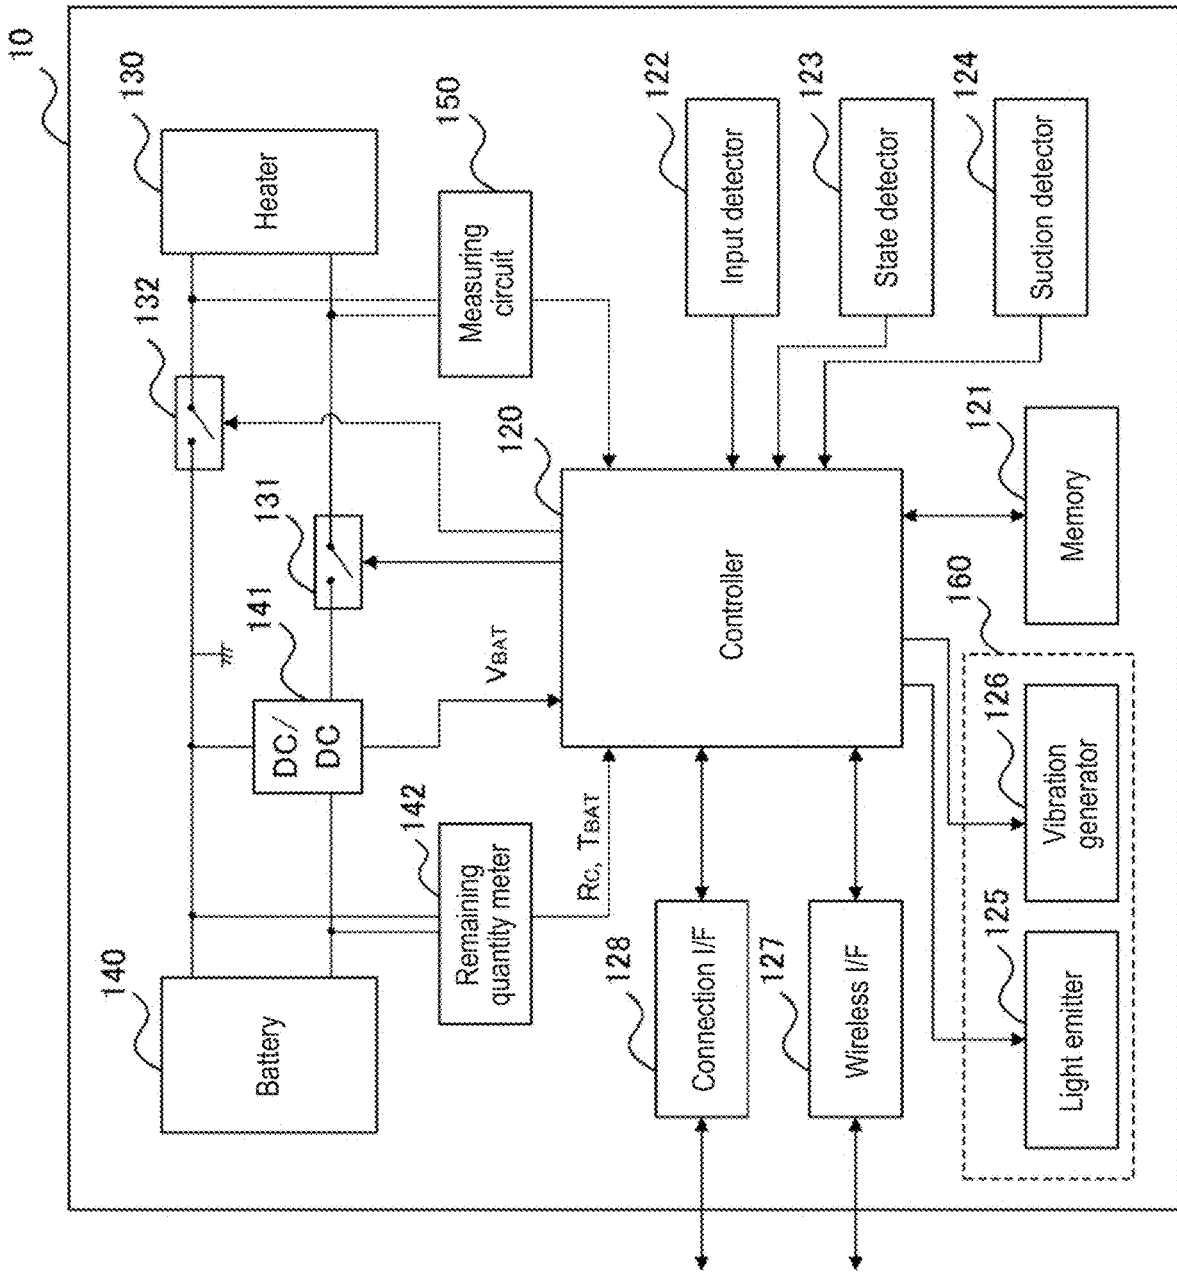


Fig. 3

Fig. 4

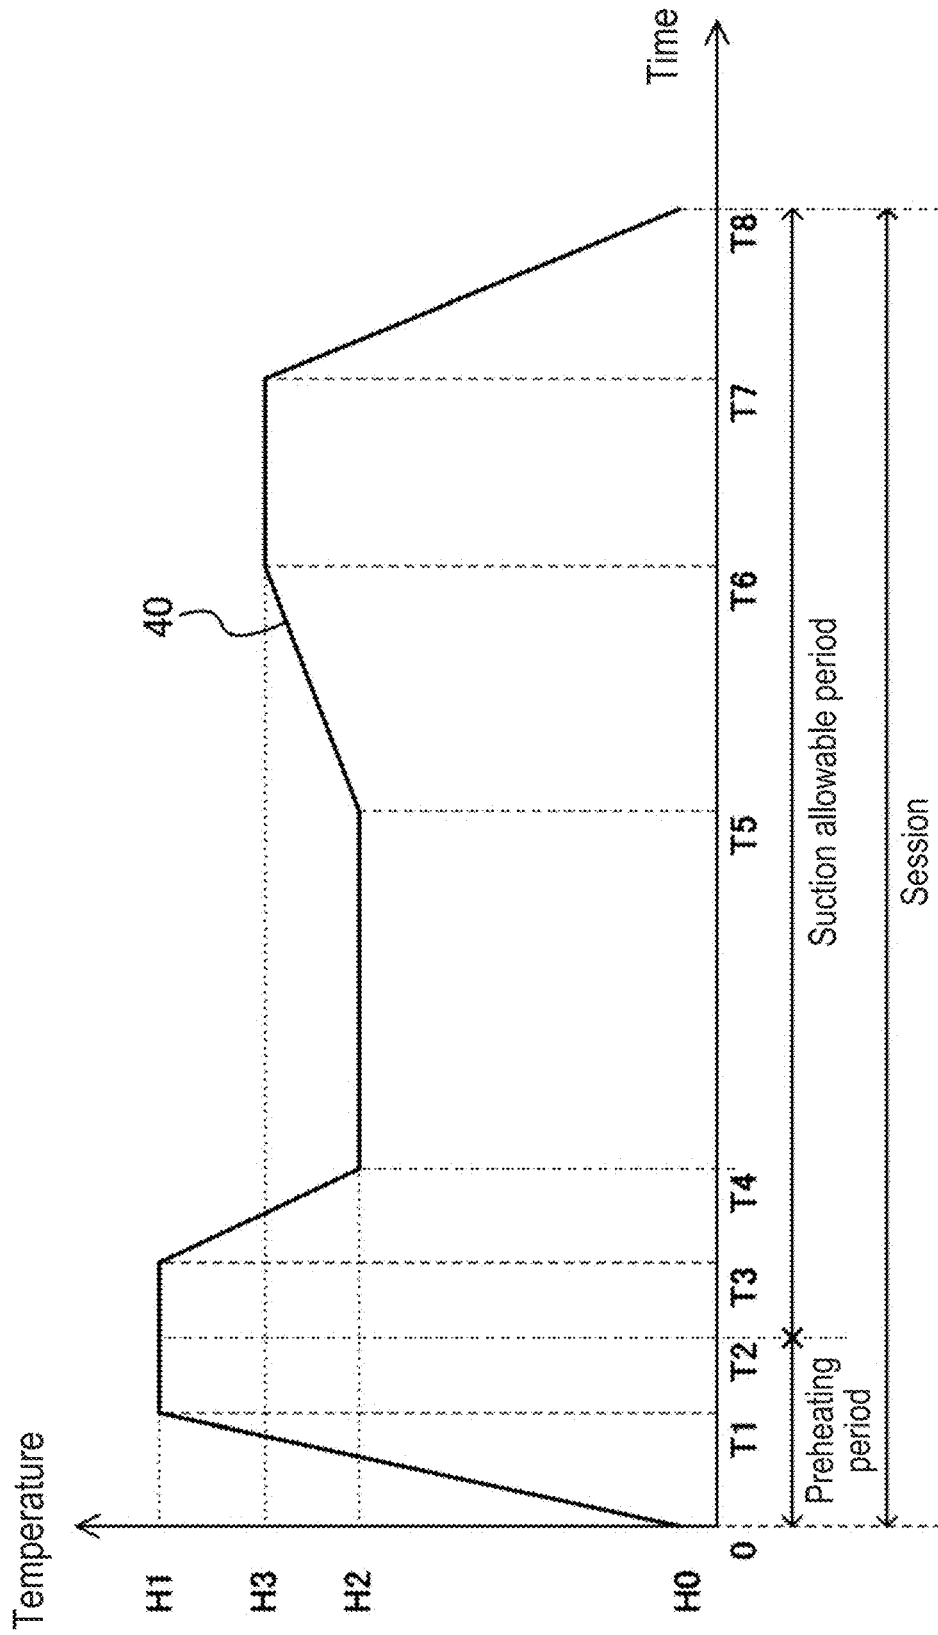


Fig. 5

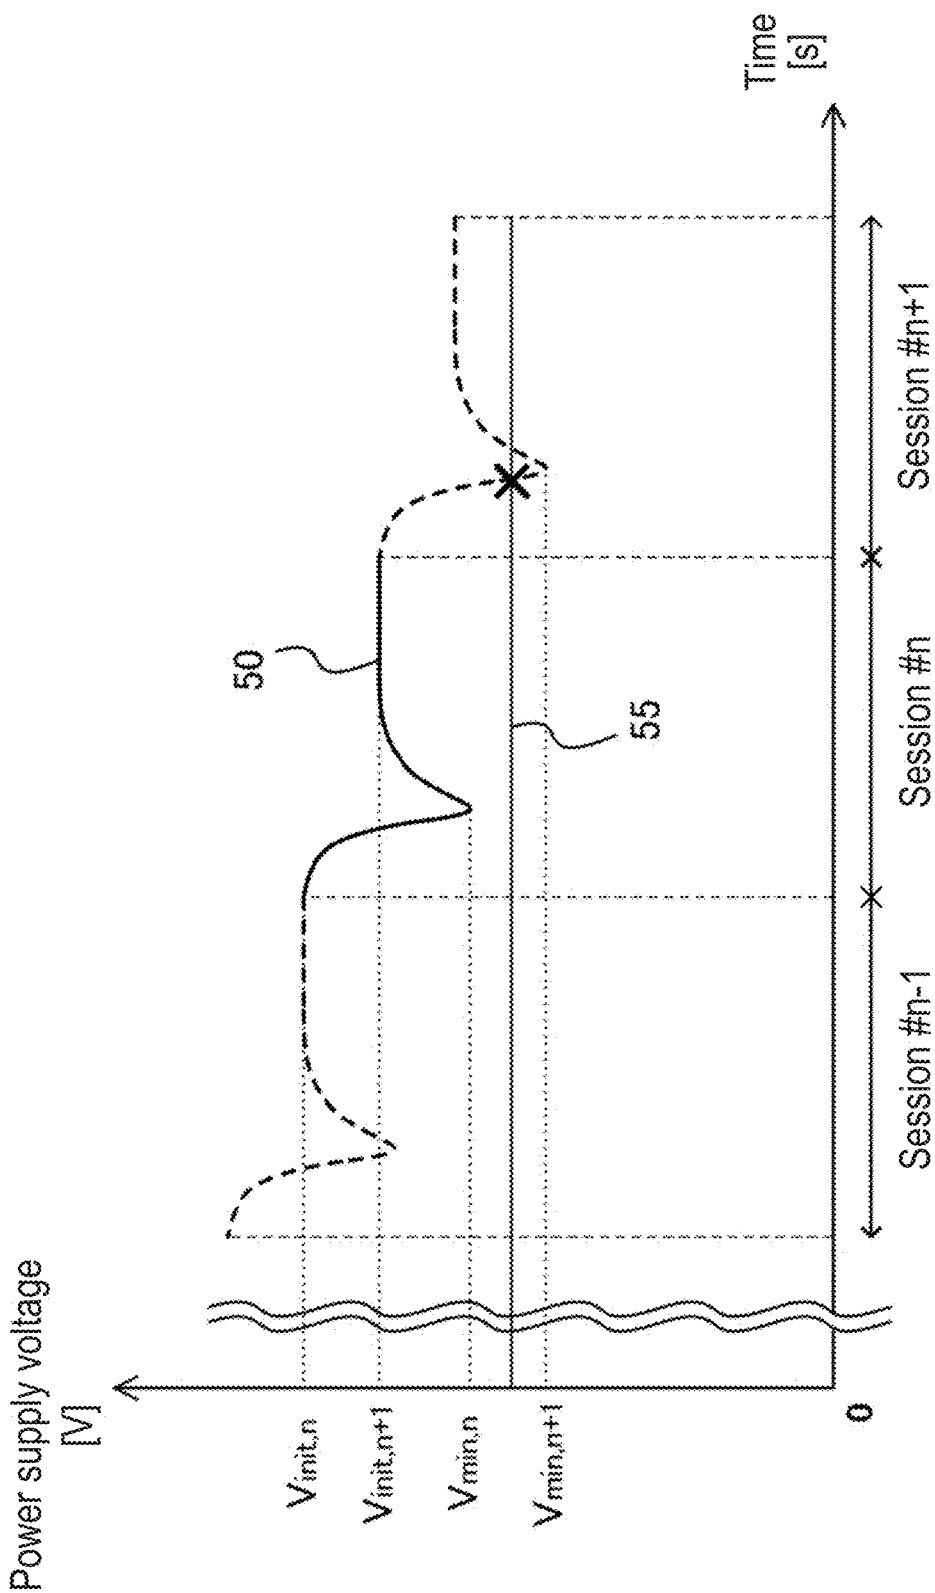


Fig. 6

Battery temperature	Category	C1	C2	C3
Range		$T_{BAT} < 10^{\circ}C$	$10^{\circ}C \leq T_{BAT} < 20^{\circ}C$	$20^{\circ}C \leq T_{BAT}$
Remaining-quantity threshold [mAh]	$R_{th1}$	$R_{th1\_low}$	$R_{th1\_mid}$	$R_{th1\_high}$
	$R_{th0}$	$R_{th0\_low}$	$R_{th0\_mid}$	$R_{th0\_high}$
Voltage threshold [V]	$V_{th}$	$V_{th}$		

Fig. 7

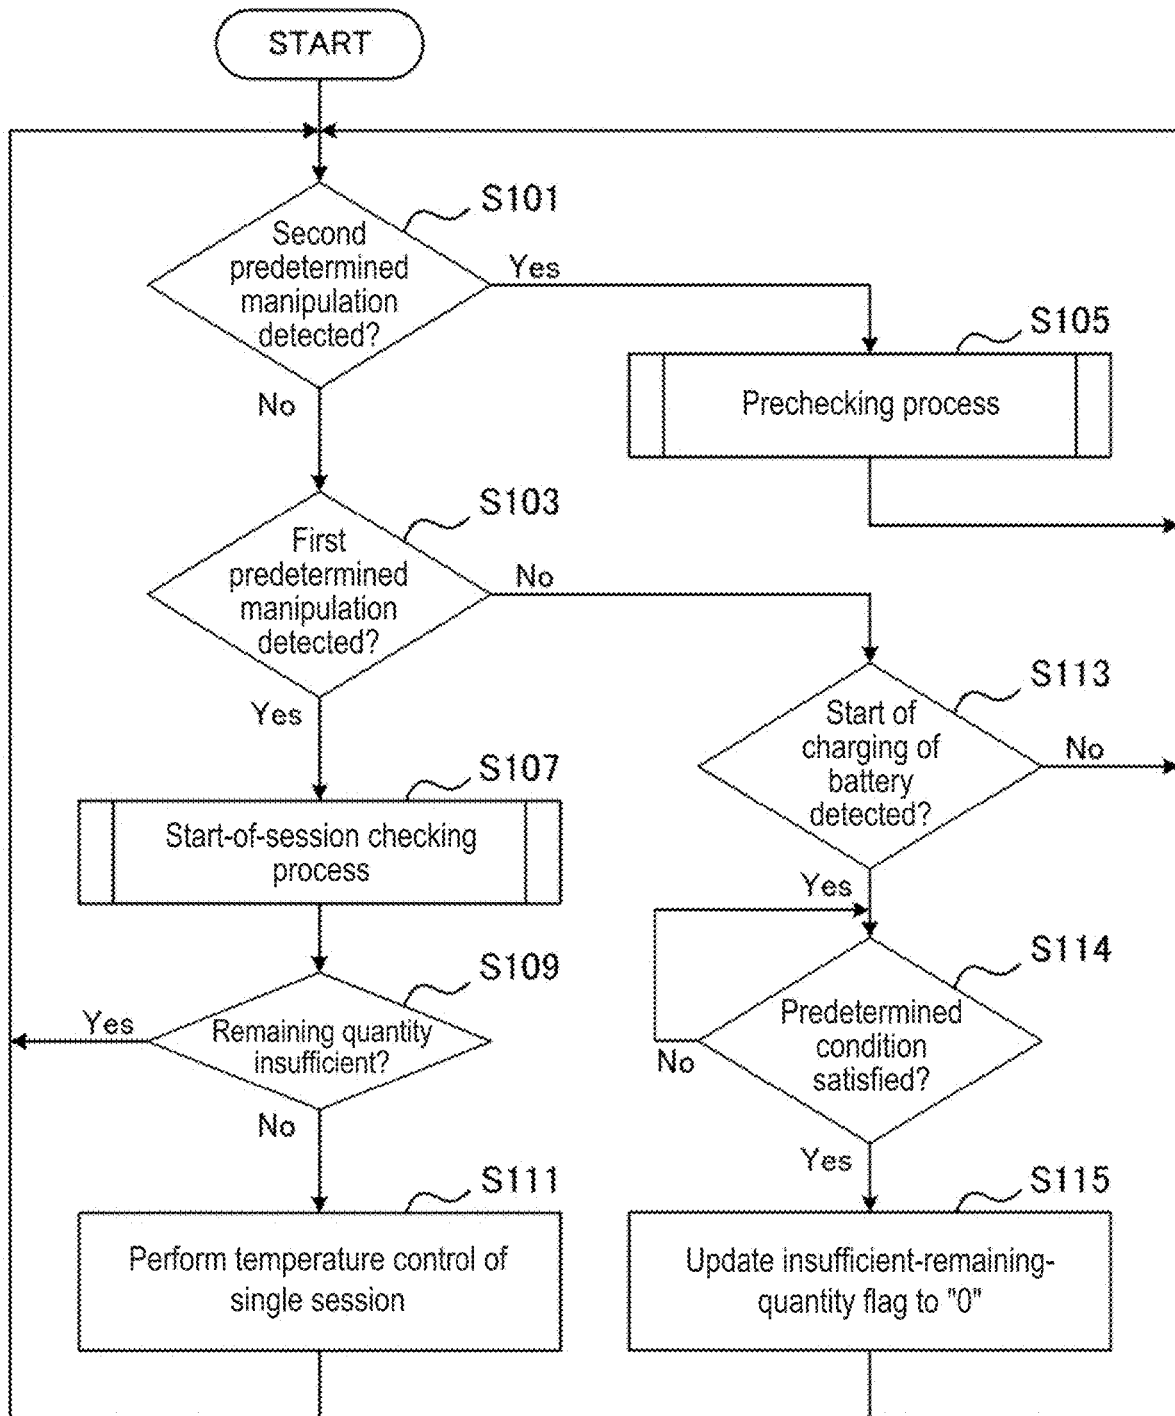


Fig. 8

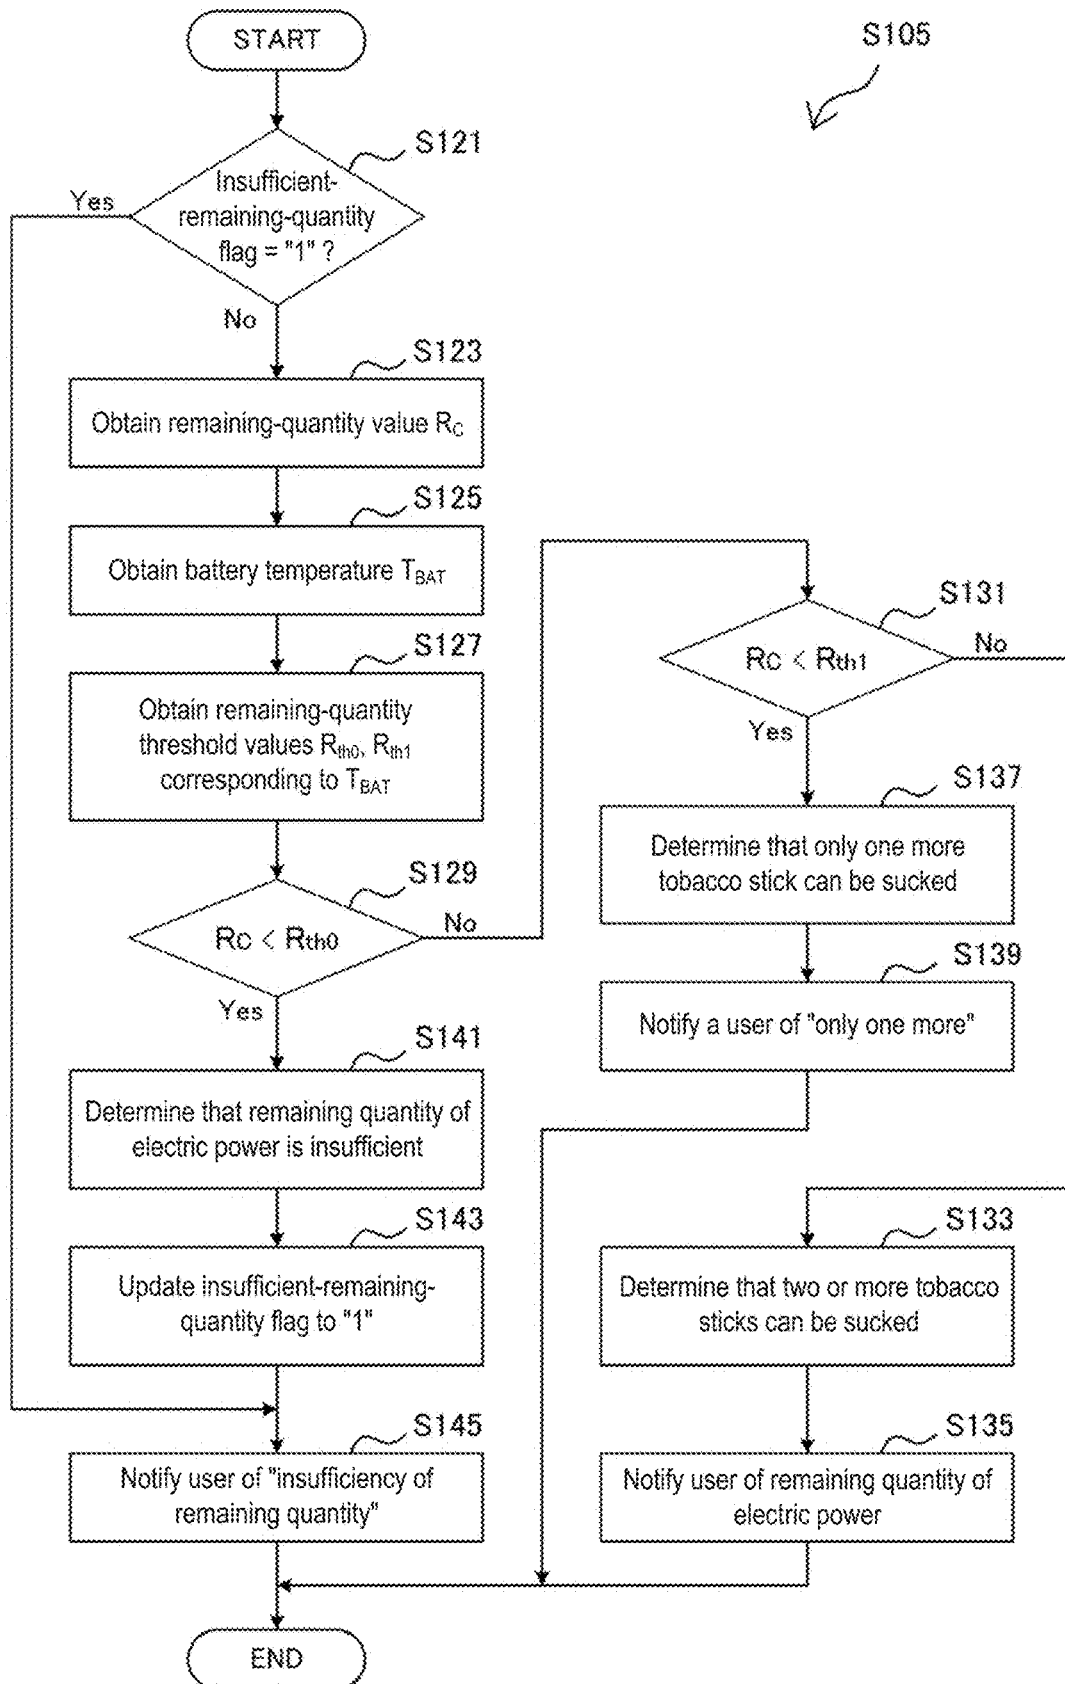


Fig. 9


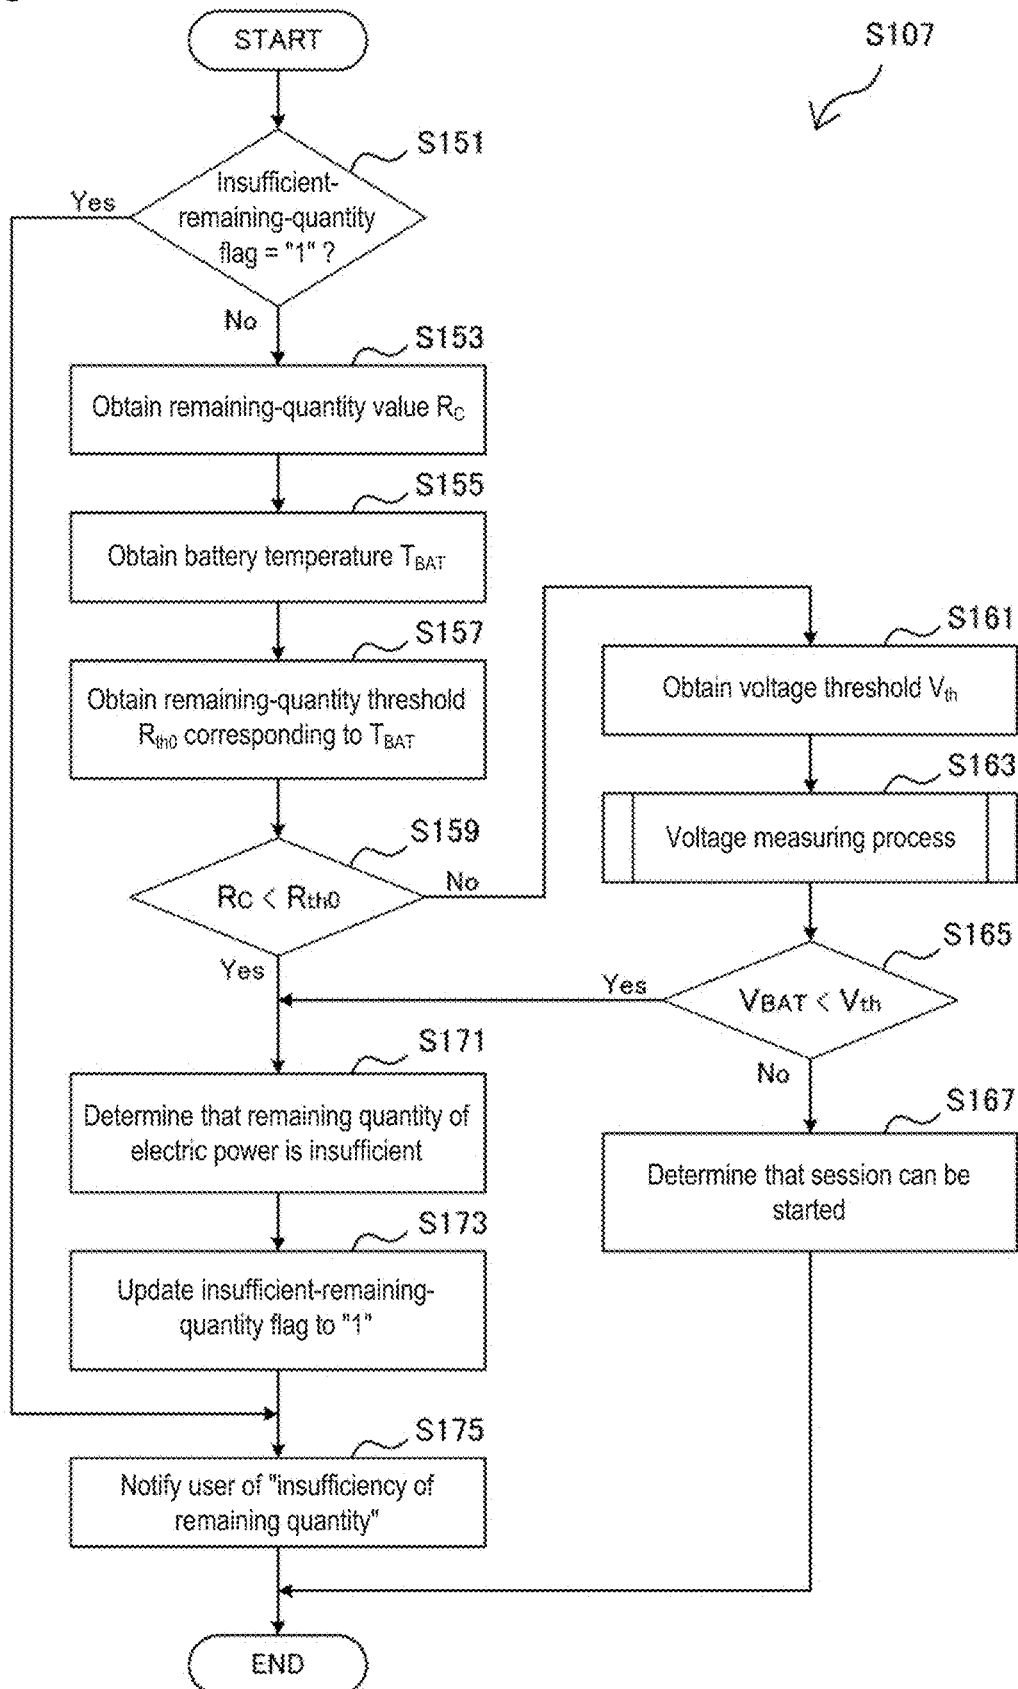


Fig. 10

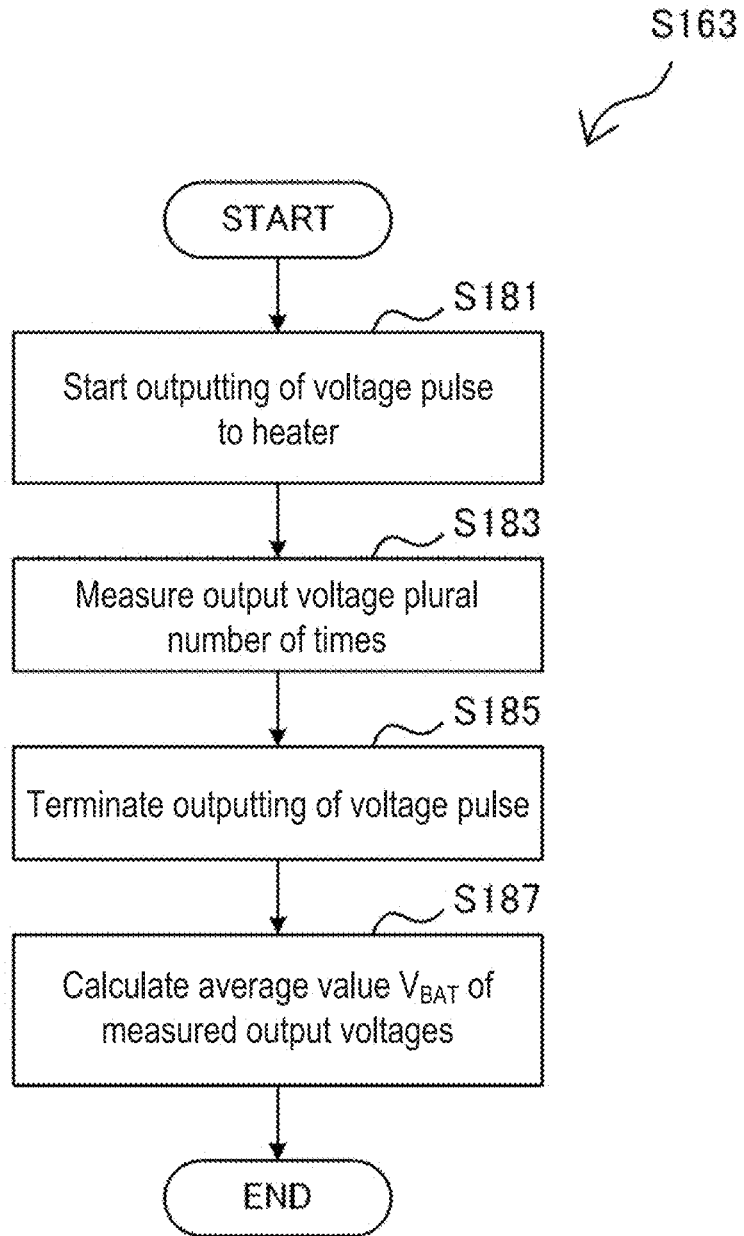

**FLAVOR INHALER OR AEROSOL  
GENERATION DEVICE, AND OPERATION  
METHOD AND PROGRAM FOR SAME**

CROSS-REFERENCE TO RELATED  
APPLICATION

[0001] The present invention contains subject matter related to International Application No. PCT/JP2022/023042 filed on Jun. 8, 2022, the entire contents of which are incorporated herein by reference.

TECHNICAL FIELD

[0002] The present application relates to a flavor inhaler or an aerosol generation device (hereinafter, a “flavor inhaler or the like”).

[0003] In this regard, a flavor inhaler is a device used for inhaling flavor, and the flavor inhalers include a heating-type flavor inhaler (which generates flavor by applying heat) and a non-heating-type flavor inhaler (which generates flavor by performing ultrasonic atomization, for example). For example, although there is no intention to limit the flavor inhalers, the flavor inhalers include, specifically, an electronic cigarette, a heated tobacco product, and conventional tobacco. Further, an “aerosol generation device” is a device used for inhaling generated aerosol, and the aerosol generation devices include a heating-type aerosol generation device (which generates aerosol by applying heat) and a non-heating-type aerosol generation device (which generates aerosol by performing ultrasonic atomization, for example). For example, although there is no intention to limit the aerosol generation devices, the aerosol generation devices include, specifically, an electronic cigarette, a heated tobacco product, and a medical nebulizer. Thus, at least some of the flavor inhalers are aerosol generation devices, and at least some of the aerosol generation devices are flavor inhalers. Further, a heating-type aerosol generation device or the like which does not perform any combustion process, for example, an electronic cigarette, may be referred to as a RRP (Reduced-Risk Product).

BACKGROUND ART

[0004] Conventionally, in a flavor inhaler or the like which comprises a power supply such as a battery or the like and generates flavor and/or aerosol (hereinafter, “flavor or the like”) by applying heat generated by using electric power from the power supply, control for checking a remaining quantity of power in the power supply before performing heating and restricting heating if the remaining quantity of power in the power supply is insufficient is performed (for example, refer to Patent Literature 1). Further, control for removing such a restriction with respect to heating, in response to charging of the power supply, is performed.

CITATION LIST

Patent Literature

[0005] PTL 1: PCT international publication No. WO 2020/084757

SUMMARY

[0006] According to an embodiment of the present invention, for solving the above problem, a device that is a flavor

inhaler or an aerosol generation device is provided, and the device comprises: a heater configured to heat a flavor source and/or an aerosol source; a power supply for supplying electric power to the heater; and a controller configured to restrict heating performed by the heater, if a remaining quantity in the power supply is insufficient, and the controller is further configured to remove, if the heating performed by the heater is restricted, the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.

BRIEF DESCRIPTION OF DRAWINGS

[0007] FIG. 1 is a perspective view which shows an external appearance of an aerosol generation device according to an embodiment.

[0008] FIG. 2 is an explanatory drawing which is used for explaining insertion of a tobacco stick into the aerosol generation device in FIG. 1.

[0009] FIG. 3 is a block diagram which shows an example of a schematic circuit configuration in the aerosol generation device in FIG. 1.

[0010] FIG. 4 is an explanatory drawing which is used for explaining an example of a temperature profile that may be realized in a single session.

[0011] FIG. 5 is an explanatory drawing which is used for explaining dropping of a power supply voltage along progress of plural sessions.

[0012] FIG. 6 is an explanatory drawing which is used for explaining an example of setting of different thresholds for plural temperature ranges.

[0013] FIG. 7 is a flow chart which shows an example of a schematic flow of a process performed by an aerosol generation device according to an embodiment.

[0014] FIG. 8 is a flow chart which shows an example of a flow of a prechecking process according to an embodiment.

[0015] FIG. 9 is a flow chart which shows an example of a flow of a start-of-session checking process according to an embodiment.

[0016] FIG. 10 is a flow chart which shows an example of a flow of a voltage measuring process according to an embodiment.

DESCRIPTION OF EMBODIMENTS

[0017] In the following description, embodiments will be explained in detail with reference to the attached figures. In this regard, the following embodiments are not those used for limiting the inventions recited in the claims, and the invention does not necessarily include all combinations of the characteristics explained in relation to the embodiments. Two or more characteristics in the plural characteristics explained in relation to the embodiments may be combined arbitrarily. Also, a reference symbol that is the same as that assigned to one configuration is assigned to the other configuration if the other configuration is the same as or similar to the one configuration, and overlapping explanation of the configuration is omitted.

1 Configuration Example of Device

[0018] In the present specification, an example wherein the technique according to the present disclosure is applied to a non-combustion-type flavor inhaler or the like which generates, without performing a combustion process, aero-

sol by heating and thereby atomizing a flavor source and/or an aerosol source (hereinafter, a “flavor source or the like”) will be explained mainly. In this regard, application is not limited to the example explained above, and the technique according to the present disclosure may be applied to any kinds of flavor sources or the like, such as a combustion-type device, a medical nebulizer, and so on.

### 1-1 External Appearance

[0019] FIG. 1 is a perspective view which shows an external appearance of a flavor inhaler or the like 10 according to an embodiment. FIG. 2 is an explanatory drawing which is used for explaining insertion of a tobacco stick into the flavor inhaler or the like 10 shown in FIG. 1. When reference is made to FIG. 1, the flavor inhaler or the like 10 comprises a main body 101, a front panel 102, a display window 103, and a slider 104.

[0020] The main body 101 is a housing which supports, in the inside thereof, one or plural circuit boards of the flavor inhaler or the like 10. In the present embodiment, the main body 101 has an approximately rectangular-parallelepiped shape that is roundish and extends in an upward direction and a downward direction in the figure. The size of the main body 101 may be a size that allows a user to grasp the main body 101 by a hand of the user, for example. The front panel 102 is a flexible panel member which covers the front face of the main body 101. The front panel 102 may be detachable from the main body 101. The front panel 102 also functions as an input unit for accepting a user input. For example, a user input may be detected as a result that a center part of the front panel 102 is pushed by a user and a button (which is not shown in the figure) positioned between the main body 101 and the front panel 102 is pushed accordingly. The display window 103 is a belt-shaped window which is positioned in an approximately center part on the front panel 102 and extends in a longitudinal direction. The display window 103 makes the light emitted from one or plural LEDs (Light Emitting Diodes) arranged between the main body 101 and the front panel 102 be transmitted through it.

[0021] The slider 104 is a cover member which is arranged in such a manner that it can slide in a direction 104a on a top surface of the main body 101. As shown in FIG. 2, an opening 106 on the top surface of the main body 101 is exposed when the slider 104 is slid toward a user’s side in the figure (i.e., when the slider 104 is opened). When a user inhales aerosol by using the flavor inhaler or the like 10, the user inserts a tobacco stick 15 into a tubular insertion hole 107 in a direction 106a, through the opening 106 which is exposed by opening the slider 104. That is, the insertion hole 107 has a role as an accepting unit for accepting the tobacco stick 15. A cross section perpendicular to a direction of an axis of the insertion hole 107 may have a circular, elliptical, or polygonal shape, for example; and the cross section area becomes smaller as the position of the cross section approaches closer to the bottom surface. Thus, an outer surface of the tobacco stick 15 inserted into the insertion hole 107 is pressed by an inner surface of the insertion hole 107, and, accordingly, falling of the tobacco stick 15 is prevented by frictional force, and transfer efficiency with respect to heat transfer to the tobacco stick 15 from a heater 130, which will be explained later, is improved. After

terminating the aerosol inhaling action, a user pulls the tobacco stick 15 out of the insertion hole 107 and closes the slider 104.

[0022] The tobacco stick 15 is a tobacco article which holds, in the inside of cylindrical rolled paper, a filling material. The filling material of the tobacco stick 15 may be a mixture of an aerosol forming base substance and shredded tobacco, for example. A base substance including any kind of aerosol source, such as glycerin, propylene glycol, triacetin, 1,3-butanediol, or a mixture thereof, for example, may be used as the aerosol forming base substance. The shredded tobacco is a so-called flavor source. The material of the shredded tobacco may be laminae or stems. In this regard, a flavor source which is not originated from tobacco may be used instead of the shredded tobacco. That is, the tobacco stick 15 corresponds to a base substance comprising a flavor source or the like. In this regard, in a different embodiment, a base substance comprising either one of a flavor source and an aerosol source may be used.

[0023] In the following explanation, it is supposed that the tobacco stick 15 comprises a flavor source or the like, wherein the quantity thereof is that allowing M times of actions for inhaling the flavor source or the like. M may be any integer equal to or greater than 2. For example, M may be a number in a range of approximately 10-20 that is close to the number of times of inhalation actions performed for a single conventional cigarette.

[0024] In this regard, the flavor inhaler or the like 10 is not limited to that explained above, and may be possible to accept an article (for example, a capsule, a cartridge, or a reservoir) which has a shape other than a stick shape. The flavor source or the like included in the article may be solid or liquid.

### 1-2 Configuration of Circuit

[0025] FIG. 3 is a block diagram which shows an example of a schematic circuit configuration in the flavor inhaler or the like 10. When reference is made to FIG. 3, the flavor inhaler or the like 10 comprises a controller 120, a memory 121, an input detector 122, a state detector 123, a suction detector 124, a light emitter 125, a vibration generator 126, a communication interface (I/F) 127, a connection I/F 128, a heater 130, a first switch 131, a second switch 132, a battery 140, a boosting circuit 141, a remaining quantity meter 142, and a measuring circuit 150.

[0026] The controller 120 may be a processor such as a CPU (Central Processing Unit), a microcontroller, or the like. The controller 120 controls functions of the flavor inhaler or the like 10 in general, by executing a computer program (this is also referred to as software or firmware) stored in the memory 121. The memory may be a semiconductor memory, for example. The memory 121 stores one or plural computer programs and data (for example, plural kinds of thresholds for determinations) used in a temperature controlling function and a checking function that will be explained later.

[0027] The input detector 122 is a detection circuit for detecting a user input for manipulation of the flavor inhaler or the like 10. For example, the input detector 122 detects pressing of the front panel 102 (pressing of a button) by a user, and outputs an input signal representing a detected state to the controller 120. In this regard, the flavor inhaler or the like 10 may comprise, in place of (or in addition to) the front panel 102, any kind of input device such as a button, a

switch, or a touch sensitive plane, for example. The state detector **123** is a detection circuit for detecting an open/close state of the slider **104**, wherein opening/closing of the slider is manipulation applied to the flavor inhaler or the like. For example, the state detector **123** may comprise a Hall IC which detects, by using a Hall element, change in a magnetic field due to opening/closing of the slider **104**. The state detector **123** outputs a state detection signal that shows whether the slider **104** is being opened or closed, to the controller **120**. The suction detector **124** is a detection circuit for detecting a suction action (a puff) applied to the tobacco stick **15** performed by a user. For example, the suction detector **124** may comprise a thermistor (which is not shown in the figure) arranged in a position close to the opening **106**. In such a case, the suction detector **124** may detect a suction action, based on change in a resistance value of the thermistor that occurs due to temperature change due to a suction action performed by a user. In a different example, the suction detector **124** may comprise a pressure sensor (which is not shown in the figure) arranged in a position on the bottom of the insertion hole **107**. In such a case, the suction detector **124** may detect a suction action, based on decrease in air pressure due to the flow of air caused by a suction action. For example, the suction detector **124** outputs a suction detection signal that shows whether or not a suction action is being performed, to the controller **120**.

[0028] The light emitter **125** comprises one or plural LEDs and a driver for driving the one or plural LEDs. The light emitter **125** makes each LED emit light according to an instruction signal inputted from the controller **120**. The vibration generator **126** comprises a vibrator (for example, an eccentric motor) and a driver for driving the vibrator. The vibration generator **126** makes the vibrator vibrate according to an instruction signal inputted from the controller **120**. The controller **120** may use, in an arbitrarily selected pattern, the light emitter **125** and/or the vibration generator **126** for notifying a user of a status (for example, a remaining quantity of power in the battery **120** that will be explained later) of the flavor inhaler or the like **10**. Accordingly, in the present embodiment, the light emitter **125** and the vibration generator **126** may collectively be referred to as a notifier **160**. For example, the light emission patterns of the light emitter **120** may be distinguished based on factors such as light emission states of each LED (always-on light emission, blinking, no light emission), frequencies of blinking, the number of LEDs which emit light, colors of emitted light, and so on. The vibration pattern of the vibration generator **126** may be distinguished based on factors such as vibration states of the vibrator (vibrating, not vibrating), the strength of vibration, the length of time of vibration, and so on.

[0029] The wireless I/F **127** is a communication interface for making the flavor inhaler or the like **10** possible to wirelessly communicate with the other device (for example, a PC (Personal computer) or a smart phone possessed by a user). The wireless I/F **127** may be an interface which conforms to any wireless communication protocol, such as Bluetooth (a registered trademark), NFC (Near Field Communication), wireless LAN (Local Area Network), or the like, for example. The connection I/F **128** is an interface which has a mechanism, such as a terminal, a coil, and so on, for connecting the flavor inhaler or the like **10** to the other device. The connection I/F **128** may be a USB (Universal Serial Bus) interface, for example. The connection I/F **128** may be used for charging the battery **140** from an external

electric power supply (via a feeder line which is not shown in the figure, or in a wireless manner).

[0030] The heater **130** is a resistance heating part, i.e., a heater, for heating an aerosol source included in the aerosol forming base substance in the tobacco stick **15** to thereby generate aerosol. In this regard, in the present embodiment, it is configured in such a manner that flavor is added to aerosol as a result that the generated aerosol passes through the flavor source included in the tobacco stick **15**. On the other hand, in a different embodiment, it may be possible to use a flavor source which generates flavor as a result that it is heated. As the resistance heating material of the heater **130**, one or two or more of copper, nickel alloy, chromium alloy, stainless steel, and platinum-rhodium, for example, may be used. One end of the heater **130** is connected to a positive electrode of the battery **140** via the first switch **131** and the boosting circuit **141**, and the other end of the heater **130** is connected to a negative electrode of the battery **140** via the second switch **132**. The first switch **131** is a switching element arranged on a feeder line between the heater **130** and the boosting circuit **141**. The second switch **132** is a switching element arranged on a ground wire between the heating element **130** and the battery **140**. Each of the first switch **131** and the second switch **132** may be an FET (Field Effect Transistor). For example, the controller **120** is able to turn on both the first switch **131** and the second switch **132** by outputting control signals that are pulse signals to the gates of the switches, to supply electric power that has a voltage amplified by the boosting circuit **141**, from the battery **140** to the heater **130**.

[0031] The battery **140** is an electric power supply for supplying electric power to the heater **130** and other components in the flavor inhaler or the like **10**. In FIG. 3, feeder lines from the battery **140** to the components other than the heater **130** are omitted. The battery **140** may be a lithium-ion battery, for example. In the present embodiment, the battery **140** has a capacity that corresponds to a quantity of electric power required for completing N (N is an integer equal to or greater than 2) sessions (that is, an electric-power quantity that is sufficient for consuming flavor sources or the like included in N tobacco sticks **15**). Thus, if the battery **140** is fully charged, a user is not required to recharge the battery **140** every time when a session is completed, and, thus, is able to enjoy plural tobacco sticks **15** consecutively. The capacity of the battery **140** may be determined by taking a trade-off between the cost and the size into consideration, and N may be approximately 25, although this is a mere example. The boosting circuit (a DC/DC converter) **141** is a voltage conversion circuit for amplifying the voltage of the battery **140**, for supplying electric power to the heater **130**.

[0032] The remaining quantity meter **142** is an IC chip for monitoring the remaining quantity of electric power and other statuses of the battery **140**. For example, the remaining quantity meter **142** derives the remaining quantity of electric power in the battery **140** by measuring, according to a Coulomb counting method, the quantity of current flown into the battery **140** when it is charged and the quantity of current flown out of the battery **140** when it is discharged, and adding the measured quantities of current. In this regard, the remaining quantity meter **142** may derive the remaining quantity of electric power in the battery **140**, according to a different algorithm such as a voltage measuring method, an impedance tracking method, or the like. Further, the remaining quantity meter **142** may be able to measure temperature

of the battery 140. For example, the controller 120 is connected to the remaining quantity meter 142 via an I2C (Inter-Integrated Circuit) communication line comprising a clock line and a data line, and operates as a master device of the I2C. In such a case, the controller 120 may be able to obtain, at arbitrarily selected timing, a value  $R_C$  of the battery's remaining quantity and a value  $T_{BAT}$  of the battery temperature that are periodically updated by the remaining quantity meter 142 which is a slave device. The remaining quantity meter 142 may further be able to measure other statuses of the battery 140, such as the state of charge (SOC: State Of Charge), the state of health (SOH: State Of Health), the relative state of charge (RSOC), and so on, and output values of the above statuses.

[0033] The measuring circuit 150 is a circuit for measuring a temperature index that correlates to the temperature of the heater 130. The temperature index in the present case may represent the temperature of the heater 130 as it stands, or an electric resistance value of the heater 130. In general, the electric resistance value of a resistance heating material has a characteristic such that it monotonously increases as temperature increases (i.e., it correlates to temperature), for example; and, accordingly, the electric resistance value of the heater 130 may be used as a temperature index. In this regard, the temperature of the heater 130 may be measured by using a thermistor (which is not shown in the figure) arranged in a position close to the heater 130.

[0034] In the present embodiment, the controller 120 is able to measure the output voltage  $V_{BAT}$  of the battery 140 (hereinafter, this is also simply referred to as a power supply voltage), in addition that the controller 120 is able to obtain various status values including the remaining-quantity value  $R_C$  and the temperature value  $T_{BAT}$  of the battery 140 from the remaining quantity meter 142. For example, the controller 120 may output short control pulses to the first switch 131 and the second switch 132, to apply a voltage pulse from the battery 140 to the heater 130, and perform analog-digital conversion of the voltage level of the voltage pulse to thereby obtain the value  $V_{BAT}$  representing the power supply voltage. In the example in FIG. 3, the controller 130 is configured to obtain the voltage value  $V_{BAT}$  via the boosting circuit 141. In this regard, the controller 120 may perform, plural times consecutively at predetermined intervals, measurement of the power supply voltage, and obtain an average value of the measured results as the voltage value  $V_{BAT}$ , for reducing or removing effect of noise.

### 1-3 Example of Temperature Profile

[0035] The controller 120 controls supplying of electric power from the battery 140 to the heater 130, for realizing a desired temperature profile for providing a user with good experience throughout a whole session. In the present specification, a session refers to a set of time periods during that temperature control for consuming a flavor source or the like included in a single article (in the present case, one tobacco stick 15 accepted in the insertion hole 107) is performed. The session may be referred to as a heating period. As explained above, a user is allowed to perform at most M suction actions during a single session.

[0036] The temperature control performed by the controller 120 may typically be feedback control (for example, PID control), wherein the temperature index measured by the measuring circuit 150 is defined as a controlled variable and the duty ratio of supplying of electric power is defined as a

manipulated variable. For example, in each of the repeated control cycles, the controller 120 outputs, to each of the first switch 131 and the second switch 132, a control pulse that has been modulated according to the duty ratio derived through the PID control. Then, a voltage pulse is applied from the battery 140 to the heater 130 with a corresponding duty ratio. Through repetition of the control cycle such as that explained above, the temperature of the heater 130 becomes closer to a target value of the PID control.

[0037] FIG. 4 is an explanatory drawing which is used for explaining an example of a temperature profile that may be realized in a single session. A horizontal axis in the figure represents time elapsed since a start of supplying of electric power to the heater 130, and a vertical axis represents temperature of the heater 130. A thick polygonal line represents a temperature profile 40 that is shown as an example. The temperature profile 40 comprises a preheating period (T0-T2) in the first part, and a suction allowable period (T2-T8) following the preheating period. For example, the length of the whole suction allowable period may be approximately 5 minutes.

[0038] The preheating period comprises a temperature increasing section (T0-T1) for rapidly increasing the temperature of the heater 130 from environmental temperature H0 to first temperature H1, and a maintaining section (T1-T2) for maintaining the temperature of the heater 130 at the first temperature H1. By rapidly heating, in a first stage, the heater 130 to have the first temperature H1 as explained above, heat spreads sufficiently throughout the hole aerosol forming base substance in the tobacco stick 15 in an early stage, and, accordingly, it becomes possible to start supplying of quality aerosol to a user more quickly.

[0039] The suction allowable period comprises a maintaining section (T2-T3) for maintaining the temperature of the heater 130 at the first temperature H1, a temperature lowering section (T3-T4) for lowering the temperature of the heater 130 to second temperature H2, and a maintaining section (T4-T5) for maintaining the temperature of the heater 130 at the second temperature H2. By lowering the temperature of the heater 130 that has been raised once to the first temperature H1, to the second temperature H2, it becomes possible to allow a user to perform suction action longer and stably with moderate smoke flavor. In the temperature lowering section, supplying of electric power from the battery 140 to the heater 130 may be stopped. The suction allowable period further comprises a temperature increasing section (T5-T6) for gradually increasing the temperature of the heater 130 from the second temperature H2 to third temperature H3, a maintaining section (T6-T7) for maintaining the temperature of the heater 130 at the third temperature H3, and a temperature lowering section (T7-T8) for lowering the temperature of the heater 130 to the environmental temperature H0. By again increasing the temperature of the heater 130 in the latter half of the suction allowable period as explained above, lowering of the smoke flavor during a situation in which the flavor source or the like included in the tobacco stick 15 is being reduced is suppressed, and, accordingly, it becomes possible to provide a user with a highly satisfactory experience until an end of the suction allowable period.

[0040] For example, the first temperature H1 may be 295 degrees Celsius, the second temperature H2 may be 230 degrees Celsius, and the third temperature H3 may be 260 degrees Celsius. In this regard, it is possible to design a

different temperature profile, according to designing principle of a manufacturer, preference of a user, or a characteristic of each tobacco article brand.

[0041] In the case that the temperature of the heater 130 is increased rapidly in the middle of the session like the case of the temperature profile 40, the quantity of current outputted from the battery 140 increases notably. If the quantity of current outputted from the battery 140 increases, the quantity of voltage drop relating to internal resistance of the battery 140 increases in response thereto, and, also, the power supply voltage significantly drops temporarily. Further, there is a risk that the device performs defective operation, if a minimum value of the power supply voltage (hereinafter, the minimum voltage) becomes that lower than an operable voltage of the circuit in the flavor inhaler or the like 10 during a session. For preventing the above matters, and for notifying a user of the state of the battery 140 at appropriate timing for encouraging the user to recharge the battery, plural functions that will be explained in the following section are incorporated in the flavor inhaler or the like 10 according to the present embodiment.

## 2 Checking of State of Battery

### 2-1 Start-of-Session Checking

[0042] FIG. 5 is an explanatory drawing which is used for explaining dropping of a power supply voltage relating to progress of plural sessions. A horizontal axis in the figure represents progress of time through plural sessions, wherein intervals between sessions are omitted. A vertical axis in the figure represents a power supply voltage (V). A voltage value  $V_{init,n}$  represents a power supply voltage of the battery 140 at the beginning of an n-th session, and a voltage value  $V_{min,n}$  represents a smallest voltage of the battery 140 during the n-th session. A solid line part 50 in a graph in the figure represents chronological change in the power supply voltage in the n-th session, wherein the power supply voltage temporarily drops from the  $V_{init,n}$  at the beginning of the session to  $V_{min,n}$ , and thereafter recovers to  $V_{init,n+1}$  in a latter half of the session. If self-discharge during intervals between sessions is ignored, the power supply voltage at the beginning of a next, i.e., (n+1)th, session will be  $V_{init,n+1}$ .

[0043] A horizontal line 55 in the figure represents an operable voltage of the circuit in the flavor inhaler or the like 10. In the example in FIG. 5, since the smallest voltage  $V_{min,n}$  in the n-th session is not lower than the operable voltage 55, the flavor inhaler or the like 10 is able to complete the n-th session. On the other hand, the smallest voltage  $V_{min,n+1}$  in the (n+1)th session is lower than the operable voltage 55. Accordingly, if the (n+1)th session is started with the power supply voltage  $V_{init,n+1}$  shown in the figure, the flavor inhaler or the like 10 will perform defective operation in the middle of the (n+1)th session, and the session will be stopped in the middle thereof. Stopping of a session in the middle thereof such as that explained above disadvantages a user, specifically, it damages an inhalation experience of the user, and, in addition, causes the remaining flavor source of the like included in the tobacco stick 15 which is being heated be wasted.

[0044] For preventing disadvantage due to stopping of a session in the middle thereof, there may be a measure wherein the power supply voltage is measured at the time of a start of a session, and the session is not started if the measure value is lower than a predetermined voltage thresh-

old. In the present embodiment, the controller 120 obtains a voltage value  $V_{BAT}$  in response to detection of a user input such as a predetermined manipulation applied to the flavor inhaler or the like 10, for example, long pressing of a button or the like, that represents a request for starting of heating, and determines that a session is not to be started (i.e., performs control for limiting heating operation in such a manner that the heater 130 does not start heating) if the obtained voltage value  $V_{BAT}$  is lower than a voltage threshold  $V_{th}$ .

[0045] In this regard, as explained above, the voltage value  $V_{BAT}$  is obtained by measuring a voltage level of a voltage pulse applied from the battery 140 to the heater 130. The above-explained application of a pulse to the heater 130 that is not for the purpose of heating should be performed at a minimum required frequency, since it consumes electric power and may raise the temperature unnecessarily. On the other hand, the power supply voltage at the time of a start of a session has a characteristic that it decreases as the battery's remaining quantity decreases. By focusing on the above characteristic, in the present embodiment, the controller 120 compares the battery's remaining quantity with a remaining-quantity threshold, before comparing the power supply voltage with the voltage threshold. Specifically, the controller 120 obtains, from the remaining quantity meter 142, a remaining-quantity value  $R_C$  representing a remaining quantity of electric power in the battery 140, in response to detection of a predetermined manipulation that is applied to the flavor inhaler or the like 10 and represents a request for starting of heating, and determines that a session is not to be started (i.e., performs control for limiting heating operation in such a manner that the heater 130 does not start heating) if the remaining-quantity value  $R_C$  is lower than a predetermined remaining-quantity threshold  $R_{th0}$ . In such a case, since the controller 120 can determine insufficiency of the remaining quantity before comparing the voltage value  $V_{BAT}$  with the voltage threshold  $V_{th}$ , it becomes possible to avoid waste of electric power and unnecessary raising of temperature due to measuring of the voltage.

[0046] If the remaining-quantity value  $R_C$  is larger than the remaining-quantity threshold  $R_{th0}$ , the controller 120 further compares the voltage value  $V_{BAT}$  with the voltage threshold  $V_{th}$ , explained above, and, if the voltage value  $V_{BAT}$  is larger than the voltage threshold  $V_{th}$ , determines that a session is to be started (i.e., makes the heater 130 start heating). By performing double-checking based on the remaining-quantity value and the voltage value as explained above, the probability of occurrence of an error in determinations due to a factor such as an error in a remaining-quantity measuring algorithm, temporary disturbance, individual differences between devices, or the like, is lowered, and stopping of a session in the middle thereof is prevented certainly.

[0047] In the following description, the above-explained checking function, that is performed in response to a predetermined manipulation that is applied to the flavor inhaler or the like 10 and represents a request for starting of heating, will be referred to as "start-of-session checking." Although an example in which double-checking based on the remaining-quantity value and the voltage value has been explained in relation to the present embodiment, it may be possible to perform checking based on either one of the remaining-quantity value and the voltage value in a different embodiment.

## 2-2 Prechecking

[0048] In the case that the start-of-session checking only is installed in the flavor inhaler or the like **10**, a user has to perform a manipulation for requesting a start of heating to know whether a sufficient quantity of electric power remains in the battery **140**. However, user is not allowed to perform such a manipulation in a place where inhaling of aerosol is not allowed. On the other hand, if the only way to invoke the above-explained start-of-session checking is to perform a manipulation that has no relation with starting of heating, a user has to perform, when starting a session, two manipulations, i.e., one for invoking the start-of-session checking and the other for starting heating, for avoiding stopping of the session in the middle thereof. Thus, in the present embodiment, the flavor inhaler or the like **10** is equipped with, in addition to the above-explained start-of-session checking that is triggered by a predetermined manipulation that is applied to the flavor inhaler or the like **10** and represents a request for starting of heating, a function for checking the remaining quantity of power in the battery **140**, wherein the function is that triggered by a different predetermined manipulation applied to the flavor inhaler or the like **10**. In the following description, the above different checking function is referred to as “prechecking.”

[0049] For convenience of explanation, the predetermined manipulation applied to the flavor inhaler or the like **10** for invoking the start-of-session checking is referred to as a first predetermined manipulation, and the predetermined manipulation applied to the flavor inhaler or the like **10** for invoking the prechecking is referred to as a second predetermined manipulation. The first predetermined manipulation corresponds to a manipulation for requesting starting of heating, and may be long pressing of a button (the front panel **102**). In such a case, the second predetermined manipulation may be any manipulation different from long pressing of the button, such as a manipulation for opening the slider **104**, short-pressing of the button, pounding of the button, or the like, for example.

[0050] In the prechecking, the controller **120** obtains the remaining-quantity value  $R_C$  from the remaining quantity meter **142** in response to the second predetermined manipulation, and, based on the obtained remaining-quantity value  $R_C$ , determines whether a quantity of electric power that is sufficient for consuming the flavor source or the like included in one tobacco stick **15** remains in the battery **140**. The determination is made by comparing the remaining-quantity value  $R_C$  with the above-explained remaining-quantity threshold  $R_{th0}$ . If the remaining-quantity value  $R_C$  is greater than the remaining-quantity threshold  $R_{th0}$ , the controller **120** may determine that a sufficient quantity of electric power remains in the battery **140**, and a single session can be completed without stopping the session in the middle thereof. On the other hand, if the remaining-quantity value  $R_C$  is smaller than the remaining-quantity threshold  $R_{th0}$ , the controller **120** may determine that the quantity remained is insufficient.

[0051] By making it possible to check, in response to a manipulation that is different from a manipulation for requesting starting of heating, whether battery's remaining quantity is insufficient, a user is allowed to know result of checking with respect to the remaining quantity of electric power when user is staying in any place other than a place where smoking is allowed.

[0052] In the prechecking, the controller **120** may determine whether the remaining quantity of electric power in the battery **140** is approximately a quantity that is sufficient for completing a single session at most, in addition to the above-explained determination with respect to insufficiency of the remaining quantity. The above determination is made by comparing the remaining-quantity value  $R_C$  with a further remaining-quantity threshold  $R_{th1}$ , in addition to comparison with the remaining-quantity threshold  $R_{th0}$  ( $R_{th1} > R_{th0}$ ). If the remaining-quantity value  $R_C$  is greater than the remaining-quantity threshold  $R_{th1}$ , the controller **120** may determine that a quantity of electric power that is sufficient for consuming flavor sources or the like included in two or more tobacco sticks **15** remains in the battery **140**. On the other hand, If the remaining-quantity value  $R_C$  is greater than the remaining-quantity threshold  $R_{th0}$  and lower than the remaining-quantity threshold  $R_{th1}$ , the controller **120** may determine that, although the quantity of electric power in the battery **140** is not insufficient at present, the quantity of electric power will be insufficient after one more tobacco stick **15** is consumed by a user.

## 2-3 Notification with Respect to Result of Checking

[0053] A user may be notified of, in various forms, check results of the above-explained prechecking and start-of-session checking. For example, the controller **120** may instruct the notifier **160** to provide, in respective forms, information with respect to the following five kinds of check results.

- [0054] Prechecking—Insufficient Quantity Remained
- [0055] Prechecking—One Stick Left
- [0056] Prechecking—Two or More Sticks Left
- [0057] Start-of-session checking—Insufficient Quantity Remained
- [0058] Start-of-session checking—Start heating

## (1) Prechecking—Insufficient Quantity Remained

[0059] In the prechecking, if  $R_C < R_{th0}$ , i.e., if the remaining-quantity value  $R_C$  indicates that a quantity of electric power that is sufficient for consuming a flavor source or the like included in the one tobacco stick **15** does not remain in the battery **140**, the notifier **160** notifies a user of insufficiency of the remaining quantity. The above notification with respect to insufficiency of the remaining quantity may be realized by emitting light having a warning color (for example, red) from an LED or blinking the LED, or generating, by a vibrator, vibration that is relatively strong or lasts for a relatively long time, for example, for making a user surely recognize necessity of charging.

## (2) Prechecking—One Stick Left

[0060] In the prechecking, if  $R_{th0} \leq R_C < R_{th1}$ , i.e., if the remaining-quantity value  $R_C$  indicates that, although the remaining quantity is not insufficient, only a quantity of electric power that allows consuming of a flavor source or the like included in the one tobacco stick **15** at most remains in the battery **140**, the notifier **160** notifies a user that the number of tobacco sticks **15** that can be used hereafter without charging is one. In terms of notification modes (for example, light emission patterns or a vibration patterns), the above notification is distinguished from the above-explained notification and notification with respect to Two or More

Sticks Left that will be explained later. As a result that a user receives the information of One Stick Left, the user can recognize, in advance, that it will become unable to inhale aerosol further if recharging is not performed after using one more tobacco stick.

### (3) Prechecking—Two or More Sticks Left

**[0061]** In the prechecking, if  $R_{th1} \leq R_C$ , i.e., if the remaining-quantity value  $R_C$  indicates that a quantity of electric power that is sufficient for consuming flavor sources or the like included in the two or more tobacco stick **15** remains in the battery **140**, the notifier **160** may notify a user of the quantity of electric power remaining in the battery **140** (the battery's remaining quantity). For example, the battery's remaining quantity may be reported in the form such as a battery level that is determined as a discrete value, a relative charging rate, the number of tobacco sticks which can be used hereafter without charging, or the like. For example, the battery level or the number of tobacco sticks left may be represented by the number of LEDs which are turned on to emit light, the number of times of blinking of an LED, or the number of times of vibration of the vibrator.

### (4) Start-of-Session Checking—Insufficient Quantity Remained

**[0062]** In the start-of-session checking, if  $R_C < R_{th0}$  or  $V_{BAT} < V_{th}$ , i.e., if the remaining-quantity value  $R_C$  or the voltage value  $V_{BAT}$  indicates that a quantity of electric power that is sufficient for consuming a flavor source or the like included in the one tobacco stick **15** does not remain in the battery **140**, the notifier **160** notifies a user of insufficiency of the remaining quantity. The above notification with respect to insufficiency of the remaining quantity may be performed in a mode that is the same as (or different from) that of the notification with respect to insufficiency of the remaining quantity in the prechecking.

### (5) Start-of-Session Checking—Start Heating

**[0063]** In the start-of-session checking, if  $R_{th0} \leq R_C$  and  $V_{th} < V_{BAT}$ , the notifier **160** notifies a user of starting of heating. The notification with respect to starting of heating may be performed by emitting light having a non-warning color (for example, white) from an LED or blinking the LED, or generating, by the vibrator, vibration that is relatively weak or lasts for a relatively short time. After the notification (or at the same time as the notification), the controller **120** makes the battery **140** start supplying of electric power to the heater **130**. Thereafter, the controller **120** may makes the notifier **160** perform further notification (for example, advance announcements with respect to an end of the preheating period and an end of the suction allowable period) at some points in time in the sessions that progress as explained by using FIG. **4**.

### (6) Other Notification Modes

**[0064]** With respect to the present embodiment, an example in which the light emitter **125** and/or the vibration generator **126** perform notification has been explained; however, the mode of notification is not limited to the above example. For example, the above explained notification may be realized by using, instead of light emission or vibration (or in addition thereto), sound outputted from a speaker or a message transmitted to an external device.

## 2-4 Example of Setting of Threshold

### (1) Basic Concept

**[0065]** The values of the voltage threshold  $V_{th}$ , the remaining-quantity threshold  $R_{th0}$  (the first remaining-quantity threshold), and the second remaining-quantity threshold  $R_{th1}$  explained above are determined in advance and stored in the memory **121**. For example, the voltage threshold  $V_{th}$  may be determined by adding, to the minimum operable voltage **55** that ensures normal operation of the circuit in the flavor inhaler or the like **10**, a margin for absorbing a quantity of voltage drop during a heating period (for example a difference between  $V_{mit,n}$  and  $V_{min,n}$ ) and voltage variation.

**[0066]** The remaining-quantity threshold  $R_{th0}$  may be determined by converting the value of the voltage threshold  $V_{th}$  to a remaining-quantity value, by using a characteristic graph representing relationship between the remaining quantity of the battery **140** (mAh) and the output voltage (at the time of a start of a session) (V). The remaining-quantity threshold  $R_{th1}$  may be determined by adding, to the remaining-quantity threshold  $R_{th0}$ , the quantity of electric power that is consumed when one tobacco stick **12** is used (i.e., when a single session is completed).

**[0067]** In this regard, in many cases, the battery's remaining quantity, that corresponds to the voltage threshold determined based on the operable voltage of the circuit, is greater than the quantity of electric power consumed for a single session. Accordingly, in this explanation, an example in which the voltage threshold  $V_{th}$  and the remaining-quantity threshold  $R_{th0}$  are determined based on the operable voltage of the circuit has been explained; however, the voltage threshold  $V_{th}$  and the remaining-quantity threshold  $R_{th0}$  are not limited to those in the above example, and they may be determined based on the electric power consumed for completing a single session.

### (2) Temperature-dependent Threshold

**[0068]** The inventors has been recognized that the "battery's remaining quantity-output voltage" characteristic may become different depending on battery temperature. Typically, if the battery's remaining quantities are the same with one another, there is a tendency that the output voltage decreases as the battery temperature decreases. Accordingly, in the present embodiment, it is supposed that the memory **121** stores, in relation to each of the remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$ , different set values associated with two or more temperature ranges, respectively.

**[0069]** FIG. **6** is an explanatory drawing which is used for explaining an example of setting of different thresholds for plural temperature ranges. In the example in FIG. **6**, the battery temperature  $T_{BAT}$  is categorized into three temperature ranges, specifically, less than 10 degrees Celsius (category C1), equal to or higher than 10 degrees Celsius to less than 20 degrees Celsius (category C2), and equal to or higher than 20 degrees Celsius (category C3). The remaining-quantity threshold  $R_{th1}$  is set to  $R_{th1\_low}$  if the battery temperature  $T_{BAT}$  is that in the category C1,  $R_{th1\_mid}$  if the battery temperature  $T_{BAT}$  is that in the category C2, and  $R_{th1\_high}$  if the battery temperature  $T_{BAT}$  is that in the category C3. Similarly, the remaining-quantity threshold  $R_{th0}$  is set to  $R_{th0\_low}$  if the battery temperature  $T_{BAT}$  is that in the category C1,  $R_{th0\_mid}$  if the battery temperature  $T_{BAT}$  is that in the category C2, and  $R_{th0\_high}$  if the battery

temperature  $T_{BAT}$  is that in the category C3. The following relationship holds for the above set values:

$$R_{th1\_high} < R_{th1\_mid} < R_{th1\_low}$$

$$R_{th0\_high} < R_{th0\_mid} < R_{th0\_low}$$

By selectively using different remaining-quantity thresholds in relation to the battery temperature  $T_{BAT}$  in the prechecking and the start-of-session checking in the manner explained above, highly reliable checking can be performed irrespective of change in environmental temperature (or the battery temperature that is affected by the environmental temperature).

**[0070]** In the example in FIG. 6, the voltage threshold  $V_{th}$  is set to a common value, irrespective of the categories of the battery temperature. In this regard, the voltage threshold  $V_{th}$  may also be set differently according to each of the categories of the battery temperature.

**[0071]** Here, a use case will be considered. It is supposed that the remaining-quantity thresholds are set in such a manner that  $R_{th1\_low}=400$  mAh,  $R_{th1\_mid}=380$  mAh,  $R_{th0\_low}=260$  mAh, and  $R_{th0\_mid}=240$  mAh, for example. Further, it is supposed that a user has the flavor inhaler or the like **10** in which the battery's remaining quantity is 250 mAh (i.e.,  $R_C=250$  mAh), and stays in an indoor place where the environment temperature is 15 degrees Celsius. In the present case, inhaling of aerosol is possible in the outdoors where the environment temperature is 5 degrees Celsius. A user first invokes the prechecking function by performing the second predetermined manipulation in the indoor place. The controller **120** compares the remaining-quantity value  $R_C$  with the remaining-quantity thresholds  $R_{th1\_mid}(=380$  mAh) and  $R_{th0\_mid}(=240$  mAh) since the battery temperature  $T_{BAT}$  is 15 degrees Celsius, and determines that only one more tobacco stick **15** can be used ( $R_{th0\_mid} < R_C < R_{th1\_mid}$ ). The notifier **160** notifies the user of the result of the determination. The user goes to the outdoors for enjoying the last one stick, and instructs, by performing the first predetermined manipulation, the flavor inhaler or the like **10** to start heating. At that time, due to change in the environmental temperature, the battery temperature  $T_{BAT}$  decreases to temperature lower than 15 degrees Celsius. If the remaining-quantity thresholds  $R_{th1\_mid}$  and  $R_{th0\_mid}$  that are the same as those shown above are used in the start-of-session checking in the present case, it will be determined that the battery's remaining quantity is not insufficient, and heating will be started. However, due to low temperature, there may be a risk that the device performs defective operation due to insufficient output of the battery **140** in the middle of a session started after a start of heating. In contrast to the above, in the present embodiment, the controller **120** takes the lowered battery temperature  $T_{BAT}$  into consideration, and compares, in the start-of-session checking, the remaining-quantity value  $R_C$  with the remaining-quantity thresholds  $R_{th1\_low}(=400$  mAh) and  $R_{th0\_low}(=260$  mAh). In such a case, since the remaining-quantity value  $R_C$  is less than  $R_{th0\_low}$ , the controller **120** determines that the remaining quantity is insufficient, and does not make the heater **130** start heating. Accordingly, stopping of a session in the middle thereof is prevented, and occurrence of the situation that the half-heated tobaccos tick **15** is wasted is avoided.

#### 2-5 Omission of Redundant Redetermination

**[0072]** The controller may store, in the memory, a flag that shows result of a determination, which was performed in the

prechecking or the start-of-session checking, with respect to insufficiency of the remaining quantity (hereinafter, an insufficient-remaining-quantity flag). Specifically, if the controller **120** has determined in each time of checking that a sufficient quantity of electric power does not remain in the battery **140** (Remaining quantity value  $R_C <$  Remaining-quantity threshold  $R_{th0}$ ), the controller **120** rewrites the value of the insufficient-remaining-quantity flag to a value representing insufficiency of the remaining quantity (for example, "1"). In this regard, it has been set such that the value of the insufficient-remaining-quantity flag being a value representing the remaining quantity being insufficient means the flavor inhaler or the like **10** being in the state that remaining quantity is insufficient, and it corresponds to that heating by the heater **130** is being restricted. Next, after the controller **120** has detected a start of charging of the battery **140**, the controller **120** restores the value of the insufficient-remaining-quantity flag to an original value (for example, "0") (that represents that the remaining quantity is not insufficient) if the controller **120** has determined that a predetermined condition(s) has been satisfied. In this regard, it has not been set such that the value of the insufficient-remaining-quantity flag being a value representing the remaining quantity being not insufficient means the flavor inhaler or the like **10** being in the state that remaining quantity is insufficient, and it corresponds to that restriction on heating by the heater **130** is being removed.

**[0073]** The controller **120** refers to the insufficient-remaining-quantity flag in response to the second predetermined manipulation that requests it to perform the prechecking, and, if the value thereof shows the remaining quantity being insufficient, determines, without performing a determination based on the remaining-quantity value  $R_C$ , that the battery's remaining quantity is insufficient; this is because the battery **140** has not yet charged sufficiently since it was determined once that the remaining quantity is insufficient.

**[0074]** Similarly, the controller **120** refers to the insufficient-remaining-quantity flag in response to the first predetermined manipulation that requests it to start heating, and, if the value thereof shows that the remaining quantity being insufficient, determines, without performing a determination based on the remaining-quantity value  $R_C$  and the voltage value  $V_{BAT}$ , that the battery's remaining quantity is insufficient; this is because the battery **140** has not yet charged sufficiently since it was determined once that the remaining quantity is insufficient. At that time, the controller **120** restricts heating in such a manner that starting of heating by the heater **130** in response to the first predetermined manipulation is prevented.

**[0075]** By performing flag management such as that explained above, redundant redetermination relating to the battery's remaining quantity can be omitted. As a result, the quantity of communication between the controller **120** and the remaining quantity meter **142** is reduced, and the load on the circuit is suppressed. Further, as a result, electric power consumed for measuring the remaining-quantity value  $R_C$  and the voltage value  $V_{BAT}$  is reduced, and, accordingly, even if the prechecking or the start-of-session checking is repeatedly performed, it becomes possible to lower the possibility that the remaining quantity of power in the battery **140** is extremely lowered to the extent that a permanent failure is decided.

## 2-6 Predetermined Condition for Removing Restriction on Heating

### 2-6-1 First Type

**[0076]** An example of the predetermined condition for removing restriction on heating is a condition that the remaining quantity in the battery **140** has increased by a quantity equal to or greater than a predetermined quantity  $\Delta R_C$ , compared with a reference that is a remaining-quantity value  $R_{C\_latest}$  that is a remaining-quantity value  $R_C$  measured before a start of charging of the battery **140**. For the above purpose, the controller **120** is able to store, in the memory **121** and as a remaining-quantity value  $R_{C\_latest}$ , a remaining-quantity value  $R_C$  that is measured when the prechecking or the start-of-session checking, that is performed before a start of charging of the battery **140**, is performed.

**[0077]** The predetermined quantity  $\Delta R_C$  may be a quantity that is sufficient for use to perform a determination relating to the remaining quantity in the battery **140**. Accordingly, the predetermined quantity  $\Delta R_C$  may be a quantity that is sufficient for completing, at least a single time, the start-of-session checking process or the prechecking process that will be explained later. A predetermined quantity  $\Delta R_C$  such as that explained above may be obtained experimentally in advance and stored in the memory **121** in advance.

**[0078]** The predetermined quantity  $\Delta R_C$  may be a quantity that is sufficient for consuming at least one tobacco stick **15**. Accordingly, the predetermined quantity  $\Delta R_C$  may be determined as Remaining-quantity threshold  $R_{th0}$ -Remaining-quantity value  $R_{C\_latest}$ , or a difference between the remaining-quantity threshold  $R_{th1}$  and the remaining-quantity value  $R_{th0}$ , i.e.,  $R_{th1}-R_{th0}$ . Further, the quantity that is sufficient for consuming at least one tobacco stick **15** may be determined based on the battery temperature  $T_{BAT}$ . That is, the predetermined quantity  $\Delta R_C$  may be determined as  $R_{th0\_low}-R_{C\_latest}$  or  $R_{th1\_low}-R_{th0\_low}$  if the battery temperature  $T_{BAT}$  belongs to the category C1,  $R_{th0\_mid}-R_{C\_latest}$  or  $R_{th1\_mid}-R_{th0\_mid}$  if the battery temperature  $T_{BAT}$  belongs to the category C2, and  $R_{th0\_high}-R_{C\_latest}$  or  $R_{th1\_high}-R_{th0\_high}$  if the battery temperature  $T_{BAT}$  belongs to the category C3.

**[0079]** The flavor inhaler or the like **10** may be configured in such a manner that a user is allowed to set the predetermined quantity  $\Delta R_C$ . The flavor inhaler or the like **10** may be configured in such a manner that a user is allowed to input the predetermined quantity  $\Delta R_C$  via the front panel **102** (the input unit) or the wireless I/F **127**. In a different configuration, the flavor inhaler or the like **10** may be configured to determine the predetermined quantity  $\Delta R_C$ , based on the number  $\Delta N$  of tobacco sticks **15** that is inputted by a user via the front panel **102** (the input unit) or the wireless I/F **127** and represents the number of tobacco sticks **15** that can be consumed. For example, the controller **120** may be configured to determine the predetermined quantity  $\Delta R_C$  as  $(R_{th1}-R_{th0})\Delta N$ .

**[0080]** The controller **120** may be configured to determine the predetermined quantity  $\Delta R_C$ , based on history of use of the flavor inhaler or the like **10** by a user. For example, the controller **120** may be configured in such a manner that it stores, as use history in the memory **121**, an average, minimum, or maximum number  $\Delta N_{statistical}$  of tobacco sticks **15** (hereinafter, "average-or-the-like number") that were consumed by a user after charging of the battery **140**, and determines the predetermined quantity  $\Delta R_C$  as  $(R_{th1}-$

$R_{th0})\Delta N_{statistical}$ , or determines it by performing machine learning, to allow consuming of the average-or-the-like number  $\Delta N_{statistical}$  of tobacco sticks **15**.

**[0081]** In this regard, it will be understood according to a configuration such as that explained above that the flavor inhaler or the like **10** can be configured to be able to rewrite the predetermined quantity  $\Delta R_C$ .

### 2-6-2 Second Type

**[0082]** A different example of the predetermined condition for removing restriction on heating is a condition that the battery **140** has been fully charged. In this regard, the method for judging whether the battery **140** has been fully charged can be selected arbitrarily. In the following description, non-limiting examples will be explained.

**[0083]** The controller **120** may determine that the battery **140** has been fully charged, when the remaining-quantity value  $R_C$  measured during charging has become that equal to or greater than a predetermined value. In a different configuration, the controller **120** may determine that the battery **140** has been fully charged, when the state of charge or the relative state of charge of the battery **140** measured during charging has become that equal to or greater than a predetermined value. Further, in a different configuration, the controller **120** may determine that the battery **140** has been fully charged, when the current flowing through the battery **140** during charging has become that equal to or smaller than a predetermined value, or when the voltage value  $V_{BAT}$  in the battery **140** during charging has become that equal to or greater than a predetermined value.

**[0084]** Further, it may be configured in such a manner that the flavor inhaler or the like **10** stores, in the memory **121** in advance, the above thresholds relating to degrees of deterioration of the battery **140**, and the controller **120** determines the above threshold based on the degree of deterioration of the battery **140** measured during charging. Further, it may be configured in such a manner that the flavor inhaler or the like **10** stores, in the memory **121** in advance, the above thresholds relating to the temperature  $T_{BAT}$  of the battery **140**, and the controller **120** determines the above threshold based on the temperature  $T_{BAT}$  of the battery **140** measured during charging.

**[0085]** In this regard, the battery **140** may temporarily become a state in which it is not determined that the battery **140** has been fully charged when charging of the battery **140** is continued after the battery **140** becomes a state in which it is determined that the battery **140** has been fully charged, due to that minor discharging and charging are repeated. Accordingly, the controller **120** may be configured in such a manner that, after it is determined once that the battery **140** has been fully charged, such a determination is maintained until charging is terminated.

### 2-6-3 Third Type

**[0086]** A further different example of the predetermined condition for removing restriction on heating is a condition that a predetermined time  $\Delta t$  or a time longer than the predetermined time  $\Delta t$  has elapsed since a start of charging, the controller **120** may be configured in such a manner that it determines the type of an external device connected to the flavor inhaler or the like for charging the battery **140**, and determines the predetermined time  $\Delta t$  based on the determined external-device type. For example, the controller **120**

is able to determine the external-device type based on the time change rate of the value of current flowing through the battery **140** during charging, and determine the predetermined time  $\Delta t$  in such a manner that an external device relating to a larger time change rate is associated with a shorter predetermined time  $\Delta t$ . The flavor inhaler or the like **10** may be configured to store, in the memory **121** in advance, the predetermined time  $\Delta t$  corresponding to each external-device type. Further, the flavor inhaler or the like **10** can be configured to be able to rewrite the predetermined time  $\Delta t$ .

### 2-7 Variations

[0087] Instead of obtaining the battery temperature  $T_{BAT}$  from the remaining quantity meter **142** in the first variation that has been explained with reference to FIG. **4** and relates to setting of thresholds relating to temperature ranges, the controller **120** may estimate the battery temperature from at least one of the date and the time of day at a point in time when checking is performed, and use a remaining-quantity threshold corresponding to the estimated temperature in the prechecking or the start-of-session checking, for judging whether a predetermined condition for removing restriction on heating has been satisfied. For example, with respect to each of the remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$ , the predetermined quantity  $\Delta R_C$ , and the above thresholds used for judging whether the battery **140** has been fully charged, the memory **121** may store a value that should be used in a warm season and a value that should be used in a cool season. In the above case, the controller **120** may read, from the memory **121** and according to whether the date when checking is performed belongs to the warm season or the cool season, different remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$ , a different predetermined quantity  $\Delta R_C$ , and different thresholds used for judging whether the battery **140** has been fully charged, and use them. In a different example, with respect to each of the remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$ , the predetermined quantity  $\Delta R_C$ , and the above thresholds used for judging whether the battery **140** has been fully charged, the memory **121** may store, in advance, a value that should be used in the daytime and a value that should be used in the nighttime. In the above case, the controller **120** may read, from the memory **121** and according to whether the time of day when checking is performed belongs to the daytime or the nighttime, different remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$ , a different predetermined quantity  $\Delta R_C$ , and different thresholds used for judging whether the battery **140** has been fully charged, and use them.

[0088] In the second variation, the controller **120** may estimate the battery temperature based on an output value from a thermistor arranged in a position close to the battery **140**, and use a remaining-quantity threshold corresponding to the estimated temperature in the prechecking or the start-of-session checking, for judging whether a predetermined condition for removing restriction on heating has been satisfied.

### 2-8 Other Checking

[0089] The controller **120** may perform, at arbitrarily selected timing, checking for confirming whether abnormality with respect to each of various states, other than the remaining quantity and the voltage of the battery **140**, in the

device has occurred. For example, one or more checking processes relating to the following checking items may be performed.

- [0090] The temperature of the heater **130** (Whether it represents abnormally high temperature)
- [0091] The temperature of the other part(s) (Whether it represents abnormally high temperature)
- [0092] The state of attaching of the front panel **102** (Whether it has been detached from the main body **101**)
- [0093] The state of the battery **140** monitored by the remaining quantity meter **142** (Whether abnormality has been detected)
- [0094] if the controller **120** detects an abnormality with respect to a checking item, the controller **120** makes the memory **121** store an error code representing the kind of detected abnormality, and the notifier **160** notifies a user of occurrence of the abnormality. If the abnormality remains, the controller **120** does not make the heater **130** start heating even if the first predetermined manipulation for requesting a start of heating is detected.

## 3 Flow of Process

[0095] In the present section, some examples of flows of processing performed in the above-explained flavor inhaler or the like **10** will be explained with reference to flow charts. In the following explanation, a processing step is abbreviated as S (step).

[0096] Regarding each flow chart, it should be reminded that processing steps for detecting abnormality, that have been explained in the above section, will not be shown in the figures for simplifying explanation. The abnormality detection may be performed periodically in a part of a regular control routine in the controller **120**, or in a part of the prechecking or the start-of-session checking. Also, a detection circuit separate from the controller **120** may detect an abnormality, and inform the controller **120** of the detected abnormality (for example, by using an interrupt signal).

### 3-1 Schematic Flow

[0097] FIG. **7** is a flow chart which shows an example of a schematic flow of a process performed by the flavor inhaler or the like **10** according to the present embodiment.

[0098] The controller **120** continuously monitors, in a standby state, a user input and the state of charging of the battery **140** (S101, S103, S113). A user input may be detected by the input detector **122**, the state detector **123**, or the suction detector **124**. For example, if the second predetermined action requesting performing of the prechecking is detected (S101-Yes), the process proceeds to S105. On the other hand, if the first predetermined action requesting a start of heating is detected (S103-Yes), the process proceeds to S107.

[0099] In S105, the controller **120** checks the remaining quantity of electric power in the battery **140** by performing the prechecking process, and makes the notifier **160** perform notification corresponding to a result of checking. A more tangible flow of the prechecking process performed herein will be further explained later.

[0100] In S107, the controller **120** performs the start-of-session checking process to determine whether the battery **140** is in a state wherein a session can be started. A more

tangible flow of the start-of-session checking process performed herein will be further explained later.

[0101] In the start-of-session checking process, if it is determined that a quantity of electric power that is sufficient for consuming a flavor source or the like included in an article does not remain in the battery 140 (S109-Yes), the controller 120 returns to the standby state without starting a session.

[0102] On the other hand, in the start-of-session checking process, if it is determined that a quantity of electric power that is sufficient for consuming a flavor source or the like included in an article remains in the battery 140 (S109-No), the controller 120 makes the heater 130 start heating, and performs temperature control for a single session for realizing a temperature profile 40 such as that explained with reference to FIG. 4, in S111. In the above session, the heater 130 receives supply of electric power from the battery 140, and heats a tobacco stick 15 including a flavor source or the like to generate aerosol. In a suction allowable period following a preheating period, a user is allowed to perform plural number of times of suction actions to inhale aerosol.

[0103] In the standby state, a user may connect the flavor inhaler or the like 10 to an external electric power supply via the connection I/F 128 for charging the battery 140. After a start of charging of the battery 140 is detected (S113-Yes), the controller 120 updates in S115 the value of the insufficient-remaining-quantity flag to “0” that means false based on a determination that a predetermined condition has been satisfied (S114-Yes). In this regard, in S115, if the value of the insufficient-remaining-quantity flag has already been set to “0,” the controller 120 does not need to perform any operation. In a different configuration, it may be configured in such a manner that a step for judging whether the insufficient-remaining-quantity flag is “0” (that is not shown in the figure) is added and performed just before S113 or S114, and the process proceeds to S113 or S114 if it is determined that the insufficient-remaining-quantity flag is not “0,” and the process returns to S101 otherwise. In any case, according to the steps including S113, S114, and S115, it will be understood that, if the insufficient-remaining-quantity flag is “1” instead of “0,” wherein “1” means true that will be explained later, and that heating by the heater 130 is restricted accordingly, the value of the insufficient-remaining-quantity flag becomes “0” based on a predetermined condition being satisfied after a start of charging of the battery 140, and the restriction on heating by the heater 130 is removed accordingly.

[0104] Further, the process performed by the flavor inhaler or the like 10 may comprise, in a part right after detecting of a start of charging of the battery 140 (S113-Yes), a step for activating a timer for measuring time elapsed since charging of the battery 140 is started (that is not shown in the figure). Further, the step for judging whether a predetermined condition has been satisfied (S114) may comprise a step for obtaining, from the remaining quantity meter 142, a temperature value  $T_{BAT}$  that represents the temperature of the battery 140. In a different configuration, the step for judging whether a predetermined condition has been satisfied (S114) may comprise a step for estimating the battery temperature as explained above, or reading the stored battery temperature from the memory 121 as explained above. The step for judging whether a predetermined condition has been satisfied (S114) may comprise a step for obtaining, from the

remaining quantity meter 142, the state of charge or the relative state of charge or the degree of deterioration of the battery 140.

### 3-2 Prechecking Process

[0105] FIG. 8 is a flow chart which shows an example of a flow of a prechecking process that may be performed in S105 in FIG. 7.

[0106] First, in S121, the controller 120 determines whether the insufficient-remaining-quantity flag shows “1” that means true. If the insufficient-remaining-quantity flag shows “1,” the process proceeds to S145. On the other hand, if the insufficient-remaining-quantity flag shows “0,” the process proceeds to S123.

[0107] In S123, the controller 120 obtains, from the remaining quantity meter 142, a remaining-quantity value  $R_C$  that represents the remaining quantity of electric power in the battery 142. In this regard, the prechecking process may include, in a part before or just before S123, a step for storing, in the memory 121, the remaining-quantity value  $R_C$  obtained in S123 as a remaining-quantity value  $R_{C\_latest}$  used in a determination with respect to a predetermined condition for removing a restriction on heating. A previously stored remaining-quantity value  $R_{C\_latest}$  may be updated by using a newly obtained remaining-quantity value  $R_{C\_latest}$ . Next, in S125, the controller 120 obtains, from the remaining quantity meter 142, temperature  $T_{BAT}$  that represents the temperature of the battery 140. Next, in S127, the controller 120 obtains, from the memory 121, remaining-quantity thresholds  $R_{th0}$  and  $R_{th1}$  that have been associated with a temperature range to which the temperature  $T_{BAT}$  belongs. For example, the controller obtains one of  $R_{th0\_low}$ ,  $R_{th0\_mid}$ , and  $R_{th0\_high}$ , and one of  $R_{th1\_low}$ ,  $R_{th1\_mid}$ , and  $R_{th1\_high}$  shown in FIG. 6.

[0108] Next, in S129, the controller 120 compares the remaining-quantity value  $R_C$  with the remaining-quantity threshold  $R_{th0}$ . In this step, if  $R_{th0} \leq R_C$  (S129-No), the controller 120 further compares, in S131, the remaining-quantity value  $R_C$  with the remaining-quantity threshold  $R_{th1}$ .

[0109] If it is determined as a result of comparison in S129 and S131 that  $R_{th1} \leq R_C$ , the controller 120 determines, in S133, that a quantity of electric power that is sufficient for sucking two or more tobacco sticks 15 remains in the battery 140. In such a case, in S135, the controller 120 makes the notifier 160 notify a user of a battery’s remaining quantity. For example, the notifier 160 makes a number of LEDs emit light, wherein the number in this case is that corresponds to the battery level or the number of tobacco sticks that can be consumed hereafter.

[0110] If it is determined as a result of comparison that  $R_{th0} \leq R_C < R_{th1}$ , the controller 120 determines, in S137, that a quantity of electric power that is sufficient for sucking a single tobacco stick 15 only remains in the battery 140. In such a case, in S139, the controller 120 makes the notifier 160 notify a user that only one more tobacco stick 15 can be sucked. For example, the notifier 160 makes an LED(s) emit light according to a preset characteristic light emission pattern, or makes a vibrator vibrate according to a characteristic vibration pattern.

[0111] If it is determined as a result of comparison that  $R_C < R_{th0}$ , the controller 120 determines, in S141, that a quantity of electric power that is sufficient for consuming a flavor source or the like included in one tobacco stick 15

does not remain in the battery 140. In such a case, in S143, the controller 120 updates the value of the insufficient-remaining-quantity flag to “1.” Next, in S145, the controller 120 makes the notifier 160 notify a user that the quantity of electric power remaining in the battery 140 is insufficient. For example, the notifier 160 makes an LED(s) emit light having a warning color for urging a user to perform recharging, or makes a vibrator vibrate according to a characteristic vibration pattern.

[0112] Further, a different example of the prechecking process may comprise, in place of or in addition to comparison between the remaining-quantity value  $R_C$  and the remaining-quantity threshold  $R_{th0}$  (S129), a step of determining that a sufficient quantity of electric power does not remain in the battery 140, based on comparison between a voltage threshold  $V_{th}$  and a voltage value  $V_{BAT}$  that is obtained by performing a voltage measuring process and represents an output voltage of the battery 140 (refer to the start-of-session checking process that will be explained later).

### 3-3 Start-of-Session Checking Process

[0113] FIG. 9 is a flow chart which shows an example of a flow of a start-of-session checking process that may be performed in S107 in FIG. 7.

[0114] First, in S151, the controller 120 determines whether the insufficient-remaining-quantity flag shows “1.” If the insufficient-remaining-quantity flag shows “1,” the process proceeds to S175. On the other hand, if the insufficient-remaining-quantity flag shows “0,” the process proceeds to S153.

[0115] In S153, the controller 120 obtains, from the remaining quantity meter 142, a remaining-quantity value  $R_C$  that represents the remaining quantity of electric power in the battery 142. In this regard, the start-of-session checking process may include, in a part after or right after S153, a step for storing, in the memory 121, the remaining-quantity value  $R_C$  obtained in S153 as a remaining-quantity value  $R_{C\_latest}$  used in a determination with respect to a predetermined condition for removing a restriction on heating. A previously stored remaining-quantity value  $R_{C\_latest}$  may be updated by using a newly obtained remaining-quantity value  $R_{C\_latest}$ . Next, in S155, the controller 120 obtains, from the remaining quantity meter 142, temperature  $T_{BAT}$  that represents the temperature of the battery 140. Next, in S157, the controller 120 obtains, from the memory 121, a remaining-quantity thresholds  $R_{th0}$  that has been associated with a temperature range to which the temperature  $T_{BAT}$  belongs. For example, the controller obtains one of  $R_{th0\_low}$ ,  $R_{th0\_mid}$ , and  $R_{th0\_high}$  shown in FIG. 6.

[0116] Next, in S159, the controller 120 compares the remaining-quantity value  $R_C$  with the remaining-quantity threshold  $R_{th0}$ . In this step, the process proceeds to S161 if  $R_{th0} \leq R_C$  (S159-No), and the process proceeds to S171 if  $R_C < R_{th0}$  (S159-Yes).

[0117] In S161, the controller 120 obtains a voltage threshold  $V_{th}$  from the memory 121. Next, in S163, the controller 120 obtains a voltage value  $V_{BAT}$  that represents an output voltage of the battery 140, by performing a voltage measuring process. A more tangible flow of the voltage measuring process performed herein will be further explained later. Next, in S165, the controller 120 compares the voltage value  $V_{BAT}$  with the voltage threshold  $V_{th}$ . In this

step, the process proceeds to S167 if  $V_{th} \leq V_{BAT}$  (S165-No), and the process proceeds to S171 if  $V_{BAT} < V_{th}$  (S165-Yes).

[0118] In S167, as a result of double checking that is based on the remaining-quantity value and the voltage value, the controller 120 determines that a session can be started, since a quantity of electric power that is sufficient to continue the session, without stopping the session in the middle thereof, remains in the battery 140. In such a case, the controller 120 makes the heater 130 start heating and performs temperature control of the single session, in S111 in FIG. 7.

[0119] On the other hand, in S171, the controller 120 determines that a sufficient quantity of electric power does not remain in the battery 140. In S173, the controller 120 updates the value of the insufficient-remaining-quantity flag to “1.” Thereafter, in S175, the controller 120 makes the notifier 160 notify a user that the quantity of electric power remaining in the battery 140 is insufficient. In such a case, the controller 120 returns to the standby state at the beginning of FIG. 7 without making the heater 130 start heating.

[0120] Further, in a different example of the start-of-session checking process, it may be possible to omit one of the step for comparing the remaining-quantity value  $R_C$  with the remaining-quantity threshold  $R_{th0}$  (S159) and the step for comparing the voltage value  $V_{BAT}$  with the voltage threshold  $V_{th}$  (S165), when determining that a sufficient quantity of electric power does not remain in the battery 140.

### 3-4 Voltage Measurement Process

[0121] FIG. 10 is a flow chart which shows an example of a flow of a voltage measuring process that may be performed in S163 in FIG. 9.

[0122] First, in S181, the controller 120 makes the battery 140 start outputting of voltage pulses to the heater 130, by turning on the first switch 131 and the second switch 132.

[0123] Next, in S183, the controller 120 measures an output voltage of the battery 140, by converting the level of the voltage inputted via the boosting circuit 141 by performing digital-analog conversion. The above measurement is performed plural times at constant time intervals.

[0124] Next, in S185, the controller 120 makes the battery 140 terminate outputting of voltage pulses to the heater 130, by turning off the first switch 131 and the second switch 132.

[0125] Next, in S187, the controller 120 calculates, as a voltage value  $V_{BAT}$  that is to be compared with a voltage threshold, an average value of the output voltages measured in S183.

## 4 Conclusion

[0126] In the above description, various embodiments and variations of the present disclosure have been explained with reference to FIGS. 1-10. In a flavor inhaler or the like which receives, by its heater, supply of electric power from an electric power supply to heat an article including a flavor source or the like to thereby generate flavor or the like, according to the technique of the present disclosure, if it is determined, in response to a user input for requesting a start of heating, that a quantity of electric power that is sufficient to consume a flavor source or the like included in a single article does not remain in an electric power supply, heating is not started, i.e., restricted, and, instead thereof, information representing insufficiency of the remaining quantity is reported to a user. In addition to the above, checking with respect to whether the sufficient quantity of electric power

remains in the electric power supply is performed in response to a user input that is different from the user input for requesting a start of heating, and a result of the checking is reported to a user. Accordingly, by simply performing a manipulation for requesting a start of heating, a user can start inhalation of aerosol without a risk of stopping of a session in the middle thereof, and know a check result with respect to the remaining quantity of electric power regardless of a place where the user stays. Further, if the remaining quantity of electric power is insufficient when heating is being restricted, the restriction is not removed, so that unnecessary repetition of the process for restricting heating is prevented.

[0127] The invention is not limited by the above-explained embodiments, and can be modified/changed in various ways within the scope of the gist of the invention.

[0128] Further, and finally, some of the characteristics of the present disclosure will be shown in the following description.

#### Characteristic 1

[0129] A device that is a flavor inhaler or an aerosol generation device, comprising:

[0130] a heater configured to heat a flavor source and/or an aerosol source;

[0131] a power supply for supplying electric power to the heater; and

[0132] a controller configured to restrict heating performed by the heater if a remaining quantity in the power supply is insufficient, wherein

[0133] the controller is further configured to remove, if the heating performed by the heater is restricted, the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.

#### Characteristic 2

[0134] The device as recited in Characteristic 1, wherein the controller is further configured to perform, in response to a first predetermined manipulation applied to the device to start heating performed by the heater, a first determination with respect to whether the remaining quantity in the power supply is insufficient.

#### Characteristic 3

[0135] The device as recited in Characteristic 2, wherein the first determination includes:

[0136] measuring the remaining quantity in the power supply; and/or

[0137] temporarily supplying electric power from the power supply to the heater to measure an operating voltage of the power supply.

#### Characteristic 4

[0138] The device as recited in Characteristic 2 or 3, wherein the controller is further configured to perform, in response to a second predetermined manipulation that is different from the first predetermined manipulation and is applied to the device, a second determination with respect to whether the remaining quantity in the power supply is insufficient.

#### Characteristic 5

[0139] The device as recited in Characteristic 4, wherein

[0140] the controller is further configured to set, if it is determined that the remaining quantity in the power supply is insufficient, an insufficient-remaining-quantity state; and

[0141] the second determination comprises:

[0142] determining whether the insufficient-remaining-quantity state has been set,

[0143] performing a measuring process if it is not determined that the insufficient-remaining-quantity state has been set, the measuring process comprising:

[0144] measuring the remaining quantity in the power supply; and/or

[0145] temporarily supplying electric power from the power supply to the heater to measure an operating voltage of the power supply; and

[0146] omitting the measuring process if it is determined that the insufficient-remaining-quantity state has been set.

#### Characteristic 6

[0147] The device as recited in any one of Characteristic 1-5, wherein the predetermined condition is a condition that the remaining quantity in the power supply has increased by a predetermined quantity or more with reference to the remaining quantity in the power supply that was measured before a start of charging of the power supply.

#### Characteristic 7

[0148] The device as recited in Characteristic 6, wherein the predetermined quantity is a quantity that is sufficient to perform a determination with respect to whether the remaining quantity in the power supply is insufficient.

#### Characteristic 8

[0149] The device as recited in Characteristic 6, wherein

[0150] the device is configured in such a manner that a base material comprising the flavor source and/or the aerosol source can be replaced, and

[0151] the predetermined quantity is a quantity that is sufficient for consuming at least one base material.

#### Characteristic 9

[0152] The device as recited in Characteristic 8, wherein the controller is further configured to determine, based on temperature of the power supply, the quantity that is sufficient for consuming the at least one base material.

#### Characteristic 10

[0153] The device as recited in Characteristic 6, configured to allow a user to set the predetermined quantity.

#### Characteristic 11

[0154] The device as recited in Characteristic 6, wherein the controller is further configured to determine, based on history of use of the device by a user, the predetermined quantity.

## Characteristic 12

[0155] The device as recited in Characteristics 6, configured in such a manner that the predetermined quantity is rewritable.

## Characteristic 13

[0156] The device as recited in any one of Characteristics 1-5, wherein the predetermined condition is a condition that the power supply has been fully charged.

## Characteristic 14

[0157] The device as recited in any one of Characteristics 1-5, wherein the predetermined condition is a condition that a predetermined time or more has elapsed since a start of charging of the power supply.

## Characteristic 15

[0158] The device as recited in Characteristic 14, wherein the controller is further configured to:

- [0159] determine a type of an external device connected to the device for charging the power supply; and
- [0160] determine the predetermined time based on the determined type of the external device.

## Characteristic 16

[0161] The device as recited in Characteristics 14, configured in such a manner that the predetermined time is rewritable.

## Characteristic 17

[0162] The device as recited in any one of Characteristics 1-16, wherein restricting by the controller the heating performed by the heater comprises restricting the heating so as to prevent the heater from starting the heating.

## Characteristic 18

[0163] A method performed by a controller in a device, the device being a flavor inhaler or an aerosol generation device, and comprising a heater configured to heat a flavor source and/or an aerosol source, and a power supply for supplying electric power to the heater, wherein the method comprises steps of:

- [0164] restricting heating performed by the heater if a remaining quantity in the power supply is insufficient; and
- [0165] removing the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.

## Characteristic 19

[0166] A program causing a controller in a device to perform steps, the device being a flavor inhaler or an aerosol generation device, and comprising a heater configured to heat a flavor source and/or an aerosol source, and a power supply for supplying electric power to the heater, wherein the steps comprises:

- [0167] restricting heating performed by the heater if the remaining quantity in the power supply is insufficient; and

[0168] removing the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.

## REFERENCE SIGNS LIST

- [0169] 10 Flavor inhaler or the like
- [0170] 15 Tobacco stick (Article)
- [0171] 101 Main body
- [0172] 102 Front panel
- [0173] 103 Display window
- [0174] 104 Slider
- [0175] 106 Opening
- [0176] 107 Insertion hole
- [0177] 120 Controller
- [0178] 121 Memory
- [0179] 122 Input detector
- [0180] 123 State detector
- [0181] 130 Heater
- [0182] 140 Battery (Power supply)
- [0183] 142 Remaining quantity meter
- [0184] 160 Notifier

1. A device that is a flavor inhaler or an aerosol generation device, comprising:
  - a heater configured to heat a flavor source and/or an aerosol source;
  - a power supply for supplying electric power to the heater; and
  - a controller configured to restrict heating performed by the heater if a remaining quantity in the power supply is insufficient, wherein the controller is further configured to remove, if the heating performed by the heater is restricted, the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.
2. The device as recited in claim 1, wherein the controller is further configured to perform, in response to a first predetermined manipulation applied to the device to start heating performed by the heater, a first determination with respect to whether the remaining quantity in the power supply is insufficient.
3. The device as recited in claim 2, wherein the first determination includes:
  - measuring the remaining quantity in the power supply; and/or
  - temporarily supplying electric power from the power supply to the heater to measure an operating voltage of the power supply.
4. The device as recited in claim 2, wherein the controller is further configured to perform, in response to a second predetermined manipulation that is different from the first predetermined manipulation and is applied to the device, a second determination with respect to whether the remaining quantity in the power supply is insufficient.
5. The device as recited in claim 4, wherein the controller is further configured to set, if it is determined that the remaining quantity in the power supply is insufficient, an insufficient-remaining-quantity state; and the second determination comprises:
  - determining whether the insufficient-remaining-quantity state has been set,

- performing a measuring process if it is not determined that the insufficient-remaining-quantity state has been set, the measuring process comprising: measuring the remaining quantity in the power supply; and/or temporarily supplying electric power from the power supply to the heater to measure an operating voltage of the power supply; and omitting the measuring process if it is determined that the insufficient-remaining-quantity state has been set.
- 6.** The device as recited in claim **1**, wherein the predetermined condition is a condition that the remaining quantity in the power supply has increased by a predetermined quantity or more with reference to the remaining quantity in the power supply that was measured before a start of charging of the power supply.
- 7.** The device as recited in claim **6**, wherein the predetermined quantity is a quantity that is sufficient to perform a determination with respect to whether the remaining quantity in the power supply is insufficient.
- 8.** The device as recited in claim **6**, wherein the device is configured in such a manner that a base material comprising the flavor source and/or the aerosol source can be replaced, and the predetermined quantity is a quantity that is sufficient for consuming at least one base material.
- 9.** The device as recited in claim **8**, wherein the controller is further configured to determine, based on temperature of the power supply, the quantity that is sufficient for consuming the at least one base material.
- 10.** The device as recited in claim **6**, configured to allow a user to set the predetermined quantity.
- 11.** The device as recited in claim **6**, wherein the controller is further configured to determine, based on history of use of the device by a user, the predetermined quantity.
- 12.** The device as recited in claim **6**, configured in such a manner that the predetermined quantity is rewritable.
- 13.** The device as recited in claim **1**, wherein the predetermined condition is a condition that the power supply has been fully charged.
- 14.** The device as recited in claim **1**, wherein the predetermined condition is a condition that a predetermined time or more has elapsed since a start of charging of the power supply.
- 15.** The device as recited in claim **14**, wherein the controller is further configured to:  
determine a type of an external device connected to the device for charging the power supply; and  
determine the predetermined time based on the determined type of the external device.
- 16.** The device as recited in claim **14**, configured in such a manner that the predetermined time is rewritable.
- 17.** The device as recited in claim **1**, wherein restricting by the controller the heating performed by the heater comprises restricting the heating so as to prevent the heater from starting the heating.
- 18.** A method performed by a controller in a device, the device being a flavor inhaler or an aerosol generation device, and comprising a heater configured to heat a flavor source and/or an aerosol source, and a power supply for supplying electric power to the heater, wherein the method comprises steps of:  
restricting heating performed by the heater if a remaining quantity in the power supply is insufficient; and  
removing the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.
- 19.** A non-transitory computer readable medium storing a program causing a controller in a device to perform steps, the device being a flavor inhaler or an aerosol generation device, and comprising a heater configured to heat a flavor source and/or an aerosol source, and a power supply for supplying electric power to the heater, wherein the steps comprises:  
restricting heating performed by the heater if the remaining quantity in the power supply is insufficient; and  
removing the restriction based on a predetermined condition having been satisfied after a start of charging of the power supply.

\* \* \* \* \*