




(86) Date de dépôt PCT/PCT Filing Date: 2013/05/17
 (87) Date publication PCT/PCT Publication Date: 2013/11/28
 (45) Date de délivrance/Issue Date: 2019/12/31
 (85) Entrée phase nationale/National Entry: 2014/11/18
 (86) N° demande PCT/PCT Application No.: GB 2013/051286
 (87) N° publication PCT/PCT Publication No.: 2013/175184
 (30) Priorité/Priority: 2012/05/21 (GB1208920.7)

(51) Cl.Int./Int.Cl. *B01D 35/06* (2006.01),
B01D 35/02 (2006.01), *E03B 7/07* (2006.01),
F16L 55/24 (2006.01), *F24D 19/00* (2006.01),
F24H 9/00 (2006.01)
 (72) Inventeurs/Inventors:
 ADEY, CHRISTOPHER, GB;
 DOWNIE, SIMON, GB
 (73) Propriétaire/Owner:
 ADEY HOLDINGS (2008) LIMITED, GB
 (74) Agent: PERRY + CURRIER

(54) Titre : DISPOSITIF SEPARATEUR CYCLONIQUE POUR UN SYSTEME DE CHAUFFAGE
 (54) Title: CYCLONIC SEPARATOR DEVICE FOR HEATING SYSTEM

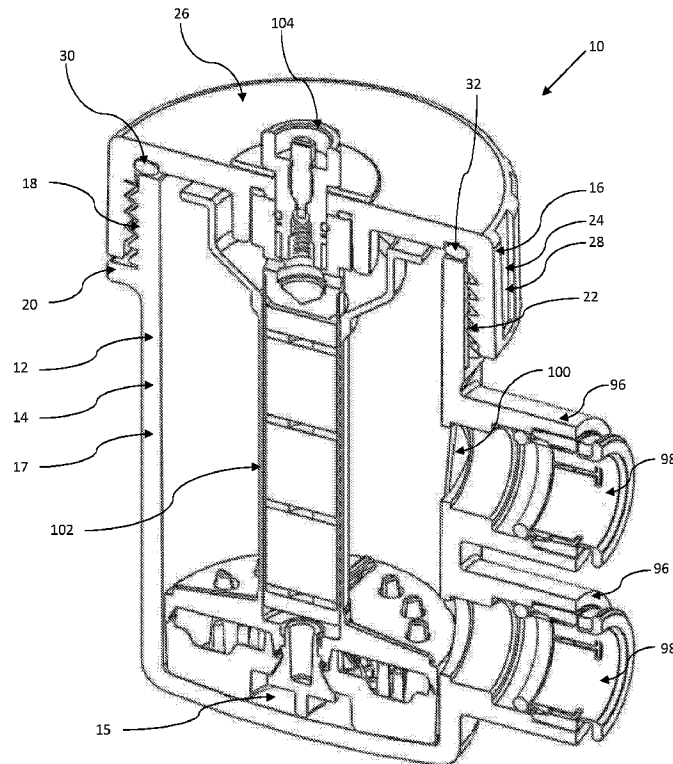

(57) Abrégé/Abstract:

A separator device (10) is provided for removing particles from suspension in a fluid comprising: a housing (12), having first and second ports (96) for ingress and egress of fluid into and out of the housing, the first and second ports being on the same vertical line; and at least one separation chamber for separating solid particles from the fluid.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2013/175184 A1(43) International Publication Date
28 November 2013 (28.11.2013)

(51) International Patent Classification:

B01D 21/26 (2006.01) *B04C 3/06* (2006.01)
B03C 1/28 (2006.01) *B01D 21/00* (2006.01)
B04C 5/04 (2006.01) *B01D 21/24* (2006.01)
F24D 19/00 (2006.01) *B01D 29/90* (2006.01)

(21) International Application Number:

PCT/GB2013/051286

(22) International Filing Date:

17 May 2013 (17.05.2013)

(25) Filing Language:

English

(26) Publication Language:

English


(30) Priority Data:

1208920.7 21 May 2012 (21.05.2012) GB

(71) Applicant: **ADEY HOLDINGS (2008) LIMITED**
[GB/GB]; UK Head Office, Gloucester Road, Cheltenham
GL51 8NR (GB).(72) Inventors: **ADEY, Christopher**; St Pierre, Oakley Road,
Battledown, Cheltenham, Gloucestershire GL52 6PA (GB).**DOWNIE, Simon**; 29 Ewlyn Road, Cheltenham,
Gloucestershire GL53 7PB (GB).(74) Agent: **GAMES, Robert**; Albright Patents LLP, Eagle
Tower, Montpellier Drive, Cheltenham, Gloucestershire
GL50 1TA (GB).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: CYCLONIC SEPARATOR DEVICE FOR HEATING SYSTEM

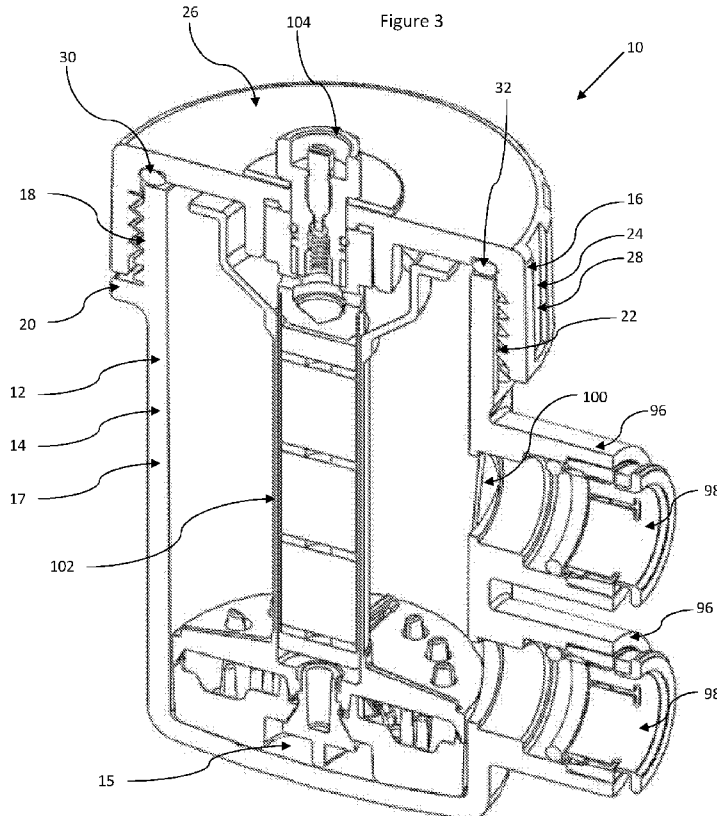

(57) Abstract: A separator device (10) is provided for removing particles from suspension in a fluid comprising: a housing (12), having first and second ports (96) for ingress and egress of fluid into and out of the housing, the first and second ports being on the same vertical line; and at least one separation chamber for separating solid particles from the fluid.

WO 2013/175184 A1

WO 2013/175184 A1 

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, **Published:**
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, — *with international search report (Art. 21(3))*
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

CYCLONIC SEPARATOR DEVICE FOR HEATING SYSTEM

The present invention relates to a separator device suitable for separating particles from a fluid flow and particularly but not exclusively to a separator device for use in a hydronic heating system.

BACKGROUND TO THE INVENTION

In a typical heating system, water is circulated by a pump through several radiators, possibly a heat exchanger in a hot water cylinder, and a boiler. During circulation, solid particles (for example, iron oxide) which have come loose from the interior of the radiators and pipework can become suspended in the water. Solid particles can also be present as contaminants in the water originally supplied to the system, and the water can become contaminated by dirt where an open expansion tank forms part of the system. These solid particles can cause malfunction if they build up in the boiler or pump, and reduce the effectiveness of the heating system by restricting the flow of water and clogging radiators. The water in a heating system should therefore be continually cleaned to remove solid particles as far as possible.

Various devices are known for removing particles from suspension in a flow of water. Typically these devices include a magnet for attracting ferrous particles, and may also include mechanical separation means for removing nonmagnetic particles. Nonmagnetic particles may be removed by causing a portion of the water to flow through a separation chamber, within which obstruction means are disposed to slow the flow. Particles will then fall out of suspension and become trapped in cavities, which can easily be cleaned during an annual service. Only a portion of the flow is slowed, so that the overall flow rate in the heating circuit is not significantly reduced. A device of this type is disclosed in the applicant's co-pending applications GB2486173 and GB2486172.

These prior devices typically consist of a cylindrical housing, a magnet disposed within the housing along its longitudinal axis, and a mechanical separation chamber disposed at a lower end of the housing. An inlet and an outlet are provided on a side wall of the housing, typically one above the other. The inlet and outlet are configured

to set up a swirl of water within the housing. In order to achieve this, the inlet and outlet are typically tangential or substantially tangential to the cylindrical housing. The inlet and outlet are disposed on different tangents of the cylindrical housing, and so are offset from each other both vertically and horizontally when the cylindrical housing is installed in an upright position, with the longitudinal axis of the housing on a vertical line. In use, the incoming flow will immediately come into contact with the inner surface of the curved wall of the housing, and will experience a force perpendicular to the surface in the direction of the centre of the cylinder. The motion of fluid within the housing is therefore substantially circular.

10

Due to the very tight space within which a device may need to be installed, particularly if it is being retrofitted to an existing installation, tangential inlet and outlet ports may impose an unwelcome constraint upon the installer. Such devices typically need to be fitted to a straight vertical pipe, and the installer will therefore need to install right angle connectors and horizontal pipe portions in order to accommodate the tangential ports which are offset vertically and horizontally. In some cases it may simply not be possible to fit a device of suitable capacity with tangential or substantially tangential inlets.

20 It is an object of this invention to provide a separator device which reduces or substantially obviates the above mentioned problems.

STATEMENT OF INVENTION

25 According to the present invention, there is provided a separator device for removing particles from suspension in a fluid, comprising:

a housing, having a central longitudinal axis and first and second ports for ingress and egress of fluid into and out of the housing; and

at least one separation chamber for separating solid particles from the fluid,

30 the first and second ports being centrally disposed on an axis and extending perpendicularly from the housing, the axis running parallel to the central longitudinal axis of the housing, and at least one deflector being provided in or adjacent to at least one of the first and second ports, for setting up a flow of fluid in circular motion about the central longitudinal axis.

The separation chamber may be substantially the entire interior of the housing, and may include a magnet for removing magnetic particles from the fluid. Further separation chambers may be provided. For example, non-magnetic separation chamber(s) may be provided near the top and/or bottom ends of the housing.

Vertically in-line ports enable ease of fitting to a heating circuit. A section may be removed from the flow or return pipe of the heating circuit, and the open ends of the flow or return pipe connected to the first and second ports of the device via right-angle connectors. Since the first and second ports are on the same vertical line, no extra pipework will be required, and only one right-angle connector is needed on each of the inlet and outlet ports.

A circular flow of fluid enables effective separation of magnetic and nonmagnetic particles, by increasing the time for which a particular portion of fluid remains within the housing, without substantially affecting the fluid dynamics in the heating circuit, for example by reducing fluid pressure between inlet and outlet.

First and second deflectors may be provided adjacent to each of the first and second ports.

Providing deflectors on both of the ports allows either to be used as the inlet, providing the installer with additional flexibility when installing the device.

The deflector or deflectors may be angled from the vertical. The or each deflector may be angled to direct flow towards the end of the housing closest to the port adjacent to which the deflector is disposed. Angled deflectors deflect fluid not only into a swirl, but also towards separation chamber(s) disposed at end(s) of the housing. This increases the effectiveness of separation.

30

The deflector or deflectors may be moulded into the housing.

The housing may have a curved surface, and may be substantially cylindrical.

At least one port may be circular, and the deflector adjacent to that port, where provided, may have an extent substantially one quarter of the diameter of the port.

DESCRIPTION OF THE DRAWINGS

5

For a better understanding of the present invention, and to show more clearly how it may be carried into effect, reference will now be made, by way of example only, to the accompanying drawings, in which:

10 Figure 1 shows a perspective view of a separator device according to the present invention;

Figure 2 shows a front view of the separator device of Figure 1;

15 Figure 3 shows a perspective cut-away view of the separator device of Figure 1.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Referring to Figures 1 to 3, a separator device for separating particles from suspension
20 in a fluid is indicated generally at 10. A housing 12 is provided, comprising of a body portion 14 and a removable closure portion 16. The body portion is substantially a cylindrical shell open at the upper end, that is, the body portion 14 comprises a floor 15 and a wall 17. The upper end of the wall 17 of the body portion 14 is formed with a male thread 18 and, directly below the male thread, a circumferential rim 20.

25

The closure portion 16 is in the form of a screw-on cap comprising a circular planar roof 26 and a circumferential wall 28 extending below the edge of the roof. A thread 22 is formed on the interior surface of the wall 28, for co-operating with the male thread 18 at the upper end of the wall 17 of the housing body portion 14. A plurality
30 of recesses 24 are provided spaced uniformly around the outside of the wall 28 of the closure portion 16 in order to assist a user in gripping the closure portion 16 to effect closure and removal.

A recess 30 is provided around the edge of the underside of the roof 26 of the closure portion 16. A rubber O-ring 32 sits within the recess 30, around half of the height of the O-ring 32 extending below the underside of the roof 26. When the closure portion 16 is screwed onto the body portion 14 of the housing 12, the O-ring 32 is compressed
5 between the roof 26 of the closure portion 16 and the upper edge of the wall 17 of the housing body portion 14, forming a watertight seal.

An inlet and an outlet are provided as first and second hollow cylindrical sockets 96 in the wall 17 of the housing body 14, each extending perpendicular to the same tangent
10 of the cylindrical body, that is, the sockets extend outwardly from the wall of the housing 14 and are parallel to each other on a diameter of the housing 12. John Guest Speedfit (RTM) connectors 98 are provided within the sockets 96, allowing easy fitting to a heating circuit.

15 The parallel inlet and outlet sockets 96 on the same diameter enable easy fitting to a heating circuit, since the inlet and outlet will be in the same straight vertical line when the device is installed.

Deflectors 100, best shown in Figure 2, are provided within each of the sockets 96 in
20 the cylindrical housing 12. The deflectors 100 block a portion of each socket 96, directing the flow on the inlet to one side and resulting in a swirling flow within the housing 12. The edges of the deflectors 100 are at an angle of around 10° from the vertical, so as to divert water slightly vertically as well as horizontally. Providing deflectors 100 in both sockets 96 allows either to be used as the inlet. The deflectors
25 100 are moulded as an integral part of the housing 12.

A bleed valve 104 is provided in the roof 26 of the closure portion 16 of the housing
12. The bleed valve may be used for dosing with an inhibitor as described in the Applicant's granted patent EP1626809.

30

A removable insert 102 comprising a sleeve for a magnet and a separation chamber for separating nonmagnetic particles from the flow is provided within the housing. The removable insert 102 is described in the Applicant's granted patent

GB2486172.

5 The deflectors 100 create a swirling flow of water, which is necessary to make magnetic and nonmagnetic separation effective. This is achieved with in-line rather than horizontally-offset tangential inlet and outlet ports, providing the installer with a device which is substantially easier to fit.

10 The embodiments described above are provided by way of example only, and various changes and modifications will be apparent to persons skilled in the art without departing from the scope of the present invention as defined by the appended claims.

Claims:

1. A filter for a hydronic heating system, the filter comprising:

a cylindrical housing, having a central longitudinal axis and first and second ports for ingress and egress of fluid into and out of the housing; and

at least one separation chamber for separating solid particles from the fluid,

the first and second ports being arranged in parallel and extending in the same direction, perpendicularly from the cylindrical wall of the cylindrical housing, and at least one deflector being provided in at least one of the first and second ports, the or each deflector being angled to direct flow towards an end of the housing closest to its respective port, for setting up a flow of fluid in circular motion about the central longitudinal axis.
2. A filter as claimed in claim 1, in which first and second deflectors are provided within the respective first and second ports.
3. A filter as claimed in claim 1 or claim 2, in which each of the ports has a deflector angled to direct flow towards an end of the housing closest to that port.
4. A filter as claimed in any one of claims 1 to 3, in which at least one deflector is moulded into the housing.
5. A filter as claimed in any one of claims 1 to 4, in which at least one port is circular.
6. A filter as claimed in claim 5, in which at least one deflector has an extent substantially one quarter of the diameter of the adjacent port.

7. A filter as claimed in any one of claims 1 to 6, in which the first and second ports are in the form of hollow cylindrical sockets.

Figure 1

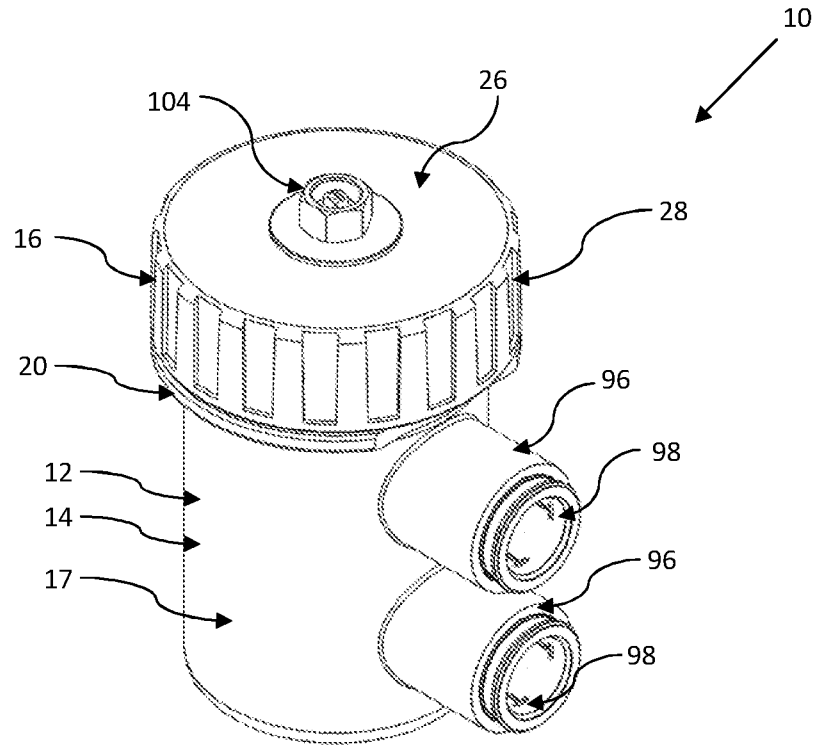


Figure 2

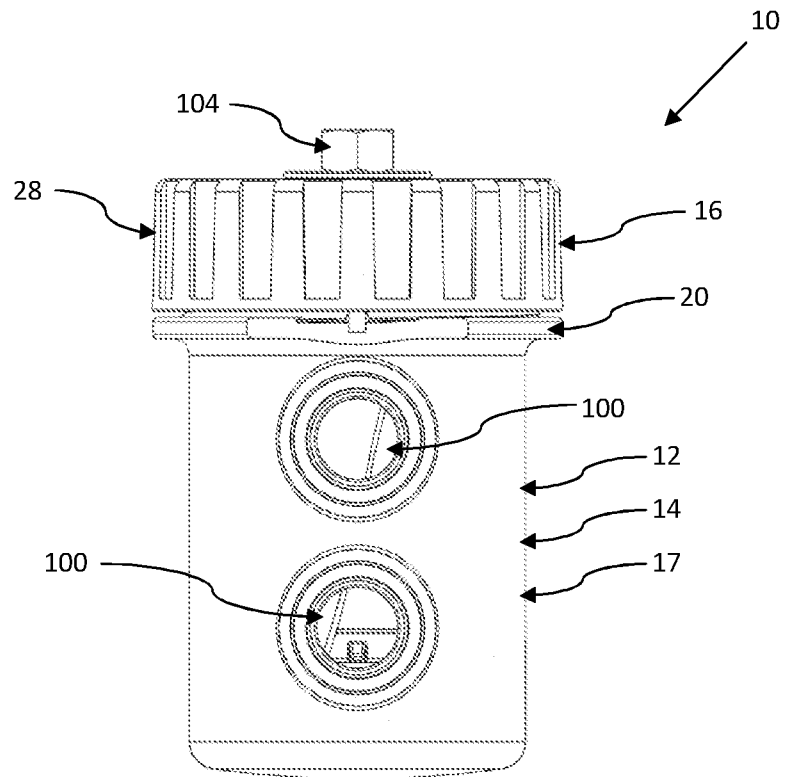


Figure 3

