

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Optical recording medium and recording device

(51)⁶ International Patent Classification(s)
G11B 7/007 (2006.01) 20060101ALI2005111
G11B 7/00 (2006.01) 0BMEP **G11B**
G11B 20/12 (2006.01) 20/12
G11B 20/14 (2006.01) 20060101ALI2006072
G11B 7/007 2BMEP **G11B**
20060101AFI2005122 20/14
0BMJP G11B 20060101ALI2005122
7/00 0BMJP
PCT/JP2003/009300

(21) Application No: 2003252233 (22) Application Date: 2003.07.23

(87) WIPO No: WO04/017310

(30) Priority Data

(31) Number	(32) Date	(33) Country
2002-234476	2002.08.12	JP
2003-19159	2003.01.28	JP

(43) Publication Date : 2004.03.03

(43) Publication Journal Date : 2004.04.22

(71) Applicant(s)
Pioneer Corporation

(72) Inventor(s)
Tomita, Yoshimi

(74) Agent/Attorney
Watermark Patent & Trademark Attorneys, Level 2 302 Burwood Road, Hawthorn, VIC, 3122

(56) Related Art
US 5949750
WO 02052558
US 5850382



AZ, BY, KG, KZ, MD, RU, TI, TM, ヨーロッパ特許
(AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,
GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR),
OAPI 特許 (BE, BI, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NL, SN, TD, TG).

2文字コード及び他の略語については、定期発行される
各PCTガゼットの巻頭に掲載されている「コードと略語
のガイダンスノート」を参照。

添付公開書類:
— 國際調査報告書

(57) 要約: 各々が主データに対する誤り訂正の単位となるブロック分の主データを有しそのブロック分の主データを所定数に分割した主データ片毎に主データ用識別データが付加された構成を有する複数のデータブロック領域と、複数のデータブロック領域間に挿入された疑似データによるリンク領域とがトラック上に備えられ、トラック間において隣接する疑似データの記録パターンが互いに異なる光学式記録媒体。記録媒体にデータブロック領域と、リンク領域とを形成する記録装置。

OPTICAL RECORDING MEDIUM AND RECORDING APPARATUS

TECHNICAL FIELD

The present invention relates to an optical recording medium and to a recording apparatus for forming the recording medium.

BACKGROUND ART

On a recordable optical recording medium such as DVD-R and DVD-RW, when new information data is written behind a location that has already been written, a linking region is formed at that junction portion. Synchronization data for reading the information data written into a data region, which follows the linking region, is written into the linking region.

However, the fact that linking regions are formed on such a recordable recording medium leads to a problem that there is a possibility of incompatibility in the recording format with read-only recording media such as DVD-ROMs that are not recordable.

It is desirable to provide a read-only optical recording medium that is compatible with recordable optical recording media in the recording format and, apparatus and method for forming the read-only optical recording medium.

DISCLOSURE OF THE INVENTION

According to one aspect, the present invention provides an optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking region inserted into a boundary portion between said unit block regions, in which a sync code having a pattern different from that of said sync code in said, unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is scrambled, so that recording patterns of said linking data are different between adjacent tracks.

According to another aspect, the present invention provides a recording apparatus for recording information data onto a track of an optical recording medium, including:

a block recording means for forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking data recording means for inserting a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, into a boundary portion between said unit block regions;

wherein said linking data recording means records linking data generated by scrambling a predetermined data piece onto said linking region, so that recording patterns of said linking data are different between adjacent tracks.

According to another aspect, the present invention provides a recording method for recording information data onto a track of an optical recording medium, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data generated by scrambling a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

According to another aspect, the present invention provides a method for producing an optical recording medium having recorded information data on a track thereof, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are

recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data generated by scrambling a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

According to another aspect, the present invention provides an optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data are recorded in a plurality of frames to which a sync code is added respectively; and

a linking region inserted into a boundary portion between said unit block regions, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is generated by exclusive o-ring of a data piece produced by bit-shifting using address information as an initial value and a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

3a

This page has deliberately been left blank

2003252233 26 Aug 2008

"Comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof."

BRIEF DESCRIPTION OF DRAWINGS

Fig 1 is a block diagram showing the configuration of a recording apparatus according to the present invention.

Fig 2 is a block diagram illustrating the configuration of a random value generator in the apparatus in Fig 1.

Fig 3 is a diagram showing the data structure of one ECC block.

Fig 4 is a diagram showing the data structure of the recording signal for one sector.

Fig 5 is a diagram showing a linking region between ECC blocks.

Fig 6 is a diagram showing the position of each linking region on a track.

Fig 7 is a diagram showing linking regions closely positioned between adjacent track portions.

Fig 8 is a diagram showing a linking region including address data that is arranged between ECC blocks.

Fig 9 is a block diagram of the configuration of a recording apparatus as another embodiment of the present invention.

Fig 10 is a block diagram of the configuration of a recording apparatus as another embodiment of the present invention.

Fig 11 is a block diagram of the configuration of a recording

apparatus as another embodiment of the present invention.

Detailed Disclosure of the Invention

The present invention will be described below in more detail with reference to the accompanying drawings in accordance with the embodiments.

Fig. 1 shows an original disk recording apparatus according to the present invention. The recording apparatus records information onto an original recording disk 1 for DVD-ROMs, and includes a master clock generator 11, a PLL circuit 12, a recording signal generation circuit 13, an optical modulator 14, a recording actuator 15, a spindle motor 16, a servo controller 17, and a main controller 18.

The master clock generator 11 generates a master clock signal, and supplies the master clock signal to the PLL circuit 12 and the servo controller 17. The servo controller 17 is supplied with the master clock signal, and with a frequency signal FG indicating a rotation frequency from the spindle motor 16. The servo controller 17 carries out rotation control for the spindle motor 16 such that the frequency signal FG is synchronized with the master clock signal, that is, it carries out spindle servo control.

The PLL circuit 12 generates a recording clock signal based on the master clock signal. The recording signal generation circuit 13 includes a data generation portion 20, an ECC block generation circuit 21, a random value generator 22, a timing circuit 23, a switching circuit 24, a modulator 25, and a synchronization adding circuit 26. The data generation portion

20 outputs information data (main data) to be recorded and address data corresponding to the information data. The ECC block generation circuit 21 outputs sector data adopted to ECC (error correction code) blocks based on the information data and the address data. The random value generator 22 generates random data for linking regions. The timing circuit 23 generates a timing signal for each ECC block in response to the recording clock signal. The switching circuit 24 selectively outputs one of information data in the ECC block and the random data in accordance with the timing signal. The modulator 25 performs 8-16 modulation for data output from the switching circuit 24. The synchronization adding circuit 26 adds a synchronization code having a 14T synchronization pattern to the modulated data so as to output a recording signal. The main controller 18 controls the components 20 to 26 inside the recording signal generation circuit 13 in synchronization with the output clock of the PLL circuit 12.

The optical modulator 14 modulates laser light in accordance with the recording signal output from the recording signal generation circuit 13, and supplies the modulated laser light to a recording actuator 15. The recording actuator 15 irradiates the laser light onto the recording portion of the original recording disk 1 rotated by the spindle motor 16, thus carrying out exposure.

As shown in Fig. 2, the random value generator 22 includes a memory 31, eleven D flip-flop circuits 32 to 42, and one adder 44. An initial value of eleven bits is previously stored in the

memory 31, and each one bit is supplied to the D flip-flops circuits 32 to 42 in response to a command from the main controller 18 at the beginning of recording of the original recording disk 1. Each of the D flip-flops circuits 32 to 42 has a preset input, and the bits corresponding to the initial value is respectively supplied to those preset inputs from the memory 31. In response to the clock, each of the D flip-flops circuits 32 to 42 outputs from the output Q one bit of data supplied to the input D. The D flip-flops circuits 32 to 42 are connected in the form of a ring via the adder 44. That is to say, the adder 44 is connected between the flip-flop circuits 32 and 33, and the output Q of the flip-flop circuit 42 is connected to the adder 44 and to the input D of the flip-flop circuit 32. The adder 44 adds data of the output Q of the flip-flop circuit 32 and data of the output Q of the flip-flop circuit 42, and supplies a result of the addition to the input D of the flip-flop circuit 33. Data having eight bits for the linking region is output from the outputs Q of the D flip-flop circuits 35 to 42. The linking region data is pseudo data of an information data piece.

The following is an explanation of the operation of the original disk recording apparatus according to the present invention.

Based on information data and address data to be recorded, the ECC block generation circuit 21 successively produces and outputs a data pieces of 91 bytes.

In the DVD format, one ECC block has sixteen sectors, as shown in Fig. 3. Each sector has a data structure of 13 rows

× 182 bytes. 91 bytes of each row constitute one data piece, so that each row has two data pieces (91 bytes × 2).

The data pieces are supplied via the switching circuit 24 to the modulator 25. After having been subjected to 8-16 modulation, the data pieces are supplied to the synchronization adding circuit 26. The synchronization adding circuit 26 adds a synchronization code (32 bits) including a 14T synchronization pattern to the data pieces having 182 bytes (1456 bits) that have been modulated, to generate a recording signal. The synchronization code is one of eight codes SY0 to SY7, and serves as identification data for identifying data position in each sector.

Fig. 4 illustrates the data structure of the recording signal for one sector. The synchronization code (SY0 to SY7) is located before the modulated data pieces, and two pairs of synchronization code and data piece are arranged in each row.

On the other hand, at the time of the beginning of the recording, the initial value is output from the memory 31 to the eleven D flip-flop circuits 32 to 42 in the random value generator 22. Each of the D flip-flop circuits 32 to 42 outputs a corresponding bit value of the initial value. The output values of the D flip-flop circuits 35 to 42 then serve as the linking region data. After that, whenever a clock signal is supplied, each of the D flip-flop circuits 32 to 42 read the output value of each of the D flip-flop circuits or the adder 44 connected to each input side, and the D flip-flop circuits 35 to 42 output as eight bits (one byte) of linking region data. As the clock

is supplied to the clock terminals C of the D flip-flops 32 to 42 for every linking region, for example, the linking region data is renewed at each clock by an adding operation of the adder 44. The linking region data is pseudo data of the above-described data pieces, and consists of 91 bytes. For one linking region, linking region data of 91×2 bytes is generated.

The switching circuit 24 performs a switching operation in response to the timing signal after relaying the data pieces for one ECC block portion from the ECC block generation circuit 21.

Thus, the switching circuit 24 becomes a state in which the output data from the random value generator 22 is relayed to the modulator 25. The linking region data is supplied from the random value generator 22 via the switching circuit 24 to the modulator 25.

After being subjected to 8-16 modulation, the linking region data is supplied to the synchronization adding circuit 26. The synchronization adding circuit 26 adds a linking region synchronization code (32 bits) including a 14T synchronization pattern to the linking region data of 182 bytes (1456 bits) that have been modulated, to generate a recording signal. The first synchronization code of one row is SYX, and the second synchronization code is SYY. Each of the synchronization codes SYX and SYY has a pattern that is different from the synchronization codes SY0 to SY7, and represents a linking region.

The linking region is formed between ECC blocks (data block regions), and as shown in Fig. 5, includes two synchronization frames that are arranged between one ECC block ($n - 1$) and the next ECC block (n).

The recording signal output from the recording signal generation circuit 13 modulates laser light in the optical modulator 14, and after the modulation, the laser light is supplied to the recording actuator 15. The recording actuator 15 irradiates the laser light onto the recording portion of the original recording disk 1, which is rotated by the spindle motor 16, and thus exposure is performed.

After producing a master disk from the original recording disk 1, optical disks are obtained by duplication with a stamper of the master disk.

Linking regions are formed on each track portion of the optical disk, as shown in Fig. 6 for example. Furthermore, between any adjacent track portions, the linking regions may be formed adjacently to one another, as shown in Fig. 7. However, since the random value generated from the random value generator 22 is used for the linking region data as described above, the data patterns of the linking region of the adjacent track portions are different from one another. For example, in the data patterns of adjacent linking regions shown in Fig. 7, the first pattern, the second pattern and the third pattern are mutually different.

In order to accurately read the information recorded on the optical disk, a tracking control for controlling a reading light beam on a recording track is performed. The phase-difference method can be used as the tracking control for high-density optical disks such as DVD-ROMs. In the phase-difference method, a tracking error signal is generated, which indicates the error between the irradiation position of the light beam and the

recording track, in accordance with the difference between the sum signals of the light-receiving signals of opposite light-receiving portions in a photo-detector partitioned into four partitions. In the case of the phase-difference method, when the correlation between adjacent track portions is strong, then the tracking error signal includes cross-talk components from the adjacent track portions, so that the tracking control becomes unstable. If there are adjacent linking regions in adjacent track portions, the data pattern of those linking regions are different from one another, so that the correlation of the adjacent track portions can be reduced. Thus, it is possible to attain a stable tracking control even when using the phase-difference method for the tracking control.

It is possible that the random value generator 22 uses current address data (which indicates an address of the adjacent data region) as the initial value. That is to say, as indicated by a dashed line in Fig. 1, address data may be supplied to the random value generator 22, and the address data may be input from the preset input into the D flip-flop circuits 32 to 42 when the first linking region has been reached, to generate the linking region data. Furthermore, it is also possible to prepare a plurality of initial values in the memory 31, and to select one of the plurality of initial values in accordance with the address data.

If the address data is used as the initial value, then the address data may also be recorded together with the random linking region data in the random value generator 22. For example, as

shown in Fig. 8, the synchronization codes SYX and SYY, the address data and the linking region data are arranged in that order in the two synchronization frames of the linking region. If the random value generation pattern of the random value generator 22 corresponding to the initial value is previously known, then it is possible to read out the address data and the linking region data, and to use the linking region data as useful data, based on the relation between the address data and the linking region data.

Moreover, as shown in Fig. 9, it is also possible to connect the random value generator 22 in series with a random value generator 28 having the same configuration as the generator 22.

Furthermore, as a configuration for generating linking region data, it is also possible to use a random value generator 22, a scrambling circuit 29 and a memory 30, as shown in Fig. 10. The scrambling circuit 29 consists of an EX-OR circuit.

Scrambling data of eight bits is previously written into the memory 30. In the scrambling circuit 29, the EX-OR value of the scrambling data and the linking region data generated by the random value generator 22 for each linking region is obtained, and that value is used as the final linking region data.

Fig. 10 shows another configuration example of a recording signal generation circuit 13. In the linking region data generation portion in Fig. 10, it is possible to connect the random value generator 22 in series with a random value generator 28, as in the configuration shown in Fig. 9. Furthermore, it is also possible to supply the address data to the random value generator

22, as indicated by a dashed line in Fig. 10, and to use the address data at the time of the beginning of recording as the initial value.

Fig. 11 shows another configuration example of a recording signal generation circuit 13. In the recording signal generation circuit 13 in Fig. 11, the ECC block generation circuit 21, the modulator 25, the synchronization adding circuit 26 and the switching circuit 24 are connected in that order, and the switching circuit 24 is provided in the stage following the synchronization adding circuit 26. The random value generator 22 and a modulator 22a are provided as a configuration for generating linking region data. After the linking region data output from the random value generator 22 have been subjected to 8-16 modulation by the modulator 22a, the data is supplied to the switching circuit 24. In accordance with the timing signal output from the timing circuit 23, the switching circuit 24 selectively supplies either the output data of the synchronization adding circuit 26 or the output data of the modulator 22a to the optical modulator 14. Thus, no synchronization code is added to the linking region data, so that the linking region formed between the ECC blocks on the track of the disk 1 has only linking region data that is pseudo data not including the synchronization code.

In the recording apparatus as described above, linking data recording means forms the pseudo data of the adjacent linking regions with recording patterns which are different from each other. In the optical recording medium, the recording patterns

of pseudo data of linking regions that are located on adjacent track portions of a track are different from one another. Thus, it is possible to provide read-only non-recordable optical recording media such as DVD-ROMs and recordable optical recording media such as DVD-RWs, with compatibility regarding the recording format. As a result, recording medium players can be designed with a simple configuration.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking region inserted into a boundary portion between said unit block regions, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is scrambled, so that recording patterns of said linking data are different between adjacent tracks.

2. An optical recording medium according to claim 1, wherein said linking data is scrambled based on address information.

3. An optical recording medium according to claim 2, wherein said address information is address information of a unit block region adjoining said linking region.

4. An optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking region inserted into boundary portion between said unit block regions, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is a random number generated using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

5. An optical recording medium according to claim 4, wherein linking data recorded in said linking region is an exclusive or value of a data piece produced

as a random number generated using address information as an initial value and a predetermined data piece.

6. An optical recording medium according to claim 4, wherein said address information is address information of a data block region adjoining said linking region.

7. An optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

linking region inserted between said unit block regions, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is a data piece produced by bit-shifting using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

8. An optical recording medium according to claim 7, wherein linking data recorded in said linking region is an exclusive or value of a data piece produced by bit-shifting using address information as an initial value and a predetermined data piece.

9. An optical recording medium according to claim 7, wherein said address information is address information of a unit block region adjoining said linking region.

10. A recording apparatus for recording information data onto a track of an optical recording medium, including:

a block recording means for forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking data recording means for inserting a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, into a boundary portion between said unit block regions;

wherein said linking data recording means records linking data generated by scrambling a predetermined data piece onto said linking region, so that recording patterns of said linking data are different between adjacent tracks.

11. A recording apparatus for recording information data onto a track of an optical recording medium, including:

a block recording means for forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking data recording means for inserting a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, into a boundary portion between said unit block regions;

wherein said linking data recording means records, onto said linking region, linking data which is a random number generated using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

12. A recording apparatus for recording information data onto a track of an optical recording medium, including:

a block recording means for forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking data recording means for inserting a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, into a boundary portion between said unit block regions;

wherein said linking data recording means records, onto said linking region, linking data which is a data piece produced by bit-shifting using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

13. A recording method for recording information data onto a track of an optical recording medium, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data generated by scrambling a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

14. A recording method for recording information data onto a track of an optical recording medium, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data which is a random number generated using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

15. A recording method for recording information data onto a track of an optical recording medium, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data which is a data piece produced by bit-shifting using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

16. A method for producing an optical recording medium having recorded information data on a track thereof, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data generated by scrambling a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

17. A method for producing an optical recording medium having recorded information data on a track thereof, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data which is a random number generated using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

18. A method for producing an optical recording medium having recorded information data on a track thereof, including the steps of:

forming, on the track, unit block regions in which unit blocks, each of which serves as an error correction unit for the information data, are recorded in a plurality of frames to which a sync code is added respectively;

forming a linking region, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded, by insertion into a boundary portion between said unit block regions; and

recording, in said linking region, linking data which is a data piece produced by bit-shifting using address information as an initial value, so that recording patterns of said linking data are different between adjacent tracks.

19. An optical recording medium having recorded information data on a track thereof, including on said track:

unit block regions in which unit blocks, each of which serves as an error correction unit for said information data, are recorded in a plurality of frames to which a sync code is added respectively; and

a linking region inserted into a boundary portion between said unit block regions, in which a sync code having a pattern different from that of said sync code in said unit block regions and linking data are recorded;

wherein linking data recorded in said linking region is generated by exclusive oring of a data piece produced by bit-shifting using address information as an initial value and a predetermined data piece, so that recording patterns of said linking data are different between adjacent tracks.

20. An optical recording medium according to claim 19, wherein said linking data is an exclusive or value of a data piece produced by bit-shifting using address information as an initial value and a predetermined data piece.
21. An optical recording medium according to claim 19, wherein said address information is address information of a unit block region adjoining said linking region.
22. An optical recording medium according to claim 19, wherein said linking region is inserted into all of boundary portions between said adjoining unit block regions.
23. An optical recording medium according to claim 19, wherein said unit block is an ECC block, said identification information is a sync code, and wherein said ECC block has a format in which said ECC block is divided into sync frames respectively including said sync code, and said linking region is constituted by a predetermined number of sync frames at least one of which is provided with a sync code that is different from said sync code in the ECC block.
24. An optical recording medium according to claim 23, wherein said ECC block is constituted by 16 sectors, each of which is constituted by 26 sync frames each including a sync code.
25. An optical recording medium according to claim 23, wherein, for said linking region, a data format is provided in which said sync code is recorded at positions having an interval identical with a sync code interval in said ECC block.
26. An optical recording medium according to claim 25, wherein, in said linking region, said sync code is recorded only at positions having an interval identical with a sync code interval in said ECC block.
27. An optical recording medium having recorded information data on a track thereof substantially as hereinbefore described with reference to the accompanying drawings.

28. A recording apparatus for recording information data onto a track of optical recording medium substantially as hereinbefore described with reference to the accompanying drawings.
29. A recording method for recording information data onto a track of optical recording medium substantially as hereinbefore described with reference to the accompanying drawings.
30. A method for producing an optical recording medium having recorded information data on a track thereof substantially as hereinbefore described with reference to the accompanying drawings.
31. An optical recording medium having recorded information on a track thereof substantially as hereinbefore described with reference to the accompanying drawings.

PIONEER CORPORATION

WATERMARK PATENT & TRADE MARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

P25167AU00

FIG. 1

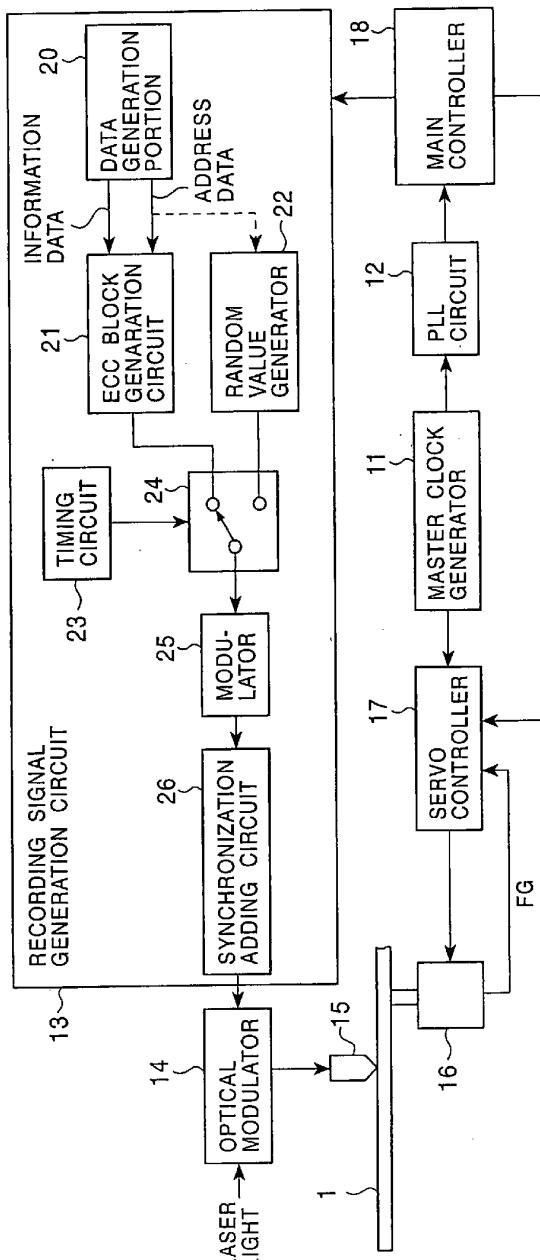


FIG. 2

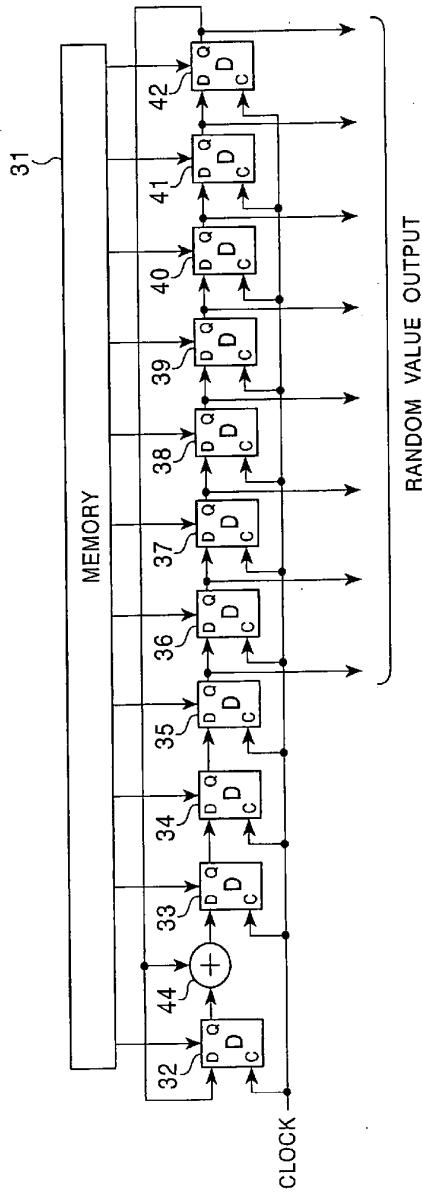


FIG. 3

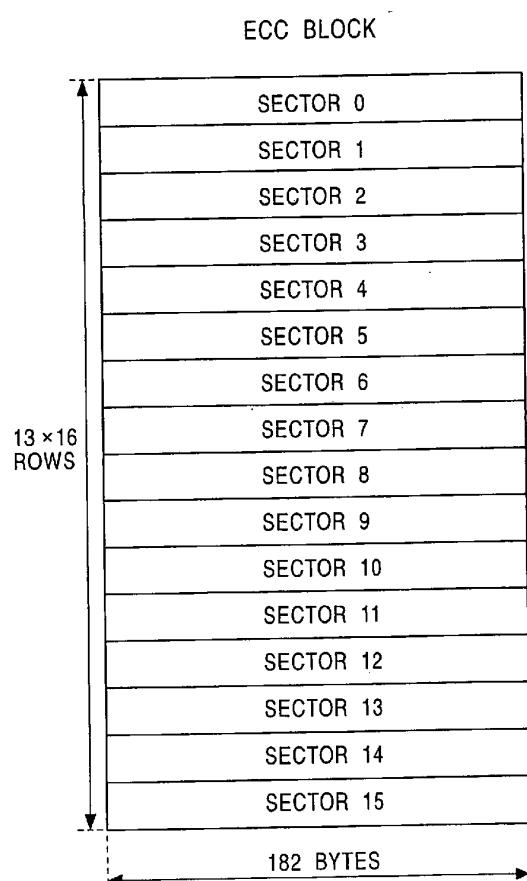


FIG. 4

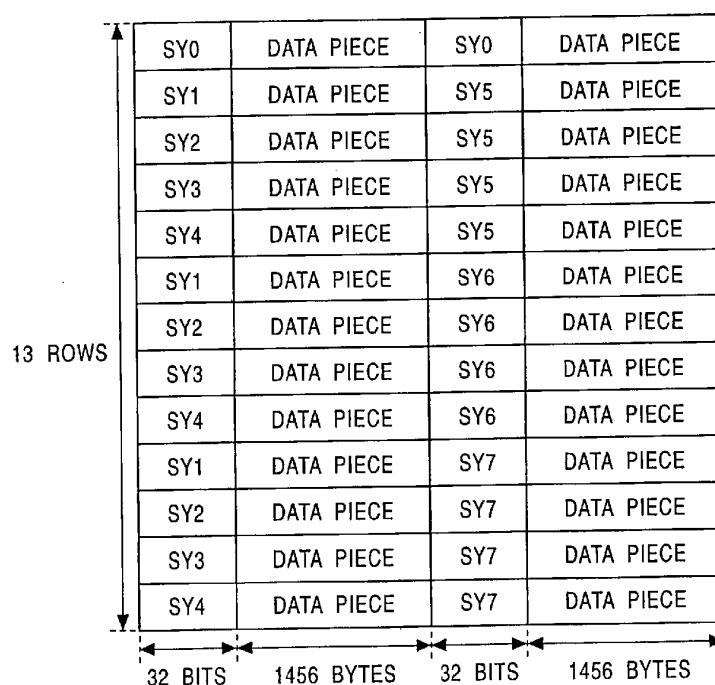


FIG. 5

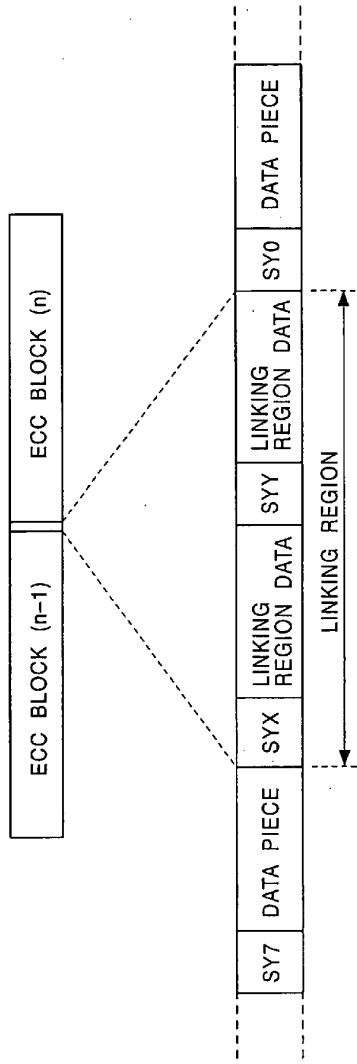


FIG. 6

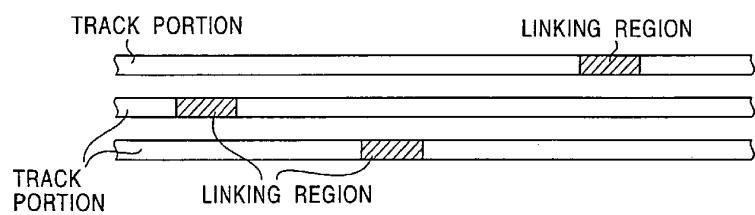


FIG. 7

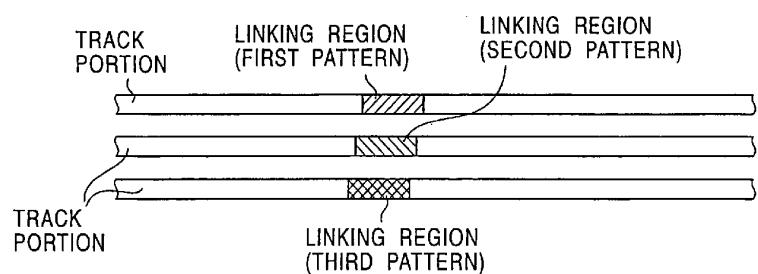


FIG. 8

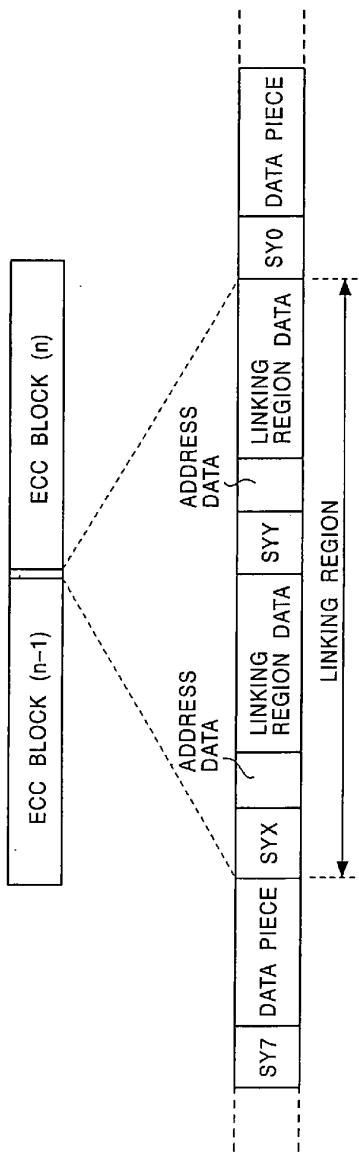


FIG. 9

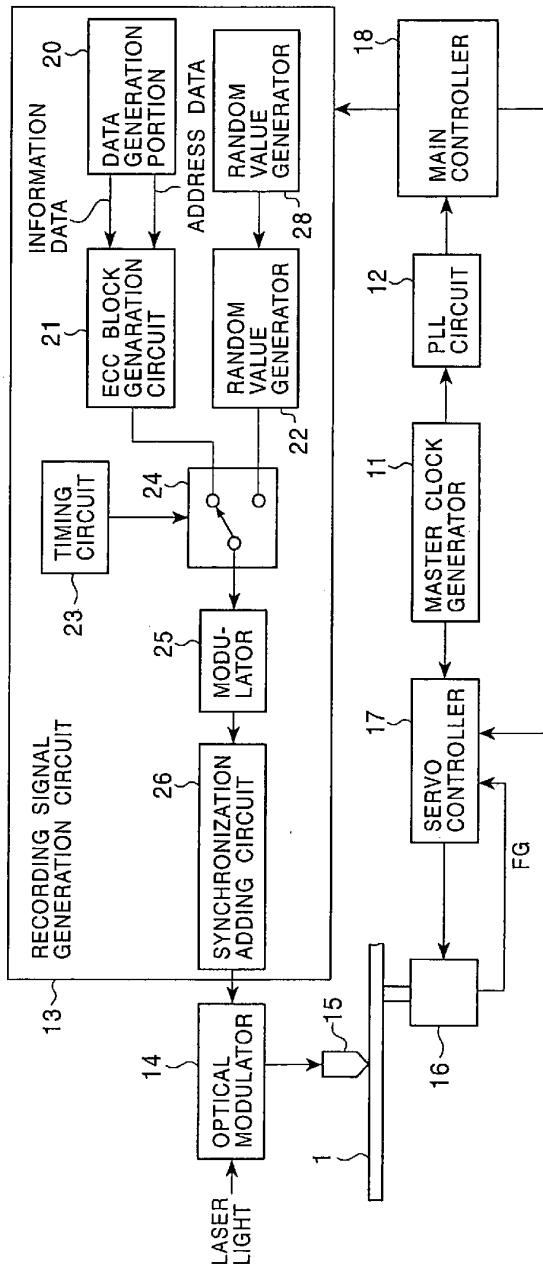


FIG. 10

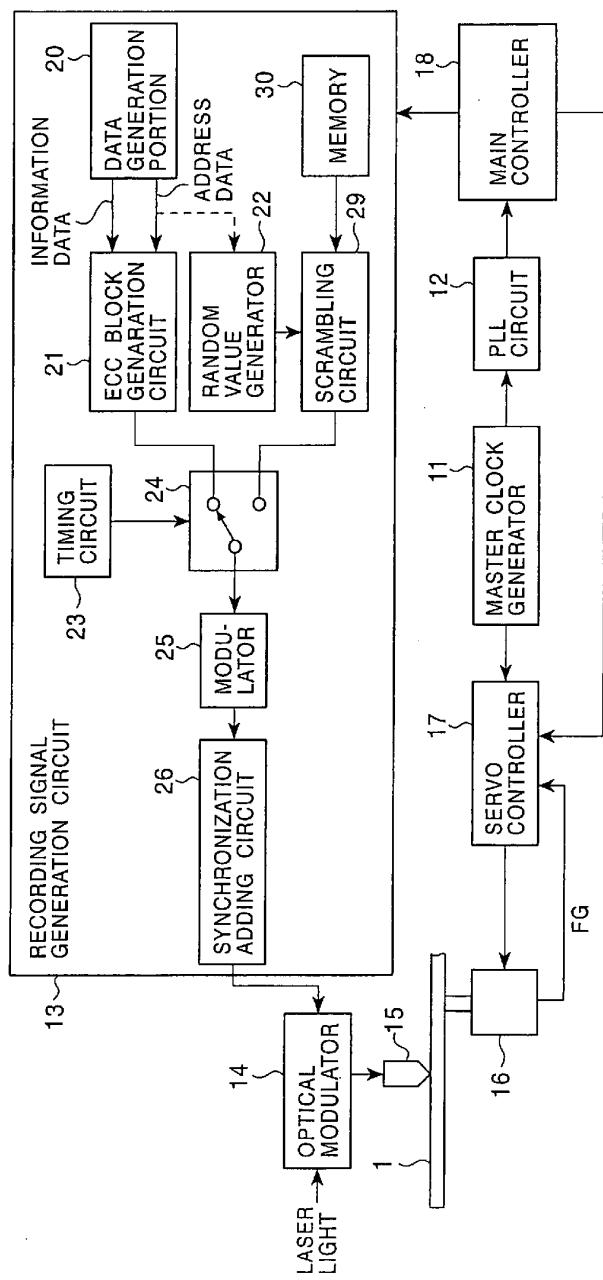


FIG. 11

