

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

04 November 2021 (04.11.2021)



(10) International Publication Number

WO 2021/221950 A1

(51) International Patent Classification:

F21V 13/04 (2006.01) F21K 9/62 (2016.01)
F21V 33/00 (2006.01) F21Y 101/00 (2016.01)
F21S 9/02 (2006.01) G04G 9/04 (2006.01)

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

— with international search report (Art. 21(3))

(21) International Application Number:

PCT/US2021/028096

(22) International Filing Date:

20 April 2021 (20.04.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/861,042 28 April 2020 (28.04.2020) US
17/166,331 03 February 2021 (03.02.2021) US

(72) Inventor; and

(71) Applicant: KNUTSON, Lara [US/US]; 443 Liberty Avenue, Beach Haven, New Jersey 08008 (US).

(74) Agent: SCOTT, Walter et al.; Alston & Bird LLP, One South at The Plaza, 101 South Tryon Street, Suite 4000, Charlotte, North Carolina 28280-4000 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: DEVICES USING GLASS BOWS

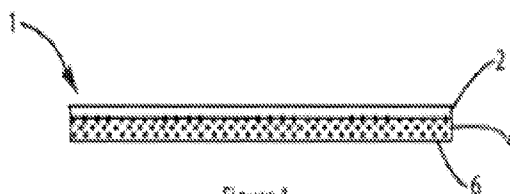


Figure 1

(57) Abstract: Glass bows are produced by shining a point light source on a reflective and refractive surface. The glass bows can be used to create a variety of products including, but not limited to, ornament products, no-touch buttons and keyboards, and clocks.



WO 2021/221950 A1

DEVICES USING GLASS BOWS

[0001] PRIORITY CLAIM

[0002] This application claims priority to and the benefit of United States Patent Application No. 17/166,331, filed February 3, 2021 and United States Patent Application No. 16/861,042, filed April 28, 2020.

[0003] BACKGROUND OF THE INVENTION

[0004] Field of the Invention

[0005] The present invention generally relates to a display device and a method for creating a display. Specifically, the present invention relates to a method of using certain refractive materials and devices using such refractive materials for creating a glass bow display effect, such as a glory or a circular, white, glass bow. By using the device and method disclosed herein a display can be created heretofore unrealized results.

[0006] Description of the Related Art

[0007] Certain light phenomena such as glories, bows, and halos have long been known to physicists who study the atmosphere. The most well know of these phenomena is a rainbow. Examples of such phenomena are described, for instance, at <http://www.dewbow.co.uk/index.html> (viewed on April 14, 2020). One specific type of bow that has been identified is the glass bow. *See e.g.*, <https://atoptics.wordpress.com/?s=glas+bow> (viewed April 14, 2020).

[0008] A rainbow is formed by “collection of suspended water droplets in the atmosphere serves as a refractor of light. The water represents a medium with a different optical density than the surrounding air. Light waves refract when they cross over the boundary from one medium to another. The decrease in speed upon entry of light into a water droplet causes a bending of the path of light towards the normal. And upon exiting the droplet, light speeds up and bends away from the normal. The droplet causes a deviation in the path of light as it enters and exits the drop.” <https://www.physicsclassroom.com/class/refrn/Lesson-4/Rainbow-Formation> (viewed April 14, 2020).

[0009] A similar phenomenon, the glass bow, has been observed with light that is reflected and refracted by small, transparent, glass and/or plastic beads.

<https://atoptics.wordpress.com/?s=glass+bow> (viewed April 14, 2020).

[0010] To date, the use of such small, transparent glass and/or plastic beads that reflect and refract light has been limited. For instance, such beads are commonly used in Signage. Signage is widespread, yet it is often difficult to capture the attention of the typical viewer, for example, a pedestrian, driver, potential customer, or patron. Many displays have been created in order to get a viewer's attention that meet with varied success. Further, many displays have been created in order to get the attention of potential shoppers, yet these are not all successful in this regard. There is therefore a great need in the art for creating a display that effectively captures the attention of a viewer.

[0011] Accordingly, there is now provided with this invention an improved method and display device effectively overcoming the aforementioned difficulties and longstanding problems inherent in present displays. These problems have been solved in a simple, convenient, and highly effective way by which to create a display. More particularly, a glass bow effect is created by the present invention which calls attention to the display in a way not previously achieved.

[0012] SUMMARY OF THE INVENTION

[0013] According to one aspect of the invention, a display device is disclosed. The display device comprises a substrate, a first layer attached to the substrate comprising glass beads and preferably at least one pigment, and an LED light source for shining upon the first layer and thereby creating a glass bow halo effect.

[0014] According to another aspect of the invention, a display device is disclosed. The display device comprises a substrate, a first layer attached to the substrate comprising glass beads and preferably at least one pigment, a reflective and refractive layer interposed between the substrate and the first layer, and an LED light source for shining upon the first layer and thereby creating a glass bow halo effect.

[0015] According to yet another aspect of the invention, a method for creating a display is disclosed. The method comprises attaching a first layer to a substrate, wherein the first layer

comprises glass beads and preferably at least one pigment and shining a first light from a first LED source onto the first layer so that a glass bow halo effect occurs.

[0016] As will be appreciated by those persons skilled in the art, a major advantage provided by the present invention is creating a glass bow display device and method. Additional objects of the present invention will become apparent from the following description.

[0017] In one embodiment of the present invention, beads are embedded in a substrate to form the reflective and refractive layer. Preferably, the beads are made of glass or plastic. While non-spherical structures may be used in making the reflective and refractive material, it is also preferred that the beads are transparent and spherical. It is also preferred that the beads are partially embedded into a substrate. Preferably, less than two thirds of each of the beads are embedded (submerged) into the substrate. It is further preferred that less than about one half of each of the beads is submerged into the substrate. It is still further preferred that about one third of each bead is submerged into the substrate.

[0018] Typically, the beads have a diameter of between about 1 μm and about 100 μm . It is preferred that the beads have a diameter of between about 30 μm and about 70 μm . It is further preferred that the beads have a diameter of between about 40 μm and about 65 μm . The diameter of the beads within a specified bead diameter range need not be uniform.

[0019] It is believed that the refractive Index (“ R_I ”) of the beads is also an important characteristic of beads useful in the present invention. Typically, the beads used in the practice of the present invention have an R_I of between about 1.1 and about 1.9. Preferably the beads used in the practice have an R_I of about 1.4 to about 1.6, and more preferred are beads with an R_I of at least about 1.5.

[0020] It is understood that the claimed device makes use of the phenomenon of retro-reflection, whereby light waves are reflected on a path approximately parallel to their initial path.

Retroreflection in the device described in the application is accomplished through microbeads embedded into a layer in the device. As a localized light source is placed in close proximity to the surface of the device, light waves from this light source are partially refracted by the beads, but largely retroreflect back towards the light source. The partial refraction causes a

concentration of light surrounding the light source, generating the appearance of a floating image above the reflective and refractive surface, which the application terms a "halo". The closer the light is placed to the surface, the more concentrated this "halo" image appears.

[0021] Embodiments of the present invention typically employ a point light source. Examples of such point light source include: light-emitting diodes ("LED's"); organic light-emitting diode ("OLED's"); Candle Light; a pinhole light source and lasers. It is preferred that the light emitted from the point light source is polychromatic and not polarized.

[0022] The light emitted by a point light source employed by an embodiment of the present invention is typically between about 5 lm (lumens) and about 600 lm. It is preferred that the light emitted by a point light source employed by an embodiment of the present invention is between about 10 lm and about 500 lm, and it is more preferred that the light emitted by a point light source employed by an embodiment of the present invention is between about 10 lm and about 100 lm.

[0023] The method and apparatus of the present invention will be better understood by reference to the following detailed discussion of specific embodiments and the attached figures which illustrate and exemplify such embodiments.

[0024] BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS.

[0025] A specific embodiment of the present invention will be described with reference to the following drawings, wherein:

[0026] FIG. 1 is a schematic drawing of an embodiment of the reflective and refractive surface used in the present invention.

[0027] FIG. 2 is a schematic drawing of another embodiment of the reflective and refractive surface used in the present invention.

[0028] FIG. 3 is an alternative schematic drawing of an embodiment of the present invention.

[0029] FIG. 4 is a schematic drawing illustrating the glass bow created by shining a point source light at different distances from a reflective and refractive surface of the present invention on the reflective and refractive surface.

[0030] FIG. 5 is a schematic drawing of the present invention illustrating the glass bow effect of a redirected light source.

[0031] FIG. 6 is a schematic representation of an embodiment of a touchless button of the present invention.

[0032] FIG. 7A is a top view of an array of lighting pins of an embodiment of a digital clock embodiment of the present invention.

[0033] FIG. 7B is a front view of an array of lighting pins of an embodiment of the digital clock embodiment of FIG. 7A.

[0034] FIG. 8A is a front view of a further embodiment of a clock according to the present invention.

[0035] FIG 8B is another front view of the clock embodiment of FIG 8A showing the plurality of radii formed from lighting pins.

[0036] FIG. 8C is a side view of the clock embodiment of FIG. 8A showing the cones of lights from three distinct point light sources on each lighting pin.

[0037] FIG. 9 is a top view of a speaker having an array of lighting pins mounted on the exterior of a cylindrical speaker.

[0038] FIG. 10A is a top view of a label embodiment of the present invention.

[0039] FIG. 10B is a front view of a label embodiment of FIG. 10A the present invention.

[0040] FIG. 11A is a side view of an umbrella embodiment of the present invention in which the umbrella covering is transparent as is the reflective and refractive strip on the inside of the umbrella.

[0041] FIG. 11B is a top view of the umbrella embodiment of FIG. 11A of the present invention in which the umbrella covering and the reflective and refractive strip on the inside of the umbrella is are both transparent.

[0042] FIG. 12 is a side view of a sneaker embodiment of the present invention.

[0043] FIG. 13A is a side view of a desk lamp embodiment of the present invention.

[0044] FIG. 13B and FIG. 13C are alternative side views of the desk lamp embodiment of FIG. 13A in which the shade has been rotated.

[0045] FIG. 13D is a further side view of the desk lamp embodiment of FIG. 13A connected to a computer.

[0046] FIG. 14A is an illustration of a flood condition that can interfere with the creation of a glass bow.

[0047] FIG. 14B is an illustration of a smoke condition that can interfere with the creation of a glass bow.

[0048] FIG. 15A is an illustration of a front view of two drawers in alignment onto which a glass bow has been projected in accordance with the present invention.

[0049] FIG. 15B is a top view of two drawers, the lower of which has been pulled out and the drawers are no longer in alignment.

[0050] FIG. 15C is front view of two drawers, the lower of which has been pulled out and the drawers are no longer in alignment.

[0051] FIG. 16A is a top view of two objects each having a perimeter of glass bows according to the present invention.

[0052] FIG. 16B is a top view of the two objects of FIG. 16A where they have moved so that they now have overlapping perimeter glass bows.

[0053] FIG. 17 illustrates an ornamental object in which a feature of the object is highlighted with a glass bow in accordance with the present invention.

[0054] FIG. 18A is a back view of a backpack embodiment of the present invention.

[0055] FIG. 18B is a side view of the backpack embodiment of Fig. 18A.

[0056] FIGs. 19A – 19D illustrate a prior art popup card; Fig. 19A illustrates an open, prior art popup card; Fig. 19B illustrates the notch in a prior art popup card that raises the “popup” aspect of the card; Fig. 19C illustrates the popup notch of a prior art popup card in an unpopped-up position; and Fig. 19 D illustrates the popup notch in a popped up position.

[0057] FIGs. 20A – 20E illustrate an opened popup card embodiment of the present invention.

[0058] DESCRIPTION OF THE PREFERRED EMBODIMENT

[0059] The following preferred embodiment as exemplified by the drawings is illustrative of the invention and is not intended to limit the invention as encompassed by the claims of this application. An apparatus and method for displaying a glass bow effect is disclosed herein.

[0060] Unless explained otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this disclosure belongs. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of the present disclosure, suitable methods and materials are described herein. The materials, methods, and examples are illustrative only and not intended to be limiting. Other features of the disclosure are apparent from the following detailed description and the claims.

[0061] As used herein, the term “pop-up” refers to an article of manufacture having at least two surfaces that can be in a state where the surfaces are in contact, or in a state where at least two surfaces are separated. When two surfaces of a pop-up are separated, a structure arises between the two surfaces. Classic examples of a pop-up include cards and books, however a pop-up may take another form. *See e.g.,*

<https://web.archive.org/web/20190407021242/https://www.hallmark.com/pop-up-cards/> and <https://www.uncommongoods.com/product/classic-fairytale-pop-up-book>.

[0062] As illustrated generally in FIGS. 1-5, a display device 1 is shown. The display device, shown in FIG. 1 comprises a substrate 2 onto which a first layer 4 is positioned. The substrate illustrated in FIG. 1 is generally flat and is reflective and refractive. The substrate may be of a fairly rigid material or be somewhat flexible depending on the surface to which it is to be attached and for the particular use intended.

[0063] The first layer 4 comprises glass beads 6 and at least one pigment. The first layer may be, for example, a fabric comprising glass beads 6 and at least one pigment. The fabric may be, for example, 57% PU coagulate and 43% a polyester/cotton 48/52 textile. The glass beads may be on the fabric as a monolayer or may, alternatively, be multilayered.

[0064] Such a fabric may be provided, for example, by I.B.R. Reflective Technologies, Via Pederzola 1/3, 24020 Scanzorosciate, Italy as described in Technical Data Sheet MI-SP20, and U.S. Patent Application Publication No. 2006/0237124. As described therein, the fabric is a textile-reinforced polyurethane coagulate coated with a monolayer of glass beads. The glass beads have a low refractive index and typically are in the form of microbeads. The pigment may be a metal grey shade, or alternatively, be selected from a broad color palette.

[0065] Typically, the reflective and refractive surface used in the embodiments of the present invention has a fabric or polymer substrate. However, the substrate can also be glass or metal. Moreover, the substrate may be a specific color or it may be multicolored. Additionally, the substrate can be rigid or flexible and it can be flat, concave, or convex. Furthermore, the substrate may have one or more perforations and if there are multiple perforations, that may be of a uniform or of random patterns.

[0066] The reflective and refractive layer itself may be microbeads, for example, approximately 15% low refractive index microbeads. The microbeads may be transparent. Further specifications of I.B.R. Reflective Technologies are denoted below.

Physical Properties (*)	Value (*) Unit	Method (*)
Retroreflection	<3 cd/lux/m ²	ITP 01-CIE 54
Coeff. R (5°, 12°)		
Weight	560 ± 50 g/m ²	ITP 04
Thickness	1.0 ± 0.1 mm	ITP 12
Tensile Strength [L/W]	>400/>400 N/5 cm	ITP 06
Break Elongation [L/W]	<25/<35 %	ITP 06
Flexions (Bally)	>40000 cycles n°	ITP 14
Tear Strength [L/W] (trouser)	>18/>15 N	ITP 07

[0067] As shown in FIG. 2, an adhesive layer 8 may be interposed between the substrate 2 and the first layer 4. The adhesive layer may be transparent or may comprise, for example, 85% adhesive and 15% pigments and additives.

[0068] The coefficient of retroflection, R_A (in cd/lux/m²) of the reflective and refractive surface used in embodiments of the present invention is between about 0.2 and about 250. It is preferred that R_A of the reflective and refractive surface used in embodiments of the present invention is between about 0.2 and about 100. It is further preferred that R_A of the reflective and refractive surface used in embodiments of the present invention is between about 0.3 and about 50. It is most preferred that R_A of the reflective and refractive surface used in embodiments of the present invention is between about 0.3 and about 30.

[0069] FIG. 4 is a schematic drawing of the present invention illustrating the effects of illuminations at different distances from the reflective and refractive surface. Specifically, FIG. 4 illustrates the display 1 illuminated by a point light source 12 thereby forming a glass bow effect (typically a sphere effect) 14. The point light source in this illustrative embodiment is an LED light source. The proximity of the light in relation to the reflective and refractive surface changes the light intensity and color saturation. All LED's in all forms at any wattage are effective light sources. In the instant invention, incident light is scattered from the surface in a distinct way, looking very different than similar reflective products illuminated by an LED light source.

[0070] The display may be illustrated by a single light source or by multiple light sources. The light source may be fixed or may be rotated. The light source may be monochromatic, multiple wavelengths, or whitelight with a wavelength of between about 10 nm and about 1600 nm. If more than one light source is used, they may be the same wavelength or be of different

wavelengths. The light sources may be at the same distance from the display or at different distances. The light sources can be layered, and colors can be mixed. Patterns can be created by layering the light sources. Depending on the intensity of the light, a corona or glory type effect is typically formed around the edge of the sphere effect 14. The brighter the light, the more solid the sphere effect appears.

[0071] As shown in FIG. 4, when the light source 12 is positioned close to the display 1, the glass bow effect 14 appears smaller than when the light source is positioned further away from the display. The light source may illuminate the display at any angle, oblique or acute. For example, the angle of incidence of the illumination from the light source onto the display may range from about 0° to 90°. The optimal angle is 90°.

[0072] FIG. 5 is a schematic drawing of the present invention illustrating the effect of a light source redirected onto the display 1. The light source of the present invention does not have to directly illuminate the display. As shown in FIG. 5, the illumination from the light source may be redirected onto the display from a reflecting surface 16. Of course, as understood by persons skilled in the art, multiple redirections of the illumination may occur before the light emanating from the light source is incident upon the display which can strike the display at any angle ranging from about 0° to 90°.

[0073] In the embodiment depicted in FIG. 3, light source 12 shines light on display 1. Incidental light, depicted by rays 21, is retroreflected at least in part through glass beads 6, depicted by rays 22, thus creating an interference pattern above display 1 that results in the appearance of image 14 above the display.

[0074] The glass bow produced by the present invention can be made to flicker by using a computing device to dim and re-brighten the point source light by reducing and increasing the power supplied to the point source light. When a plurality of point light sources are used, the point source lights can be individually, or a subset of point source lights collectively, can be dimmed and re-brightened.

[0075] In alternative embodiments of the present invention, the point light sources, e.g., LEDs may have different colors, or the LEDs can emit light of different colors in response to an instruction from a computing device.

[0076] As used herein, the term computing device refers to a device with a programmable processor and includes the programing. For example, a microcomputer or a smart phone are non-limiting examples of a computing device.

[0077] Example 1: an ornamental display

[0078] Example 1: As shown in Fig. 17, a portion of Ornamental object 1800 – for instance a reindeer – nose 1810 can be highlighted with a glass bow 1820. A point light source (not shown) is mounted behind ornamental object 1800 and is shining on a reflective and refractive surface further away from ornamental object 1800. The light is reflected and refracted by the reflective and refractive surface and projects a glass bow on the ornamental object. The point light source can be positioned so that the path the light it emits forms an angle in its travel to the reflective and refractive surface and then to the aspect of the ornamental object that is to be highlighted. Additionally, the back surface of the ornamental surface can be flat, concave, or convex.

[0079] In one embodiment of the present invention, an ornamental display is prepared by positioning a shaped ornamental object in front of a reflective and refractive surface. Preferably the reflective and refractive surface has a retroreflection coefficient (in cd/lux/m^2) of between about 0.2 and about 250. The shaped ornamental object is positioned between about 1 cm and 2 meters in front of said reflective and refractive surface. The shaped ornamental object has a thickness of between about 5 mm and about 50 cm.

[0080] The shaped ornamental object has a front and a back surface and when the shaped ornamental object is positioned in front of the reflective and refractive surface, the back surface of the shaped ornamental object is facing the reflective and refractive surface. The shaped ornamental object also has an edge between said front and back surfaces.

[0081] Additionally, the shaped ornamental object includes one or more features that can be highlighted.

[0082] Mounted on the back surface of said shaped ornamental object is a light source. In one embodiment of the present invention, the light source is mounted on the back surface of said shaped ornamental object in proximity to a feature to be highlighted. Typically, the light source is mounted between about 5 mm and 2 m from an edge of said shaped ornamental object in the direction of said reflective and refractive surface. When determining how far to place the point light source away from the object in the direction of the reflective and refractive surface, the point light source associated with a narrower objects may usefully be placed closer the reflective and refractive surface than larger objects.

[0083] The light source may be monochromatic, multiple wavelengths, or white light with a wavelength of between about 10 nm and about 1600 nm. Typically for an ornamental object, the wavelength of light emitted by the light source is between about 400 nm to about 700 nm. When a nimbus of a specific color is desired, the light emitted by the source may be filtered to only permit a narrower range of wavelengths to be reflected by the reflective and refractive surface. For instance, if a red nimbus were desired, then only light having a wavelength between about 635 nm and about 700 nm should be reflected by the reflective and refractive surface. For instance, if an orange nimbus were desired, then only light having a wavelength between about 590 nm and about 635 nm should be reflected by the reflective and refractive surface. For instance, if a yellow nimbus were desired, then only light having a wavelength between about 560 nm and about 590 nm should be reflected by the reflective and refractive surface. For instance, if a green nimbus were desired, then only light having a wavelength between about 520 nm and about 560 nm should be reflected by the reflective and refractive surface.

[0084] Additionally, a power source is connected to said light source. In one embodiment of the present invention, the power source is a battery, more preferably a rechargeable battery. In an alternative embodiment of the present invention, the power source is an appropriate connection the building electric power. In a further embodiment of the present invention, the power delivered to the one or more point light sources is controlled by a computing device.

[0085] Example 2: a clock

[0086] A Clock - a clock in which LED lights tell time in hour, minute and second locations. Forms can vary and halo created can mix color in space. The 3d effect can move around space

and overlap on the surface to tell time. The numbers can also be in a mesh and project onto the surface. The lights are on the mesh and will light up to spell out numbers.

[0087] Turning to Fig. 7A which shows a top view of an embodiment of digital clock **800** according to the present invention. Digital clock 800 has a surface **830** (which can be flat, concave or convex) having mounted thereon an array of lighting pins **810**. Surface **830** comprises a reflective and refractive surface of the type described herein.

[0088] Each lighting pin **810** comprises wiring (not shown, and preferably inside the pin) that delivers power to light source **815** mounted near the exterior of said pin near the end of the pin furthest from the surface on which the pins are mounted. Additionally, each of said lighting sources are arranged to direct their light on the reflective and refractive surface, see light cone **820**.

[0089] The wiring from each pin is powered, or turned off, by a computing device which determines which pins should be powered to display the current time.

[0090] When the computing device powers an arrangement of the first seven columns of lighting pins (i.e. the left hand side), a plurality of nimbuses are created above the reflective and refractive surface and about the pins of these seven columns of lighting pins that are perceived as a number from 1 to 12 corresponding to the current hour.

[0091] In an example of a digital clock according to the present invention, the fourth, eighth, tenth, and fourteenth columns of lighting pins are typically always off to separate the numbers being displayed.

[0092] In this example of a digital clock according to the present invention, in the ninth column of lighting pins, the lighting pins in the second and fifth rows, and only those two pins, are always on to separate the current hour from the current number of minutes past the last hour.

[0093] As shown in Fig. 7B, when the computing device (not shown) powers an arrangement of the columns of lighting pins on the right hand side, a plurality of nimbuses, or glass bows, 850 are created above and about the end of the lighting pins furthest from the reflective and refractive

surface that are perceived as a number from 1 to 60, corresponding to the number of minutes since the current hour began.

[0094] In an alternative embodiment of this clock, a wave guide runs up the interior of each of the lighting pins and after the wave guide exits the end of its lighting pin at the end of the lighting pin furthest from the reflective and refractive surface and shines on the reflective and refractive surface.

[0095] In this alternative embodiment of the clock of the present invention, which pins shine light via their wave guides is controlled by a computing device.

[0096] In a still further alternative embodiment of the clock of the present invention, a plurality of lighting pins, each with three different color point light sources are mounted on a reflective and refractive surface in a plurality of circular rows. Preferable, each row comprises 60 lighting pins.

[0097] This still further alternative embodiment of the clock of the present invention also comprises a computing device to control which color on which lighting pins are on at any time. For instance, a radius of blue lighting pins could indicate the hour, a radius of red lighting pins could indicate the minute, and a radius of yellow lighting pins could indicate the second. See Figs. 8A, 8B, and 8C.

[0098] Turning to Fig. 8A, clock 900 has second hand 920, minute hand 930, and hour hand 910, each formed by a plurality of glass bows. In a preferred embodiment of clock 900, the point light sources creating the second hand are all of a first color, the point light sources creating the minute hand are all of a second color, and the point light sources creating the hour hand are all of a third color.

[0099] Fig. 8B shows that clock 900 has a plurality of radii 950 formed from lighting pins.

[0100] Fig. 8C shows a side view of clock 900. As shown in this view, each lighting pin has three point light sources. The three point light sources on each lighting pin are at different heights. The point light sources that are furthest from the clock face produce the largest glass

bows. The point light sources that are closest to the clock face produce the narrowest glass bows and the intermediate point light sources produce an intermediate sized glass bow.

[0101] Example 3: a no touch button

[0102] A no-touch button -painted surface with glass microspheres that is illuminated by LEDs or OLED's or any point light source to create a glass bow light effect that, when interrupted, turns on and activates something.

[0103] Because such a no-touch button does not provide the user with immediate feedback that the button was activated, the use of such a button can be accompanied by a lighting change, a noise, or both to signify to the user that the button was activated. For instance, when the no-touch button is activate, it can change color, or the color light can turn off when activated. Alternatively, when the no-touch button is activated, it can be accompanied by a "Noise" to indicate that a function happened. Additionally, a no-touch button of the present invention can be activated with a body part such as a finger, or by using a stylus etc.

[0104] Fig. 6 illustrates an embodiment of a no touch button. An image 750 is created away from a surface. In one embodiment, image 750 is the nimbus created about an object by shining a point light source on a reflective and refractive surface comprising a layer of glass beads having a refractive index of about 1.5, and a coefficient of retroreflection of about 3 cd/lux/m2.

[0105] The embodiment of Fig. 6 includes an array of lights 710 and 730, each shining on one or more photodetectors 720 and 740. Lights 710 and 730 and photodetectors 720 and 740 are positions away from a surface, and in alignment with each other.

[0106] A person wishing to activate something, *e.g.*, an elevator or an appliance, touches image 750, and in doing so, interrupts the light from lights 710 and 730 before it reaches photodetectors 720 and 740. In this example, the light from lights 715 and 735, when image 750 is touched the light from lights 715 and 735 is interrupted before it reaches photodetectors 725 and 745. These interruptions are interpreted by a computing device (not shown) such as that described in U.S. Patent No. 4,587,630 to Straton et al., which patent is hereby incorporated by reference. In this embodiment, this touch to image 750 is interpreted by the computing device as a command to

activate an action, such as making an elevator go to the second floor of a building without the person who wishes to initiate such action touching a surface.

[0107] In alternative embodiments of the present invention, the “touching” of the no-touch button of the present invention is determined by the use of a motion or heat sensor.

[0108] In a further alternative embodiment of the no-touch button of the present invention, the no-touch button has a plurality of cameras that take images of the fingerprint(s) used to activate the no-touch button. The images generated are then processed by a system such as that described in Published U.S. Patent Application No. 20200082147 of Thuillier et al.

[0109] Example 4: a no touch keyboard

[0110] A no-touch Keyboard - a flat or dimensional surface that is coated with microspheres that allows for a light source to project onto the glass surface to create a visual 3D light effect. It could be activated with a heat sensor or motion sensor. When the user uses fingers/hand/stylus or an object near the surface. The light source can come from any part of the keyboard and project onto the glass surface.

[0111] An embodiment of the no touch keyboard of the present invention comprises an array of images 750 of Example 3 in which each of the keys of a keyboard has its own image 750, each of which exists at a position spaced away from any surface. The plurality of keyboard key images are within an array of lights and photodetectors (corresponding to lights 710 and 730 and photodetectors 720 and 740 of Fig. 6) so that the associated computing device (see U.S. Patent No. 4,587,630 to Straton et al.) can ascertain which keys were intended to be activated and in which order.

[0112] Example 5: a backpack turn signal indicator

[0113] Example 5: A backpack - light indicator on a bag made with "the material" that indicates directions turn signals, breaks, speed and any other necessary information for road safety. It could be connected to a mechanism controlled by the bag wearer.

[0114] Fig. 18A illustrates the back of a preferred backpack embodiment of the present invention. Backpack 1900 has mounted on its back surface a hinged arm at 1910. When the user

does not want to generate a glass bow on the back of the backpack, hinged arm 1910 is rotated to lie against the back surface of backpack 1900. When the user wants to generate a glass bow on the back of the backpack, hinged arm 1920 is rotated to be approximately perpendicular to the back of backpack.

[0115] At the end of hinged arm 1910 is mounted a point light source (not seen in Fig. 18A). When hinged arm 1910 is positioned perpendicular to the backpack (see Fig. 18B), point light source at 1920 shines a cone of light 1930 on reflective and refractive surface 1940. Shining this light on reflective and refractive surface 1940 produces a glass bow.

[0116] In an alternative embodiment of backpack 1900 of the present invention, hinged arm 1920 is mounted on the back of the backpack, in the middle of the back of the backpack near the top edge of the back of the backpack. In this alternative embodiment, there are two patches of reflective and refractive material 1940 on the back of the backpack, one on either side (left and right) of the backpack. Two point light sources 1920 are mounted at the end of hinged arm 1920 away from the backpack. One point light source is set to shine on the left hand patch of reflective and refractive material, and the other to shine on the right hand patch of reflective and refractive material. In this embodiment, which, if any, point light source is on at a specific time is controlled by a remote control accessible to the wearer of the backpack while wearing the backpack.

[0117] Example 6: a speaker cover that changes color and intensity in response to the sound emitted by the speaker

[0118] Example 6: a speaker cover that changes color and intensity in response to the sound emitted by the speaker. The surface inside, or around the speaker can play with light.

[0119] Turning to FIG. 9 is a top view of speaker 100 which can change its exterior color and the intensity of the exterior color in response to the sound emitted by the speaker.

[0120] The exterior of speaker 100 is covered with reflective and refractive surface 110 of the present invention. Reflective and refractive surface 110 has a plurality of perforations so that the sound emitted by the speaker can reach listeners in the vicinity of speaker 100. An array of lighting pins 130 mounted on the exterior of a cylindrical speaker and a point light source 120 is

located on each lighting pin 130 near the end of the pin furthest from reflective and refractive surface 110. The light from each of the point light sources 120 is directed towards reflective and refractive surface 110. This light, after interacting with the reflective and refractive surface 100, returns to vicinity of the point light source forming a glass bow.

[0121] In a preferred embodiment of the speaker cover of the present invention, the point light sources emit red, green, or blue light, and the power to each point light source is controlled by a computing device that is programmed to alter to color of the light, as well as the intensity of the colors in response to the music.

[0122] In a further preferred embodiment of the speaker cover of the present invention, the speaker and the lighting pins (and hence any glass bows) are within another cylinder 140 that has a plurality of perforations so an observer looking at the speaker can see the colors and changes to the colors as they occur.

[0123] Example 8: a moisture indicator

[0124] Example 8: a moisture/particle/smoke indicator - when the microsphere surface is blocked by smoke, moisture or anything at all, the glass bow effect will not appear. It can show when something is full or empty.

[0125] In an alternative use of a glass bow producing apparatus of the present invention, the presence of a glass bow is monitored by a computing device. In the event that the path of the point light source is blocked by smoke, moisture or other materials, the computing device detects the absence of the glass bow and issues an alert.

[0126] Figs. 14A and 14B illustrate conditions that will interrupt the light path from the point light source to the reflective and refractive material. Specifically, Fig. 14A shows an example of a water level rising so that it interrupts the light path from the point light source to the reflective and refractive material. Correspondingly, Fig. 14B shows an example of a smoke condition that interrupts the light path from the point light source to the reflective and refractive material.

[0127] Example 9: a UV/infrared light reflector

[0128] Example 9: a UV/infrared reflector - a surface that allows light to reflect back more efficiently. Can be used in heat lamps and grow lamps. Can be seen with special devices (UV or infrared sensitive goggles). Makes these lights more energy efficient.

[0129] Example 10: a label

[0130] Example 10: a label - a label on a product that has a glass bow light effect.

[0131] Turning to Fig. 10A, a side view of a label embodiment of the present invention. Label 1100 has a back member 1120 which has a forward facing surface including a reflective and refractive surface. Label 1100 also has front member 1110 connected to and positioned in front of back member 1120. Front member 1110 has one or more apertures (not seen in this view) in which a point light source is positioned so that it shine on the reflective and refractive surface of back member 1120.

[0132] Fig. 10B shows a front view of a label embodiment of the present invention. Label 1100 has a name with two i's printed on front 1110. Where the dot of each i goes, is aperture 1150. At the center of each aperture 1150 is a point light source pointed toward the back member of label 1100. When this point light source is illuminated, a glass bow appears about the dot of each "i". Alternatively, the point light source is illuminated.

[0133] Not shown in Figs. 10A and 10B is a power source for the point lights. In an alternative embodiment of the label of the present invention, there is also provided a computing device to create variations in the glass bow. For instance, the computing device could reduce and increase the power to each point light source so as to cause the glass bows to flicker.

[0134] Example 11: a badge

[0135] Example 11: a badge - similar to a label, but this device can be removed and reused on other necessary objects such as a luggage tag, name tag or pin.

[0136] Example 12: a device to blend colored light

[0137] Example 12: a device to blend colored light - could be used in a lightbulb, toys, remote controls to change colors of lightbulbs on a remote or within a lightbulb or light fixture, it could be a desk toy, a keyboard or button. It can be one or more LED lights mixing together, it can be on a grid or mesh containing led's. The LED's don't have to be next to each other, that can be on different planes. They can be made from one device or two or more coming together.

[0138] Example 13: a proximity detector

[0139] Example 13: proximity detector - mixes color when close. Something interrupts sphere of light. Could be used in toys and sensors. It could be two or more spheres of light coming together to detect proximity or one sphere coming into proximity with an object or surface.

[0140] Fig. 16A shows two objects 700. The perimeter of each object 700 has a plurality of point light sources 710 positioned away from object 700 and shining their light on a reflective and refractive surface 720 that covers the circumference of each object 700. As a result, there are a plurality of glass bows 730 projecting from the perimeter of each object 700.

[0141] Fig. 16C also shows objects 700 in a position in which some of glass bows 730 from each object 700 overlaps at 740. Such an overlap of glass bows, in the region of overlap, can be detected by either a change in color or in intensity in the overlap region.

[0142] Example 14:

[0143] A detector for determining whether a drawer or door is opened.

[0144] Figs. 15A, 15B, and 15C illustrate an embodiment that determines whether a drawer, or door, has been opened. Fig. 15A shows a front view of two drawers (610 and 620) in alignment (i.e., both are closed, or both are pulled out the same amount). A glass bow projected on the two drawers in alignment has the same radius on each drawer (650 and 660).

[0145] Fig. 15B is a top view of drawers 610 and 620 where lower drawer 620 has been pulled out. Also shown in this figure is point light source 630 projecting a glass bow cone onto the drawers.

[0146] Fig. 15C is a front view of drawers 610 and 620 as shown in Fig. 15B. Because lower drawer 620 has been pulled out, the glass bow projected on its front has a smaller radius than the glass bow projected on the front surface of top drawer 610.

[0147] By monitoring the size of the glass bow projected on these drawers, a computing device can determine whether either of these drawers was opened during the monitoring, and if a drawer was opened, the computing device can determine which drawer was opened and for how long.

[0148] Example 15:

[0149] Fig. 12 shows a sneaker embodiment of the present invention. Sneaker 300 has a plurality of point light sources 310 mounted on its exterior. For instance, point light source 310 could be mounted, or attached, to an eyelet on sneaker 300. In an alternative embodiment, point light source 310 is the end of a fiber optic wave guide. In the fiber optic wave guide embodiment, the wave guide may be woven into the fabric of sneaker 300. In either embodiment, there is a power source for the light attached to, but not shown, on sneaker 300.

[0150] Sneaker 300 also has one, or more, surface regions that include a reflective and refractive material 330. Point light source 310 is arranged to shine on reflective and refractive material 330.

[0151] Example 16:

[0152] An umbrella incorporating a device for creating a glass bow of the present invention.

[0153] Fig. 11A shows umbrella embodiment 220 of the present invention, albeit with a transparent covering. Mounted on shaft 225 of umbrella 220, above the bottom edge of the umbrella covering, is ring 223, which is secured to shaft 225. Mounted on ring 223 are a plurality of point light sources 224. The inside of umbrella 220 also is lined with a reflective and refractive material between circles 227 and 228. Point light sources 224 are in electrical communication with a power source not shown. Also not shown is a switch to turn the point light sources on or off.

[0154] Fig. 11B is a top view of umbrella 220 shown in Fig. 11A. Fig. 11B also shows ring 223 and point light sources 224, as well as the upper 228 and lower 227 ends of a reflective and refractive material lining the inside of umbrella 220.

[0155] In the embodiment of Figs. 11A and 11B, when the point light sources are on, they shine on the reflective and refractive material and create glass bows inside umbrella 220.

[0156] In an alternative embodiment of umbrella 220, the point light sources are mounted in shaft 225 and not in ring 223.

[0157] Example 17

[0158] A desk lamp embodiment of the present invention

[0159] Fig. 13A is a side view of a desk lamp of the present invention. Desk lamp 400 has wire 450 connected to rotatable joint 420 in which point light source 410 is mounted. In an alternative embodiment, wire 450 is encased in a flexible metal tube to provide support for desk lamp 400.

[0160] Desk lamp 400 also includes shade 440. Shade 440 is mounted to rotatable joint 420 so that point light source 410 always shines directly on the interior of shade 440. Additionally, at least a portion of the interior of shade 440 is coated with a reflective and refractive material. It is preferred that at least the middle fifth of the interior of shade 440 is coated with a reflective and refractive material.

[0161] Figs. 13B and 13C are alternative side views of the desk lamp embodiment of Fig. 13A with shade 440 rotated into different positions.

[0162] Fig. 13D is another alternative side view of the desk lamp embodiment of Fig. 13A in which wire 450 is connected to a USB port on a laptop computer.

[0163] Example 18

[0164] A prior art embodiment of a pop-up card

[0165] Fig. 19A shows a prior art popup card 2000. The prior art popup card 2000 has two panels, 2010 and 2015 that are on either side of crease 2005. Prior art popup card 2000 also has a notch 2020 formed between two slits cut in panels 2010 and 2015 about crease 2005. When the prior art popup card 2000 is opened, panels 2010 and 2015 can be moved into an approximately right angle about crease 2005. Additionally, when prior art card 2000 is opened, object 2030, which is adhered to the leg of notch 2020 that is attached to panel 2010, “pops up”.

[0166] Fig. 19B provides a view of how notch 2020 is formed in prior art popup card 2000. Parallel slits 2024 and 2027 are cut into panels 2010 and 2015 to form notch 2020.

[0167] Fig. 19C provides a view of prior art popup card 2000 when opened after slits 2024 and 2027 are cut into panels 2010 and 2015 to form notch 2020.

[0168] Fig. 19D provides a view of prior art popup card 2000 after notch 2020 has been cut in panels 2010 and 2015 and notch 2020 has been pushed up. In prior art pop up card 2000, the object that is to popup when the card is opened is adhered to surface 2015 of notch 2020.

[0169] Example 19

[0170] A popup card embodiment of the present invention

[0171] Card 2100 of Fig. 20A illustrates a popup card of the present invention. On panel 2115 of popup card 2100 there is a reflective and refractive surface 2105 on the surface of panel 2115. This reflective and refractive surface will generally have an RA (cd/lux/m²) (5°, 12°) of between about 0.2 and about 250. However, it is preferred that the reflective and refractive surface has an RA (cd/lux/m²) of between about 0.3 and about 50. It is further preferred that the reflective and refractive surface has an RA (cd/lux/m²) of between about 0.3 and about 50.

[0172] Additionally, card 2100 has a point light source 2120 on the side of object 2140 facing reflective and refractive surface 2105. In a preferred embodiment, point light source 2120 is positioned so that when the popup card is opened, it is positioned near the center of reflective and refractive surface 2105. Not shown in Fig. 20A is a power source, for instance a battery, and a circuit connecting the power source to point light source 2120, as well as a switch that closes the circuit and provides power to point light source 2120 when card 2100 is opened.

[0173] Fig. 20 also shows that point light source 2120 shines a cone of light 2125 on reflective and refractive surface 2105.

[0174] Fig. 20 also shows that popup card 2100 also has a second panel 2110, and the popup mechanism formed by strips 2130 and 2135.

[0175] In an alternative embodiment of card 2100 of the present invention, card 2100 has a second point light source also located on the side of object 2140 facing surface 2105, which when powered, the light from the second point light source is reflected and refracted and produces a second nimbus about another edge of object 2130. In a further embodiment of card 2100 of the present invention, the light from the first and the second point light sources have different wavelengths of visible light.

[0176] Figs. 20B, 20C, 20D and 20E illustrate an embodiment of popup card 2100 of the present invention. In this embodiment, shining point light source 2120 on the reflective and refractive surface 2105 produces a glass bow (nimbus) about an edge of object 2140. In these figures, the reflective and refractive surface 2105 is on a portion of panel 2110 and on a portion of panel 2115.

[0177] Example 20

[0178] A popup book embodiment of the present invention

[0179] One embodiment of a Pop-up Book of the present invention is formed by adhering one of the exterior panels of a first popup card embodiment to an exterior panel of a second popup card.

[0180] Although the particular embodiments shown and described above will prove to be useful in many applications in the advertising and other display arts to which the present invention pertains, further modifications of the present invention will occur to persons skilled in the art. All such modifications are deemed to be within the scope and spirit of the present invention as defined by the appended claims.

Claims:

1. An ornamental display comprising: a. a reflective and refractive surface having a retroreflection coefficient, R_A (in cd/lux/m^2) (5° , 12°) of between about 0.2 and about 250; b. positioned between about 1 and 100 cm in front of said reflective and refractive surface, a shaped object having a front side facing away from the reflective and refractive surface and a back side facing said reflective and refractive surface as well as an edge forming a perimeter of said shaped object; c. said edge of said opaque object having one, or more, aspects to have a nimbus, d. mounted on said back side of said shaped object, between about 5 mm and 2 cm from said aspect of said shaped object to have a nimbus and between about 5 mm and about 2 m from said back side in the direction of said reflective and refractive surface is a point light source that shines on said reflective and refractive surface, and e. a power source in communication with said point light source to turn said point light source on.
2. The ornamental display of claim 1 in which the shape of said shaped object comprises at least a recognizable part of the shape of one member of the group consisting of a human, animal, religious symbol, or a combination thereof.
3. The ornamental display of claim 2 in which said shaped object further comprises a printed image on said front side.
4. The ornamental display of claim 1 in which the retroreflection coefficient, R_A (in cd/lux/m^2), of said reflective and refractive surface is between about 0.2 and about 100.
5. The ornamental display of claim 1 in which the retroreflection coefficient, R_A (in cd/lux/m^2), of said reflective and refractive surface is between about 0.3 and about 50.
6. The ornamental display of claim 1 in which the retroreflection coefficient, R_A (in cd/lux/m^2), of said reflective and refractive surface is between about 0.3 and about 30.
7. A method of enhancing an aspect of a shaped object to be displayed, said shaped object comprising a to-be-viewed side and a not to-be-viewed side as well as an edge around the

perimeter of said shaped object, said method comprising the steps of: a. mounting a point light source on the not to-be-viewed side of said shaped opaque object between about 5 mm and about 2 cm from said the edge of said shaped object near said aspect to be enhanced, b. positioning said not to-be-viewed side of said shaped opaque object between about 5 mm and 2 m in front of a reflective and refractive surface having a retroreflection coefficient, R_A (in cd/lux/m^2), of between about 0.2 and about 250, and c. providing power to said light source so that it partially illuminates said reflective and refractive surface.

8. A no-touch button system that closes an electrical circuit comprising a. a reflective and refractive surface, b. a post projecting from said reflective and refractive surface at an angle of between about 60° and about 120° , c. a point light source mounted of said post between about 5 mm and 2 m from said reflective and refractive surface, d. a power source for illuminating said point light source, and e. a detector in communication with a computer device that determines whether a glass bow produced by said no-touch button system has been touched.

9. The no-touch button system wherein the angle between said reflective and refractive surface and said post is approximately 90° .

10. A clock comprising: a. a reflective and refractive surface, b. a plurality of lighting pins projection at about a 90° angle from said reflective and refractive surface, c. at least one point light source on each of said lighting pins, each of said point light sources when on shines on the reflective and refractive surface, and d. a power supply connected to each of said point light sources.

11. The clock of claim 9 further comprising a computing device to control when each of the point light sources is turned on and off.

12. A pop-up having a collapsed and a popped-up state comprising a glass bow wherein the improvement comprises:

- a. a reflective and refractive surface having a retroreflection coefficient, R_A (cd/lux/m^2) (5° , 12°) of between about 0.2 and about 250;

- b. positioned between about 1 and 17 cm in front of said reflective and refractive surface, a shaped object having a front and a back side, said front side of said shaped object facing away from the reflective and refractive surface and said back side of said shaped object facing said reflective and refractive surface as well as an edge forming a perimeter of said shaped object;
 - c. said edge of said opaque object having one, or more, aspects about which a nimbus can be created,
 - d. mounted on said back side of said shaped object, between about 5 mm and 2 cm from said aspect of said shaped object to have a nimbus and between about 5 mm and about 17 cm from said back side in the direction of said reflective and refractive surface is a point light source that shines on said reflective and refractive surface, and
 - e. a power source in communication with said point light source to turn said point light source on.
13. The pop-up of Claim 12 in which the object including the pop-up is a greeting card.
14. The pop-up of Claim 12 in which the object including the pop-up is a book.
15. The pop-up of Claim 12 further comprising a switch that closes the circuit to said point light source when said pop-up is popped-up.
16. The pop-up of Claim 12 in which the retroreflection coefficient, R_A (cd/lux/m²), of said reflective and refractive surface is between about 0.3 and about 50.
17. The pop-up of Claim 12 in which the retroreflection coefficient, R_A (cd/lux/m²), of said reflective and refractive surface is between about 0.3 and about 30.
18. The pop-up of Claim 12 in which said power source comprises a battery.

19. The pop-up of Claim 14 in which said power source comprises an external solar panel.
20. The pop-up of Claim 19 in which said external solar panel is in connectable communication with said point light source.
21. The pop-up of Claim 12 further comprising a second opaque object having an aspect about which a nimbus can be created.
22. The pop-up of Claim 12 in which said power source is external to said pop-up and removably connected to said point light source.



Figure 1

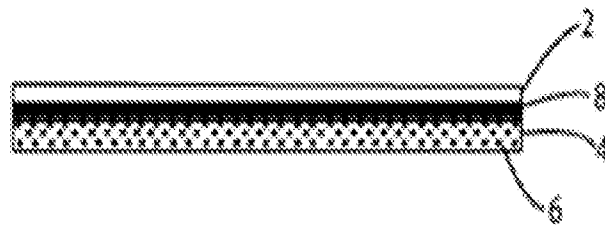


Figure 2

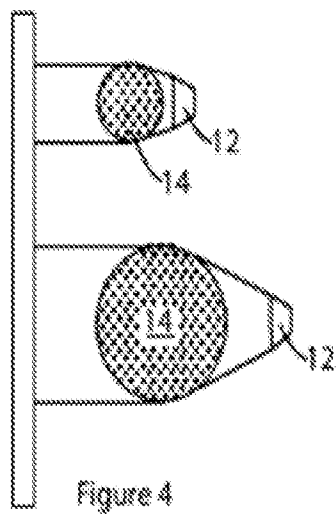


Figure 4

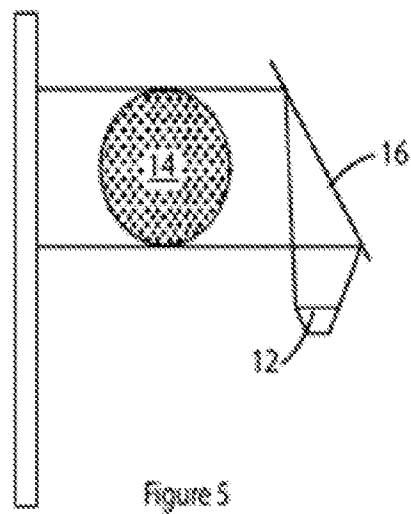


Figure 5

FIG. 3

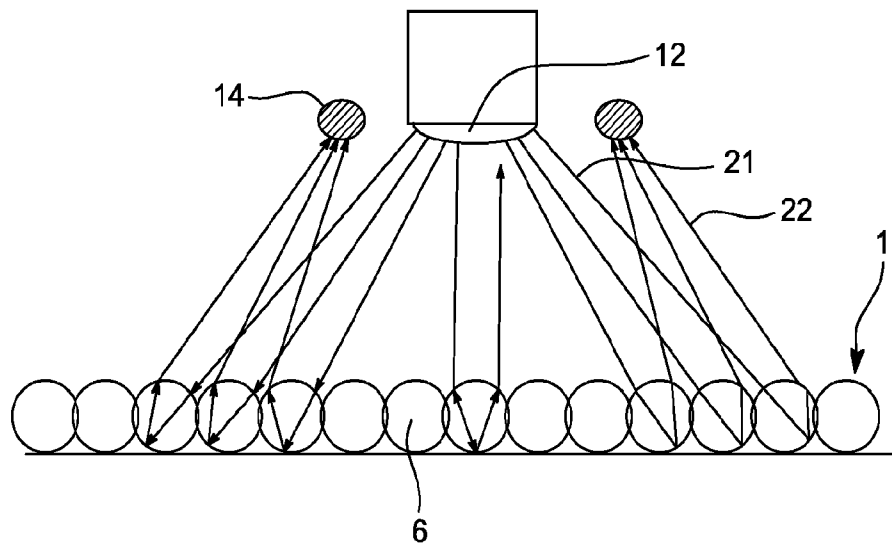


FIG. 6

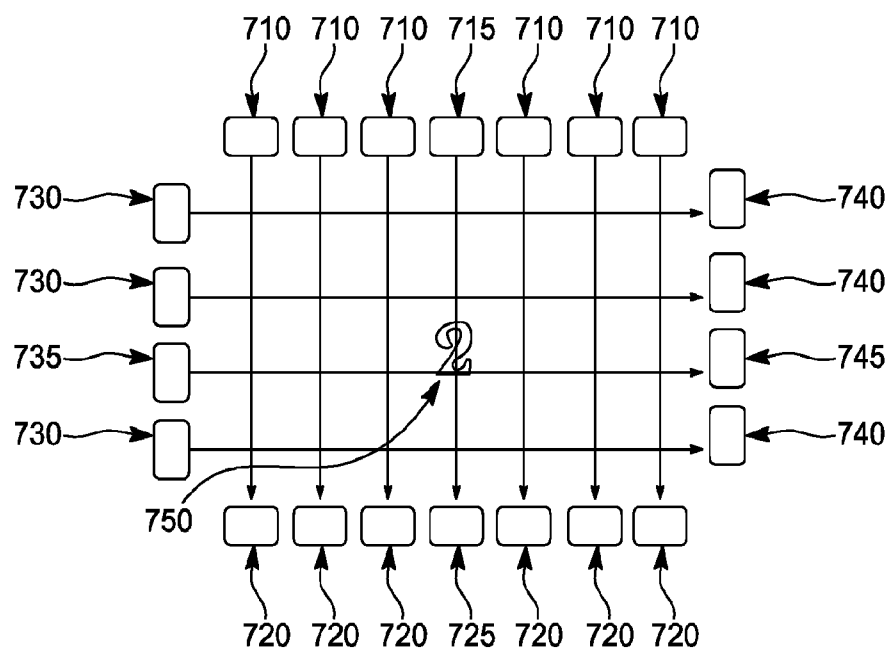


FIG. 7A

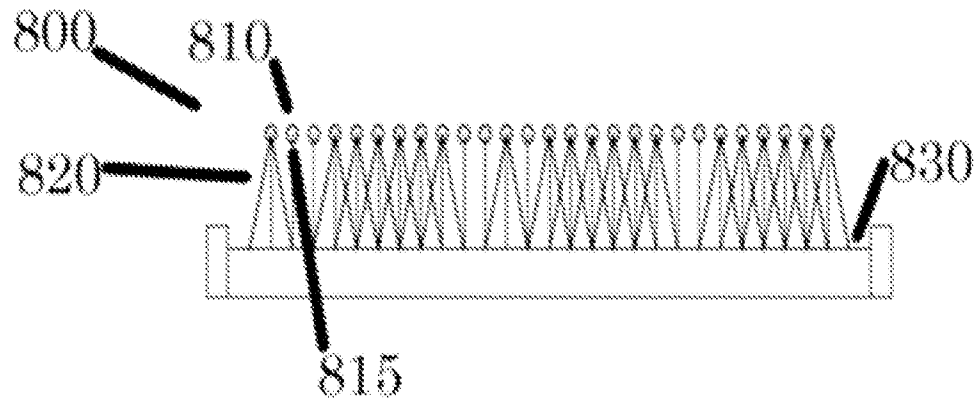


FIG. 7B

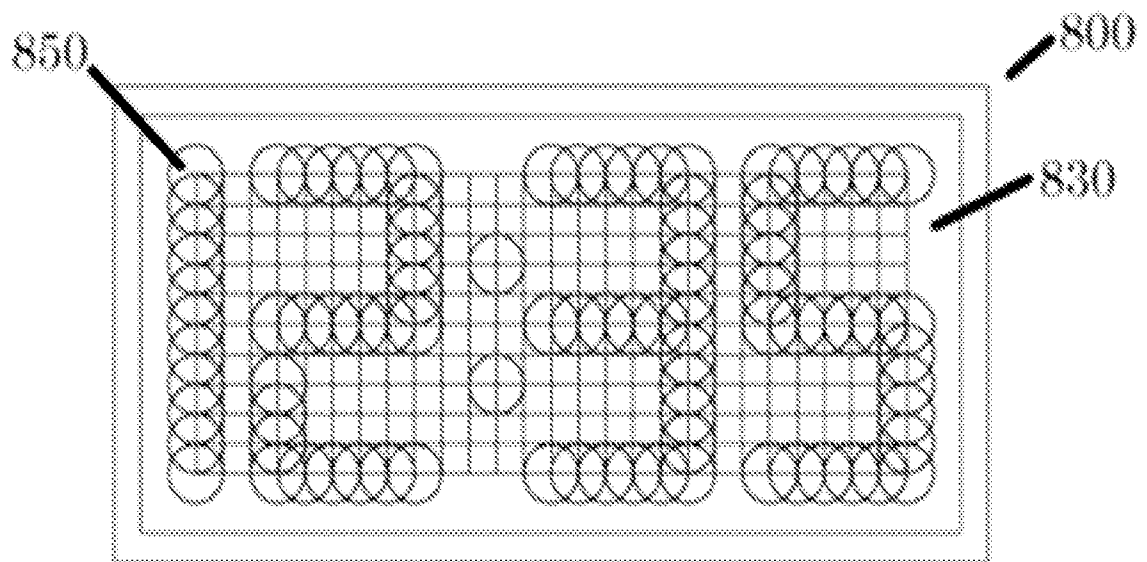


FIG. 8A

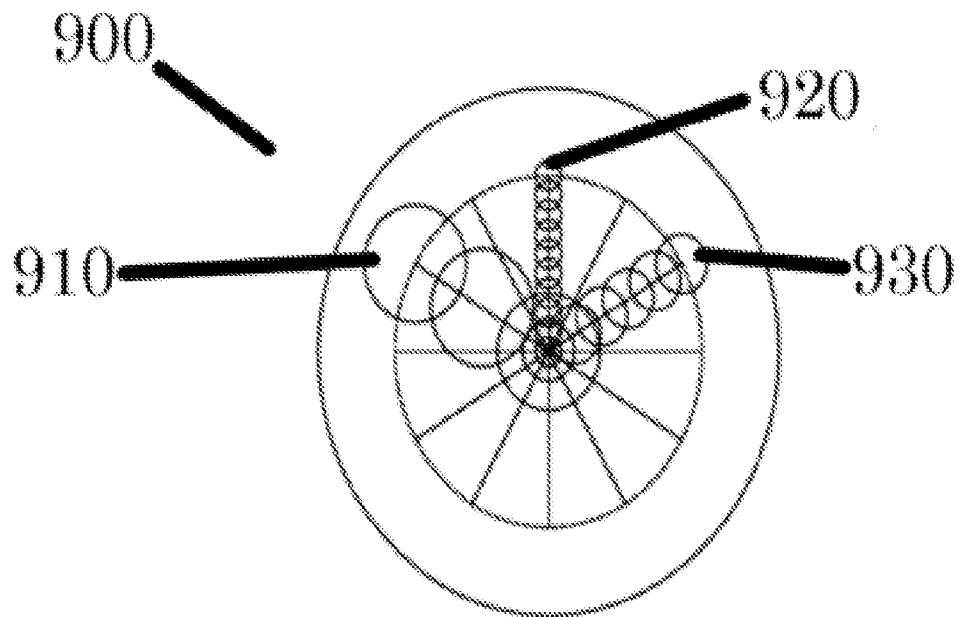


FIG. 8B

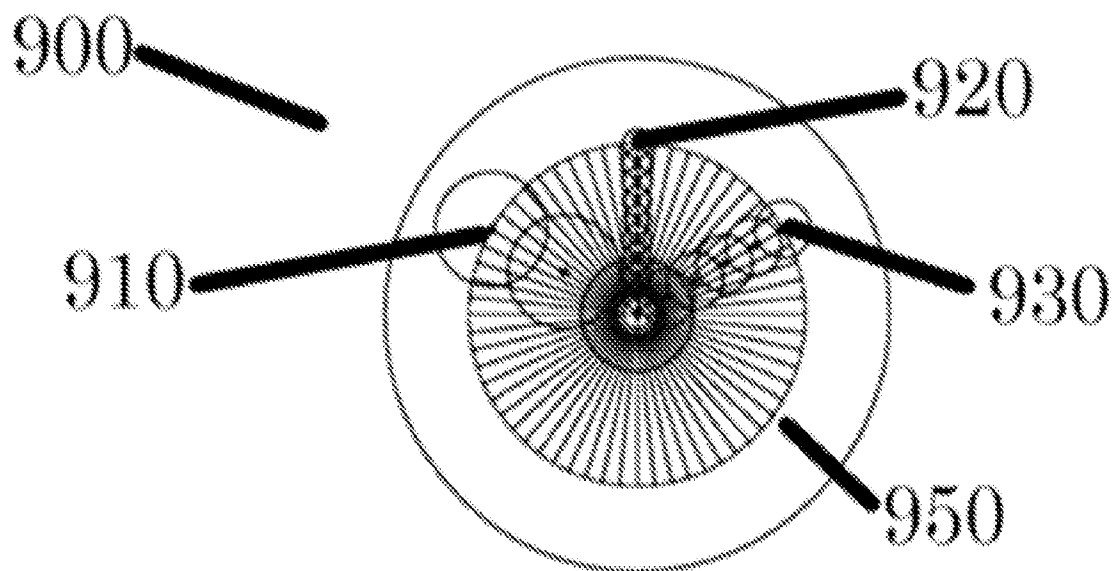


FIG. 8C

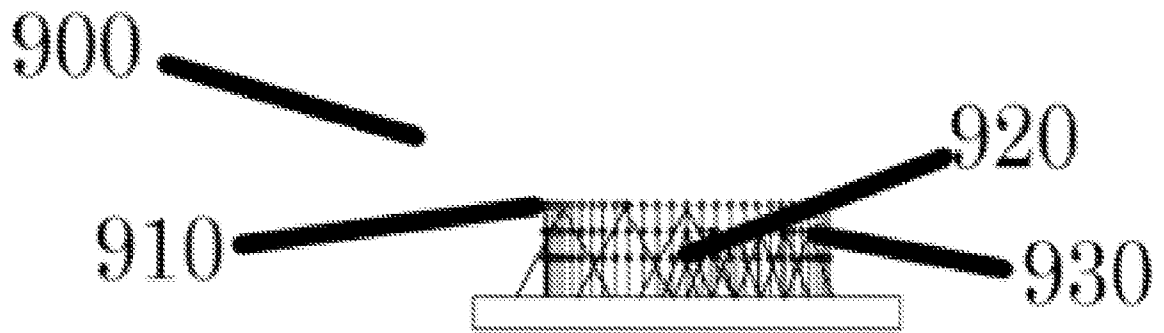


FIG. 9

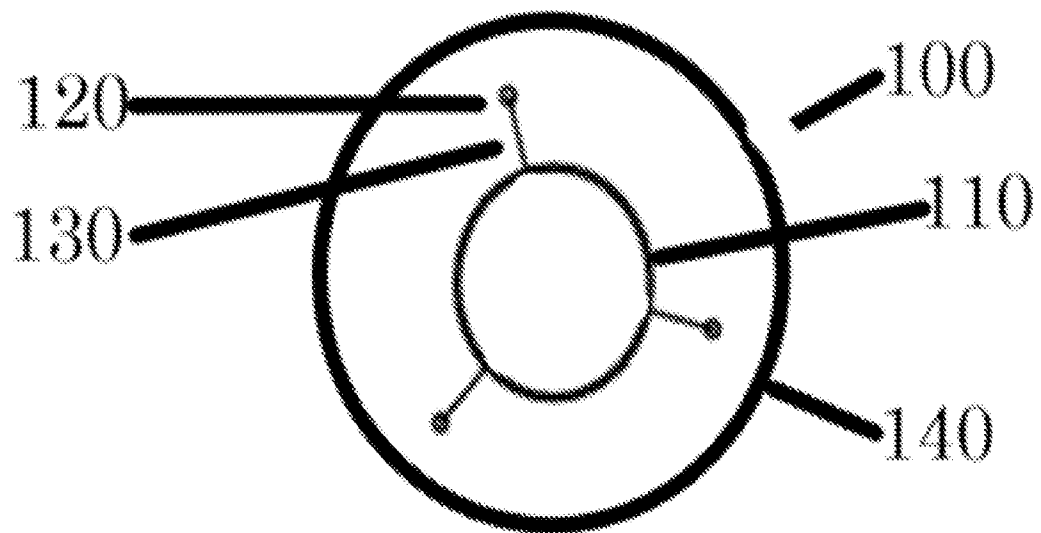


FIG. 10A

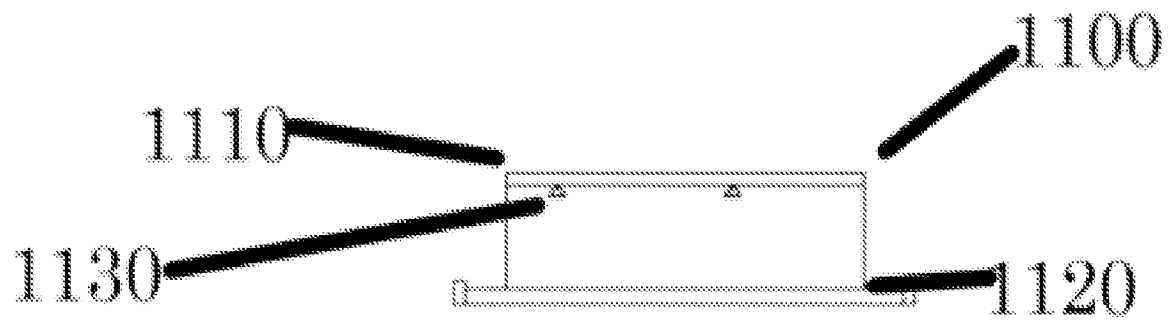


FIG. 10B

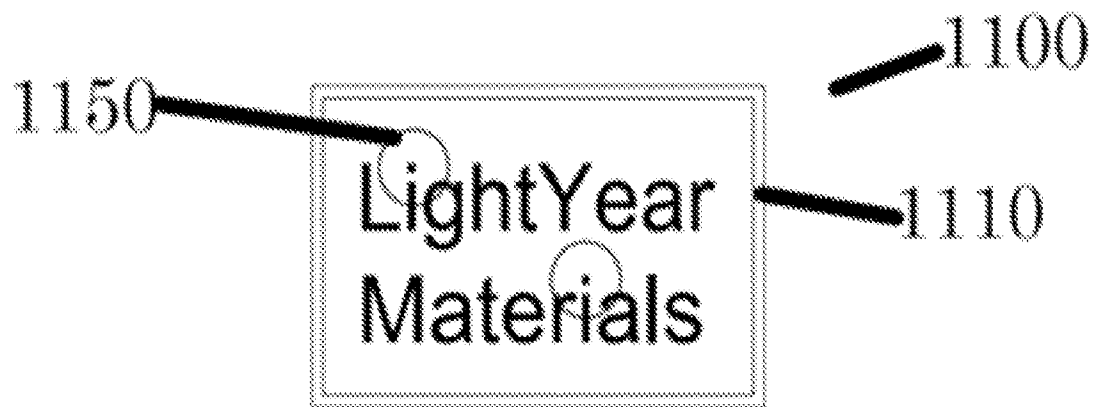


FIG. 11A

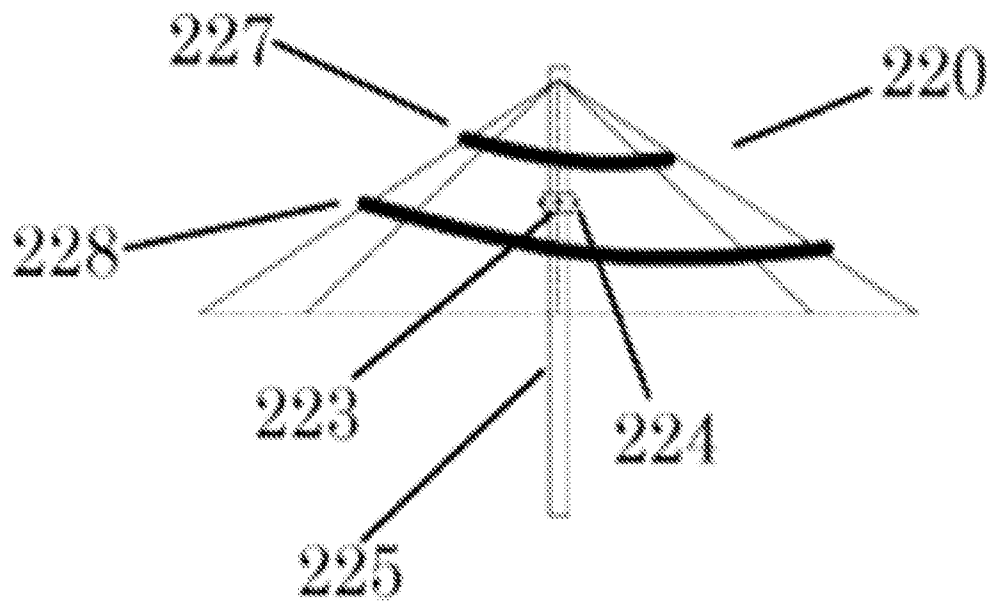


FIG. 11B

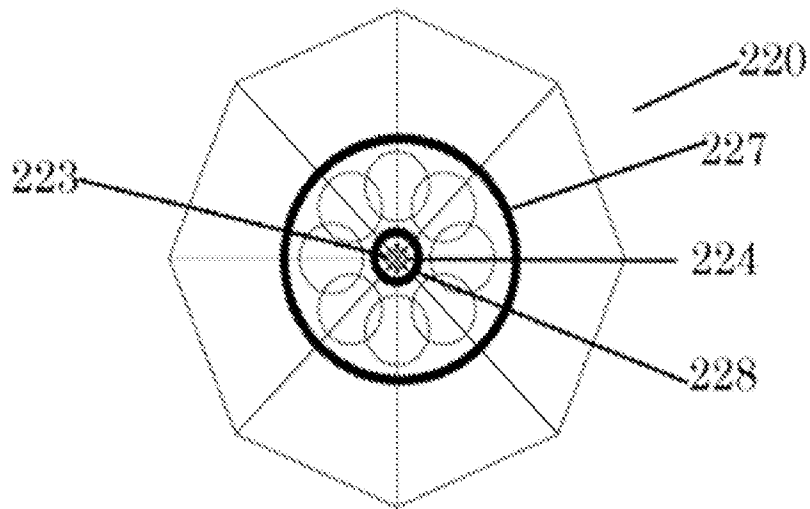


FIG. 12

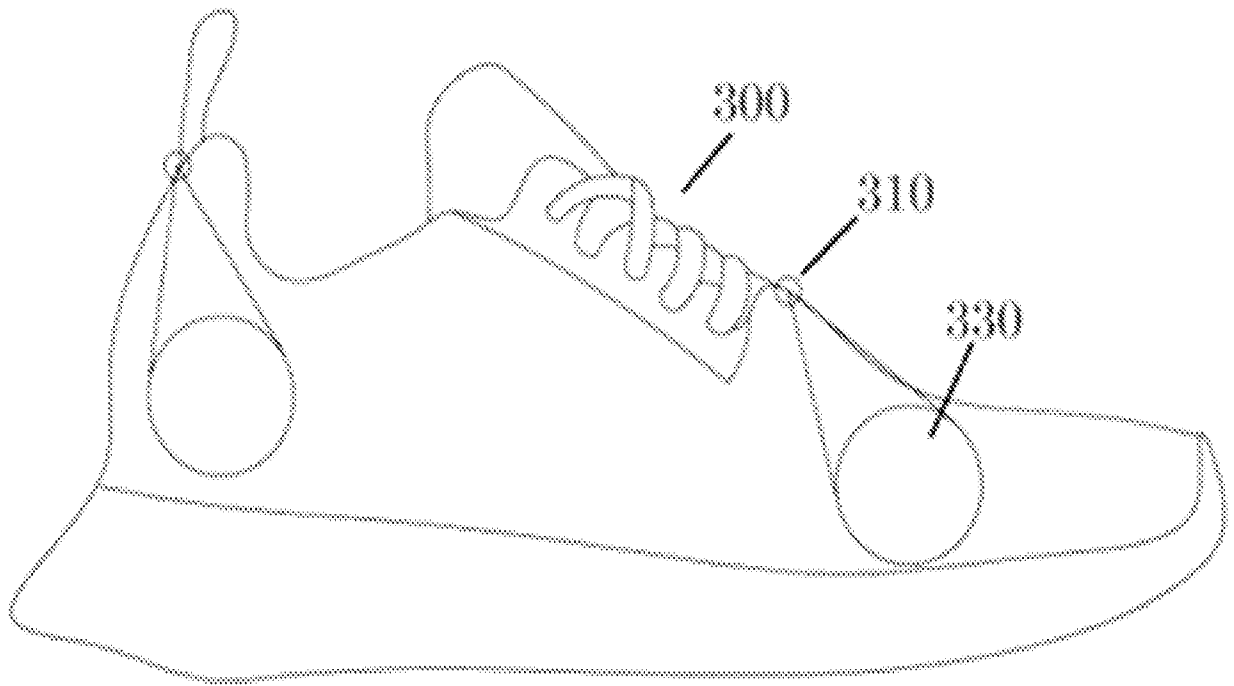


FIG. 13A

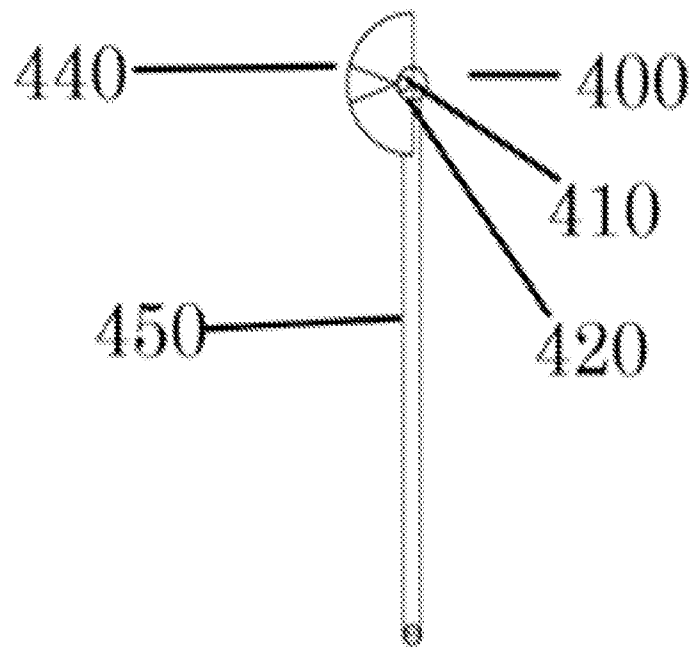


FIG. 13B

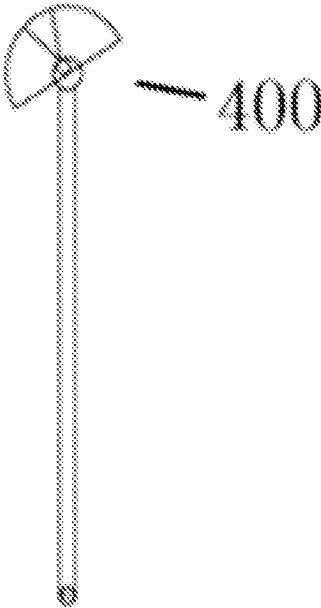


FIG. 13C

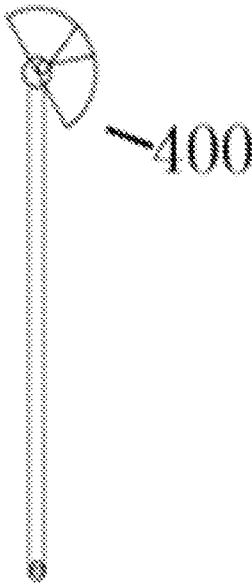


FIG. 13D

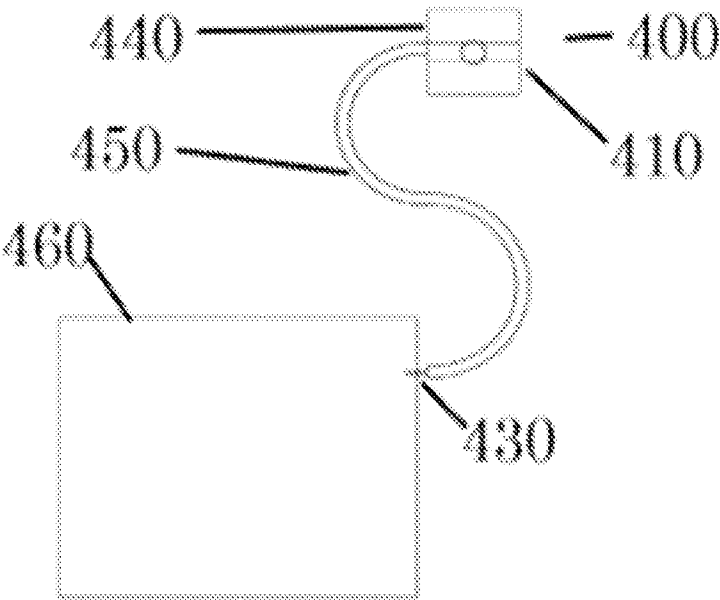


FIG. 14A

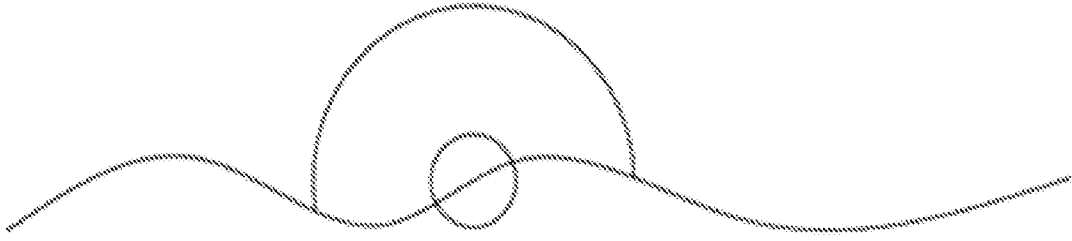


FIG. 14B

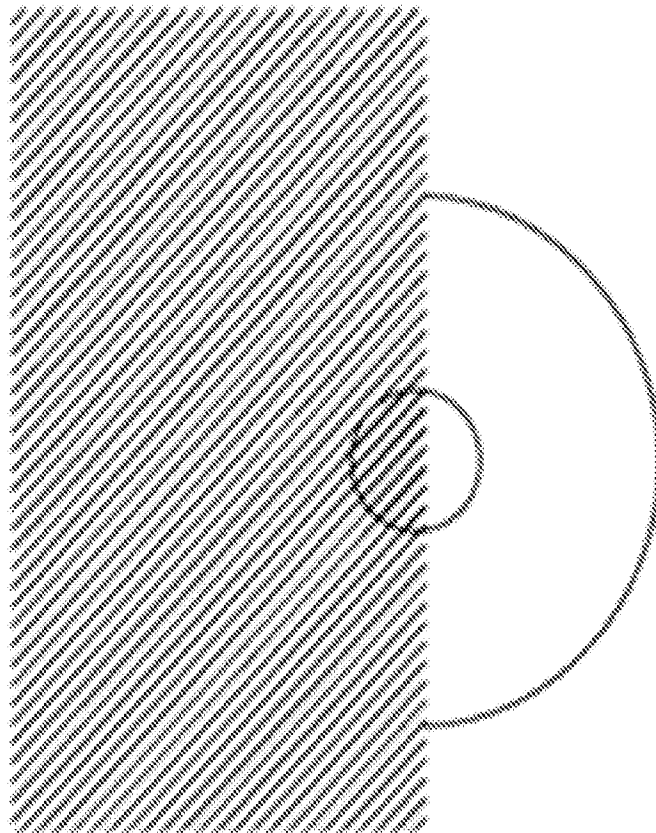


FIG. 15A

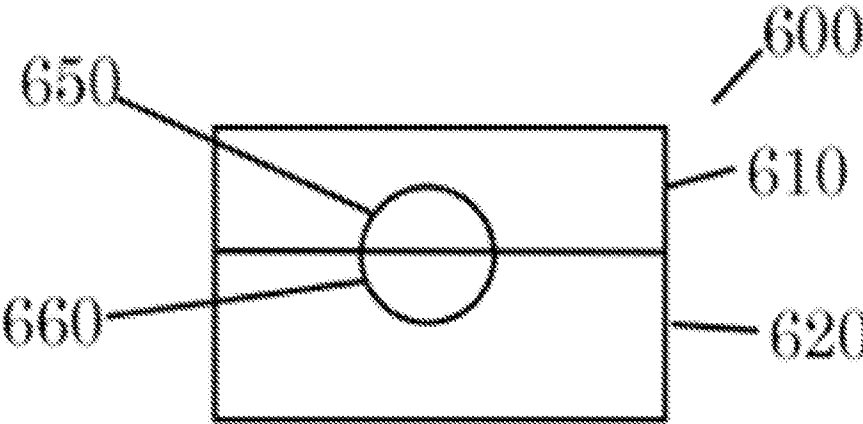


FIG. 15B

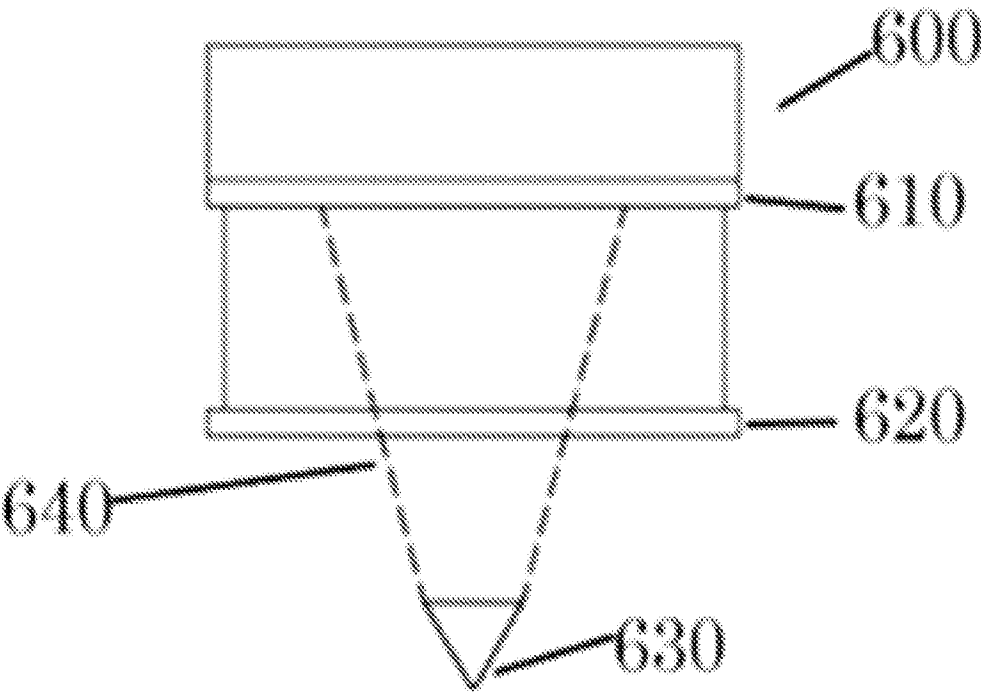


FIG. 15C

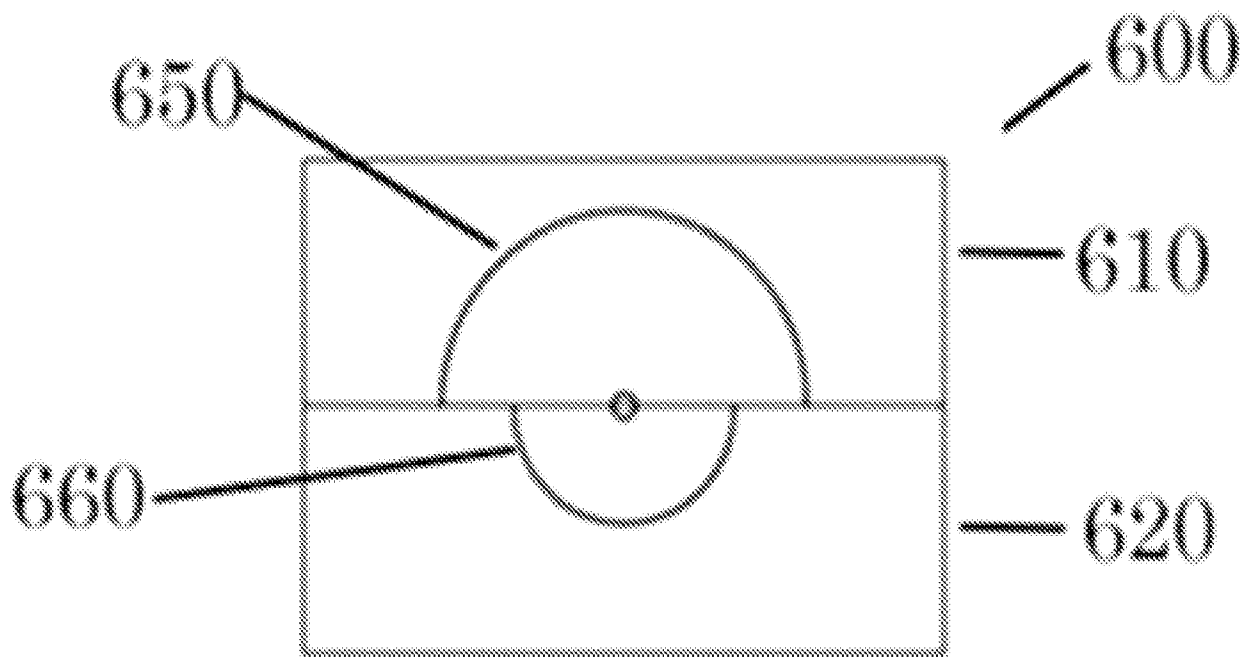


FIG. 16A

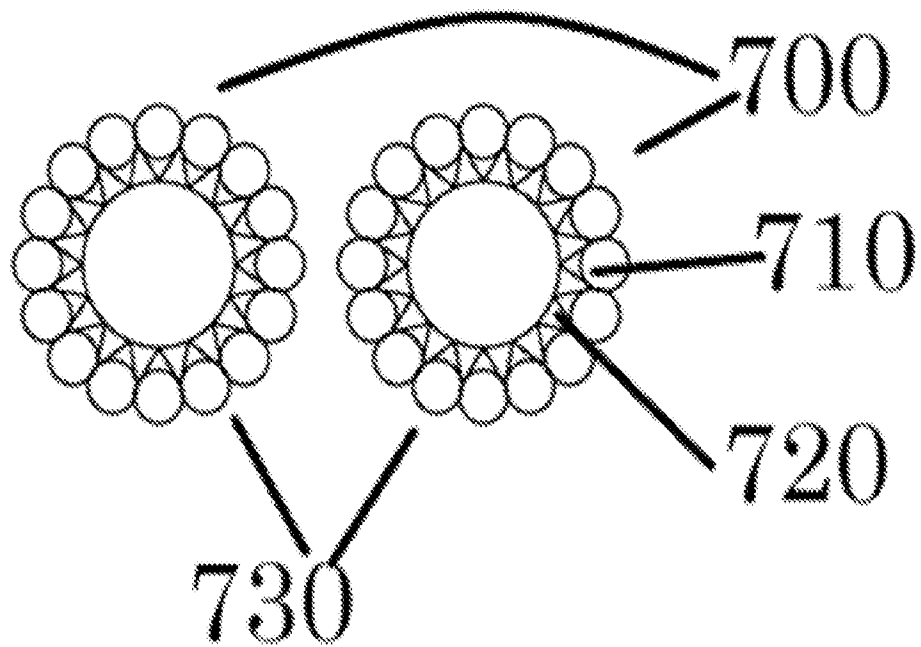


FIG. 16B

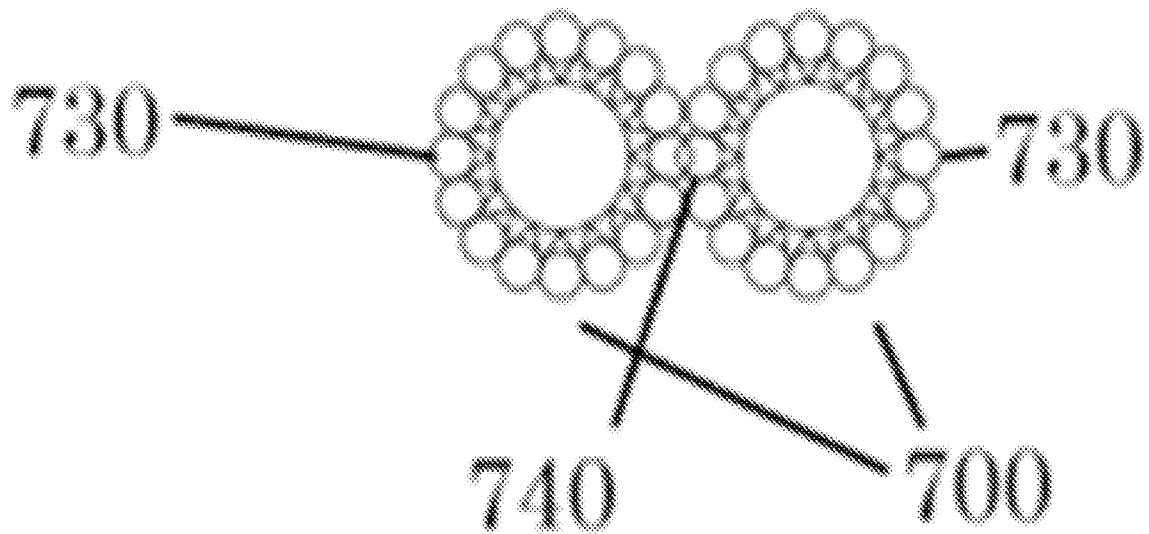


FIG. 17

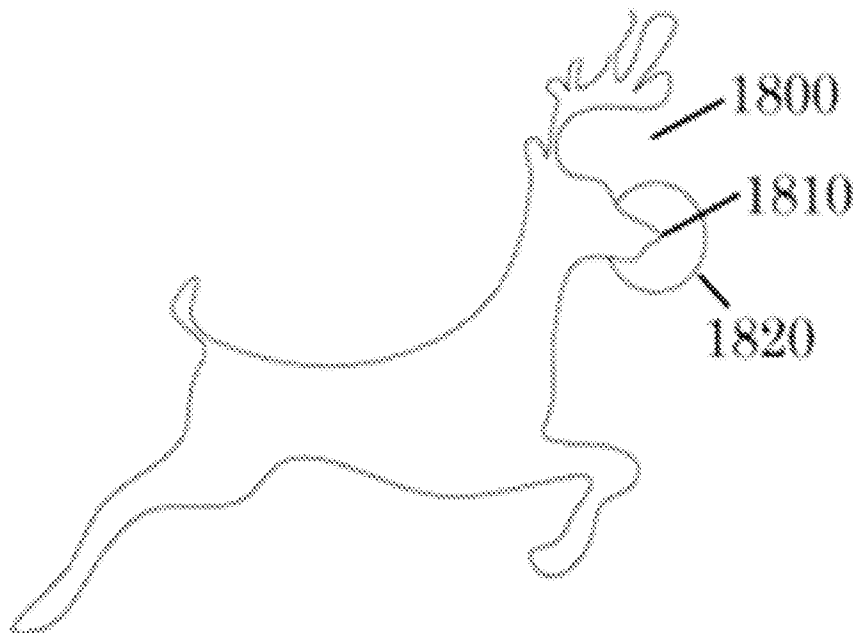


FIG. 18A

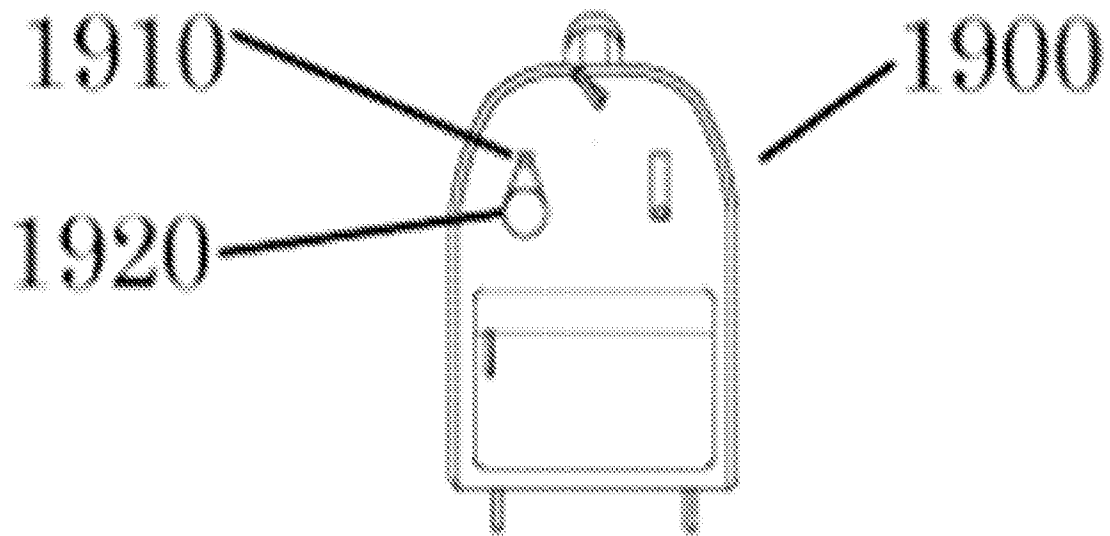


FIG. 18B

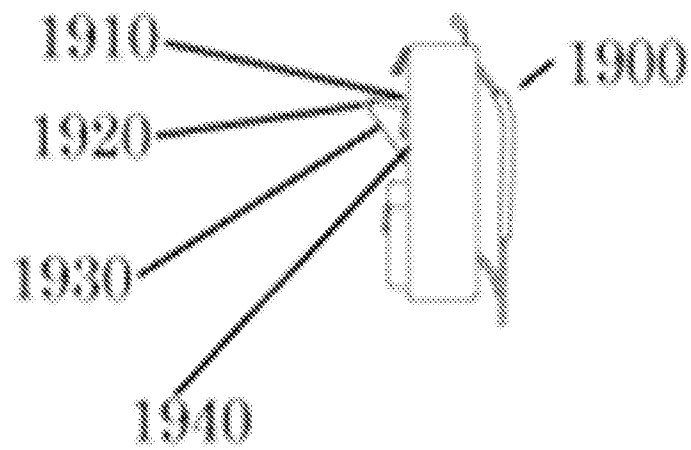


Fig. 19A

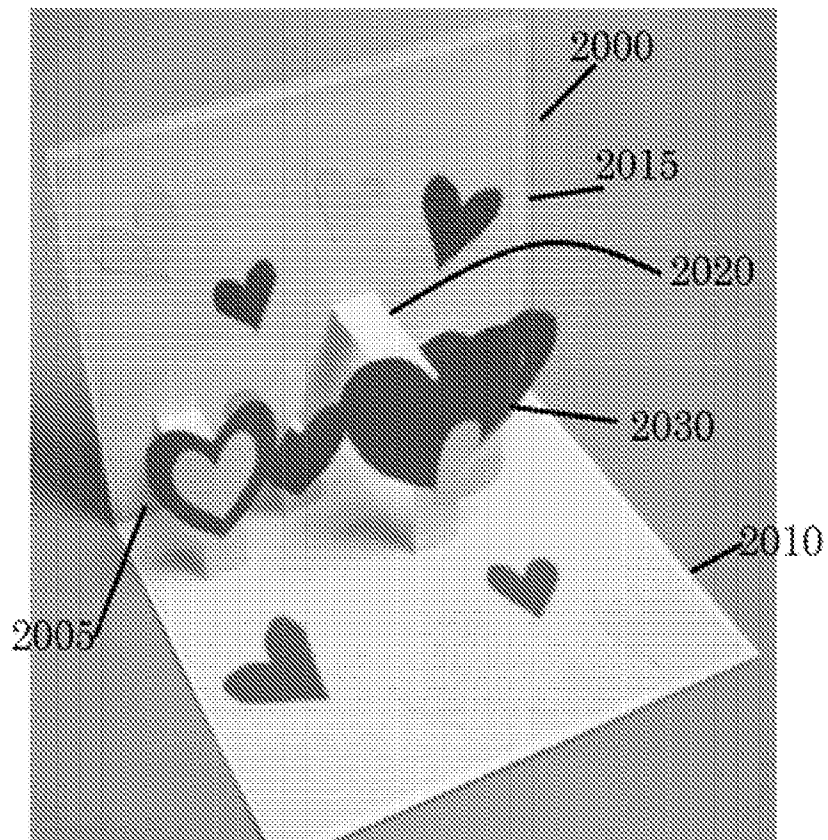


Fig. 19B

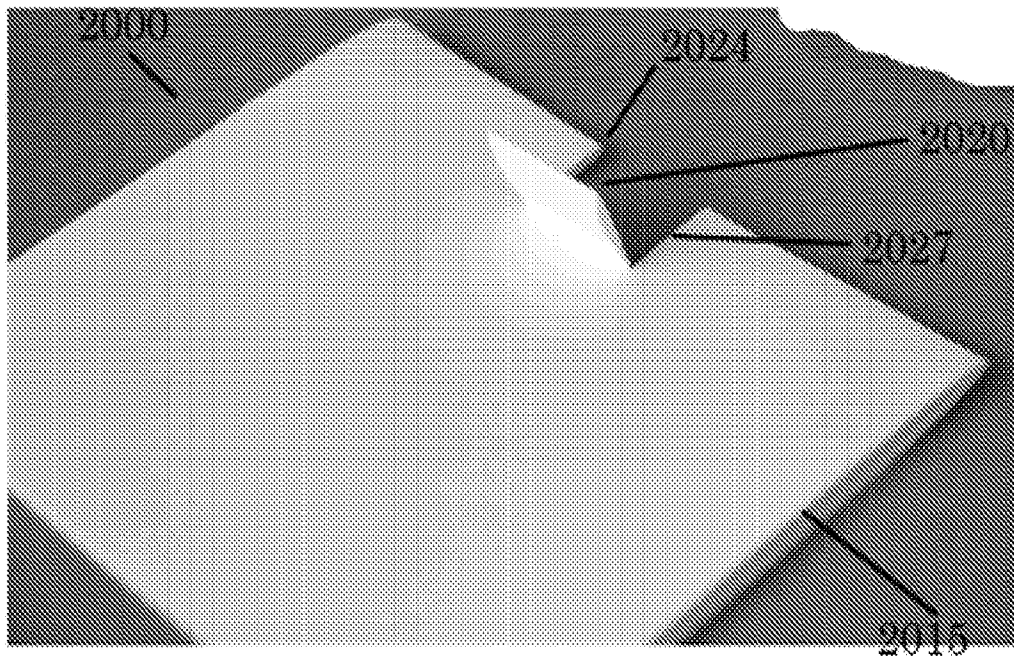


Fig. 19C

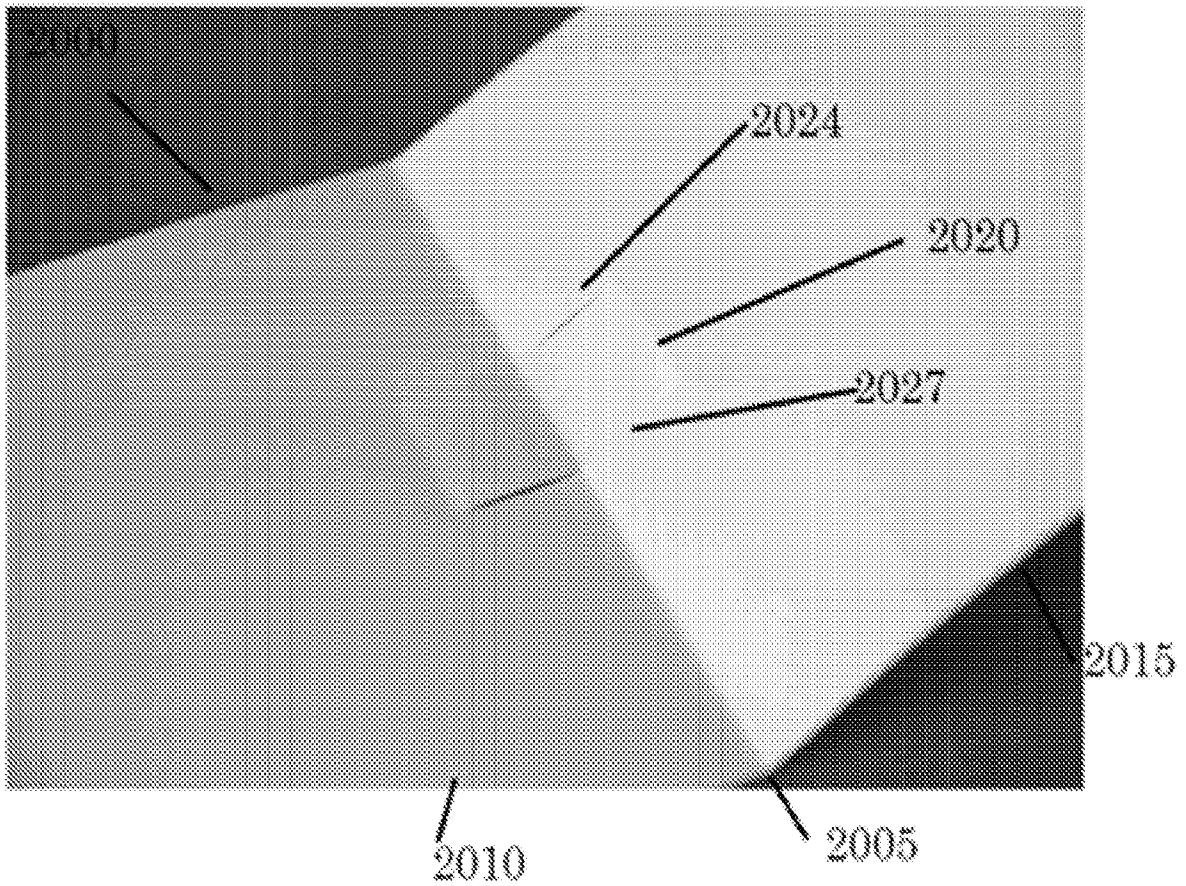


Fig. 19D

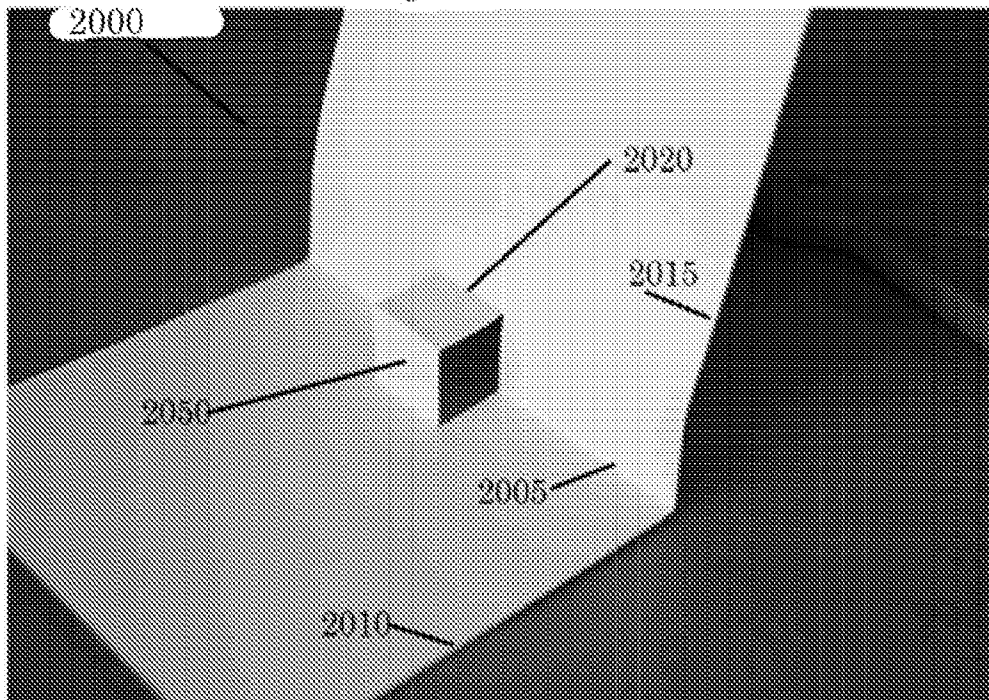


Fig. 20A

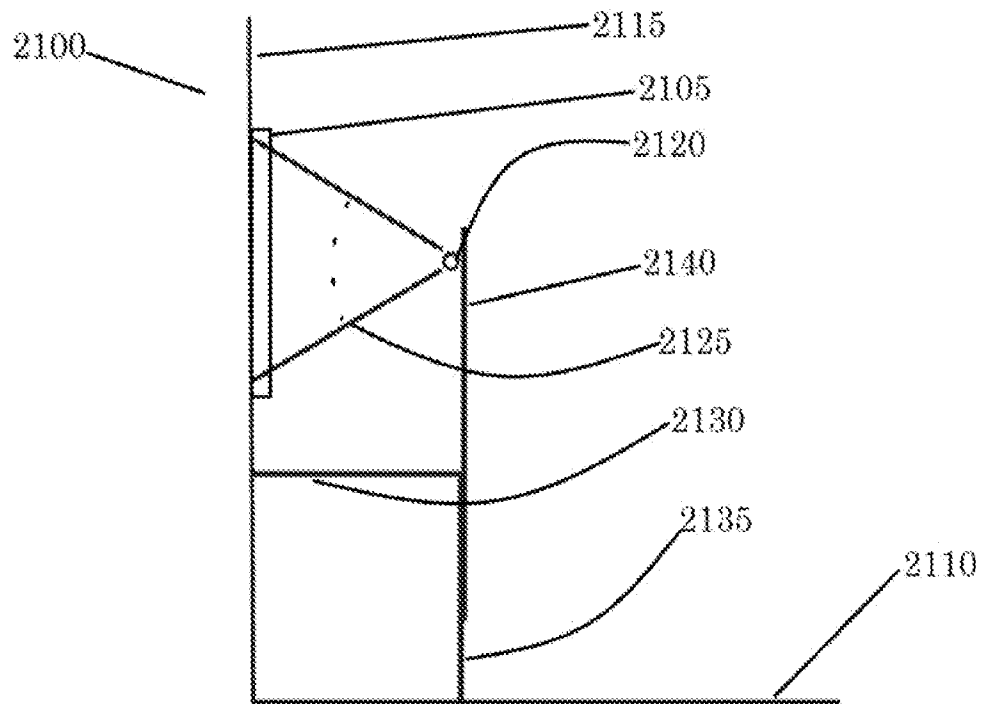


Fig. 20B

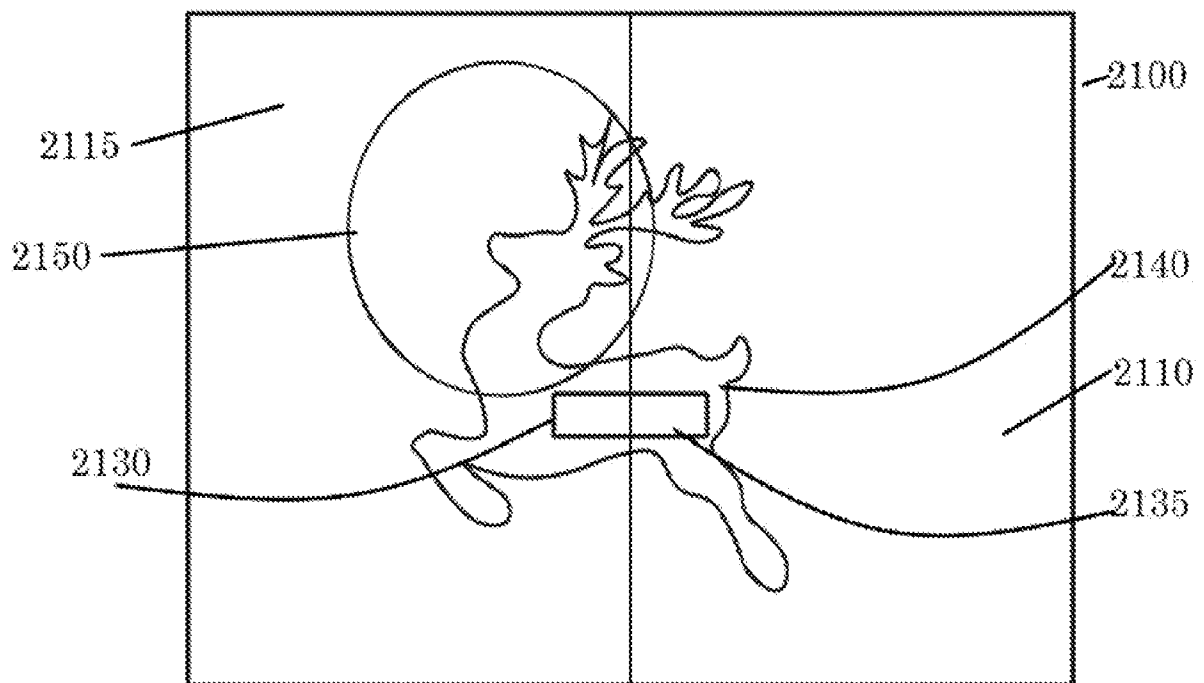


Fig. 20C

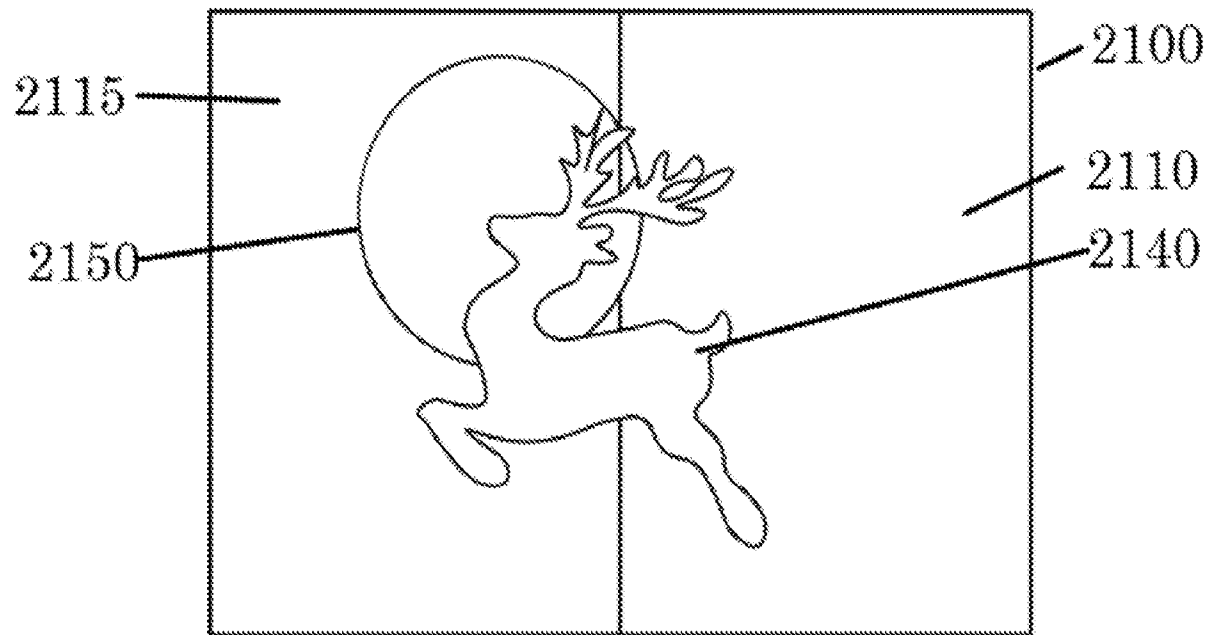


Fig. 20D


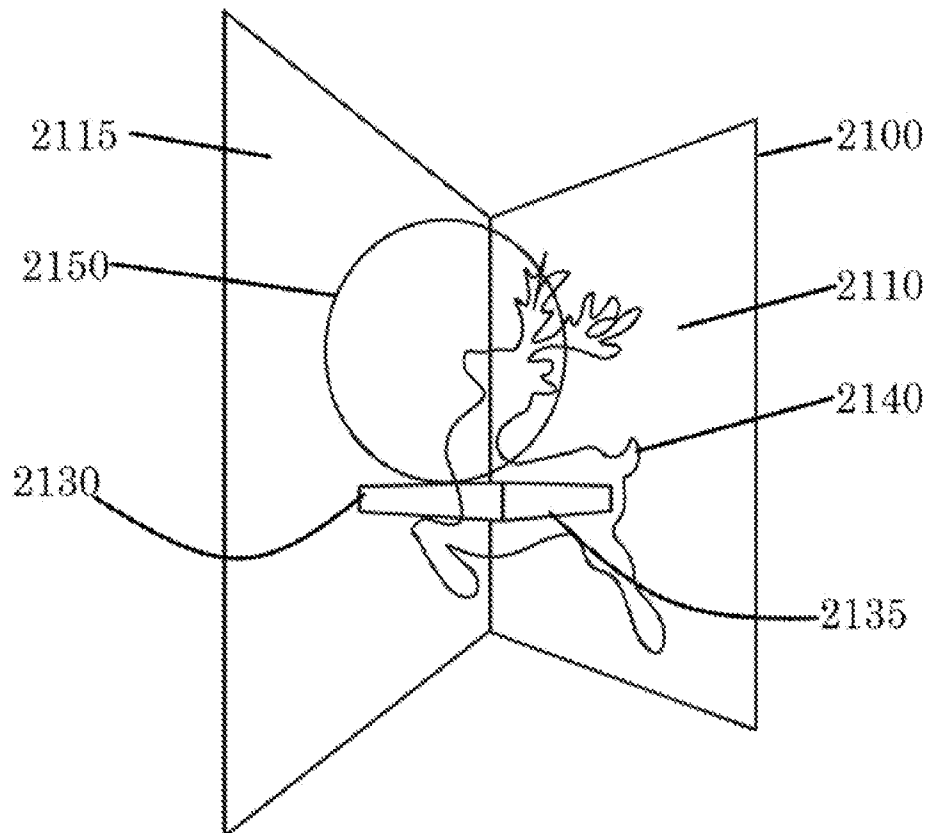


Fig. 20E

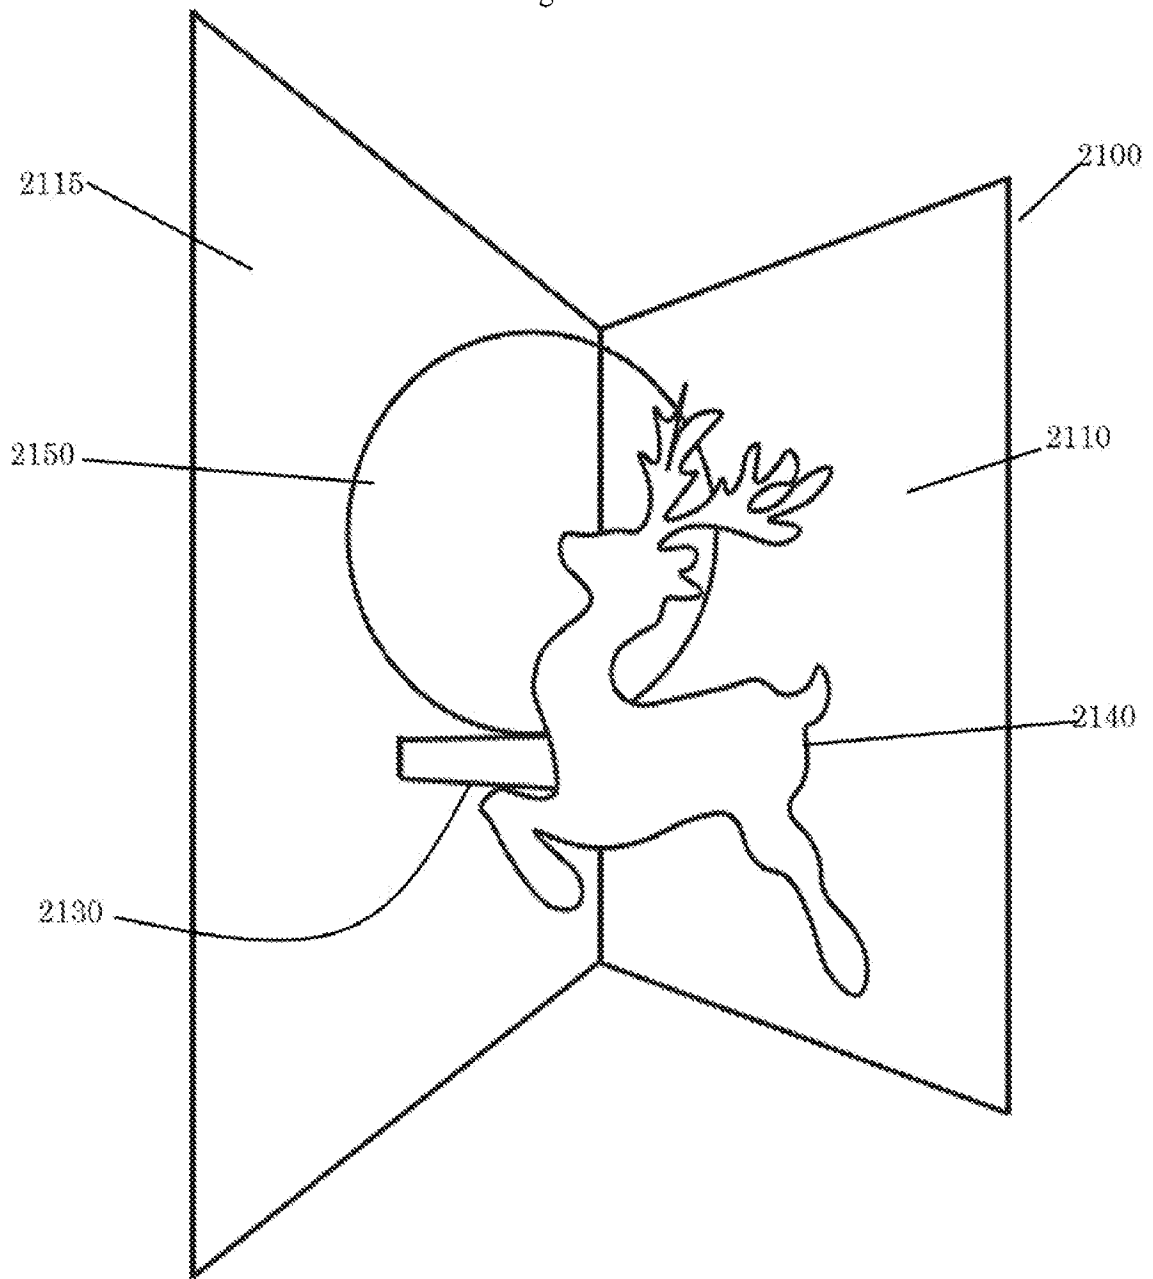

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 21/28096

A. CLASSIFICATION OF SUBJECT MATTER

IPC - F21V 13/04; F21V 33/00; F21S 9/02; F21K 9/62; F21Y 101/00; G04G 9/04 (2021.01)

CPC - F21V 13/04; F21V 33/00; F21S 9/02; F21K 9/62; F21Y 101/00; G04G 9/04; F21Y 2115/10; H01L 2933/0091

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,536,558 A (SHELTON) 16 July 1996 (16.07.1996): abstract, col. 8 ln 19-27	1-22
A	US 2012/0063159 A1 (PROPP) 15 March 2012 (15.03.2012): abstract, [0125]-[0126]	1-22
A	US 2016/0356929 A1 (KNUTSON) 08 December 2016 (08.12.2016): abstract, [0025]	1-22
A	US 2015/0003045 A1 (HO) 01 January 2015 (01.01.2015): abstract, [0007], [0030]	1-22
P, X	US 10,962,200 B1 (KNUTSON) 30 March 2021 (30.03.2021): abstract	1-22

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 July 2021

Date of mailing of the international search report

JUL 27 2021

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Kari Rodriguez

Telephone No. PCT Helpdesk: 571-272-4300