

**PCT**WORLD INTELLECTUAL PROPERTY  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER T

WO 9607691A2

**(51) International Patent Classification<sup>6</sup> :**  
**C08G 73/10, 73/12, C07D 207/452****A2****(11) International Publication Number:** **WO 96/07691****(43) International Publication Date:** 14 March 1996 (14.03.96)**(21) International Application Number:** PCT/US95/11116**(22) International Filing Date:** 30 August 1995 (30.08.95)**(30) Priority Data:**

08/300,721	2 September 1994 (02.09.94)	US
08/460,495	2 June 1995 (02.06.95)	US

**(60) Parent Application or Grant**

**(63) Related by Continuation**  
US 08/300,721 (CIP)  
Filed on 2 September 1994 (02.09.94)

**(71) Applicant (for all designated States except US):** QUANTUM MATERIALS, INC. [US/US]; 9938 Via Pasar, San Diego, CA 92126 (US).**(72) Inventors; and****(75) Inventors/Applicants (for US only):** DERSHEM, Stephen, M. [US/US]; 9097 Truman Street, San Diego, CA 92129 (US). PATTERSON, Dennis, B. [US/US]; 8132 Camino del Sol, La Jolla, CA 92037 (US). OSUNA, Jose, A., Jr. [US/US]; 6055 Estelle Street #1, San Diego, CA 92115 (US).**(74) Agent:** REITER, Stephen, E.; Pretty, Schroeder, Brueggemann & Clark, Suite 2000, 444 South Flower Street, Los Angeles, CA 90071 (US).**(81) Designated States:** AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).**Published***Without international search report and to be republished upon receipt of that report.***(54) Title:** THERMOSETTING RESIN COMPOSITIONS CONTAINING MALEIMIDE AND/OR VINYL COMPOUNDS**(57) Abstract**

In accordance with the present invention, there are provided novel thermosetting resin compositions which do not require solvent to provide a system having suitable viscosity for convenient handling. Invention compositions have the benefit of undergoing rapid cure. The resulting thermosets are stable to elevated temperatures, are highly flexible, have low moisture uptake and are consequently useful in a variety of applications, e.g., in adhesive applications since they display good adhesion to both the substrate and the device attached thereto.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

THERMOSETTING RESIN COMPOSITIONS CONTAINING  
MALEIMIDE AND/OR VINYL COMPOUNDS

RELATED APPLICATIONS

This application is a continuation-in-part of United States Patent Application Ser. No. 08/460,495, filed June 2, 1995, now pending, which is, in turn, a continuation-in-part of United States Patent Application Ser. No. 08/300,721, filed September 2, 1994, now pending, both of which are hereby incorporated by reference in their entirety.

FIELD OF THE INVENTION

10           The present invention relates to thermosetting resin compositions and uses therefor. In a particular aspect, the present invention relates to thermosetting resin compositions containing maleimide resins, vinyl resins, or both.

15                           BACKGROUND OF THE INVENTION

Bismaleimides per se occupy a prominent position in the spectrum of thermosetting resins. Indeed, several bismaleimides are commercially available. Bismaleimide resins are used as starting materials for the preparation of thermoset polymers possessing a wide range of highly desirable physical properties. Depending on the particular resin and formulation, the resins provide cured products having excellent storage stability, heat resistance, as well as good adhesive, electrical and mechanical properties. Accordingly, bismaleimide resins have been used for the production of moldings, heat-resistant composite materials, high temperature coatings and for the production of adhesive joints. Typically, however, in any particular resin formulation there is a trade-off between the various properties. For example, in the formulation of

"snap" cure adhesives (i.e., adhesives that cure in two minutes or less at  $\leq 200^{\circ}\text{C}$ ), it is desirable to use a system which does not require the addition of diluent to facilitate handling. In other words, snap cure products  
5 require formulations containing 100% reactive materials. Thus, it is desirable to prepare snap cure resins which are liquid at or about room temperature (i.e., low viscosity materials) for ease of handling.

Unfortunately, up until now, it has not proved  
10 possible to formulate bismaleimide compositions that are both quick curing, easy to handle (i.e., liquid at or about room temperature), and have low moisture uptake. Consequently, it is a desideratum to provide thermosetting bismaleimide resin compositions that produce cured resins  
15 exhibiting a combination of highly desirable physical properties, including a combination of rapid curing and low water absorption.

A particular disadvantage of the use of bismaleimide resins for the types of applications described  
20 above is that, at room temperature, such materials exist as solid resins which require the addition of liquid diluents, in order for such resins to achieve a useful and processable viscosity. This difficulty has been compounded by the poor solubility of bismaleimides in organic  
25 solvents. This poor solubility generally necessitates the use of polar diluents, such as N-methyl-2-pyrrolidone or dimethylformamide. These diluents are undesirable, *inter alia*, from the viewpoint of environmental pollution. Therefore, it is another desideratum to provide  
30 bismaleimide resins that require little, if any, non-reactive diluent to facilitate handling.

One approach to solving the problem of a need for a diluent has been to use reactive liquid diluents. For example, the co-cure of simple bismaleimides with

relatively simple divinyl ethers is known in the art. The use of such diluents is advantageous in that these materials become incorporated into the thermosetting resin composition, and hence do not create disposal problems.

5 However, the range of suitable liquid reactive diluents is very limited. Many of the available diluents are restricted by the low boiling points thereof, and, therefore, the high volatility thereof; by the odor of such materials; by the toxicity of such materials and/or

10 problems with skin irritation induced thereby; by the poor ability of such materials to solubilize bismaleimides; by the high viscosity of such materials, which, again, limits the bismaleimide solubility and also leads to little or no tack in the formulation; by the poor thermal stability

15 and/or hydrolytic stability of such materials; by the incompatibility of such materials with other formulation modifiers, and the like. In particular, since the diluents become an integral component of the thermosetting resin composition, they necessarily influence its properties.

20 Consequently, it is another desideratum to provide combinations of bismaleimide resins with reactive diluents which do not suffer from the above-described drawbacks and that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid

25 curing and low water absorption.

Accordingly, there has existed a definite need for bismaleimide resins that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water

30 absorption. There has existed a further need for bismaleimide resins that require the addition of little, if any, non-reactive diluent to facilitate handling. And there has existed a still further need for combinations of bismaleimide resins with reactive diluents which do not

35 suffer from the limitations of known reactive resins and that produce cured resins exhibiting a combination of

highly desirable physical properties, including rapid curing and low water absorption. The present invention satisfies these and other needs and provides further related advantages.

5

#### BRIEF DESCRIPTION OF THE INVENTION


In accordance with the present invention, we have developed novel thermosetting compositions which meet all of the above-described needs, i.e., produce cured resins exhibiting a combination of highly desirable physical  
10 properties, including rapid curing and low water absorption, and which require little, if any, diluent to provide a system of suitable viscosity for convenient handling. In another aspect of the invention, we have developed novel combinations of maleimide compounds with  
15 reactive diluents, which do not suffer from the limitations of known reactive materials and that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water absorption. The resulting cured resins are stable at  
20 elevated temperatures, are highly flexible, have low moisture uptake and good adhesion.

#### DETAILED DESCRIPTION OF THE INVENTION

In accordance with the present invention, there are provided novel maleimide compositions of general  
25 Formula I, or isomers or precursors thereof, wherein Formula I is as follows:

30

35

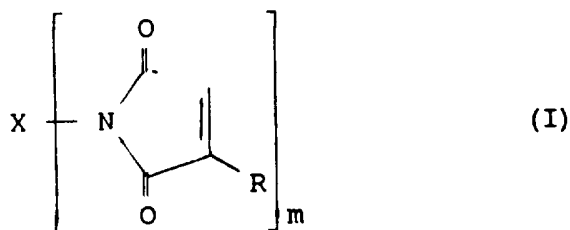

5

wherein:

$m = 1, 2 \text{ or } 3,$

each R is independently selected from hydrogen or lower alkyl, and

5


X is a monovalent or polyvalent radical selected from:

10

high molecular weight branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,

aromatic groups having the structure:

15

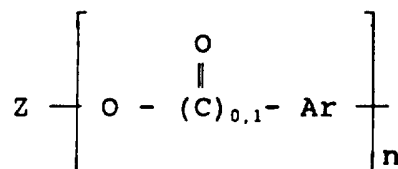

wherein:

20

$n = 1, 2 \text{ or } 3,$

25

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

30

Z is a high molecular weight branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,

as well as mixtures thereof.

As used herein, precursors of Formula I refer to compounds which can be converted *in situ* into the cyclic species contemplated herein. For example, di(meth)acrylamides (i.e., diacrylamide or 5 dimethacrylamide) and mono- and di-substituted di(meth)acrylamides, under polymerization conditions, form a polymeric chain bearing five- or six-membered rings which are equivalent to the ring structures contemplated herein.

As used herein, isomers of Formula I refer to 10 compounds which have the same empirical formula as the species described herein, but differ in the position of one or more bonds therein, relative to the structure set forth above for Formula I. For example, readily prepared isomers of the maleimides described herein are the itaconamides.


15 It is a distinct advantage of the maleimide compositions of Formula I that they can be used with little, if any, added diluent. Generally, for easy handling and processing, the viscosity of a thermosetting resin composition must fall in the range of about 10 to 20 about 12,000 centipoise, preferably from about 10 to about 2,000 centipoise. Maleimide compositions of Formula I typically require no added diluent, or when diluent is used with compositions contemplated by Formula I, far less diluent is required to facilitate handling than must be 25 added to conventional maleimide-containing thermosetting resin systems. Preferred maleimide compositions of Formula I include stearyl maleimide, oleyl maleimide and behenyl maleimide, 1,20-bismaleimido-10,11-dioctyl-eicosane (which likely exists in admixture with other isomeric species 30 produced in the ene reactions employed to produce dimer acids from which the maleimide is prepared, as discussed in greater detail below), and the like, as well as mixtures of any two or more thereof.



When a diluent is added, it can be any diluent which is inert to the maleimide composition and in which the composition has sufficient solubility to facilitate handling. Representative inert diluents include  
 5 dimethylformamide, dimethylacetamide, N-methylpyrrolidone, toluene, xylene, methylene chloride, tetrahydrofuran, methyl ethyl ketone, monoalkyl or dialkyl ethers of ethylene glycol, polyethylene glycol, propylene glycol or polypropylene glycol, glycol ethers, and the like.

10 Alternatively, the diluent can be any reactive diluent which, in combination with maleimide composition, forms a thermosetting resin composition. Such reactive diluents include acrylates and methacrylates of monofunctional and polyfunctional alcohols, vinyl compounds  
 15 as described in greater detail herein (e.g., vinyl ethers, polybutadienes, and the like), styrenic monomers (i.e., ethers derived from the reaction of vinyl benzyl chlorides with mono-, di-, or trifunctional hydroxy compounds), and the like.

20 Now in accordance with the invention there has been found an especially preferred class of reactive diluents corresponding to vinyl or polyvinyl compounds having the general formula:



wherein:

30  $q$  is 0, 1, 2 or 3, with the proviso that when  $q$  is 0,  $Y$  is an unsaturated species,

each  $R$  is independently as defined above,

35 each  $Q$  is independently selected from -O-, -O-C(O)-, -C(O)- or -C(O)-O-, and

$Y$  is selected from:


5 saturated straight chain alkyl, alkylene or alkylene oxide, or branched chain alkyl, alkylene or alkylene oxide, optionally containing saturated cyclic moieties as substituents on said alkyl, alkylene or alkylene oxide chain or as part of the backbone of the alkyl, alkylene or alkylene oxide chain, wherein said alkyl, alkylene or alkylene oxide species have at least 6 carbon atoms, preferably wherein said alkyl, alkylene or alkylene oxide species are high molecular weight branched chain species having from about 12 to about 500 carbon atoms,

aromatic moieties having the structure:



wherein each R is independently as defined above, Ar is as defined above, t falls in the range of 2 up to 10 and u is 1, 2 or 3,

25 polysiloxanes having the structure:




30 wherein each R is independently defined as above, and each R' is independently selected from hydrogen, lower alkyl or aryl, m' falls in the range of 1 up to 10, n' falls in the range of 1 up to

10, and  $q'$  falls in the range of 1 up to 50,

polyalkylene oxides having the structure:

5



wherein each R is independently as defined above, r falls in the range of 1 up to 10, s falls in the range of 1 up to 10, and  $q'$  is as defined above,

10

as well as mixtures of any two or more thereof.

Exemplary vinyl or polyvinyl compounds embraced by the above generic structure include stearyl vinyl ether, behenyl vinyl ether, eicosyl vinyl ether, isoeicosyl vinyl ether, isotetracosyl vinyl ether, poly(tetrahydrofuran) divinyl ether, tetraethylene glycol divinyl ether, tris-2,4,6-(1-vinyloxybutane-4-)oxy-1,3,5-triazine, bis-1,3-(1-vinyloxybutane-4-)oxycarbonyl-benzene (alternately referred to as bis(4-vinyloxybutyl)isophthalate; available from Allied-Signal Inc., Morristown, NJ, under the trade name Vectomer™ 4010), divinyl ethers prepared by transvinylation between lower vinyl ethers and higher molecular weight di-alcohols (e.g.,  $\alpha,\omega$ -dihydroxy hydrocarbons prepared from dimer acids, as described above; an exemplary divinyl ether which can be prepared from such dimer alcohols is 10,11-dioctyl eicosane-1,20-divinyl ether, which would likely exist in admixture with other isomeric species produced in ene reactions employed to produce dimer acids), in the presence of a suitable palladium catalyst (see, for example, Example 9), polybutadienes (e.g., 1,2-polybutadiene (*cis*- or *trans*-), 1,4-polybutadiene (*cis*- or *trans*-), or mixtures thereof), optionally hydrogenated  $\alpha,\omega$ -disubstituted polybutadienes, optionally hydrogenated  $\alpha,\omega$ -disubstituted polyisoprenes, optionally hydrogenated  $\alpha,\omega$ -

distubstituted poly[(1-ethyl)-1,2-ethane], and the like. Preferred divinyl resins include stearyl vinyl ether, behenyl vinyl ether, eicosyl vinyl ether, isoeicosyl vinyl ether, poly(tetrahydrofuran) divinyl ether, divinyl ethers  
5 prepared by transvinilation between lower vinyl ethers and higher molecular weight di-alcohols (e.g.,  $\alpha,\omega$ -dihydroxy hydrocarbons prepared from dimer acids, as described above; an exemplary divinyl ether which can be prepared from such dimer alcohols is 10,11-dioctyl eicosane-1,20-divinyl  
10 ether, which would likely exist in admixture with other isomeric species produced in ene reactions employed to produce dimer acids), in the presence of a suitable palladium catalyst (see, for example, Example 9), and the like. Preferred polybutadienes are low viscosity liquid  
15 polybutadienes.


Additionally, in accordance with another embodiment of the present invention, it has been found that divinyl compounds corresponding to Formula II where -Q- is -C(O)-O- and Y is a high molecular weight branched chain  
20 alkylene species having from about 12 to about 500 carbon atoms are useful thermosetting resin compositions, even in the absence of bismaleimide resins. When combined with suitable amounts of at least one free radical initiator and at least one coupling agent, these divinyl ether resins,  
25 alone, are capable of forming thermosetting resin compositions exhibiting excellent physical properties, including rapid cure rates and low water absorption.

In accordance with yet another embodiment of the present invention, there are provided thermosetting resin  
30 compositions made of mixtures of a vinyl compound of Formula II and a maleimide corresponding to the following general formula (generally containing in the range of about 0.01 up to about 10 equivalents of vinyl compound per equivalent of maleimide with in the range of about 0.01 up  
35 to about 1 eq. being preferred where the vinyl compound is a mono- or polyvinyl ether):

11

5

10

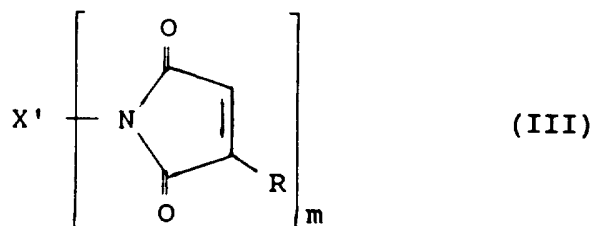

wherein:

m is as defined above,

15

each R is independently as defined above, and

X' is a monovalent or polyvalent radical selected from:

20


25

30

saturated straight chain alkyl or alkylene, or branched chain alkyl or alkylene, optionally containing saturated cyclic moieties as substituents on said alkyl or alkylene chain or as part of the backbone of the alkyl or alkylene chain, wherein said alkyl or alkylene species have at least 6 carbon atoms, preferably wherein said alkyl or alkylene species are high molecular weight branched chain species having from about 12 to about 500 carbon atoms,

aromatic groups having the structure:

35

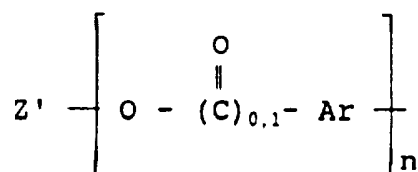


wherein

n is as defined above, Ar is as defined above, and Z' is a monovalent or polyvalent radical selected from:


5                   saturated straight chain  
alkyl or alkylene, or branched  
chain alkyl or alkylene,  
optionally containing saturated  
cyclic moieties as substituents  
10 on said alkyl or alkylene chain  
or as part of the backbone of the  
alkyl or alkylene chain, wherein  
said species have at least 6  
carbon atoms, preferably wherein  
15 said species are high molecular  
weight branched chain species  
having from about 12 to about 500  
atoms as part of the backbone  
thereof,

20                   siloxanes having the  
structure:



wherein each R and R' is  
independently defined as above,  
25 and wherein each of m', n' and q  
is as defined above,

polyalkylene oxides having  
the structure:




30                   wherein each R is independently  
as defined above, and wherein

13

each of r, s and q' is as defined above,

aromatic moieties having the structure:


5



10

wherein each R is independently as defined above, Ar is as defined above, and each of t and u is as defined above,


siloxanes having the structure:



15

wherein each R and R' is independently defined as above, and wherein each of m', n' and q' is as defined above,

polyalkylene oxides having the structure:



20

wherein each R is independently as defined above, and wherein each of r, s and q' is as defined above,

as well as mixtures of any two or more thereof.

25 Such mixtures possess a combination of highly desirable physical properties, including both rapid cure rates and low water absorption.

Exemplary maleimides embraced by Formula III include bismaleimides prepared by reaction of maleic anhydride with dimer amides (i.e.,  $\alpha,\omega$ -diamino hydrocarbons prepared from dimer acids, a mixture of mono-, di- and tri-  
5 functional oligomeric, aliphatic carboxylic acids; dimer acids are typically prepared by thermal reaction of unsaturated fatty acids, such as oleic acid, linoleic acid, and the like, which induces an ene reaction, leading to the above-mentioned mixture of components). An exemplary  
10 bismaleimide which can be prepared from such dimer amides is 1,20-bismaleimido-10,11-dioctyl-eicosane, which would likely exist in admixture with other isomeric species produced in the ene reactions employed to produce dimer acids. Other maleimides contemplated for use in the  
15 practice of the present invention include bismaleimides prepared from  $\alpha,\omega$ -aminopropyl-terminated polydimethyl siloxanes (such as "PS510" sold by Hüls America, Piscataway, NJ), polyoxypropylene amines (such as "D-230", "D-400", "D-2000" and "T-403", sold by Texaco Chemical  
20 Company, Houston, TX), polytetramethyleneoxide-di-p-aminobenzoates (such as the family of such products sold by Air Products, Allentown, PA, under the trade name "Versalink" e.g., "Versalink P-650"), and the like. Preferred maleimide compositions of Formula III include  
25 stearyl maleimide, oleyl maleimide, behenyl maleimide, 1,20-bismaleimido-10,11-dioctyl-eicosane (which likely exists in admixture with other isomeric species produced in the ene reactions employed to produce dimer acids from which the maleimide is prepared, as discussed in greater  
30 detail elsewhere in this specification), and the like, as well as mixtures of any two or more thereof.

In preferred embodiments of the present invention, when mixtures of bismaleimides and divinyl compounds are employed, either X' (of the bismaleimide) or  
35 Y (of the divinyl compound) can be aromatic, but both X' and Y are not both aromatic in the same formulation.



Additionally, in preferred embodiments of the present invention, when mixtures of bismaleimides and divinyl compounds are employed, at least one of X' or Y is a high molecular weight branched chain alkylene species having  
5 from about 12 to about 500 carbon atoms.

Maleimides can be prepared employing techniques well known to those of skill in the art. The most straightforward preparation of maleimide entails formation of the maleamic acid via reaction of the corresponding  
10 primary amine with maleic anhydride, followed by dehydrative closure of the maleamic acid with acetic anhydride. A major complication is that some or all of the closure is not to the maleimide, but to the isomaleimide. Essentially the isomaleimide is the dominant or even  
15 exclusive kinetic product, whereas the desired maleimide is the thermodynamic product. Conversion of the isomaleimide to the maleimide is effectively the slow step and, particularly in the case of aliphatic amides, may require forcing conditions which can lower the yield.  
20 Nevertheless, in the case of a stable backbone such as that provided by a long, branched chain hydrocarbon (e.g.,  $-(CH_2)_9-CH(C_8H_{17})-CH(C_8H_{17})-(CH_2)_9-$ ), the simple acetic anhydride approach appears to be the most cost effective method. Of course, a variety of other approaches can also  
25 be employed.

For example, dicyclohexylcarbodiimide (DCC) closes maleamic acids much more readily than does acetic anhydride. With DCC, the product is exclusively isomaleimide. However, in the presence of suitable  
30 isomerizing agents, such as 1-hydroxybenzotriazole (HOBt), the product is solely the maleimide. The function of the HOBt could be to allow the closure to proceed via the HOBt ester of the maleamic acid (formed via the agency of DCC) which presumably closes preferentially to the maleimide.  
35 However, it is unclear why such an ester should exhibit

such a preference. In any case, it is demonstrated herein that isoimide generated by reaction of the bismaleamic acid of 10,11-dioctyleicosane with either acetic acid anhydride or EEDQ (2-ethoxy-1-ethoxycarbonyl-1,2-dihydroquinoline) is  
5 isomerized to the bismaleimide by catalytic amounts of HOBT. 3-Hydroxy-1,2,3-benzotriazine-4-one appears to be at least as effective as HOBT in effecting this isomerization, whereas N-hydroxysuccinimide is substantially less so.

Likely, isomerizing agents such as HOBT add to  
10 the isoimide to yield the amic acid ester. If this exhibits any tendency whatsoever to close to the imide, much less a strong bias for doing so, a route for interconverting isoimide and imide is thereby established and the thermodynamic product, imide, should ultimately  
15 prevail. Thus if the initial closure of ester formed in the DCC reaction yields any isoimide, or if any isoimide is produced by direct closure of the acid, the situation will be subsequently "corrected" via conversion of the isoimide to the imide by the action of the active ester alcohol as  
20 an isomerizing agent.

One problem encountered with maleimides, especially bismaleimides, is a proclivity for oligomerization. This oligomerization is the principle impediment to yield in the synthesis of maleimides, and may  
25 present problems in use. Radical inhibitors can mitigate this potential problem somewhat during the synthesis but these may be problematic in use. Fortunately, oligomer may be removed by extracting the product into pentane, hexane or petroleum ether, in which the oligomers are essentially  
30 insoluble.

Thermosetting resin compositions of the invention also contain a suitable catalyst, such as, for example, a free radical catalyst, an anionic catalyst, or the like.

When crosslinking of invention compositions is promoted by free radical catalysis, typically in the range of 0.2 up to 3 wt % of at least one free radical initiator (based on the total weight of organic materials in the composition, i.e., in the absence of filler) is employed. As employed herein, the term "free radical initiator" refers to any chemical species which, upon exposure to sufficient energy (e.g., light, heat, or the like), decomposes into two parts which are uncharged, but which each possesses at least one unpaired electron. Preferred as free radical initiators for use in the practice of the present invention are compounds which decompose (i.e., have a half life in the range of about 10 hours) at temperatures in the range of about 70 up to 180°C.

Exemplary free radical initiators contemplated for use in the practice of the present invention include peroxides (e.g., dicumyl peroxide, dibenzoyl peroxide, 2-butanone peroxide, tert-butyl perbenzoate, di-tert-butyl peroxide, 2,5-bis(tert-butylperoxy)-2,5-dimethylhexane, bis(tert-butyl peroxyisopropyl)benzene, and tert-butyl hydroperoxide), azo compounds (e.g., 2,2'-azobis(2-methylpropanenitrile), 2,2'-azobis(2-methylbutanenitrile), and 1,1'-azobis(cyclohexanecarbonitrile)), and the like. Peroxide initiators are presently preferred because they entail no gas release upon decomposition into free radicals. Those of skill in the art recognize, however, that in certain adhesive applications, the release of gas (e.g. N<sub>2</sub>) during cure of the adhesive would be of no real concern. Generally in the range of about 0.2 up to 3 wt % of at least one free radical initiator (based on the total weight of the organic phase) will be employed, with in the range of about 0.5 up to 1.5 wt % preferred.

When crosslinking of invention compositions is promoted by anionic catalysis, typically in the range of 0.1 up to about 5 wt % of at least one anionic species

(based on the total weight of organic materials in the composition, i.e., in the absence of filler) is employed. As employed herein, the term "anionic species" refers to any chemical species which is capable of acting as a Lewis  
5 base.

Exemplary free anionic species contemplated for use in the practice of the present invention include imidazoles (e.g., imidazole, 2-undecylimidazole, 1-methylimidazole, 2-methylimidazole, 2,4-dimethyl-  
10 imidazole, 1-benzyl-2-methylimidazole, 1-dodecyl-2-methylimidazole, 1-cyanoethyl-2-ethyl-4-methylimidazole, tricyanoethyl-2-phenylimidazole, 2-benzyl-1,4-methylimidazole, 2-propylimidazole, a salt of an imidazole (such as the imidazole salts of trimellitic or iso-cyanuric  
15 acid), and the like), tertiary amines (e.g., N,N-dimethyloctadecylamine, N,N-dimethyl-1-hexadecylamine, N,N-diethyl-1-octadecylamine, N,N-diethyl-1-hexadecylamine, N,N-dimethylbenzylamine, 2,4,6-tris(dimethylaminoethyl)-phenol, N,N,N',N'-tetramethyl-1,20-diamino-(10,11-  
20 dioctyl)eicosane, N,N-dimethylbenzylamine, N,N,N-trimethyl-N'-octadecyl-1,2-diaminoethane, N-hexadecylpiperidine, N-octadecylpiperidine, aziridines (e.g., trimethylolpropane tris(2-methyl-1-aziridine propionate), and the like), and the like. Generally in the range of about 0.1 up to about  
25 10 wt % of at least one anionic species (based on the total weight of the organic phase) will be employed, with in the range of about 0.5 up to about 5 wt % preferred.

Optionally, anionically cured resin formulations can further contain catalytically effective amounts of at  
30 least one glycidyl ether epoxy compound, which serves to accelerate the rate of cure of the resulting formulation. Aliphatic or cycloaliphatic epoxies have been found to be ineffective for this purpose.

When included in the anionically cured  
35 formulation, typically in the range of 0.5 up to 25 wt % of

at least one glycidyl ether epoxy compound (based on the total weight of organic materials in the composition, i.e., in the absence of filler) is employed. As employed herein, the term "glycidyl ether epoxy compound" refers to any  
5 glycidyl ether epoxy compound containing one or more epoxide functionality(ies).

Exemplary glycidyl ether epoxy compounds contemplated for use in the practice of the present invention include the diglycidyl ether of bisphenol A, the  
10 diglycidyl ether of bisphenol F, the diglycidyl ether of neopentyl glycol, the diglycidyl ether of cyclohexane dimethanol, the glycidyl ether of 2-ethylhexanol, the diglycidyl ester of phthalic acid, triglycidyl amino phenol, the triglycidyl ether of glycerol, polyglycylated  
15 novolacs, and the like. Generally in the range of about 0.5 up to about 25 wt % of at least one glycidyl ether epoxy compound (based on the total weight of the organic phase) will be employed, with in the range of about 1 up to about 5 wt % preferred.

20 In accordance with yet another aspect of the present invention, further synergism for fast cure can be achieved by adding a phenol, a bisphenol, an alcohol or a polyol to the catalyst system employed for cure of the invention formulation. Examples of such optional further  
25 additives include diallyl bisphenol A, octadecyl phenol, dodecyl phenol, trimethyl ethane, 10,11-dioctyl-1,20-eicosenediol, and the like. When employed, such additives are present in amounts ranging from about 0.5 up to about 5 wt % (based on the total weight of the organic phase).

30 Thermosetting compositions of the invention possess a variety of physical properties making them particularly adapted for use in the preparation of "snap" cure adhesives. Such adhesives are useful, for example, in die attach applications. When used in adhesive

applications, it is desirable to add coupling agent(s) to the formulation.

As employed herein, the term "coupling agent" refers to chemical species that are capable of bonding to a mineral surface and which also contain polymerizably reactive functional group(s) so as to enable interaction with the adhesive composition. Coupling agents thus facilitate linkage of the adhesive composition to the substrate to which it is applied.

Exemplary coupling agents contemplated for use in the practice of the present invention include silicate esters, metal acrylate salts (e.g., aluminum methacrylate), titanates (e.g., titanium methacryloxyethylacetoacetate triisopropoxide), or compounds that contain a copolymerizable group and a chelating ligand (e.g., phosphine, mercaptan, acetoacetate, and the like). Generally in the range of about 0.1 up to 10 wt % of at least one coupling agent (based on the total weight of the organic phase) will be employed, with in the range of about 0.5 up to 2 wt % preferred.

Presently preferred coupling agents contain both a co-polymerizable function (e.g., vinyl moiety, acrylate moiety, methacrylate moiety, styrene moiety, cyclopentadiene moiety, and the like), as well as a silicate ester function. The silicate ester portion of the coupling agent is capable of condensing with metal hydroxides present on the mineral surface of the substrate, while the co-polymerizable function is capable of co-polymerizing with the other reactive components of invention adhesive composition. Especially preferred coupling agents contemplated for use in the practice of the invention are oligomeric silicate coupling agents such as poly(methoxyvinylsiloxane).

In addition to the incorporation of coupling agents into invention adhesive compositions, it has also been found that the optional incorporation of a few per cent of the precursor bismaleamic acid greatly increases  
5 adhesion. Indeed, good adhesion is retained even after strenuous exposure to water.

Adhesive compositions of the invention possess a combination of physical properties believed to be critical to successful commercial application:

- 10           1. The adhesive compositions have good handling properties, needing little, if any, inert diluent added thereto (i.e., the resin compositions form 100% reactive systems of sufficiently low viscosity);
- 15           2. The adhesive compositions are capable of rapid ("snap") cure, i.e., curing in two minutes or less (preferably as short as 15 seconds) at  $\leq 200^{\circ}\text{C}$ ;
- 20           3. The resulting thermosets are stable to at least  $250^{\circ}\text{C}$ , wherein "stable" is defined as less than 1% weight loss at  $250^{\circ}\text{C}$  when subjected to a temperature ramp of  $10^{\circ}\text{C}/\text{min}$ . in air via thermogravimetric analysis (TGA);
- 25           4. The resulting thermosets are sufficiently flexible (e.g., radius of curvature  $> 1.0$  meter for a  $300 \text{ mil}^2$  silicone die on a copper lead frame using a cured bond line  $\leq 2$  mils) to allow use in a variety of high stress applications;
- 30           5. The resulting thermosets exhibit low-moisture uptake (in nonhermetic packages); and
- 35           6. The resulting thermosets exhibit good adhesion to substrates, even after strenuous exposure to moisture.

Adhesive compositions of the invention can be employed in the preparation of die-attach pastes comprising in the range of about 10 up to 80 wt % of the above-described thermosetting resin composition, and in the range of about 20 up to 90 wt % filler. Fillers contemplated for use in the practice of the present invention can be electrically conductive and/or thermally conductive, and/or fillers which act primarily to modify the rheology of the resulting composition. Examples of suitable electrically conductive fillers which can be employed in the practice of the present invention include silver, nickel, copper, aluminum, palladium, gold, graphite, metal-coated graphite (e.g., nickel-coated graphite, silver-coated graphite, and the like), and the like. Examples of suitable thermally conductive fillers which can be employed in the practice of the present invention include graphite, aluminum nitride, silicon carbide, boron nitride, diamond dust, alumina, and the like. Compounds which act primarily to modify rheology include fumed silica, alumina, titania, high surface area smectite clays, and the like.

In accordance with yet another embodiment of the present invention, there are provided assemblies of components adhered together employing the above-described adhesive compositions and/or die attach compositions. Thus, for example, assemblies comprising a first article permanently adhered to a second article by a cured aliquot of the above-described adhesive composition are provided. Articles contemplated for assembly employing invention compositions include memory devices, ASIC devices, microprocessors, flash memory devices, and the like.

Also contemplated are assemblies comprising a microelectronic device permanently adhered to a substrate by a cured aliquot of the above-described die attach paste. Microelectronic devices contemplated for use with invention die attach pastes include copper lead frames, Alloy 42 lead



frames, silicon dice, gallium arsenide dice, germanium dice, and the like.

In accordance with still another embodiment of the present invention, there are provided methods for adhesively attaching two component parts to produce the above-described assemblies. Thus, for example, a first article can be adhesively attached to a second article, employing a method comprising:

(a) applying the above-described adhesive composition to said first article,

(b) bringing said first and second article into intimate contact to form an assembly wherein said first article and said second article are separated only by the adhesive composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said adhesive composition.

Similarly, a microelectronic device can be adhesively attached to a substrate, employing a method comprising:

(a) applying the above-described die attach paste to said substrate and/or said microelectronic device,

(b) bringing said substrate and said device into intimate contact to form an assembly wherein said substrate and said device are separated only by the die attach composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said die attach composition.

Conditions suitable to cure invention die attach compositions comprise subjecting the above-described assembly to a temperature of less than about 200°C for about 0.25 up to 2 minutes. This rapid, short duration

heating can be accomplished in a variety of ways, e.g., with an in-line heated rail, a belt furnace, or the like.

In accordance with a still further embodiment of the present invention, there is provided a method for the preparation of bismaleimides from diamines. The invention  
5 synthetic method comprises:

adding diamine to a solution of maleic anhydride,  
adding acetic anhydride to said solution once  
diamine addition is complete, and then allowing the  
10 resulting mixture to stir overnight, and thereafter  
treating the resulting reaction mixture with a  
suitable isomerizing agent.

Diamines contemplated for use in the practice of the present invention include saturated and unsaturated  
15 dimer diamines (such as the dimer amines sold by Henkel Corporation, Ambler, PA, under the trade name "Versamine 552" and "Versamine 551"),  $\alpha,\omega$ -aminopropyl-terminated polydimethyl siloxanes (such as "PS510" sold by Hüls America, Piscataway, NJ), polyoxypropylene amines (such as  
20 "D-230", "D-400", "D-2000" and "T-403", sold by Texaco Chemical Company, Houston, TX), polytetramethyleneoxide-di-p-aminobenzoate (such as the family of such products sold by Air Products, Allentown, PA, under the trade name "Versalink" e.g., "Versalink P-650"), and the like.  
25 Diamine and maleic anhydride are typically combined in approximately equimolar amounts, with a slight excess of maleic anhydride preferred. Isomerizing agents contemplated for use in the practice of the present invention include 1-hydroxybenzotriazole, 3-hydroxy-1,2,3-benzotriazine-4-one,  
30 1-hydroxy-7-azabenzotriazole, N-hydroxysuccinimide, and the like.

The invention will now be described in greater detail by reference to the following non-limiting examples.

EXAMPLE 1

Preparation of the bismaleimide of hydrogenated dimer acid diamine (Henkel Corp. Versamine 552) by closure of the bismaleamic acid with acetic anhydride to a mixture of isomaleimide and maleimide, followed by isomerization of the isomaleimide to maleimide with 1-hydroxybenzotriazole (HOBt) under mild conditions. A solution of 30.0 g of Versamine 552 in 90 mL of anhydrous tetrahydrofuran (THF) was slowly added to a solution of 12.5 g of maleic anhydride in 60 mL of THF. One hour after completion of the addition, 125 mL of acetic anhydride was added and the reaction mixture stirred overnight under argon atmosphere.

A Fourier transform infrared attenuated total reflectance (FTIR ATR) spectrum indicated substantial conversion of the amic acid to the isoimide, with little if any amide. The reaction mixture was brought to reflux and maintained there for three hours. FTIR now indicated a mixture of isoimide and maleimide with the former apparently (uncalibrated spectrum) predominating. Benzoquinone, 0.1 g, was added to the reaction mixture and the solvent/acetic anhydride/acetic acid stripped under vacuum (ultimately 0.1 mm Hg) at 30°C. The resulting residue was taken up in 75 mL of fresh THF and 10.2 g of HOBt (< 5% H<sub>2</sub>O material) was added and dissolved in at room temperature.

An FTIR spectrum one hour after the addition indicated that the isomaleimide in the mixture had been largely, perhaps completely, consumed. Most of it appeared to have been converted to maleamic acid HOBt ester. The reaction mixture was stirred overnight. FTIR then indicated essentially complete conversion to the maleimide.

The solvent was stripped off at 30°C and the residue extracted 2X with several hundred mL of pentane.

The combined pentane fractions were chilled in a Dry Ice/isopropyl alcohol bath, which caused a white solid to crystallize out. (The solid is thought to be the acetate of HOBT, with some free HOBT). The pentane suspension was  
5 filtered cold, allowed to warm to room temperature, dried over anhydrous  $\text{MgSO}_4$  and the solvent stripped to give 16.9 g (43.8%) of high purity product (as determined by FTIR).

#### EXAMPLE 2

Bismaleamic acid was generated from 10.0 g of  
10 Versamine 552 and 3.9 g of maleic anhydride, each in 40 mL of THF. 2-Ethoxy-1-ethoxycarbonyl-1,2-dihydroquinoline (EEDQ), 9.3 g, was added. Monitoring by FTIR indicated that two days sufficed to effect essentially complete conversion to isomaleimide. HOBT, 4.9 g, was dissolved in  
15 the reaction mixture. Monitoring by FTIR indicated that six hours sufficed to convert all the isoimide to imide. The solvent was stripped off and the residue extracted with pentane to yield 6.0 g of product bismaleimide, contaminated with quinoline from the EEDQ.

20

#### EXAMPLE 3

E.C. Martin and A.A. DeFusco, in U.S. Statutory Invention Registration No. H424 (2/2/88) teach the preparation of bismaleimide from "dimer diamine" (source not given but material NOT having had the olefinic  
25 unsaturation removed) by means of HOBT and DCC. However, the maximum yield of bismaleimide reported is 50%. Thus, following the procedure of Martin and Fusco, the bismaleimide of Versamine 552 (Henkel Corp.) was prepared using dicyclohexylcarbodiimide (DCC) and 1-  
30 hydroxybenzotriazole (HOBT). A solution of 50.0 g (0.179 amine equiv) of Versamine 552 in 60 mL of anhydrous tetrahydrofuran (THF) was added slowly under argon atmosphere to a solution of 20.2 g (0.206 mole) of maleic

anhydride in 300 mL of THF. The reaction mixture was stirred for an hour after completion of the addition and then 25.2 g (0.186 mole) of HOBt (< 5% H<sub>2</sub>O) was dissolved in. The stirred reaction mixture was chilled in an ice bath and melted DCC added neat in portions to a total of 49.2 g (0.238 mole). After completion of this addition, the reaction mixture was stirred in the ice bath for another hour. The ice bath was then removed and the stirred reaction mixture allowed to warm to room temperature overnight. The reaction mixture was filtered and the resulting solid was washed with THF. All THF phases were combined, 0.2 g methoxyphenol was added and the THF stripped on a rotary evaporator at 30°C. A thick, semisolid residue resulted. This residue was extracted with hexane and the hexane stripped to give 40.7 g (63.3%) of a product which still had some solid impurity. This material was extracted with pentane, which cleanly separated the solid impurity. The pentane extract was dried over MgSO<sub>4</sub> and the solvent stripped to give 32.1 g (49.9%) of lightly colored, low viscosity material with the expected FTIR spectrum.

#### Example 3A

The monomaleimide of oleylamine was prepared using a method similar to the one described in Example 3. Oleylamine was obtained from Aldrich Chemical Company (Milwaukee, WI). The amine (40.0 grams, 150 meqs) was dissolved in 100 ml of anhydrous THF. This solution was slowly added (under an argon purge) to a mechanically stirred solution containing maleic anhydride (14.7 g, 150 meqs) dissolved in 100 ml of anhydrous THF. Stirring was continued for another hour after the addition was complete. The stirred reaction mixture was then cooled via an external ice bath and 30.8 g (149 meqs) dicyclohexylcarbodiimide (DCC), dissolved in 30 mls anhydrous THF, was added. The chilled mixture was stirred

for an additional hour before 19.7 g (146 meqs) of 1-hydroxybenzotriazole (HOBt) was added. The mixture was allowed to warm up to room temperature while stirring was continued for another sixteen hours. The reaction mixture  
5 was filtered and the filtered residue was washed with additional THF. The combined THF solutions were stripped on a rotary evaporator at 40°C until the pressure under full mechanical vacuum was  $\leq 0.5$  torr. The viscous residue was then dissolved in pentane. The pentane solution was  
10 extracted five times with 50 ml portions of aqueous methanol (70% MeOH). Magnesium sulfate was added to the washed pentane solution fraction and it was allowed to settle overnight in a refrigerator. The solution was warmed the next morning to room temperature, filtered, and  
15 the solvent stripped off in a rotary evaporator (using water aspirator, followed by full mechanical vacuum until the pressure remained  $\leq 0.5$  torr for one hour). The product recovered was a light brown, low viscosity liquid with an FTIR spectrum consistent with what one would  
20 predict for the expected structure.

#### Example 3B

A diacrylate was prepared as follows from the dimer diol derived from oleic acid. This diol was obtained from Unichema North America (Chicago, IL) under the  
25 designation Pripol 2033. Approximately 53.8 grams of Pripol 2033 and 22.3 grams of triethylamine (reagent grade from Aldrich Chemical Co., Milwaukee, WI) were dissolved in 136.0 grams of dry acetone. This solution was chilled to 5°C. in an ice bath while the contents of the flask were  
30 blanketed under a slow argon purge. The solution was subjected to mechanical stirring while acryloyl chloride (18.1 grams dissolved in 107.3 grams of dry acetone) was added dropwise over a two hour period. Stirring was continued for another hour and the bath was allowed to warm  
35 up to room temperature. Approximately 7.1 mg of methoxy

hydroquinone (inhibitor) was added to the final reaction product and the acetone was removed on a rotary evaporator. The product was then dissolved in methylene chloride and this solution was then extracted three times with 7% aqueous sodium bicarbonate and another two times with 18 meg-ohm water. The solution was dried over magnesium sulfate and then filtered. Finally, the methylene chloride solvent was removed under full mechanical vacuum on the rotary evaporator. An FTIR analysis of this product showed a characteristic ester absorption around 1727 wave numbers. The final yield was 71% (based on the starting Pripol 2033).

#### EXAMPLE 4

This example illustrates improvement in yield obtained by using 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO) instead of HOBt. The bismaleamic acid of Versamine 552 was prepared by the dropwise addition over an hour (dry argon atmosphere) of a solution of 144.0 g of Versamine 552 in 100 mL of dry dichloromethane ( $\text{CH}_2\text{Cl}_2$ ) to a stirred solution of 50.4 g maleic anhydride in 300 mL of dry  $\text{CH}_2\text{Cl}_2$  chilled in an ice bath. The ice bath was removed at the end of the addition and the reaction mixture stirred for another hour. The ice bath was then put back in place and 84.0 g (100%) of 3-hydroxy-1,2,3-benzotriazin-4-one was added. To the chilled reaction mixture was then added a solution of 106.1 g of DCC in 100 mL of  $\text{CH}_2\text{Cl}_2$  over 30 minutes, with stirring. After completion of the addition, the ice bath was removed and the reaction mixture stirred overnight at room temperature. The reaction mixture was suction-filtered and the collected solid was washed twice with 100 mL portions of  $\text{CH}_2\text{Cl}_2$ , which were combined with the original  $\text{CH}_2\text{Cl}_2$  filtrate. The  $\text{CH}_2\text{Cl}_2$  was stripped on a rotary evaporator, at 35-40°C, ultimately under oil-pump vacuum (0.1 Torr). The resulting residue was extracted twice with 500 mL portions of pentane and once with a 1000

mL portion of pentane, all of which were combined and stripped on the rotary evaporator. The original residue was extracted with more pentane for a final total of four liters of pentane. After condensation to a volume of 500 mL, the solution was stored in the freezer overnight. It was allowed to warm to room temperature, suction-filtered through fine filter paper and the remaining pentane stripped to yield 145.0 g (80.0%) of the bismaleimide.

#### EXAMPLE 5

10                This example demonstrates that a very satisfactory yield may be obtained using much less than an equivalent of the coreactant compound, 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO), and that it may be added after the DCC. The bismaleamic acid of Versamine 552 was  
15 generated as in Example 4 from 136.5 g of Versamine 552 and 46.3 g of maleic anhydride, except that the solvent was THF rather than CH<sub>2</sub>Cl<sub>2</sub>. To the chilled (ice bath) reaction mixture was added a THF solution of DCC containing 100.5 g of DCC. After an FTIR spectrum showed that the amic acid  
20 had been entirely converted to isoimide, 12 g (15%) of HOBtCO was added and the reaction mixture maintained at 45°C for four hours, which sufficed, by FTIR, to convert the isoimide entirely to imide. Workup as in the preceding example resulted in a yield of 122 g (70%) of the  
25 bismaleimide.

#### EXAMPLE 6

                 This example illustrates the use of 1-hydroxy-7-aza-1,2,3-benzotriazole (HOAt) as the coreactant compound, again at a low level. Using the procedure described in the  
30 preceding example but with 20% HOAt, 51.5 g of Versamine 552 yielded 48.8 g (70.0%) of the BMI. Separation of the HOAt from the reaction product was facile and 4.4 g was recovered.



EXAMPLE 7

The following experiments demonstrate improvements in the yield, obtained by the procedure of Martin and Fusco by changes in procedure and protocol while still using HOBt. The procedure and protocol used is that detailed in Example 4 in which 3-hydroxy-1,2,3-benzotriazin-4-one is used except that the reaction solvent was THF in all cases here rather than the dichloromethane used in Example 4. A reaction using 100% HOBt gave a yield of 51.9%; four reactions using 80% HOBt gave yields of 56.8, 60.0, 65.1 and 70.2%, respectively. Also, a reaction employing dimer diamine in which the olefinic unsaturation has not been removed, as in U.S. Statutory Invention Registration No. H424 (Henkel Versamine 551 rather than 552), and 80% HOBt gave a yield of 52.2% of the corresponding BMI.

Examples 4-7 show that by variations in solvent and procedures, yields as high as 70% may be obtained using HOBt and as high as 80% using 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO) in lieu of HOBt. Also the realization in the course of the present work that compounds such as HOBt and HOBtCO are potent agents for the isoimide to imide isomerization means that the reaction may be run with less than a full equivalent of such. The fact that such compounds are first consumed and then liberated during the cyclodehydration, and are thus in principle catalysts, does not of itself necessarily imply that they may be used at less than a full equivalent since the potentially competing reaction of direct cyclodehydration of the amic acid by DCC to the isoimide would still be of concern. However, as it turns out, HOBt, HOBtCO, and the like are effective at promoting the facile isomerization which leads to the desired product.

EXAMPLE 8

A masterbatch of the bisisomaleimide of Versamine 552 was prepared from 30.0 g of the amine, dissolved in 80 mL of anhydrous THF and added dropwise to a solution of 11.7 g of maleic anhydride in 100 mL of anhydrous THF to yield the bismaleamic acid, followed by the addition of 125 mL of neat acetic anhydride. One half of this reaction mixture was allowed to stand for three days at room temperature. The solvent and excess acetic anhydride were stripped to leave the isomaleimide. Portions of this isomaleimide were treated as follows. A 5.0 g sample was dissolved in anhydrous THF along with 2.6 g of 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO). This solution was allowed to stand overnight, which sufficed to effect complete conversion to the maleimide, ultimately recovered in 56% yield. Another 5.0 g of the isomaleimide was treated with 2.3 g of HOBt in the same manner; a 46% yield of bismaleimide was recovered as well as a larger amount of oligomerized material than in the HBtCO reaction. A third portion of the isomaleimide, 4.9 g, was treated with 2.1 g of N-hydroxysuccinimide in acetonitrile solution. In this case, overnight reflux was used to effect conversion to the maleimide, recovered in only 36% yield.

EXAMPLE 9

A divinyl ether was prepared as follows from the dimer diol derived from oleic acid employing Pripol 2033 dimer diol obtained from Unichema North America (Chicago, IL), vinyl propyl ether obtained from BASF Corp. (Parsippany, NJ), and palladium 1,10-phenanthroline diacetate [Pd(phen)(OAc)<sub>2</sub>]. Thus, the Pripol was pre-dried over molecular sieves (3A) approximately 3 hours prior to use. Next, to a clean and dry 1 liter flask, with large oval Teflon stir bar, was added 149.1 grams (523.3 meqs) of Pripol 2033, 280 grams (3256 meqs) of vinyl propyl ether,

and 1.0 grams  $\text{Pd}(\text{phen})(\text{AcO})_2$  (2.5 meqs). The head space of the flask was purged with argon and the reaction flask fitted with an oil bubbler (to eliminate any pressure build up in the flask). The flask was placed on a magnetic stir plate and stirring initiated and continued for approximately 48 hours. The solution color changed from a light yellow to a deep dark brown. After 48 hours, an aliquot was removed and the bulk of the vinyl propyl ether was blown off using argon. An FTIR analysis was performed on the residue and it was determined that virtually all the alcohol had reacted (i.e., no OH absorbance between 3400 and 3500  $\text{cm}^{-1}$  remained).

To the original solution approximately 10-15 grams of activated charcoal was added. The solution was mixed for approximately 1 hour on the magnetic stir plate, then about 5 grams of Celite was added. The activated charcoal and Celite were removed via suction filtration through a fritted funnel packed with additional Celite (about an additional 15 grams). The solution that passed through the funnel retained a slight brown color.

The bulk of the excess vinyl propyl ether was then removed using a rotary evaporator at a bath temperature of 35-40°C under a partial (water aspirator) vacuum. Once condensation stopped, the cold traps were emptied and replaced. A full mechanical vacuum was then applied and continued at the 35-40°C bath temperature for approximately 1 hour. The vacuum decreased to under 1.0 torr within an hour. Product recovered at this point was a light brown, low viscosity liquid.

The last traces of propyl vinyl ether were removed using a falling film molecular still (operated at a strip temperature of 70°C and a vacuum of less than one torr). The product residence time in the still head was about 15 to 20 minutes and the complete stripping procedure

required about two hours. The product, following this strip, had no residual odor characteristic of the vinyl propyl ether. Thermogravimetric analysis showed no significant weight loss by 200°C. The product, therefore, 5 was considered to be free of the vinyl ether starting material and any propyl alcohol co-product.

#### Example 9A

A divinyl ether was prepared from an alpha-omega terminated, hydrogenated 1,2-polybutadiene. This diol had 10 a molecular weight of approximately 3,000 grams per mole and was obtained from Ken Seika Corporation (Little Silver, NJ) under the trade name GI-3000. The method used to synthesize the divinyl ether was analogous to the one described in Example 9. Approximately 51.5 grams (34.4 15 meqs) of GI-3000 was dissolved in 158.9 grams (1,840 meqs) of vinyl propyl ether. The mixture was stirred magnetically until a homogeneous solution was obtained. Palladium 1,10-phenanthroline diacetate (0.53 grams, 1.33 meqs) was then added and the entire mixture was allowed to 20 stir for five days at room temperature under an argon atmosphere. An aliquot of the reaction product was removed and the volatiles (vinyl propyl ether and propanol) were blown off. An FTIR trace obtained on this residue demonstrated that the diol had been completely converted to 25 the corresponding divinyl ether.

The bulk of the reaction product was then worked up according to the procedure described in the Example 9. The solution was decolorized using activated charcoal, treated with Celite, and the suspension was then passed 30 through a filter packed with additional Celite. The bulk of the excess vinyl propyl ether and propanol were removed using a rotary evaporator (bath temperature  $\leq 40^{\circ}\text{C}$ ) at full mechanical pump vacuum. Evaporation was continued until the pressure fell to under one torr. The last traces of

volatiles were stripped off using a falling film molecular still as described in Example 9. The final product was a viscous (although less so than the starting diol) straw colored liquid.

5

Example 9B

Another oligomer diol was subjected to transvinylation. The alpha-omega diol of hydrogenated polyisoprene was employed for this example, and is available from Ken Seika Corporation under the designation  
10 "TH-21". This oligomer has an approximate molecular weight of 2,600 grams per mole. The same method as described in Example 9 was used to convert this diol to the corresponding divinyl ether. Thus, TH-21 (52.0 grams, 40 meqs) was dissolved in 83.7 grams of vinyl propyl ether  
15 (972 meqs) and 0.4 grams (1.0 meq) of palladium 1,10-phenanthroline diacetate catalyst was added. The mixture was stirred magnetically at room temperature under an argon atmosphere for six days. An evaporated aliquot of the reaction mixture was found to be essentially free of  
20 alcohol functionality according to FTIR analysis. The bulk of the reaction product was worked up as per the method described in Example 9. The final product was an amber, viscous liquid (again the viscosity of the divinyl compound was considerably lower in viscosity than the starting  
25 diol).

Example 9C

Iso-eicosyl alcohol, obtained from M. Michel and Co., Inc. (New York, NY) was transvinylated according to the method described in Example 9. The alcohol (100.3  
30 grams, 336 meqs) was dissolved in 377.4 grams of the vinyl propyl ester (4,383 meqs) and 1.0 gram (2.5 meqs) of palladium 1,10-phenanthroline diacetate catalyst was added. The mixture was magnetically stirred under an argon

atmosphere for four days. An FTIR trace of the evaporated reaction product showed that no detectable alcohol residue remained. The product was worked up as previously described. The final material was a pale yellow liquid  
5 with a "water-like" viscosity.

#### Example 9D

Behenyl alcohol (1-docosanol), obtained from M. Michel and Co., Inc. (New York, NY) was transvinylated substantially as described in Example 9, however, since the  
10 starting alcohol was a waxy solid with limited room temperature solubility in vinyl propyl ether, it was necessary to conduct the reaction at an elevated temperature. Thus, a mixture of the alcohol (100.8 grams, 309 meqs), vinyl propyl ether (406.0 grams, 4,714 meqs),  
15 and palladium 1,10-phenanthroline diacetate catalyst (1.0 gram, 2.5 meqs) was magnetically stirred at 50°C under an argon atmosphere for 20 hours. Analysis of an evaporated aliquot after this period showed that no detectable alcohol remained. The behenyl vinyl ether was worked up as  
20 described above. The final product was an off-white waxy solid.

#### EXAMPLE 10

An organic adhesive vehicle was prepared using 2.78 grams (1.0 equivalents) of the BMI prepared according  
25 to Example 8, 0.94 grams (0.5 equivalents) of the divinyl ether prepared according to Example 9, and 0.58 grams (0.5 equivalents) of Vectomer 4010 (i.e., bis(4-vinyloxybutyl) isophthalate). An additional 1% by weight dicumyl peroxide (initiator), 0.5% gamma-methacryloxypropyltrimethoxysilane  
30 (coupling agent), and 0.5% beta-(3,4-epoxycyclohexyl)ethyltrimethoxysilane (coupling agent) were added to complete the organic adhesive mix.

Twenty-two percent by weight of the organic adhesive mixture was added to 78% by weight of silver metal filler. The mixture was stirred under high shear until homogeneous. The resulting paste was then degassed at 1  
5 torr. The paste was dispensed onto silver plated copper lead frames using a starfish dispense nozzle. Bare silicon dice (300 x 300 mils on a side) were then placed on top and compressed into the adhesive until a 2.0 mil bondline had been attained (this process is virtually instantaneous when  
10 using automated "pick and place" equipment. The assembled parts were then cured on a heated surface (hot plate) controlled at 200°C for two minutes. Additional void test parts (which were assembled in parallel using a 300 x 300 glass slide to replace the silicon die) showed the cured  
15 adhesive film to be free of voiding. Half of the assembled parts were subjected to tensile test immediately. The other half were placed in a pressure cooker at 121°C for 168 hours (i.e., one week). The pressure cooker is considered to be a very aggressive test that has predictive  
20 value for the long term robustness of adhesives used in non-hermetic environments.

Adhesion strength testing was performed on these parts using a "Tinius Olsen 10,000" tensile test machine. Steel cube studs (0.25 x 0.25 x 0.8 inches) were attached  
25 at room temperature to the top of the die and the bottom of the lead frame using Loctite 415 cyanoacrylate glue. The cubes were attached using a V-block fixturing device to assure their co-linearity. Once the room temperature gluing operation was complete (~one hour later), the entire  
30 assembly was loaded into the tensile test machine. Pins were used to secure the steel blocks (through holes present in each of the test blocks) to the upper and lower arms of the stud pull machine. The tensile pull speed used was 3.00 inches per minute, and the adhesion measurement was  
35 recorded in terms of pounds of force. The tensile test

results for the initial and post pressure cooker parts are presented in Table 1.

Table 1

	<u>Initial Adhesion (lbs)</u>	<u>Retained Adhesion (lbs)</u>
5	191	141
	169	147
	179	112
	180	153
	166	126
10	155	138
	174	161
	175	121
	111	133
	149	149
15	164	154
	144	119

As the results in Table 1 demonstrate, the product was found to have good initial and retained adhesion. The average adhesion for the parts prior to pressure cooker treatment was 163 pounds and after pressure cooker it was 138 pounds. Thus, even after one full week at two atmospheres pressure of steam (14.7 psig, 121°C) about 85% of the initial adhesion was retained. It is noteworthy that a competitive material which was run at the same time had an initial adhesion of 338 pounds, but dropped down to zero after the pressure cooker treatment.

Example 10A

A composition was formulated using a monovinyl ether diluent and a divinyl ether "rubber" comonomer. The addition of these materials was used to enhance certain properties of the adhesive composition. Specifically, the monovinyl ether was used to reduce the viscosity and increase the thixotropic index (defined as the quotient of the 1 rpm over the 20 rpm viscosity). The "rubber" comonomer was used to "flexibilize" the cured adhesive.



Flexibility is especially important when thin bondlines are used since stress increases as bondline decreases. A convenient measure of stress for a cured part is the radius of curvature (ROC). This measurement is traditionally done with a surface profilometer and is an index of the "bowing" of the silicon die. The higher the ROC (i.e., the larger the sphere described by measured arc) the lower the stress. It is generally desirable to have an  $ROC \geq$  one meter. The composition described in Example 10 results in a radius of curvature of greater than 1.5 meters when used at a 2.0 mil bondline, but gives a ROC of less than one meter when the bondline is reduced to 1.0 mils.

The monovinyl ether diluent used, vinyl octadecyl ether, was purchased from BASF Corp. (Parsippany, NJ). The divinyl ether "rubber" was the product described in Example 9B. An organic adhesive vehicle was prepared using 1.29 grams (3.7 meqs) of the BMI prepared according to Example 8, 0.1125 grams (0.38 meqs) vinyl octadecyl ether, and 0.1127 grams (0.08 meqs) of the divinyl ether prepared according to Example 9B. An additional 1.0% by weight dicumyl peroxide (initiator) and 2.7% gamma-methacryloxy-propyltrimethoxysilane coupling agent were added to complete the organic adhesive mix.

Twenty-seven percent by weight of the above organic adhesive mixture was added to 73% by weight of silver filler. The mixture was homogenized under high shear and then degassed using a full mechanical pump vacuum. The adhesive was dispensed into silver plated copper lead frames using a starfish dispense nozzle. Bare silicon dice (300 x 300 mil on a side) were placed on top and compressed into the adhesive to achieve a 1.0 mil bondline. A similar set of parts was generated using the adhesive composition described in Example 10. The parts were cured for one minute at 200°C. The radius of curvature for parts using the adhesive described here was

1.29 meters. The ROC for the control parts was 0.76 meters. The 10 rpm viscosity (Brookfield viscometer) for the adhesive described here was 5,734 centipoise at 25.0°C and the thixotropic index was 6.60. The control adhesive  
5 had a 12,040 10 rpm viscosity at 25.0°C and a thixotropic index of 4.97. The post cure adhesion results for the adhesive described here and the control were as follows:

Table 2

	Adhesion for Test Paste	Adhesion for Control
	(lbs)	(lbs)
10	157	72
	149	139
	154	175
	134	149
15	158	97
	159	136

The results presented here demonstrate that  
20 several of the adhesive composition properties can be improved with little or no sacrifice of initial adhesion by the incorporation of modest amounts of a reactive diluent and a flexibilizing comonomer.

Example 10B

25 The previous examples demonstrated how adhesive compositions could be formulated in which no more than one equivalent of vinyl ether comonomer is used in conjunction with an excess of a bismaleimide. It is not necessary to have any vinyl ether present in the composition, however.  
30 That is to say, that compositions may be formulated where maleimide is the only polymerizable function.

Thus, an organic adhesive vehicle was prepared using 96.25% by weight of the BMI prepared according to Example 8, 1% by weight USP90MD [1,1 bis(t-amyl peroxy) cyclohexane - an initiator available from Witco Corporation, Marshall, TX], 0.76% gamma-methacryloxypropyl-trimethoxysilane (coupling agent), and 1.72% beta-(3,4-epoxycyclohexyl)ethyltrimethoxysilane (coupling agent).

Twenty-five percent by weight of the above organic adhesive mixture was added to 75% by weight of silver metal filler. The mixture was sheared and degassed as before. Dispense and die placement were performed as described earlier (300 x 300 mil silicon die on Ag coated Cu lead frames). The bondline used was 1.0 mils and the cure time was one minute at 200°C. Initial and post pressure cooker (16 hour) adhesion values are presented in the following table.

Table 3

	Initial Adhesion (lbs)	Post Pressure Cooker Adhesion (lbs)
20	165	83
	137	188
	115	143
	171	122
	148	208
25	154	200

This composition exhibited a narrow exotherm with a maxima at 128.8°C via differential scanning calorimetry (DSC) and a weight loss of less than 0.75% by 350°C according to TGA (10°C/min. using an air purge). This composition therefore demonstrates the viability of an "all maleimide" snap cure adhesive system.

Example 10C

The previous examples have demonstrated the utility of maleimide/vinyl ether co-cure and maleimide homocure for use as adhesives. Other polymerizable functional groups including acrylate and methacrylate may also be used alone or in combination with maleimide and/or vinyl ether monomers.

Thus, an organic adhesive vehicle was prepared using 4.00 grams of the diacrylate prepared according to Example 3B, 1.00 gram decanediol dimethacrylate (purchased from Polysciences, Inc., Warrington, PA), and 1.00 gram Ricon R-130 Epoxy (obtained from Advanced Resins, Inc., Grand Junction, CO). Two percent by weight of dicumyl peroxide initiator was dissolved in this mix.

Twenty percent by weight of the organic adhesive mixture was added to 80% by weight silver metal filler. The mixture was homogenized using high shear and then degassed. Parts were assembled as before using 300 x 300 silicon on Ag plated Cu lead frames. The cure condition was 200°C for one minute, and the bondline thickness used was 1.0 mil. The initial adhesion values and the corresponding failure mode information is presented in the following table:

Table 4

	<u>Initial Adhesion (lbs)</u>	<u>Failure Mode (lbs)</u>
25	66	material
	55	material
	67	material
	62	material
30	63	material
	59	material

The measured adhesion for this mixture was lower than observed for most of the BMI containing compositions. The failure mode, however, was of the most preferred (all material) type (i.e., entirely cohesive rather than adhesive failure). The radius of curvature for the cured adhesive at the bondline thickness used here was 2.51 meters.

#### EXAMPLE 11

A test paste was made that contained one equivalent each of the bismaleimide of Versalink 650 (polytetramethyleneoxide-di-p-aminobenzoate, marketed by Air Products, Allentown, PA) and the divinyl ether of tetraethylene glycol. The organic phase had 1% by weight of dicumyl peroxide. Seventy-five percent by weight silver filler was used in the paste. Ten parts were assembled and cured as per the preceding example using this paste that contained no coupling agent. One percent by weight of the same mixed coupling agents noted above were then added to the paste. Another ten parts were assembled and cured using this new paste mix. Both groups of parts were then divided into two sets. Half of the parts from each group was tested for tensile strength immediately and the other half following four hours of immersion in the pressure cooker. Tensile strength measurements were performed according to the procedure described in Example 10. The results of this testing are summarized in Table 5.

Table 5  
Tensile Strength of Adhesive Bond

No Coupling Agent		With Coupling Agent	
5	<u>Initial Value</u> <u>Post Moisture</u>	<u>Initial Value</u> <u>Post Moisture</u>	
	110.7                      0	112.3                      88.8	
	111.2                      0	102.6                      84.3	
	107.7                      0	108.5                      83.8	
	110.5                      0	109.2                      87.9	
10	106.5                      0	115.6                      93.3	

The data in Table 5 shows that the presence of the coupling agents has a dramatic impact on the survival of the adhesive bond in extreme moisture environments.

#### EXAMPLE 12

A test was conducted to test the adhesion performance of invention compositions following a one minute cure at 200°C. The bondline used for these parts was also dropped from 2.0 down to 1.0 mils during the attach step. Stress, which is induced by the large thermal mismatch between the silicon and lead frame, increases when the bondline is decreased. The organic adhesive portion of paste consisted of one equivalent each of the BMI prepared according to Example 8, and Vectomer 4010 (i.e., bis(4-vinyloxybutyl)isophthalate). It also contained 4.5% of gamma-methacryloxypropyl-trimethoxysilane coupling agent, as well as 0.95% dicumyl peroxide initiator. A paste was made consisting of 22% by weight of this adhesive composition and 78% by weight of silver flake. The paste was degassed and then used to attach 300 x 300 mil silicon die to silver plated copper lead frames using the reduced bondline and cure time. Six parts were assembled and cured. Two void test parts (same conditions but using 300 x 300 mil glass slides to replace the silicon die) were

also made. There was no evidence of porosity in the void test parts. Tensile strength measurements were performed according to the procedure described in Example 10. The tensile test values for the other parts were: 116, 114,  
5 119, 122, 128 and 134 pounds force.

### EXAMPLE 13


An adhesive composition was prepared comprising 89.5 wt % of the BMI prepared according to Example 8, 10 wt % MY510 (the triglycidyl etheramine of 4-aminophenol,  
10 sold by Ciba-Geigy), and 0.5 wt % of N,N,N',N'-tetramethyl-1,20-diamino-(10,11-dioctyl)eicosane. This mixture developed a bright red orange tint upon mixing and had a viscosity of approximately 1,300 centipoise at 25°C. Seventy-five percent by weight of silver flake was added to  
15 this composition to produce a homogeneous paste. The paste was degassed and then used to attach a 300 mil<sup>2</sup> silicon disc to a silver coated copper lead frame.

Three parts were assembled in this way and then subjected to a 200°C cure for one minute. A tensile test  
20 was then performed on the parts. The adhesion was measured at 71, 81, and 121 pounds force, respectively. A significant degree of voiding was noted for these parts (in spite of the degassing step, and the fact that the resin system itself did not void under similar conditions). It  
25 believed that the voids arise from decarboxylation of the fatty acid lubricants present on the silver flake. It should therefore be possible to eliminate this problem via the use of non-ionic lubricants on the silver.

While the invention has been described in detail  
30 with reference to certain preferred embodiments thereof, it will be understood that modifications and variations are within the spirit and scope of that which is described and claimed.

That which is claimed is:

1. A bismaleimide composition having the structure:

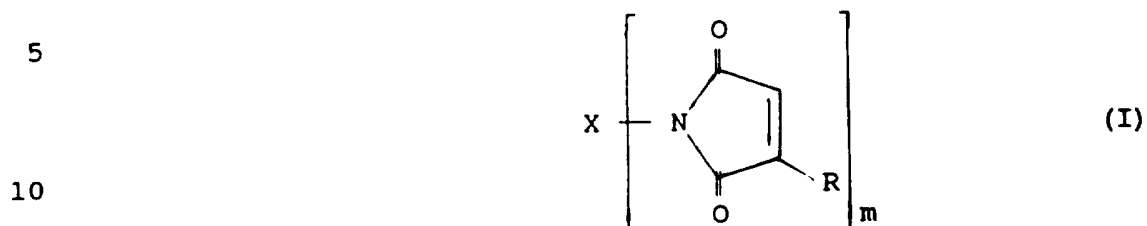

wherein:


15  $m = 1, 2 \text{ or } 3,$

each R is independently selected from hydrogen or lower alkyl, and

X is a monovalent or polyvalent radical  
selected from:

20                    branched chain alkyl, alkylene or  
                     alkylene oxide species having from  
                     about 12 to about 500 carbon atoms,

aromatic groups having the structure:

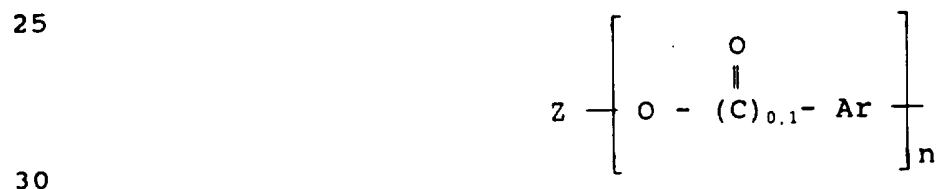

wherein:



47

 $n = 1, 2 \text{ or } 3,$ 

35 each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

40 Z is a branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,


or mixtures thereof.

2. A thermosetting resin composition comprising:

(a) a maleimide composition having the structure:

5

10

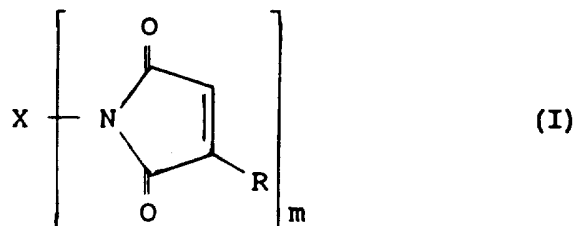

wherein:

15

 $m = 1, 2 \text{ or } 3,$ 

each R is independently selected from hydrogen or lower alkyl, and

X is a monovalent or polyvalent radical selected from:

20


branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

48

aromatic groups having the structure:

25

30

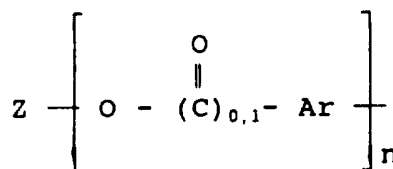

wherein:

$n = 1, 2 \text{ or } 3,$

35

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

40

Z is a branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,

or mixtures thereof;

(b) in the range of 0.1 up to 5 wt % of at least one suitable crosslinking catalyst, based on the total weight of the composition; and

45

(c) optionally, a diluent for the maleimide composition.

3. The thermosetting resin composition according to claim 2, further comprising

(d) in the range of 0.1 up to 10 wt % of at least one coupling agent, based on the total weight of the composition.

5

4. The thermosetting resin composition according to claim 1, wherein said crosslinking catalyst is selected from a free radical initiator or an anionic species.

5. The thermosetting resin composition according to claim 3, wherein the composition has a viscosity of from about 10 to about 12,000 centipoise.

6. The thermosetting resin composition according to claim 3, wherein the composition has a viscosity of from about 10 to about 2,000 centipoise.

7. The thermosetting resin composition according to claim 3, wherein the diluent is selected from dimethylformamide, dimethylacetamide, N-methylpyrrolidone, toluene, xylene, methylene chloride, tetrahydrofuran, glycol ethers, methyl ethyl ketone or monoalkyl or dialkyl ethers of ethylene glycol, polyethylene glycol, propylene glycol or polypropylene glycol.


8. The thermosetting resin composition according to claim 3, wherein the free radical initiator is selected from peroxides or azo compounds.

9. The thermosetting resin composition according to claim 3, wherein the coupling agent is selected from silicate esters, metal acrylate salts, titanates or compounds containing a co-polymerizable group and a chelating ligand.

50

10. A thermosetting resin composition comprising:

(a) a maleimide having the structure:

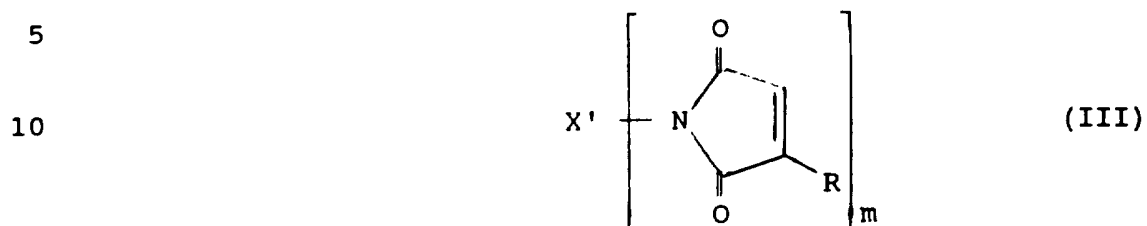

15 wherein:

$m = 1, 2 \text{ or } 3,$

each R is independently selected from hydrogen or lower alkyl, and

X' is selected from:


20 saturated straight chain alkyl, alkylene or alkylene oxide, or branched chain alkyl, alkylene or alkylene oxide, optionally containing saturated cyclic moieties as substituents on said

25 alkyl, alkylene or alkylene oxide chain or as part of the backbone of the alkyl, alkylene or alkylene oxide chain, wherein said species have at least 6 carbon atoms,

30 aromatic groups having the structure:

51

35

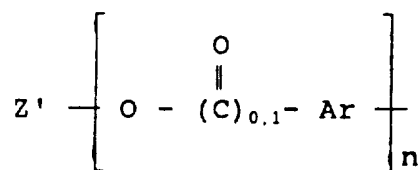

wherein

n = 1, 2 or 3,

40

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

45

Z' is selected from:

50


saturated straight chain alkyl, alkylene or alkylene oxide, or branched chain alkyl, alkylene or alkylene oxide, optionally containing saturated cyclic moieties as substituents on said alkyl, alkylene or alkylene oxide chain or as part of the backbone of the alkyl, alkylene or alkylene oxide chain,

55

wherein said species have at least 6 carbon atoms,

siloxanes having the structure:

60




wherein each R is independently defined as above, and each R' is independently selected from

52

65 hydrogen, lower alkyl or aryl,  $m'$  falls in the range of 1 up to 10,  $n'$  falls in the range of 1 up to 10, and  $q'$  falls in the range of 1 up to 50,

70 polyalkylene oxides having the structure:




75 wherein each R is independently as defined above,  $r$  falls in the range of 1 up to 10,  $s$  falls in the range of 1 up to 10, and  $q'$  is as defined above,

aromatic moieties having the structure:



85 wherein each R is independently as defined above,  $t$  falls in the range of 2 up to 10,  $u$  is 1, 2 or 3, and Ar is as defined above,


polysiloxanes having the structure:



90 wherein each R and  $R'$  is independently defined as above, and wherein each of  $m'$ ,  $n'$  and  $q$  is as defined above,

53

polyalkylene oxides having the structure:




95

wherein each R is independently as defined above, and wherein each of r, s and q' is as defined above,

as well as mixtures of any two or more thereof,

100 (b) in the range of about 0.01 up to about 10 equivalents of a vinyl compound per equivalent of maleimide, wherein said vinyl compound has the structure:



wherein:

q is 1, 2 or 3,

110 each R is independently as defined above,

each Q is independently selected from -O-, -O-C(O)-, -C(O)- or -C(O)-O-, and

Y is selected from:


115 saturated straight chain alkyl, alkylene or alkylene oxide, or branched chain alkyl, alkylene or alkylene oxide, optionally containing saturated cyclic moieties as substituents on said alkyl, alkylene or alkylene oxide chain  
120 or as part of the backbone of the alkyl, alkylene or alkylene oxide

54

chain, wherein said species have at least 6 carbon atoms,

125


aromatic moieties having the structure:



130

wherein each R is independently as defined above, and each of Ar, t and u is as defined above,


siloxanes having the structure:



135

wherein each R and R' is independently defined as above, and wherein each of m', n' and q is as defined above,

polyalkylene oxides having the structure:



140

wherein each R is independently as defined above, and wherein each of r, s and q' is as defined above,

as well as mixtures of any two or more thereof,

145 (c) in the range of 0.2 up to 3 wt % of at least one free radical initiator, based on the total weight of the composition.



55

11. A thermosetting resin composition according to claim 10 further comprising


(d) in the range of 0.1 up to 10 wt % of at least one coupling agent, based on the total weight of the composition.

12. A thermosetting resin composition according to claim 11 wherein X' is a polyvalent radical selected from:

branched chain alkylene species having from about 12 to about 500 carbon atoms,

aromatic groups having the structure:

10

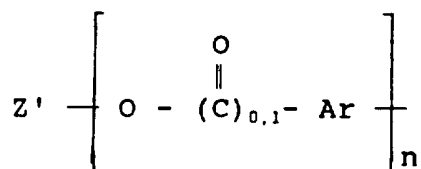

15

wherein

$n = 1, 2 \text{ or } 3,$

20

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

25

Z' is a branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

56

or mixtures thereof.

13. A thermosetting resin composition in accordance with claim 11 wherein Y is a polyvalent radical selected from:

5 branched chain alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

aromatic groups having the structure:



15 wherein

$n = 1, 2 \text{ or } 3,$

20 each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and


$Z''$  is a branched chain alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

25 or mixtures thereof.

14. A thermosetting resin composition according to claim 13 wherein Q is  $-C(O)-O-$ .

15. A thermosetting resin composition according to claim 11 wherein X' is derived from a dimer amine, and includes  $-(CH_2)_9-CH(C_8H_{17})-CH(C_8H_{17})-(CH_2)_9-$ .

16. A thermosetting resin composition according to claim 11 wherein Y is selected from stearyl, behenyl, eicosyl, isoeicosyl, as well as:




5  $-(CH_2)_4-O-(C_3N_3)-[O-(CH_2)_4]_2-$ , wherein  $-(C_3N_3)-$  is a 2,4,6-trisubstituted 1,3,5-triazine;



10  $-(CH_2)_4-O-C-Ar-C-O-(CH_2)_4-$ , wherein  $-Ar-$  is a 1,3-disubstituted phenyl ring;

Y is derived from a dimer amine, and includes



optionally hydrogenated  $\alpha,\omega$ -disubstituted polybutadienes, optionally hydrogenated  $\alpha,\omega$ -disubstituted  
15 polyisoprenes, optionally hydrogenated  $\alpha,\omega$ -disubstituted poly[(1-ethyl)-1,2-ethane].


17. A thermosetting resin composition according to claim 12 wherein X' and Y are not both aromatic.

18. A thermosetting resin composition according to claim 11, wherein the free radical initiator is selected from peroxides or azo compounds.

19. A thermosetting resin composition according to claim 11 wherein the coupling agent is selected from silicate esters, metal acrylate salts, titanates or compounds containing a co-polymerizable group and a chelating ligand.

58

20. A polyvinyl composition having the structure:



wherein:

q is 1, 2 or 3,


10 each R is independently selected from hydrogen or lower alkyl,

Q is -C(O)-O-, and

Y is selected from:

15 branched chain alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

aromatic groups having the structure:

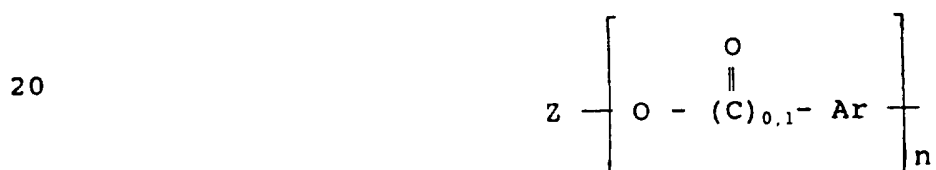

wherein

25 n = 1, 2 or 3,

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

30

Z is a branched chain alkylene or alkylene oxide species having from about 12 to about 500 carbon atoms,

or mixtures thereof.

21. A thermosetting resin composition comprising

- (a) a divinyl composition according to claim 20, and
- (b) a sufficient amount of at least one free radical initiator.

22. The thermosetting resin composition in accordance with claim 21, further comprising

- (c) a sufficient amount of at least one coupling agent, based on the total weight of the composition.

23. The thermosetting resin composition in accordance with claim 21, wherein the free radical initiator is selected from peroxides or azo compounds.

24. The thermosetting resin composition in accordance with claim 22, wherein the coupling agent is selected from silicate esters, metal acrylate salts, titanates or compounds containing a copolymerizable group  
5 and a chelating ligand.

25. An assembly comprising a first article permanently adhered to a second article by a cured aliquot of the thermosetting resin composition according to claim 3.

26. An assembly comprising a first article permanently adhered to a second article by a cured aliquot of the thermosetting resin composition according to claim 11.

27. An assembly comprising a first article permanently adhered to a second article by a cured aliquot of the thermosetting resin composition according to claim 20.

28. A die-attach paste comprising:

in the range of about 10 up to 80 wt % of the thermosetting resin composition according to claim 3, and

5 in the range of about 20 up to 90 wt % of a conductive filler.

29. A die-attach paste comprising:

in the range of about 10 up to 80 wt % of the thermosetting resin composition according to claim 11, and

5 in the range of about 20 up to 90 wt % of a conductive filler.

30. A die-attach paste comprising:

in the range of about 10 up to 80 wt % of the thermosetting resin composition according to claim 20, and

5 in the range of about 20 up to 90 wt % of a conductive filler.

31. A die-attach paste according to claim 28 wherein the conductive filler is electrically conductive.

32. A die-attach paste according to claim 29 wherein the conductive filler is electrically conductive.

33. A die-attach paste according to claim 30 wherein the conductive filler is electrically conductive.

34. A die-attach paste according to claim 28 wherein said conductive filler is thermally conductive.

35. A die-attach paste according to claim 29 wherein said conductive filler is thermally conductive.

36. A die-attach paste according to claim 30 wherein said conductive filler is thermally conductive.

37. An assembly comprising a microelectronic device permanently adhered to a substrate by a cured aliquot of the die attach paste according to claim 28.

38. An assembly comprising a microelectronic device permanently adhered to a substrate by a cured aliquot of the die attach paste according to claim 29.

39. An assembly comprising a microelectronic device permanently adhered to a substrate by a cured aliquot of the die attach paste according to claim 30.

40. A method for adhesively attaching a first article to a second article, said method comprising:

(a) applying composition according to claim 28 to said first article,

5

(b) bringing said first and second article into intimate contact to form an assembly wherein said first article and said second article are separated only by the adhesive composition applied in step (a), and thereafter,

10

(c) subjecting said assembly to conditions suitable to cure said adhesive composition.

41. A method for adhesively attaching a first article to a second article, said method comprising:

(a) applying composition according to claim 29 to said first article,

5 (b) bringing said first and second article into intimate contact to form an assembly wherein said first article and said second article are separated only by the adhesive composition applied in step (a), and thereafter,

10 (c) subjecting said assembly to conditions suitable to cure said adhesive composition.

42. A method for adhesively attaching a first article to a second article, said method comprising:

(a) applying composition according to claim 30 to said first article,

(b) bringing said first and second article into intimate contact to form an assembly wherein said first article and said second article are separated only by the adhesive composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said adhesive composition.

43. A method for adhesively attaching a microelectronic device to a substrate, said method comprising:

5 (a) applying die attach paste according to claim 28 to said substrate and/or said microelectronic device,

(b) bringing said substrate and said device into intimate contact to form an assembly wherein said substrate and said device are separated only  
10 by the die attach composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said die attach composition.



44. A method for adhesively attaching a microelectronic device to a substrate, said method comprising:

5 (a) applying die attach paste according to claim 29 to said substrate and/or said microelectronic device,

(b) bringing said substrate and said device into intimate contact to form an assembly wherein said substrate and said device are separated only  
10 by the die attach composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said die attach composition.

45. A method for adhesively attaching a microelectronic device to a substrate, said method comprising:

5 (a) applying die attach paste according to claim 30 to said substrate and/or said microelectronic device,

(b) bringing said substrate and said device into intimate contact to form an assembly wherein said substrate and said device are separated only  
10 by the die attach composition applied in step (a), and thereafter,

(c) subjecting said assembly to conditions suitable to cure said die attach composition.

46. Method for the preparation of bismaleimides from diamines, said method comprising:

adding diamine to a solution of maleic anhydride,  
adding acetic anhydride to said solution once  
5 diamine addition is complete, and then allowing the resulting mixture to stir for at least 12 hours, and thereafter

treating the resulting reaction mixture with a suitable isomerizing agent.