




(86) Date de dépôt PCT/PCT Filing Date: 2011/05/20
 (87) Date publication PCT/PCT Publication Date: 2011/12/15
 (45) Date de délivrance/Issue Date: 2015/03/24
 (85) Entrée phase nationale/National Entry: 2012/12/07
 (86) N° demande PCT/PCT Application No.: US 2011/037299
 (87) N° publication PCT/PCT Publication No.: 2011/156107
 (30) Priorité/Priority: 2010/06/07 (US12/795,292)

(51) Cl.Int./Int.Cl. *E21B 29/00* (2006.01)
 (72) Inventeurs/Inventors:
 LAIRD, MARY L., US;
 COLBERT, ROBBIE B., US
 (73) Propriétaire/Owner:
 BAKER HUGHES INCORPORATED, US
 (74) Agent: SIM & MCBURNEY

(54) Titre : COUPE-TUBAGE ENTRAINE PAR MOTEUR HYDRAULIQUE ET DESCENDU PAR CABLE LISSE
 (54) Title: SLICKLINE RUN HYDRAULIC MOTOR DRIVEN TUBING CUTTER

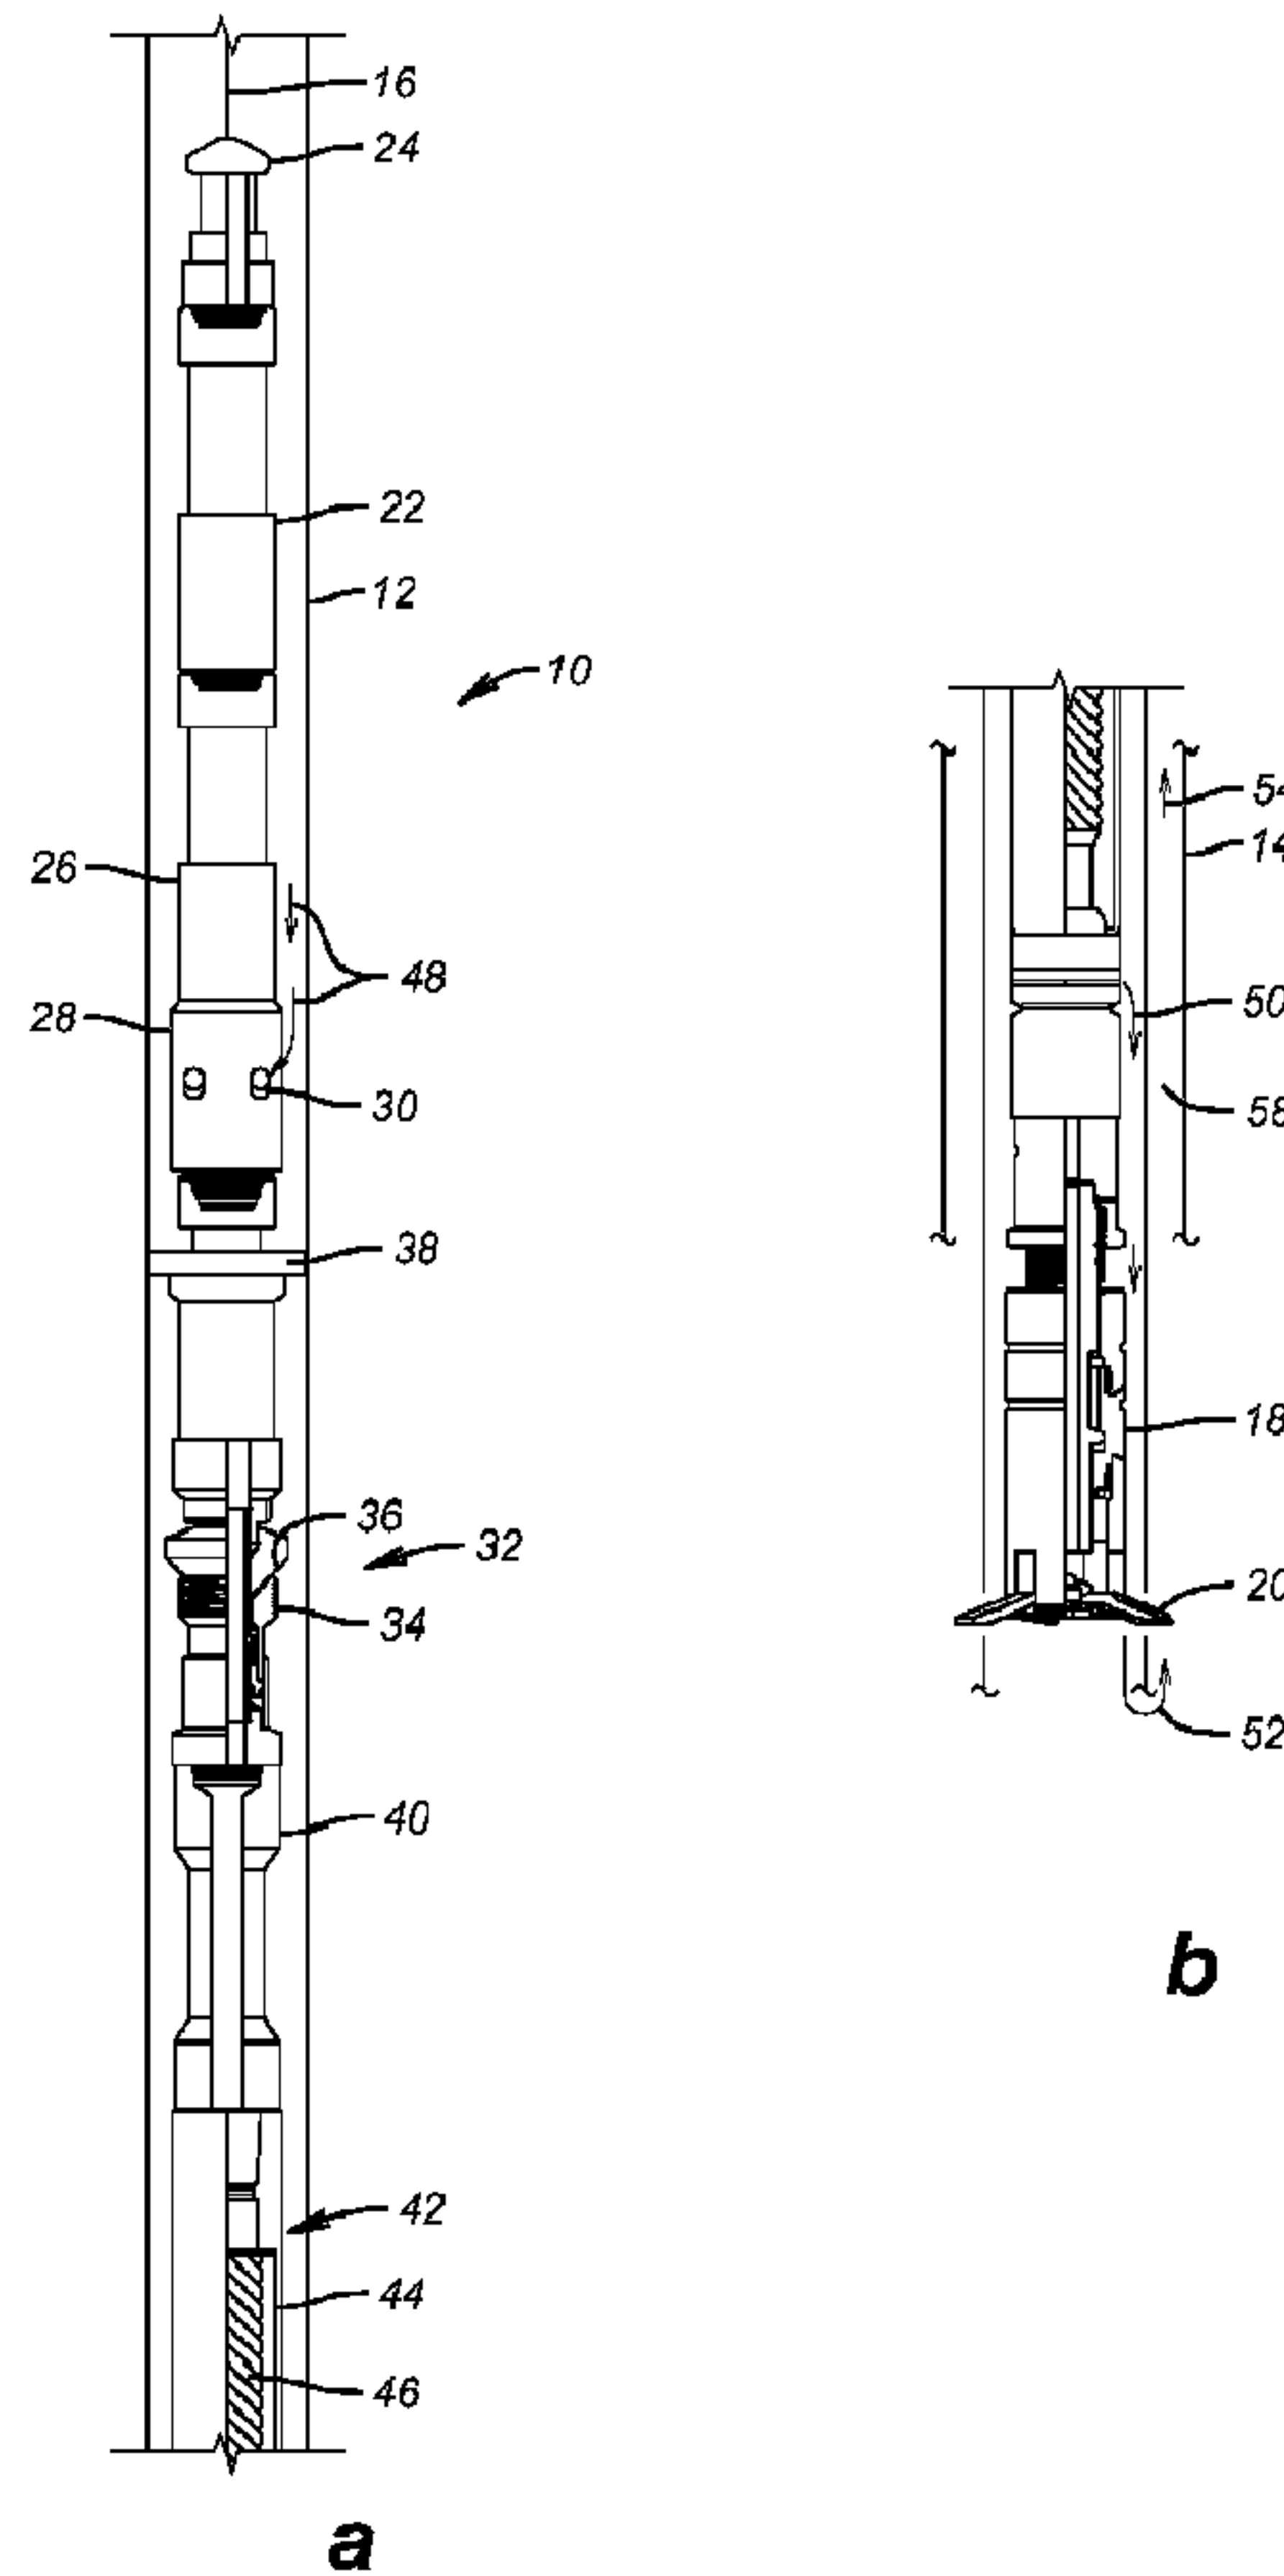

(57) Abrégé/Abstract:

A tubing cutter is run in with a bottom hole assembly that includes a seal and support within the tubing to be cut. A ported sub allows pressurized fluid pumped from the surface to enter the bottom hole assembly above the sealed support location and to be

(57) **Abrégé(suite)/Abstract(continued):**

directed to set an anchor and to a fluid driven motor such as a progressive cavity motor that is in turn connected to the tubing cutter at the rotor of the progressive cavity motor. The rotation of the cutter with its blades extended cuts the tubular as the fluid exiting the stator goes to the lower end of the tubing being cut and can return to the surface through an annulus around the tubing to be cut. Other configurations such as cutting casing or cutting casing through tubing are also envisioned.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 December 2011 (15.12.2011)(10) International Publication Number
WO 2011/156107 A3(51) International Patent Classification:
E21B 29/00 (2006.01)(21) International Application Number:
PCT/US2011/037299(22) International Filing Date:
20 May 2011 (20.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/795,292 7 June 2010 (07.06.2010) US(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LAIRD, Mary, L.** [US/US]; 309 Mourning Dove Lane, Madisonville, LA 70447 (US). **COLBERT, Robbie, B.** [US/US]; 52535 Cemetery Road, Perdido, AL 26562 (US).(74) Agent: **PORTER, Andre, J.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: SLICKLINE RUN HYDRAULIC MOTOR DRIVE TUBING CUTTER

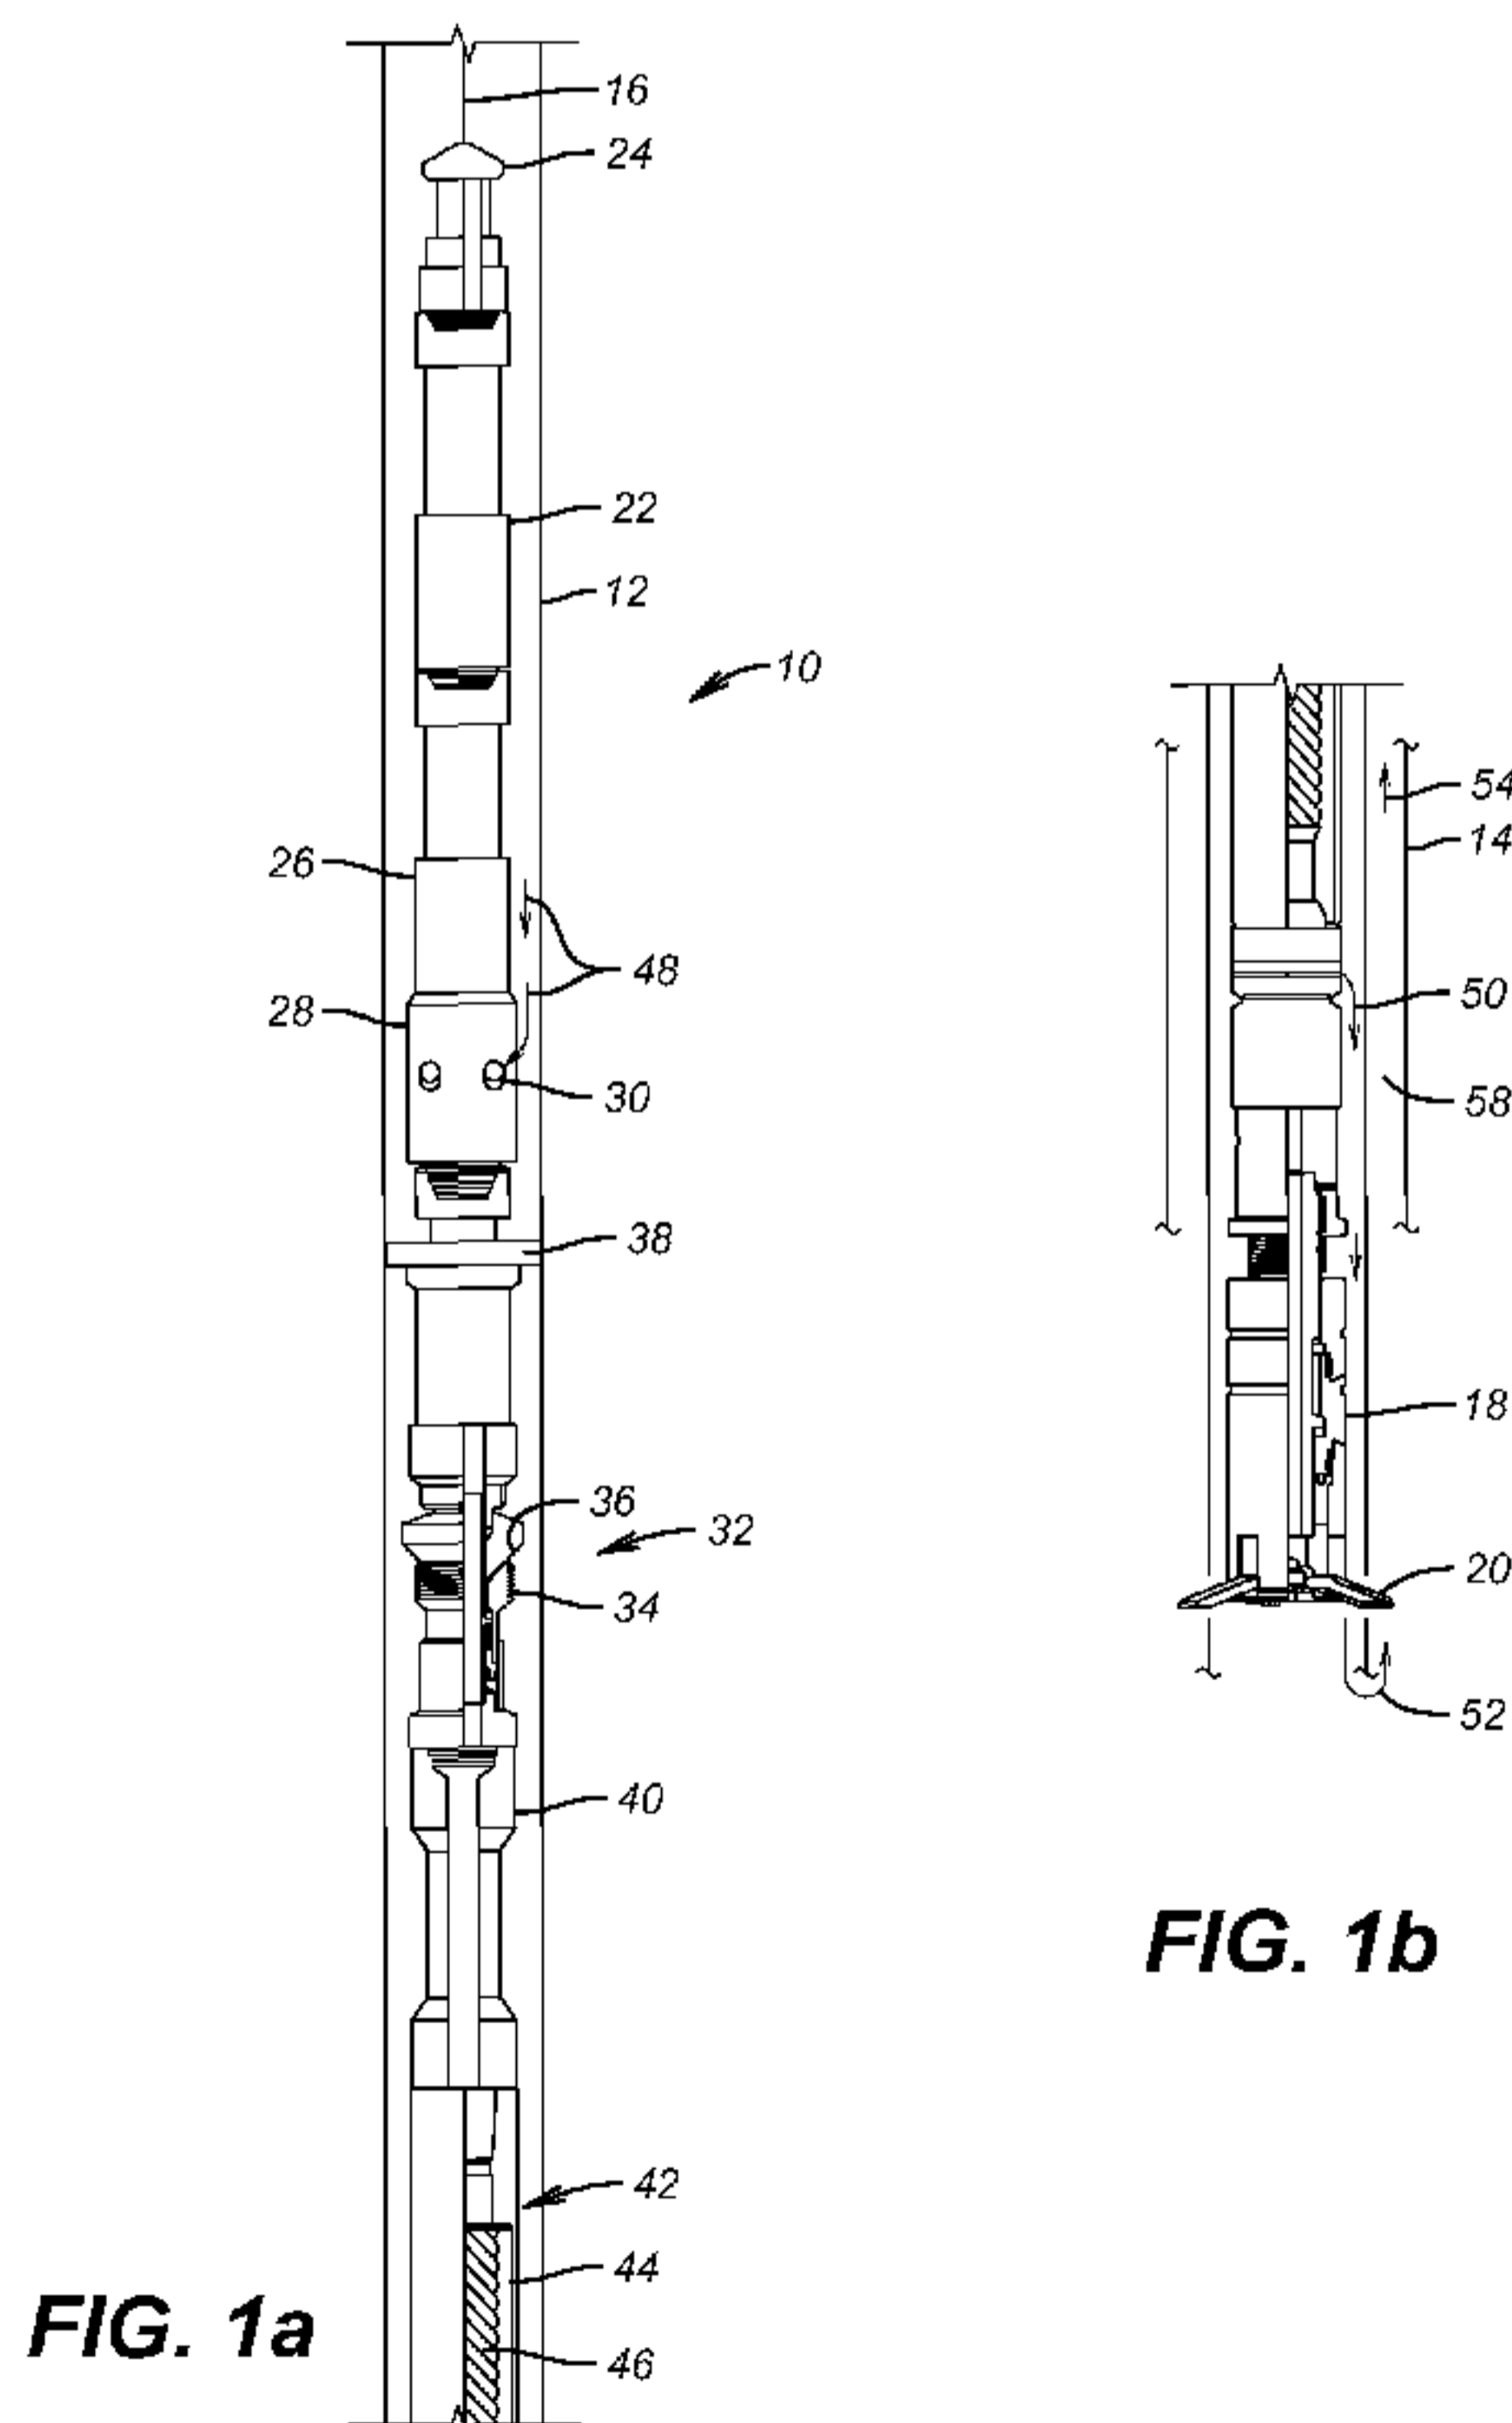

(57) Abstract: A tubing cutter is run in with a bottom hole assembly that includes a seal and support within the tubing to be cut. A ported sub allows pressurized fluid pumped from the surface to enter the bottom hole assembly above the sealed support location and to be directed to set an anchor and to a fluid driven motor such as a progressive cavity motor that is in turn connected to the tubing cutter at the rotor of the progressive cavity motor. The rotation of the cutter with its blades extended cuts the tubular as the fluid exiting the stator goes to the lower end of the tubing being cut and can return to the surface through an annulus around the tubing to be cut. Other configurations such as cutting casing or cutting casing through tubing are also envisioned.

WO 2011/156107 A3

WO 2011/156107 A3 

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
16 February 2012

TTI4-50545-WO

SLICKLINE RUN HYDRAULIC MOTOR DRIVEN TUBING CUTTER

Inventors: Mary L. Laird and Robbie B. Colbert

FIELD OF THE INVENTION

[0001] The field of this invention is tubular cutters and more specifically those that are rotatably driven by a bottom hole assembly suspended from the surface with a cable while a motor in the assembly powers the cutter using fluid flow into the tubular.

BACKGROUND OF THE INVENTION

[0002] Tubing cutters have been run into a subterranean location into tubing that is to be cut on coiled tubing and/or tubular. The coiled tubing or tubular has fluid pumped through it to power a downhole motor that is fluid driven such as a progressing cavity pump. The rotation of the pump drives the cutter after extending its blades. Some examples are USP 7,225,873 and 7,086,467. Coiled tubing units are frequently not at a well site and are very expensive to deploy.

[0003] Older designs would cut tubing using explosive charges that are set off with a dropped weight on a slickline such as illustrated in USP 5,992,289. These tools did not rotate and the positioning of the explosives made the circumferential cut. These designs had the obvious safety issues of dealing with explosives. The extension reach of the explosion could damage the outer string on the back side of the tubing being cut.

[0004] Rotating tubing cutters have been run in on wireline where power was transmitted to an electric motor in the bottom hole assembly as illustrated in USP 7,370,703.

[0005] Other assemblies disclose the use of a tubing cutter but the focus is on how the blades are extended or how the cutter is anchored with no details about the drive system other than stating that there is a driver and that the traditional conveyances for cutters such as coiled tubing, wireline or slickline can be used. Some examples are USP 7,478,982 and 7,575,056.

[0006] There are many occasions where a coiled tubing unit or an E-line rig is not available and a need to cut tubing arises. Under those circumstances it would be advantageous to use a slickline supported cutter. Since a slickline cannot convey power and a self contained power supply in the bottom hole

TTI4-50545-WO

assembly, such as a battery, may not have the output to get the job done or may not even fit in a confined location of a small wellbore, the present invention provides an alternative to make the tubing cut.

[0007] The preferred deployment of the invention is in a well with production tubing inside casing where the tubing is cut to be freed from a production packer by allowing it to extend so that its slips and sealing system can retract. In the context of this application, the reference to “tubing” is to tubular strings in a wellbore and includes casing, production or injection tubing in casing or tubulars in other environments that need to be cut. In the preferred mode the rig pumps provide fluid under pressure around the bottom hole assembly that is supported in the tubular to be cut in a sealed manner and retained against reaction torque from the cutting operation. The pumped fluid enters the bottom hole assembly through a ported sub and goes to a fluid driven pump such a progressing cavity pump to operate the cutter. Exhaust fluid from the pump goes out the tubing and back to the surface through perforated holes in the tubing allowing access to the annulus where the tubing inside the casing is being cut. Those skilled in the art will more readily appreciate other aspects of the invention from a review of the detailed description and the associated drawings that appear below while recognizing that the full scope of the invention is to be found in the appended claims.

SUMMARY OF THE INVENTION

[0008] A tubing cutter is run in with a bottom hole assembly that includes a seal and support within the tubing to be cut. A ported sub allows pressurized fluid pumped from the surface to enter the bottom hole assembly above the sealed support location and to be directed to set an anchor and to a fluid driven motor such as a progressive cavity motor that is in turn connected to the tubing cutter at the rotor of the progressive cavity motor. The rotation of the cutter with its blades extended cuts the tubular as the fluid exiting the stator goes to the lower end of the tubing being cut and can return to the surface through an annulus around the tubing to be cut. Other configurations such as cutting casing or cutting casing through tubing are also envisioned.

TTI4-50545-WO

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIGS. 1a-1b show the arrangement of a bottom hole assembly with the tubing to be cut omitted for clarity.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0010] The cutter assembly **10** is preferably positioned in a tubular string **12** that is disposed in a surrounding string such as casing **14** shown in part in FIG. 1a. A slickline **16** or alternatively a wireline, if available at the surface, supports the illustrated equipment down to the cutter **18** shown in FIG. 1a with cutting blades **20** extended into the cutting position. The slickline **16** supports an optional accelerator **22** for use in shallow depth applications. Other familiar components when running slickline are employed in the assembly **10** such as a fishing neck **24** and a jar tool such as **26**. The jar tool **26** allows jarring to get unstuck while the fishing neck **24** allows the assembly to be fished out if the jar tool **26** does not help it break loose. A ported sub **28** has ports **30** that preferably stay open.

[0011] The equipment shown below the ported sub **28** is schematically illustrated to perform a sealing function in string **12** so that fluid pumped from the surface will go into ports **30** and for securing the bottom hole assembly against reaction torque from the cutting operation as the blades **20** are rotated. The anchor tool **32** has slips **34** driven along ramps **36** to bite the inside of the string **12** for support of the weight of the assembly **10** and to retain the assembly **10** against rotation. A seal **38** is radially extendable in a variety of ways. It can be made of a swelling material that reacts to well fluids or added fluids to swell and seal. It can be set against the inner wall of the string **12** by longitudinal compression that is initiated mechanically such as when a slickline **16** is in use or it can be actuated electrically using a setting tool powered by power delivered through a wireline, when available. If the string **12** has a landing nipple that has a seal bore, on the other hand, the seal **38** can just be advanced into the seal bore to get a seal. The no-go that is typically provided in a landing nipple can be configured not only for weight support but also for a rotational lock of the assembly **10**. In those cases with latching into a landing nipple the anchor **32** would not be used as dogs going into a profile provide weight support and a rotational lock.

TTI4-50545-WO

[0012] One or more pipe sections **40** can be provided for proper spacing of the blades **20** when working off a landing nipple. When using an anchor **32** that can be deployed as needed, the pipe sections **40** can be eliminated. A downhole motor **42**, preferably a progressive cavity Moineau pump is used with a stationary stator **44** and a rotor **46** operatively connected to the tubing cutter **18**. Arrows **48** represent pumped fluid from the surface going down the string **12** and entering the ports **30**. From there the flow continues within the assembly **10** to the stator **44** which sets the rotor **46** turning. The fluid is exhausted from the stator **46** and follows the path of arrows **50**, **52** and **54** to get back to the surface through the annulus **58** between strings **12** and **14**.

[0013] When used in a cased hole to cut casing the exhaust fluid from the motor **42** can be directed further downhole such as into a formation, although in some application this may not be desirable. With larger sizes there can also be issues of the weight capacity of the slickline to support the assembly **10**. The preferred application is in cutting production or injection tubing such as in applications to sever a packer body to allow it to be released so that it can be removed with the tubing being severed. The anchor and seal **32** and **38** can be configured for multiple deployments at different locations in a single trip so that more than one cut of the tubular **12** can take place in one trip. Various configurations of rotating cutters are envisioned that are responsive to rotational input to operate. The tubing cutter **18** is a known product adapted to be used in the assembly **10**.

[0014] In a broad sense a bottom hole assembly **10** can be run in on a cable, whether slickline or a wireline, if available, for support in a tubular to be cut and the ability to divert flow pumped into the tubular to a downhole motor to make the cut with a rotary bladed cutter or in the alternative with a fluid jet or jets that can cut through the tubing either with or without body rotation of the cutter. The motor **42** can drive a downhole pump that builds pressure that is exhausted through jet nozzles in the cutter **18**. Alternatively the tubing **12** above the seal **38** can be raised to a high enough pressure to operate cutting jets in the cutter **18**. The support cable can be selectively released to be removed from the wellbore after the tubular is cut. Depending on the cutter configuration the tubing can be cut circumferentially for 360

degrees to remove a part of it or an opening of a desired shape can also be cut into the tubular 12 depending on the cutter configuration.

[0015] The scope of the claims should not be limited by the preferred embodiments set forth above, but should be given the broadest interpretation consistent with the description as a whole.

TTI4-50545-WO

We claim:

1. A method of cutting a tubular, comprising:
supporting a tubular cutter assembly at least in part on a cable within a tubular to be cut;
pumping fluid into the tubular to be cut to operate said cutter;
cutting the tubular with said cutter.
2. The method of claim **1**, comprising:
driving a motor operably connected to said cutter with said pumping.
3. The method of claim **2**, comprising:
diverting said pumped fluid to said motor.
4. The method of claim **3**, comprising:
using a progressing cavity device as said motor.
5. The method of claim **3**, comprising:
directing fluid exhausted from said motor to the surface.
6. The method of claim **5**, comprising:
flowing said exhausted fluid out of a lower end of said tubular to be cut and back to the surface through an annular space defined between said tubular to be cut and a surrounding tubular.
7. The method of claim **3**, comprising:
accomplishing said diverting with an exterior seal on said assembly.
8. The method of claim **7**, comprising:
actuating said seal to engage an inner surface of the tubular to be cut.
9. The method of claim **7**, comprising:
providing a seal bore in the tubular to be cut; and
inserting said seal into said seal bore to accomplish said diverting.
10. The method of claim **7**, comprising:
providing a ported sub adjacent said seal; and
directing flow through said ported sub and into said motor.
11. The method of claim **10**, comprising:
providing a hydraulically actuated anchor in said assembly.
12. The method of claim **11**, comprising:
locating said anchor between said seal and said motor;
using said diverted fluid to actuate both said anchor and said motor.

TTI4-50545-WO

13. The method of claim **10**, comprising:
supporting said assembly on a landing nipple in said tubular to be cut.
14. The method of claim **10**, comprising:
using rotation of the motor to drive at least one blade on said cutter in contact with said tubular to be cut.
15. The method of claim **14**, comprising:
cutting a 360 degree cut on the tubular to be cut.
16. The method of claim **14**, comprising:
cutting an opening in the tubular to be cut.
17. The method of claim **14**, comprising:
using a slickline as said cable.
18. The method of claim **1**, comprising:
using a slickline or a wireline as said cable.
19. The method of claim **1**, comprising:
driving said pumped fluid through fluid nozzles on said cutter.
20. The method of claim **10**, comprising:
driving a pump with said motor;
boosting pressure of fluid in said tubular to be cut with said pump;
directing fluid from said pump through at least one jet nozzle in said cutter.

1/1

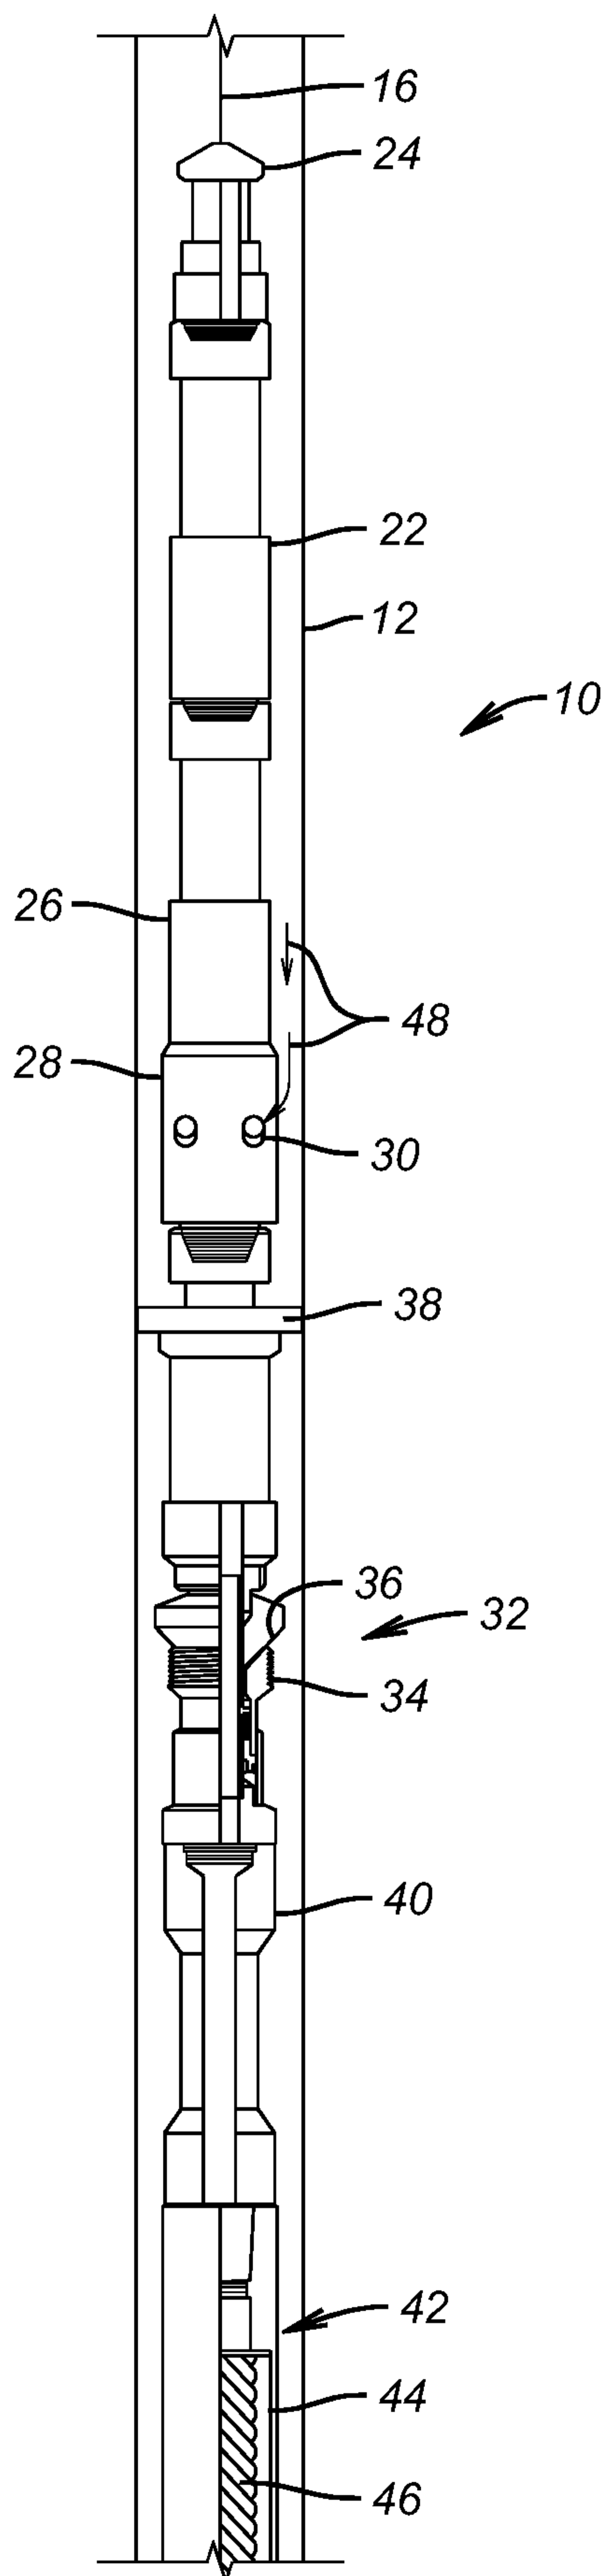


FIG. 1a



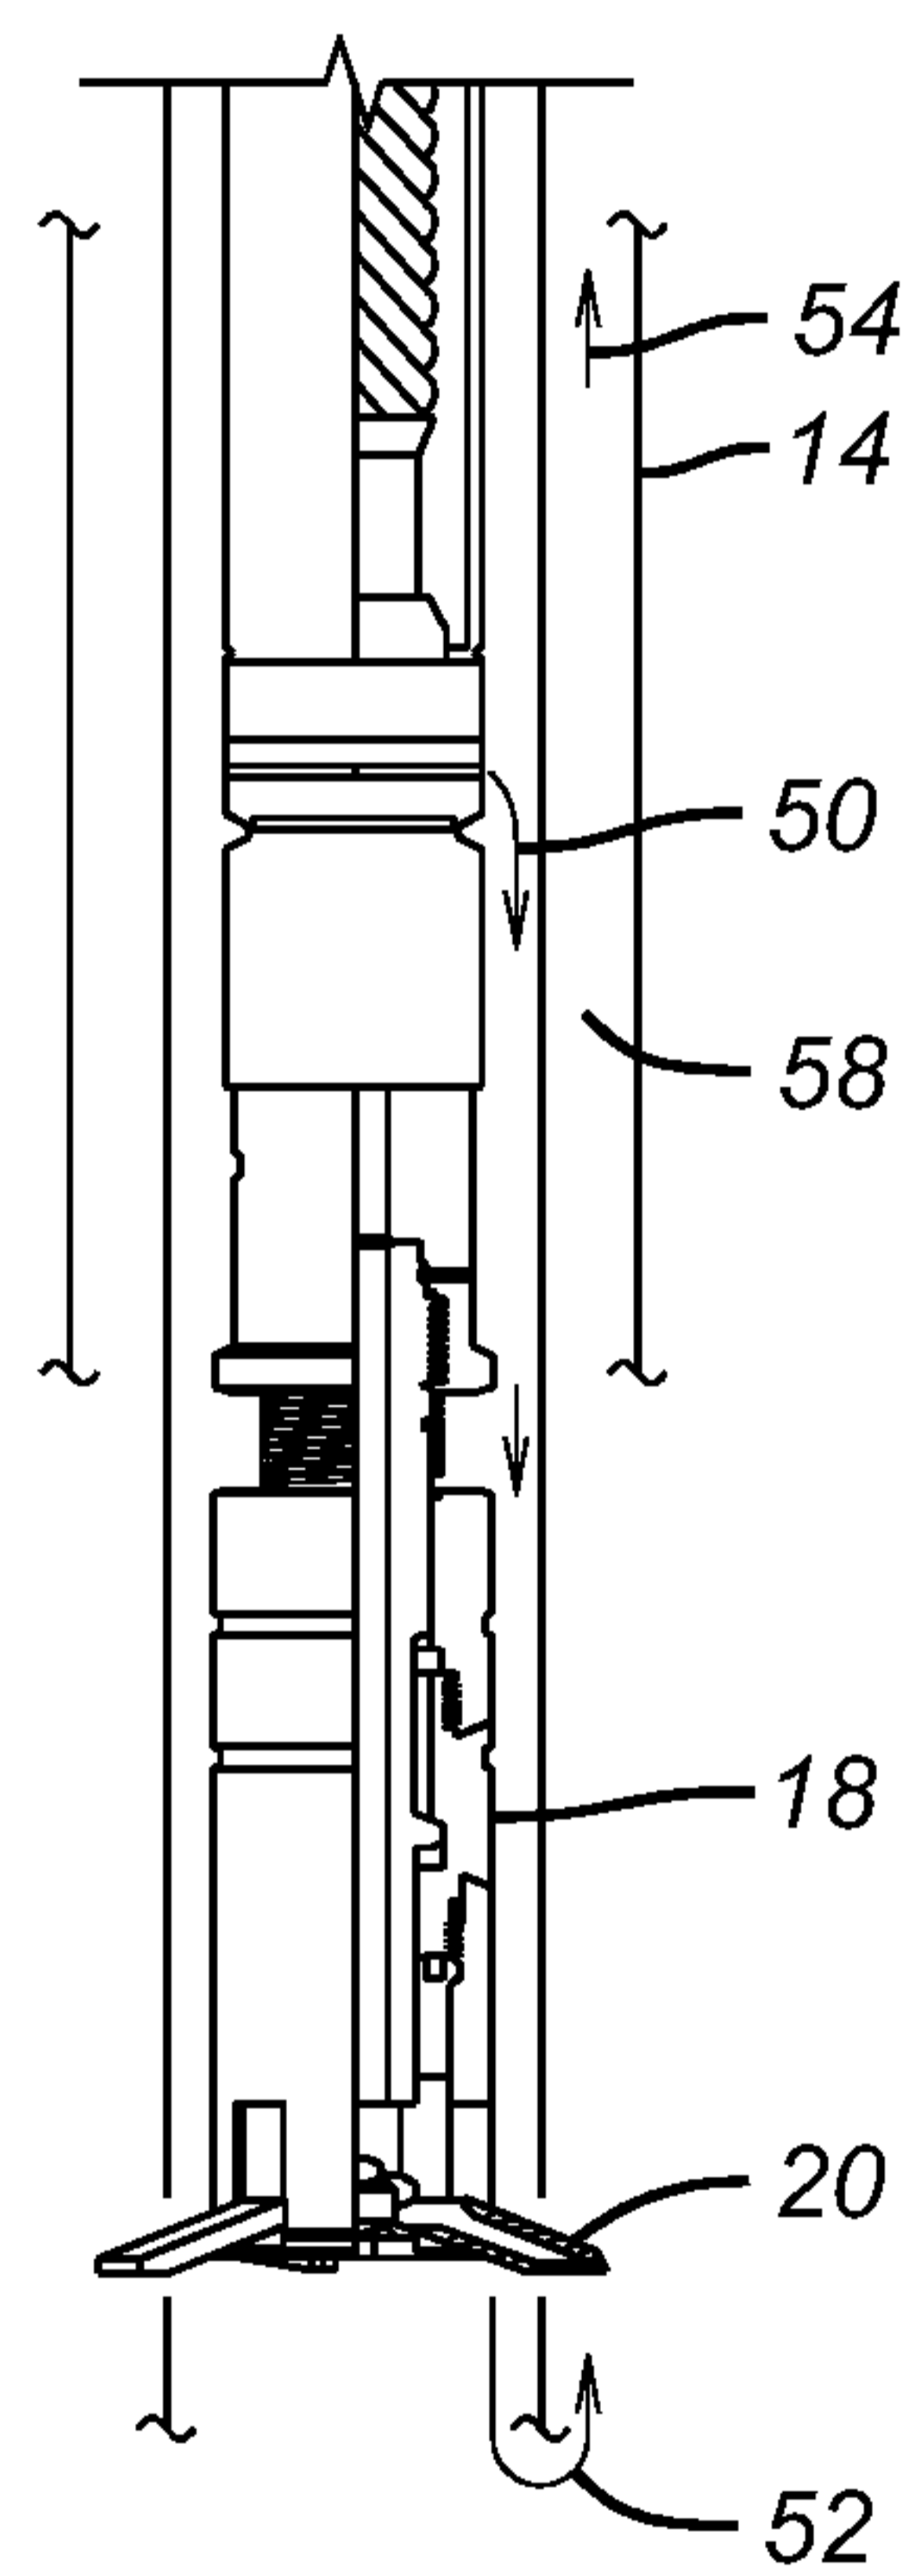


FIG. 1b

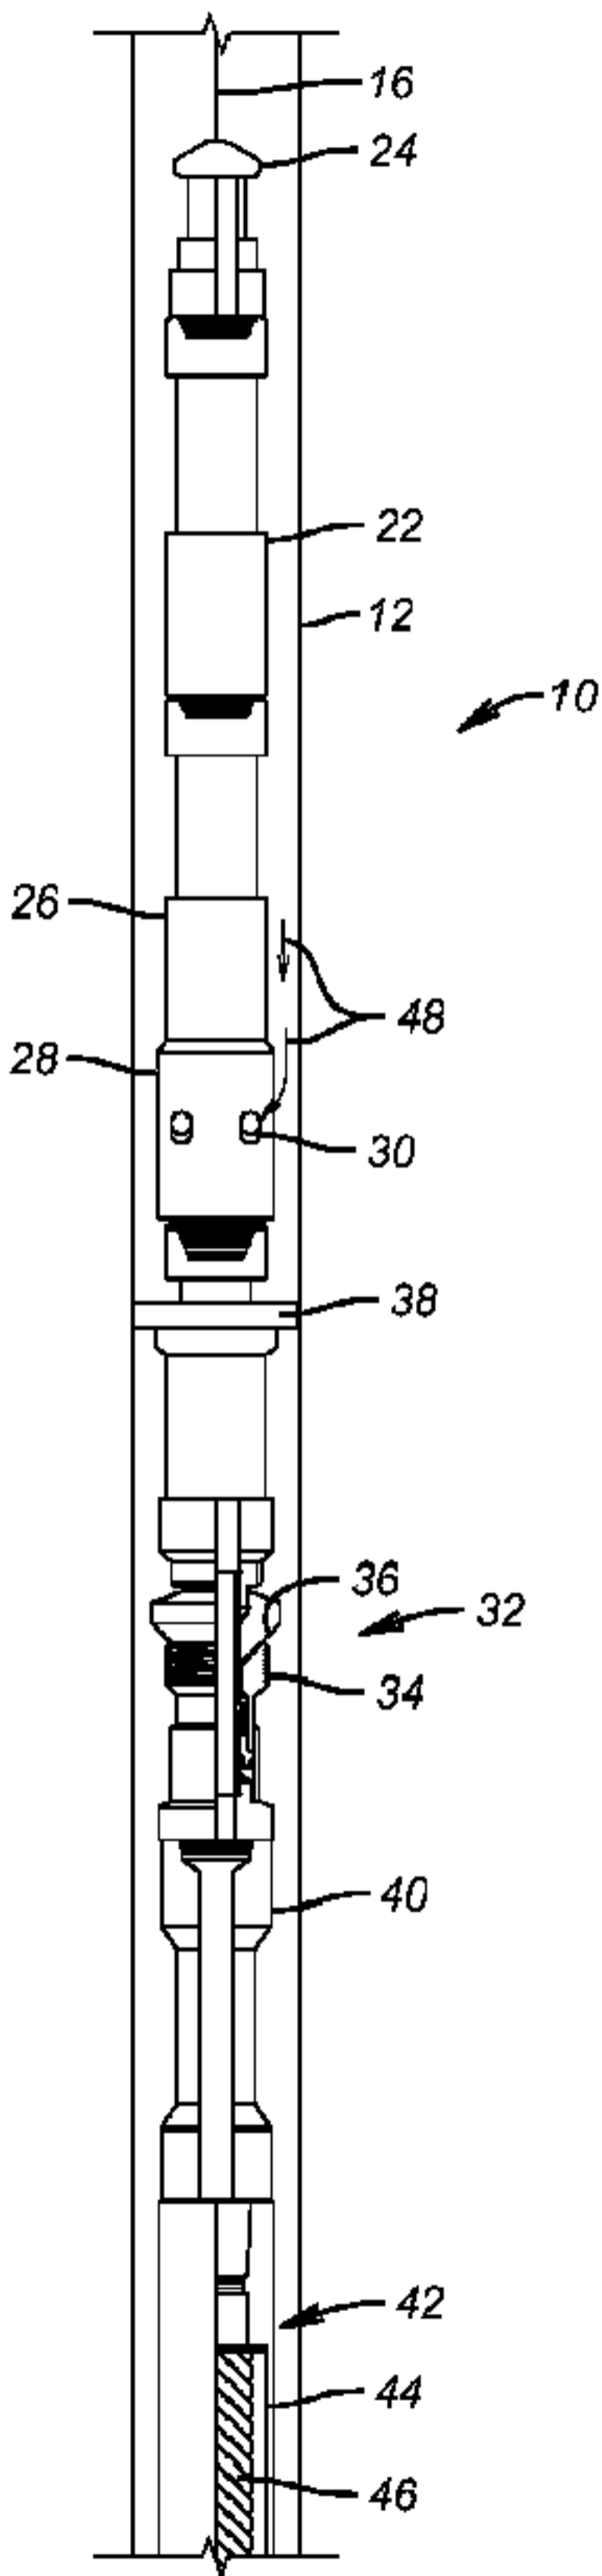

a

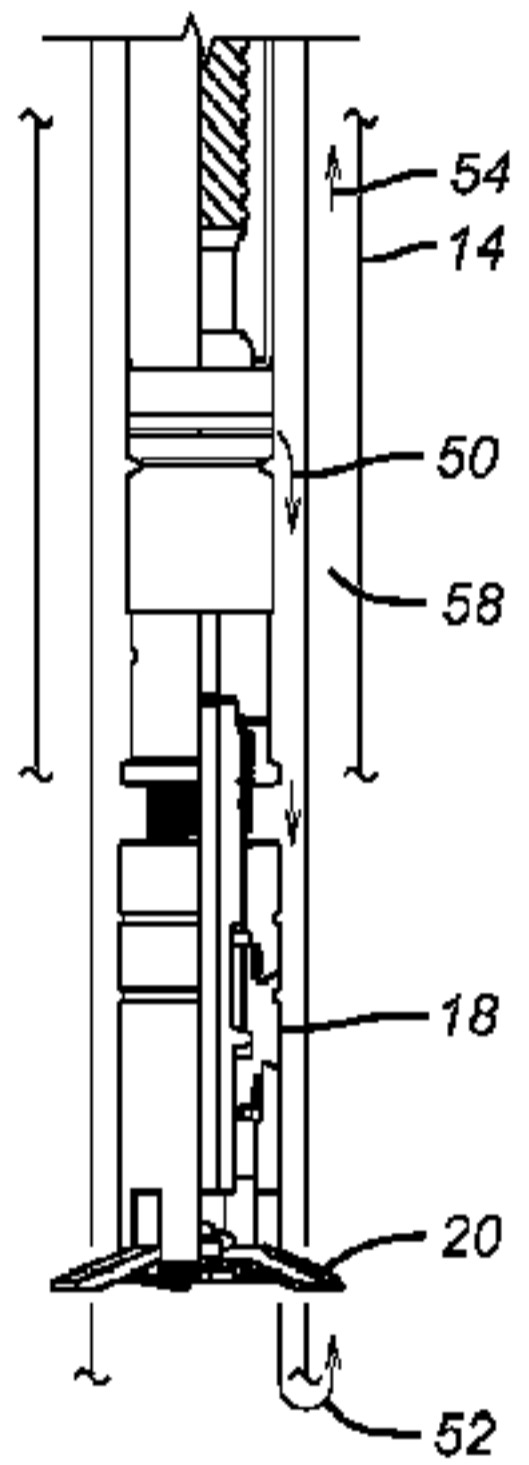

b