




(86) Date de dépôt PCT/PCT Filing Date: 2017/04/12
(87) Date publication PCT/PCT Publication Date: 2017/11/02
(45) Date de délivrance/Issue Date: 2021/01/26
(85) Entrée phase nationale/National Entry: 2018/10/29
(86) N° demande PCT/PCT Application No.: US 2017/027261
(87) N° publication PCT/PCT Publication No.: 2017/189238
(30) Priorité/Priority: 2016/04/29 (US62/329,663)

(51) Cl.Int./Int.Cl. *H01M 8/0668* (2016.01),
F01K 23/10 (2006.01), *F02C 1/00* (2006.01),
H01M 8/04044 (2016.01), *H01M 8/04111* (2016.01)
(72) Inventeur/Inventor:
JAHNKE, FRED C., US
(73) Propriétaire/Owner:
FUELCELL ENERGY, INC., US
(74) Agent: PRAXIS

(54) Titre : METHANISATION DE GAZ D'ÉCHAPPEMENT D'ANODE POUR AMÉLIORER LA CAPTURE DE DIOXYDE DE CARBONE

(54) Title: METHANATION OF ANODE EXHAUST GAS TO ENHANCE CARBON DIOXIDE CAPTURE

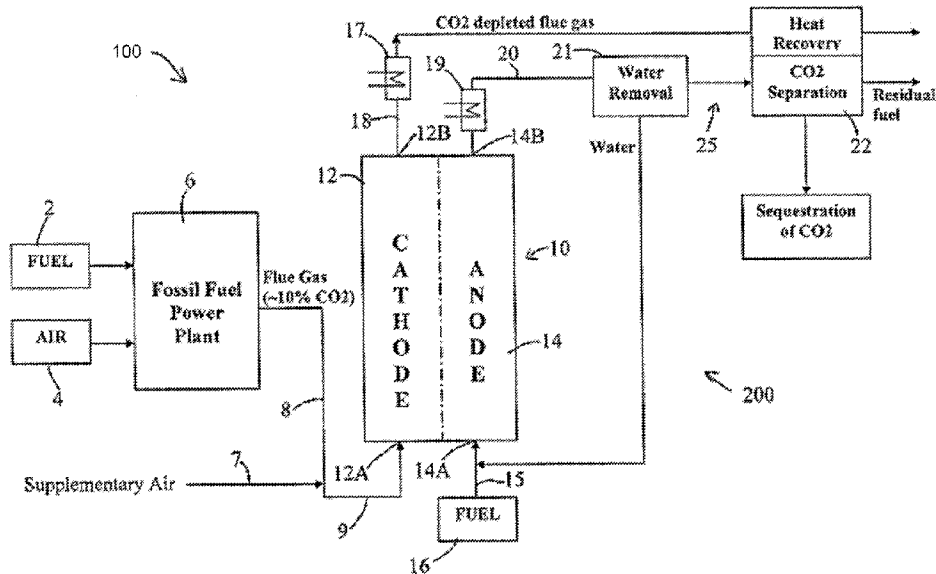

(57) **Abrégé/Abstract:**

A power production system includes a flue gas generator configured to generate a flue gas that includes carbon dioxide and oxygen; a fuel supply; a fuel cell assembly that includes: a cathode section configured to receive the flue gas generated by the flue gas generator, and output cathode exhaust, and an anode section configured to receive fuel from the fuel supply, and output anode exhaust that contains hydrogen and carbon dioxide; a methanator configured to receive the anode exhaust to methane, and output methanated anode exhaust; a chiller assembly configured to cool the methanated anode exhaust to a predetermined temperature so as to liquefy carbon dioxide in the methanated anode exhaust; and a gas separation assembly configured to receive the cooled methanated anode exhaust and separate the liquefied carbon dioxide from residual fuel gas.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number
WO 2017/189238 A1

(43) International Publication Date
02 November 2017 (02.11.2017)

(51) International Patent Classification:

H01M 8/0668 (2016.01) F02C 1/00 (2006.01)
H01M 8/04044 (2016.01) F01K 23/10 (2006.01)
H01M 8/04111 (2016.01)

(72) Inventor: JAHNKE, Fred C.; 2 Winthrop Street, Rye, New York 10580 (US).

(74) Agent: SPROW, Marcus et al.; Foley & Lardner LLP, 3000 K Street, N.W. Suite 600, Washington, District of Columbia 20007-5109 (US).

(21) International Application Number:

PCT/US2017/027261

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

12 April 2017 (12.04.2017)

(25) Filing Language:

English

(26) Publication Language:

English


(30) Priority Data:

62/329,663 29 April 2016 (29.04.2016) US

(71) Applicant: FUELCELL ENERGY, INC. [US/US]; 3 Great Pasture Road, Danbury, Connecticut 06810 (US).

(54) Title: METHANATION OF ANODE EXHAUST GAS TO ENHANCE CARBON DIOXIDE CAPTURE

FIG. 1B

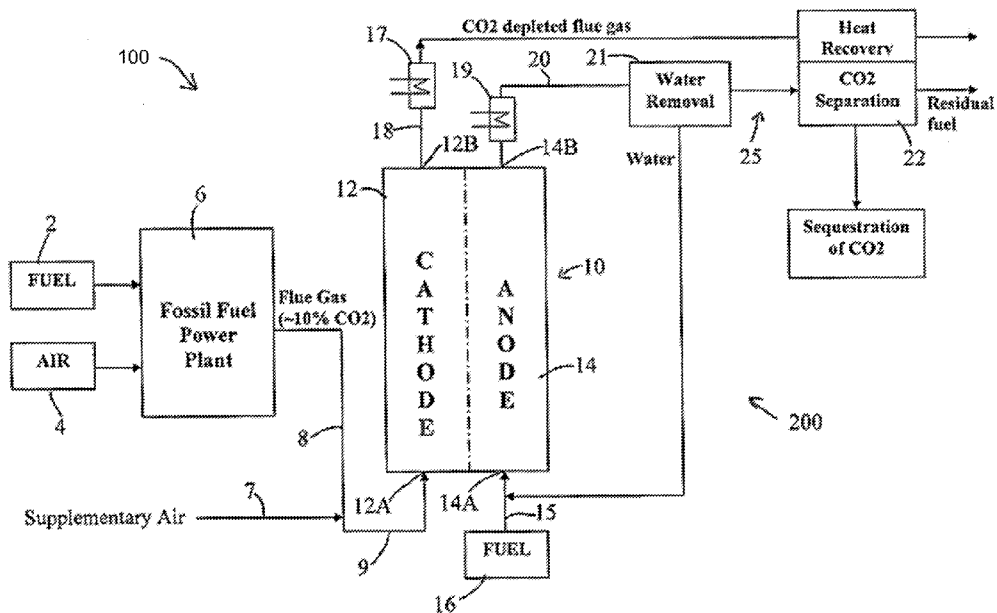

(57) Abstract: A power production system includes a flue gas generator configured to generate a flue gas that includes carbon dioxide and oxygen; a fuel supply; a fuel cell assembly that includes: a cathode section configured to receive the flue gas generated by the flue gas generator, and output cathode exhaust, and an anode section configured to receive fuel from the fuel supply, and output anode exhaust that contains hydrogen and carbon dioxide; a methanator configured to receive the anode exhaust, convert at least a portion of the hydrogen in the anode exhaust to methane, and output methanated anode exhaust; a chiller assembly configured to cool the methanated anode exhaust to a predetermined temperature so as to liquefy carbon dioxide in the methanated anode exhaust; and a gas separation assembly configured to receive the cooled methanated anode exhaust and separate the liquefied carbon dioxide from residual fuel gas.



WO 2017/189238 A1

WO 2017/189238 A1 

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

TITLE

[0001] METHANATION OF ANODE EXHAUST GAS TO ENHANCE CARBON DIOXIDE CAPTURE.

BACKGROUND

[0002] The present disclosure relates to fuel cell power production systems and, in particular, to a fuel cell power producing gas separation system and method.

[0003] A fuel cell is a device which directly converts chemical energy stored in a fuel into electrical energy through electrochemical reactions. Generally, a fuel cell comprises an anode and a cathode separated by an electrolyte, which serves to conduct electrically charged ions. Molten Carbonate Fuel Cells (MCFCs) operate by passing a reactant fuel gas through the anode, while oxidizing gas, such as carbon dioxide and oxygen, is passed through the cathode. Combustion-based power plants produce energy by combusting flammable hydrocarbon based fuels including coal, natural gas, biogas, and syngas.

[0004] As a result of the combustion process, combustion-based power plants generate flue gas, which is often disposed of by atmospheric emissions. Such emissions, however, are harmful to the environment because they contain carbon dioxide (CO₂) which contributes to global climate change. Increasing national and international regulations are placing strict regulations on the amount of CO₂ which may be released in the environments by such power generation systems.

[0005] Accordingly, a number of approaches have been used to control or limit carbon dioxide emissions from combustion-based power plants. However, separating the carbon dioxide from the post-combustion flue gas is highly expensive because of the significant loss of energy (power and/or heat) as the result of application of carbon dioxide capture systems to dilute CO₂ containing flue gas. The flue gas including the carbon dioxide may be provided to an electrochemical fuel cell which may include a cathode, an anode and an electrolyte, for

concentrating the carbon dioxide in the anode exhaust gas. The anode exhaust gas including the carbon dioxide from the flue gas may be communicated to a compressor, condenser and/or chiller to liquefy and separate the carbon dioxide from the other gases included in the anode exhaust gas. Hydrogen gas and other non-condensable gases included in the anode exhaust gas will, however, hamper capturing of the carbon dioxide and increase the cost of compression and/or condensation via refrigeration (e.g., by increasing the energy used for compression and/or condensation) or reducing the amount of CO₂ captured.

SUMMARY

[0006] Embodiments described herein generally relate to systems and methods for capturing carbon dioxide by use of fuel cell systems, and in particular to a fuel cell power producing gas separation system that may be integrated with a fossil fuel device, facility or installation (e.g., a power plant, boiler or any other combustor such as kilns in a cement factory and coke ovens in the steel industry) configured to efficiently separate various gases included in a flue gas, particularly carbon dioxide. The hydrogen included in the fuel cell anode exhaust gas is methanated so as to increase the relative concentration of carbon dioxide in the anode exhaust gas and reduce the volume of water separated anode exhaust gas.

[0007] In some embodiments, a fuel cell power producing system is configured to be integrated with a fossil fueled installation so as to utilize flue gas produced by the fossil fueled installation. The flue gas includes carbon dioxide and oxygen output by the fossil fueled installation. The power producing system includes an anode section and a cathode section. The flue gas containing carbon dioxide is communicated to the cathode section of the fuel cell. The anode section produces an anode exhaust gas including carbon dioxide, water, hydrogen, carbon monoxide and other gases. The anode exhaust gas is communicated to a gas separation assembly. The gas separation assembly includes a methanator configured to convert at least a portion of hydrogen included in the anode exhaust gas to methane so as to generate a methanated anode exhaust gas. The methanated anode exhaust gas has a higher ratio of carbon dioxide to non-condensable gases relative to a non-methanated exhaust gas.

[0008] In some embodiments, the gas separation assembly may include a chiller assembly for cooling the anode exhaust to a predetermined temperature so as to liquefy carbon dioxide in

the methanated anode exhaust. In some embodiments, waste heat produced by the fuel cell is utilized to drive the chiller assembly. In some embodiments, the inlet flue gas supplied to the cathode section of the fuel cell contains exclusively all or part of the flue gas output by the fossil fueled installation, facility or device. In certain embodiments, the chiller assembly may include one or more chillers or knock out pots. In some embodiments, the gas separation assembly recovers waste heat from cathode exhaust output by the cathode section of the fuel cell and utilizes at least a portion of the recovered waste heat to drive the chiller assembly.

[0009] In some embodiments, the gas separation assembly further includes a water removal assembly for separating water from the anode exhaust and for outputting water-separated anode exhaust, and the chiller assembly receives the water-separated anode exhaust. The gas separation assembly further includes a compressor for compressing the water-separated anode exhaust output from the water removal assembly prior to the water-separated anode exhaust being conveyed to the chiller assembly.

[0010] In some embodiments, the gas separation assembly is configured to receive a methanated anode exhaust gas from the power producing system. The compressor may compress the methanated anode exhaust gas to at least 250 psi (about 1.72 MPa) and the chiller assembly chills the methanated anode exhaust gas to less than -40 °C. The methanated anode exhaust gas causes the gas separation assembly to provide a 10-20% increase in carbon dioxide capture and greater than a 20% decrease in compressor power, which includes the power required to operate the compressor assembly, relative to the gas separation assembly operating on non-methanated anode exhaust gas.

[0011] In some embodiments, the power producing system also includes an oxidizer that receives flue gas output by the fossil fueled installation, facility or device and at least part of the residual fuel gas separated by the gas separation device. The oxidizer oxidizes the residual fuel to heat the flue gas, where the oxidizer outputs heated flue gas to the cathode section of the fuel cell. In some embodiments, part of the residual fuel is recycled to the anode. The power producing system also includes at least one heat exchanger for utilizing waste heat in the cathode exhaust for heating at least one of fuel gas to be input to the anode section and flue gas output by the fossil fueled installation, facility or device. In some embodiments, the fuel cell is an internal

reforming Molten Carbonate Fuel Cell (MCFC), while in other embodiments the fuel cell is an external reforming MCFC.

[0012] In some embodiments, a non-methanated anode exhaust gas includes 20-25 mole% hydrogen and other non-condensable gases and 65-75 mole% of carbon dioxide inclusive, and the methanated anode exhaust gas includes about 5-10 mole% of hydrogen and other non-condensable gases and 75-85 mole% of carbon dioxide.

[0013] These and other advantageous features will become apparent to those reviewing the disclosure and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1A is a schematic illustration of a fuel cell, according to an embodiment.

[0015] FIG. 1B is a schematic illustration of a power production system, according to an embodiment.

[0016] FIG. 2 is a schematic illustration a power producing system, and an embodiment of a gas separation assembly including a methanator fluidly coupled to the power production system.

[0017] FIG. 3 is a schematic illustration of another embodiment of a gas separation assembly.

[0018] FIG. 4 is a plot showing heat curves of a heat exchanger included in the gas separation assembly of FIG. 3.

[0019] FIG. 5 is a schematic flow diagram of an example method for increasing a concentration of carbon dioxide in an anode exhaust gas by methanating at least a portion of the hydrogen included in the exhaust gas.

DETAILED DESCRIPTION

[0020] Embodiments described herein generally relate to systems and methods for capturing carbon dioxide produced by fuel cell systems, and in particular to an integrated power production system or fuel cell system that may be integrated with a fossil fuel device, facility or installation

(e.g., a power plant, boiler or any other combustor such as kilns in a cement factory and coke ovens in the steel industry). The systems and methods described herein are configured to efficiently separate various gases included in an anode exhaust gas, particularly carbon dioxide. The hydrogen included in the anode exhaust gas is methanated so as to increase a relative concentration of carbon dioxide in the anode exhaust gas.

[0021] As used herein, the term “methanation” or “methanated” refers to the conversion of at least a portion of hydrogen and CO₂ included in an anode exhaust gas to methane.

[0022] FIG. 1 A is a schematic illustration of a fuel cell 1. The fuel cell 1 comprises an electrolyte matrix 2, an anode 3, and a cathode 4. The anode 3 and the cathode 4 are separated from one another by the electrolyte matrix 2. Flue gas from a combustion exhaust supply unit may be provided to the cathode 4 as oxidant gas. In the fuel cell 1, in the cathode, CO₂ and O₂ in the form of CO₃⁼ ions are transferred from the cathode to the anode and in the anode, fuel gas and oxidant gas undergo an electrochemical reaction in the presence of an electrolyte (e.g., a carbonate electrolyte) present in the pores of the electrolyte matrix 2.

[0023] In some embodiments, the fuel cell 1 may comprise a fuel cell stack assembly in which multiple individual fuel cells 1 are stacked and connected in series. FIG. 1B is a schematic illustration of an integrated power production system 100 according to an embodiment. The power production system 100 comprises a flue gas generating assembly 6, which includes one or more of a fossil fueled installation, facility or device, a boiler, a combustor, a furnace and kiln in a cement factory (hereinafter “fossil fueled installation, facility or device”). The flue gas generating assembly may be configured to burn a fossil fuel (e.g., coal, natural gas, gasoline, diesel, etc.) and produce a flue gas including carbon dioxide.

[0024] The power production system 100 includes a fuel cell assembly 10 (e.g., a carbonate fuel cell assembly) fluidly coupled to the flue gas generating assembly 6 and configured to receive the flue gas therefrom. The power production system 100 also includes a power producing gas separation and sequestration system that includes a carbonate fuel cell assembly 10 and a gas separation assembly 25 in accordance with illustrative embodiments. As shown in FIG. 1B, the fuel cell assembly 10 includes a cathode section 12 and an anode section 14. In some embodiments, the fuel cell assembly 10 may include an internally reforming or a direct

molten carbonate fuel cell assembly in which the fuel for the anode is internally reformed in the assembly. In other embodiments, the fuel cell assembly 10 may include an externally reforming carbonate fuel cell assembly can also be employed in which case a reformer would be used to reform the fuel prior to delivery to the fuel cell anode section.

[0025] The flue gas generation assembly 6 and the fuel cell assembly 10 of the power producing gas separation and sequestration system may be arranged in tandem as shown in FIG. 1B such that the cathode section 12 of the fuel cell assembly 10 is supplied with the flue gas from the flue gas generation assembly 6. In some embodiments, the flue gas from the flue gas generation assembly is supplied exclusively to the cathode section 12. For example, a fossil fuel such as coal, natural gas or other hydrocarbon fuel is delivered to the fossil fueled installation, facility or device 6 from a fossil fuel supply 2 along with air delivered from an air supply 4. The fossil fuel and air may undergo a combustion reaction in the flue generation device 6 producing power and resulting in an output flue gas exhaust. The flue gas exhaust may comprise approximately 3-15% carbon dioxide, 1-20% water (preferably 10-20%), and 3-15% oxygen (preferably 5-15%), with the balance nitrogen. The exact amounts of these components depends upon the type of fossil fuel and the amount of air from the air supply 4. The oxygen content can be varied by adjusting the air supply 4 or by addition of supplementary air 7 to the flue gas 8 before entering in the fuel cell cathode section 12. The supplementary air may be used to increase the oxygen portion of the combined stream 9, in case there is not sufficient oxygen in the flue gas 8 required for the fuel cell operation.

[0026] As shown in FIG. 1B, a line 9 fluidly couples a part or all of the flue exhaust gas to the inlet 12A of the cathode section 12 so that the flue gas or oxidant gas supply to the cathode inlet 12A includes the flue gas exhaust. In some embodiments, the flue gas in combination with a possible supplementary air stream is the exclusive oxidant gas supply to the cathode inlet 12A. At the same time, fuel from a supply 16, such as coal gas, natural gas or other hydrogen-containing fuel, is delivered over a line 15 to an inlet 14A of the anode section 14. In the fuel cell assembly 10, the oxidant gas in the cathode section 12 comprising flue gas exhaust and the reformed hydrogen in the anode section 14 undergo an electrochemical reaction to produce a power output. Also, this electrochemical reaction results in a substantial portion (approximately

65 to 85% or more) of the carbon dioxide in the flue gas being transferred from the cathode section 12 to the anode section 14 of the fuel cell 10.

[0027] Expanding further, the carbon dioxide and oxygen in the flue gas react in the cathode section 12 of the fuel cell assembly 10 to produce carbonate ions which are carried to the anode section 14 of the fuel cell 10 through the fuel cell electrolyte. At the anode section 14, the carbonate ions are reduced with hydrogen from the fuel to produce water and carbon dioxide. The net result is the above-mentioned transfer of a substantial portion of the carbon dioxide in the flue gas from the cathode section 12 to the anode section 14. Anode exhaust gas at the outlet 14B of the anode section 14 of the fuel cell 10 is thus, high in concentration of carbon dioxide, thereby permitting the carbon dioxide gas to be more easily and efficiently captured and sequestered using the CO₂ separation and sequestration systems described herein. In some embodiments, a concentration of carbon dioxide in the anode exhaust gas in range of 60-75 mole% (dry basis) inclusive of all ranges and values therebetween. In alternative embodiments, a higher concentration may be achieved.

[0028] In the embodiment shown in FIG. 1B, flue gas depleted of carbon dioxide exits the cathode section 12 through a cathode outlet 12B via a line 18, and anode exhaust gas containing predominantly carbon dioxide as well as unreacted hydrogen, carbon monoxide, water vapor and trace amounts of other gases exits the anode outlet 14B and is conveyed by line 20 to the gas separation assembly 25. In some embodiments, the gas separation assembly 25 may include at least a water removal assembly 21 for recovering water from the anode exhaust and a carbon dioxide separation assembly 22 for separating carbon dioxide from the remaining anode exhaust gas. Moreover, because the cathode gas exits the fuel cell assembly 10 at high temperature, all or part of the detectable heat from this stream may be recovered by one or more heat recovery units 17 and may be used for pre-heating gases incoming into the fuel cell assembly 10. In some embodiments, heat may be recovered from the anode exhaust gas exiting the fuel cell anode section 14 prior to being conveyed to the gas separation assembly 25.

[0029] FIG. 2 is a more detailed schematic illustrations of the power producing gas separation and sequestration system 200, according to an embodiment. The system 200 receives, flue gas from a combustion exhaust supply 205 (e.g., the flue gas generation assembly 6). The

flue gas mainly contains carbon dioxide, water, oxygen and nitrogen, and may be produced from combustion of flammable hydrocarbons, including, for example, coal, natural gas, biogas, syngas, and other hydrocarbonaceous fuels such as ethanol, in a combustion-based power plant, a fossil fueled installation, facility or device or the like. The combustion exhaust supply 205 supplies the flue gas exhaust through a gas stream conduit 210a to a trace contaminant/pollutant gas removal device 215. The trace contaminant/pollutant gas removal device 215 removes combustion by-products including sulfur oxide gases, such as SO₂, mercury, and particulates. Nitrogen oxide gases (NO_x) need not be removed since they do not impact the performance of fuel cell and most of the NO_x will be destroyed in the fuel cell cathode. As shown in FIG. 2, the trace contaminant/pollutant gas removal device 215 outputs cleaned flue gas to a flue gas blower 220 through the gas stream conduit 210b. The flue gas blower 220 boosts the pressure of the cleaned flue gas such that the flue gas is pushed through the system 200.

[0030] The flue gas blower 220 outputs the flue gas to a first heat exchanger 225, which is configured to heat the flue gas to a temperature of approximately 500°C - 650°C. In some embodiments, the first heat exchanger 225 may also remove heat from the flue gas and divert the heat for heat recovery. As shown in FIG. 2, the first heat exchanger 225 receives the cleansed flue gas from the combustion exhaust supply 205 through the gas stream conduit 210b and also receives cathode exhaust output from a cathode side 236 of the fuel cell 235. After the flue gas is heated to the desired temperature in the first heat exchanger 225, the heated flue gas is output to an oxidizer assembly including an oxidizer 230. The oxidizer 230 also receives gas containing fuel, such as a portion of the anode exhaust or all or a portion of residual fuel separated from the anode exhaust gas in a gas separation device 275 described herein below. In some embodiments, it also receives part of the natural gas feed 241. In the oxidizer 230, fuel containing gas is oxidized in the presence of flue gas, thereby further heating the flue gas. The oxidizer 230 outputs the further heated flue gas through the gas stream conduit 210c to the fuel cell 235.



[0031] The fuel cell 235 comprises the cathode section 236 and the anode section 237. The fuel cell 235 may include an internal reforming Molten Carbonate Fuel Cell (MCFC), an external reforming fuel cell, or a combination thereof for reforming the fuel before it is conveyed to the anode section 237. The cathode section 236 is coupled to the combustion exhaust supply 205 via the gas stream conduits 210a-c and receives the flue gas from the combustion exhaust supply 205

through the gas stream conduits 210b-c after the flue gas has been processed in the trace contaminant/pollutant gas removal device 215 and heated in the first heat exchanger 225 and the oxidizer 230. As shown in FIG. 2, the cathode section 236 receives exclusively the flue gas, or processed flue gas, provided from the combustion exhaust supply 205. However, in other embodiments, the flue gas or the processed flue gas may be mixed with air or oxidant gas from other sources.

[0032] After undergoing an electrochemical reaction in the fuel cell 235, the cathode section 236 outputs the cathode exhaust through a gas stream conduit 212 to a second heat exchanger 240 which also receives fuel, such as natural gas, from a fuel supply 241 and water 252 through a fuel supply conduit 242. Any suitable fuel may be used including but not limited to natural gas, coal-derived syngas, anaerobic digester gas, and renewable fuels such as ethanol or hydrogen. In some embodiments, harmful fuel cell contaminants such as sulfur-bearing species may be removed from the fuel gas before usage in the fuel cell 235. In the second heat exchanger 240, the received fuel is heated using waste heat from the cathode exhaust to a temperature of approximately 450 – 650 degrees Celsius, and heated fuel and steam is then conveyed from the second heat exchanger 240 to the anode section 237 of the fuel cell 235. The second heat exchanger 240 also outputs cooled cathode exhaust which is then conveyed through the first heat exchanger 225 to pre-heat the cleaned flue gas.

[0033] As shown in FIG. 2, the anode section 237 receives pre-heated fuel, which may be humidified by adding water via conduit 252, and after the gases undergo an electrochemical reaction in the fuel cell 235, the anode section 237 outputs anode exhaust gas to the gas separation assembly 25 via a conduit 214. The gas separation assembly 25 includes a methanator 245, a water removal assembly 250, a compressor 260 and a carbon dioxide separation assembly 22, including a chiller assembly 265 driven by waste heat of the fuel cell 235 and a flash drum 275 or another suitable gas-liquid separation device. Although not shown, partial cooling of the anode exhaust gas is required prior to entering the methanator as lower temperatures favor the equilibrium formation of methane. Because the methanation reaction is exothermic, multiple methanators with cooling between stages may be used.

[0034] The methanator 245 is configured to convert at least a portion of the hydrogen included in the anode exhaust gas to methane via the following reactions;



which produces a methanated anode exhaust gas, i.e., an anode exhaust gas having a higher percentage of methane and a lower percentage of hydrogen. This leads to the exhaust gas having a lower total volume, especially after the water is condensed and removed and a higher concentration of carbon dioxide relative to the non-condensables in the anode exhaust gas.

[0035] Expanding further, the hydrogen and other non-condensable gases present in the anode exhaust gas interfere with the concentration of carbon dioxide by the fuel cell anode exhaust which may also lead to increased cost of compression and chilling of the carbon dioxide downstream of the fuel cell. Methanating the hydrogen included in the anode exhaust gas reduces 4 moles of inert hydrogen into 1 mole of inert methane. Because anode exhaust gas generally includes hydrogen + carbon monoxide in the range of about 25% and about 75% carbon dioxide on a dry basis, this increases the percent concentration of carbon dioxide in the anode exhaust gas from about 75% to about 85% and reduces the volume of the anode exhaust gas by approximately 15%. In some embodiments, methanating the anode exhaust gas may increase a concentration of carbon dioxide in the anode exhaust gas in the range of 10-20% inclusive of all ranges and values therebetween.

[0036] The methanator 245 may have any suitable configuration and/or structure and may include a catalyst formulated to promote conversion of hydrogen to methane. Suitable catalysts may include but are not limited to ruthenium, cobalt, nickel, iron, any other suitable catalyst or a combination thereof. The methanator 245 may be a single stage or a multiple stage methanator. The methanated anode exhaust gas from the methanator 245 is then conveyed to the water removal assembly 250, including a condenser or the like, where water present in the methanated anode exhaust gas is separated from the remaining gases through condensation.

[0037] The water removal assembly 250 outputs condensed water through a water removal conduit 251 from which the condensed water is recycled back to the system 200 or output to a

product water collector 255 for use outside the system 200 and/or recycling back to the system. As shown in FIG. 2, all or a portion of the condensed water may be recycled for fuel humidification by routing the water to the fuel supply conduit 242 via the water recycling conduit 252. As also shown, the remaining portion of the condensed water is either output from the system 200 or collected in a product water collector 255 and may be recycled back to the system 200 when needed.

[0038] The condenser assembly 250 outputs water-separated anode exhaust through the gas stream conduit 216 to the compressor 260, which compresses the anode exhaust gas to a suitable pressure—for example, a pressure of about 200 psi (or 1.38 MPa) or higher. The higher the pressure of the compressor 260, the higher the temperature that can be offered by the chiller. The design points are a trade-off between a larger and more cooling chiller and higher compression power consumption. The compressor 260 outputs the compressed anode exhaust to the chiller assembly 265. In some embodiments, the compressor 260 is a multiple stage compressor with interstage cooling. The chiller assembly 265 may include one or more devices that use heat to drive cooling of the compressed water-separated anode exhaust so as to cause separation of the individual gases within the anode exhaust. As shown in FIG. 2, the chiller assembly 265 comprises one or more absorption chillers, i.e., one or more absorption refrigerators. In some embodiments, an assembly of a plurality of absorption chillers connected in series may be used, wherein each of the absorption chillers receives all or a portion of the compressed water-separated anode exhaust from the compressor 260.

[0039] In the chiller assembly 265, water-separated compressed anode exhaust gas is cooled to a predetermined temperature while maintaining its compressed state. In particular, the anode exhaust gas is cooled to a temperature of about -40°C or cooler, while maintaining the high pressure of the gas, i.e., at about 200 psi (about 1.38 MPa) or higher. At this temperature and pressure, most of the carbon dioxide present in the anode exhaust is liquefied causing separation of the carbon dioxide from other gases, such as residual hydrogen and methane fuel present in the anode exhaust gas. The higher CO_2 concentration, resulting from methanation, increases the amount of CO_2 liquefied. The chiller assembly 265 utilizes waste heat generated by the fuel cell 237 and recovered from fuel cell exhaust in a heat recovery assembly 270. Specifically, cathode exhaust is conveyed to the heat recovery assembly 270 via conduit 266 after being passed

through the second heat exchanger 240 and through the first heat exchanger 225. The heat recovery assembly 270 recovers the remaining waste heat from the cathode exhaust and utilizes the recovered waste heat to drive the chiller assembly 265.

[0040] After being conveyed through the heat recovery assembly 270, the cathode exhaust is removed from the system 200 and emitted to the atmosphere by a system exhaust duct 280 through an exhaust conduit 271. In some embodiments, further heat is recovered by preheating the flue gas feed prior to heat exchanger 225. The chiller assembly 265 outputs the cooled anode exhaust, in which carbon dioxide has been liquefied while the residual fuel is in gas state, to the gas separation device 275. The gas separation device 275 also called a flash drum is a tank that separates the liquefied carbon dioxide from the residual fuel gas and outputs the separated nearly pure and liquefied carbon dioxide to a sequestration assembly 280 such as an underground storage unit. A pump 281 or the like may be used to facilitate the flow of separated and liquefied pure carbon dioxide from the gas separation device 275. For example the pump 281 may be utilized to increase the liquefied carbon dioxide pressure to >2200 psi (about 15.17 MPa) in order to transform the carbon dioxide to a super-critical state to facilitate its long distance transportation to the sequestration site.

[0041] In some embodiments, the separated carbon dioxide is utilized by other processes and applications such as Enhanced Oil Recovery (EOR), production of chemicals, and food production in the food industry. The gas separation assembly 275 also outputs the separated residual fuel gas, such as hydrogen and methane, through a fuel gas recycling conduit 276. In the illustrative embodiment of FIG. 2, the fuel gas recycling conduit 276 is coupled to the oxidizer unit 230 so that separated residual fuel output is output from the gas separation device 275 to the oxidizer unit 230 for pre-heating of the flue gas. In other embodiments, the separated residual fuel gas may be utilized as a syngas byproduct in other processes including but not limited to refineries, combustion turbines, and other fuel cells, which are not contained within the system 200 or recycled to the anode feed.

[0042] Methanation of the anode exhaust gas by the gas separation assembly before compression and chilling may increase the concentration of CO₂ in the exhaust gas (e.g., in a range of 10% - 20%) as well as reduce the power and thereby cost for compression and/or

chilling (or condensing) the anode exhaust gas for extracting the carbon dioxide therefrom (e.g., by about 15%). For example, Table I summarizes various parameters of a non-methanated anode exhaust gas, an anode exhaust gas subjected to one stage methanation and subjected to two stage methanation.

Table I: Various parameters of non-methanated, one stage methanated and two stage methanated anode exhaust (AE) gas

459	Name	AE Gas	One stage methanation	Two stage methanation			
	Molar flow lbmol/hr	45.77	43.62	42.63			
	Mass flow lb/hr	1,305.5	1,305.5	1,305.5			
	Temp F	1032 °	774 °	180 °			
	Pres psia	15.43	15.04	14.71			
	IWCg	20.18	9.63	0.38			
	Enth MMBtu/hr	-5.056	-5.295	-5.583			
	Vapor mole fraction	1.000	1.000	1.000			
	SCFM	289.46	275.86	269.62			
	Average mol wt	35.53	29.93	30.62			
	Actual dens lb/ft3	0.0275	0.0340	0.0660			
	Actual vol ft3/min	791.25	639.65	329.79			
	Cp Btu/lbmol-F	10.32	10.24	9.09			
	Cp/Cv	1.239	1.241	1.295			
	Z factor	1.0000	0.9997	0.9949			
	Visc cP	0.0342	0.0289	0.0154			
	Th cond Btu/hr-ft-F	0.0460	0.0345	0.0140			
	Components	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %
	Hydrogen	4.57	16.54	2.47	9.75	0.75	3.16
	Methane	0.02	0.06	1.09	4.30	1.58	6.70
	Carbon Monoxide	2.48	9.02	0.27	1.07	0.03	0.11
	Carbon Dioxide	20.34	74.10	21.47	84.68	21.23	89.82
	Water		0.00		0.00		0.00
	Nitrogen	0.05	0.18	0.05	0.19	0.05	0.21
	Total	27.45	100.00	25.36	100.00	23.63	100.00
		100%		92%		86%	

[0043] The mole% of CO₂ increases from about 74% in the non-methanated anode exhaust gas to about 85% in the one stage methanated exhaust gas, and to about 90% in the two stage methanated anode exhaust gas. Furthermore, the flow rate in lb-mole/hr decreases to 92% in the one stage methanation and to 86% in the two stage methanation. The lower flow rate reduces the power required for downstream compression and/or chilling of the anode exhaust gas, thereby reducing the compression and/or chilling cost.

[0044] FIG. 3 is a schematic block diagram of another embodiment of a gas separation assembly 300 that may be used to separate carbon dioxide from methanated or non-methanated anode exhaust gas (e.g., anode exhaust gas produced by the fuel cell assembly 1/10/235). The gas separation assembly 300 comprises a compression loop 300a and a chilling loop 300b.

[0045] A methanated or non-methanated anode exhaust gas stream 535 is provided to a first cooler 302 and then to the low pressure (LP) compressor 304 as stream 706. Water included in the anode exhaust stream is separated via a first water separator 306, and extracted as a first water stream 30.

[0046] Anode exhaust gas stream 708 emerging from the LP compressor 304 is communicated via a second cooler 308 as stream 709 to a high pressure (HP) compressor 310. A second water separator 312 collects water included in the HP exhaust stream as second water stream 35.

[0047] A high pressure anode exhaust gas stream 711 emitted by the HP compressor 310 is communicated via a third cooler 316 and through a third water separator 318 to the chilling loop 300b as stream 715. The third water separator 318 removes substantially all of the remaining water from the high pressure stream which is extracted as third water stream 37. Water streams from the various separators are mixed together in mixers 330 and 314 and exported from the gas separation assembly 300 as liquid water stream 39.

[0048] In the embodiment shown, the high pressure anode exhaust gas stream 715 having a temperature of about 100 degrees Fahrenheit is communicated through a heat exchanger 320 which cools the high pressure anode exhaust gas. A cooled high pressure anode exhaust gas stream 800 having a temperature of less than -30 degrees Fahrenheit is communicated to a first

separation device (knock out pot) 322. The chiller 320 cools the high pressure anode exhaust gas so as to generate a first liquid CO₂ stream 850.

[0049] An anode exhaust gas stream 805 emanating from the first separation device (knock out pot) 322 is then communicated via a fourth cooler/chiller 326 as stream 510 to a second separation device (knock out pot) 328. The second chiller 326 liquefies additional carbon dioxide in the anode exhaust gas so as to generate a second liquid CO₂ stream 855. The remaining anode exhaust gas stream 815 which cannot be easily condensed any further is removed from the gas chilling loop 300b and may be recycled back to a fuel cell (e.g., the fuel cell 10 or 235).

[0050] The first liquid CO₂ stream 850 and the second liquid CO₂ stream are combined to produce a total liquid CO₂ stream 857. The total liquid CO₂ may be collected or communicated to a flash cooler 324. The flash cooler 324 further reduces the pressure of the liquid CO₂ so that part of the CO₂ vaporizes and reduces the temperature of the liquid CO₂ stream, so as to produce a reduced temperature liquid CO₂ stream 860 which is communicated to the heat exchanger 320. The liquid CO₂ may serve as the coolant in the heat exchanger 320 for cooling the high pressure anode exhaust gas received from the compression loop 300a. The liquid CO₂ may be vaporized in the heat exchanger 320 to produce a vaporized CO₂ stream 865 which may be extracted from the chilling loop 300b and collected. FIG. 4 is a plot showing the heat curves for the high pressure anode exhaust gas stream 715 and liquid carbon dioxide stream 860, showing the change in enthalpy and temperature for each stream.

[0051] If liquid CO₂ is the desired method of recovery, the liquid CO₂ stream 857 may be pumped to a higher pressure and exported. In this embodiment, chiller 320 and the separation device (knock out pot) 322 are eliminated and the duty of the refrigeration chiller 326 is increased.

[0052] Tables II summarizes the parameters of various streams of a non-methanated anode exhaust gas, and Table III summarizes the parameters various streams of liquid CO₂ and water streams separated from the non-methanated anode exhaust gas flowing through the gas separation assembly 300. The performance of the methanated anode exhaust gas is similar except that a reduced volume flow from the methanator reduces the compression power required,

and a lower amount of the non-condensable anode exhaust gas stream is generated, increasing the amount of CO₂ captured. Table IV compares the parameters of anode exhaust gas stream 535, the non-condensable anode exhaust gas stream 815 and the exported CO₂ stream 865 for the gas separation assembly 300 operating on non-methanated anode exhaust gas (base case) and methanated anode exhaust gas (methanated case). It can be seen that the non-methanated anode exhaust gas includes about 66 mole% carbon dioxide, while the methanated anode exhaust gas includes about 77 mole% carbon dioxide. Moreover, the volume flow of the non-methanated anode exhaust gas is about 322 lb-mole/hr and the volume flow rate of the methanated anode exhaust gas is 260.05 lb-mole/hr. Therefore, lower compressive power is required to compress the methanated anode exhaust gas which results lower power consumption and lower costs. The non-condensable anode exhaust gas stream is reduced from 153.49 lb-mole/hr for the non-methanated case to 48.24 lb-mole/hr for the methanated case, reducing the CO₂ in the residual fuel and increasing the CO₂ exported.

Table II: Parameters of various streams of a non-methanated anode exhaust gas flowing through the gas separation assembly 300.

Stream No.	535		39		715		800		860		865	
Name	AO Blwr Out from Methanator		Compression Condensate 0.88 gpm		HP AE to Cooling		AE from Stage 1 Cooling to KP Pot #2		Flashed AE Liquid (CO ₂) to Hx #132		Vaporized AE Liquid (CO ₂) from Hx #132	
Molar flow lbmol/hr	260.05		24.21		235.85		235.85		187.60		187.60	
Mass flow lb/hr	9,691.9		436.4		9,255.5		9,255.5		8,095.4		8,095.4	
Temp F	148 °		100 °		100 °		-42 °		-75 °		80 °	
Pres psia	16.50		16.50		314.50		314.50		80.00		80.00	
Components	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %
Hydrogen	14.36	5.52	0.00	0.00	14.36	6.09	14.36	6.09	0.46	0.24	0.46	0.24
Methane	17.14	6.59	0.00	0.00	17.14	7.27	17.14	7.27	4.28	2.28	4.28	2.28
Carbon Monoxide	0.76	0.29	0.00	0.00	0.76	0.32	0.76	0.32	0.10	0.06	0.10	0.06
Carbon Dioxide	202.21	77.76	0.01	0.03	202.20	85.74	202.20	85.74	181.95	96.98	181.95	96.98
Water	24.94	9.59	24.20	99.96	0.74	0.31	0.74	0.31	0.74	0.39	0.74	0.39
Nitrogen	0.65	0.25	0.00	0.00	0.65	0.27	0.65	0.27	0.07	0.04	0.07	0.04
Oxygen	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total	260.05	100.00	24.21	100.00	235.84	100.00	235.84	100.00	187.60	100.00	187.60	100.00
	Comp kw		200	LP	190	HP	390		Tot KW			

Table III: Parameters of various carbon dioxide and water streams separated from a non-methanated anode exhaust gas in the gas separation assembly 300.

Stream No.	805		510		815		850		855		857	
Name	AE vapor from KO Pot #2		AE from Refrig Cooling to KO Pot #4		Non-Condensable Gas (Recycle to Fuel Cell)		AE Liquid (CO ₂) from KO Pot #2		AE Liquid (CO ₂) from KO Pot #4		Total AE Liquid (CO ₂) for export or to Hx #132	
Molar flow lbmol/hr	55.76		55.76		48.24		180.09		7.51		187.60	
Mass flow lb/hr	1,484.4		1,484.4		1,160.1		7,771.1		324.3		8,095.4	
Temp F	-42 °		-50 °		-50 °		-42 °		-50 °		-42 °	
Pres psia	314.50		314.50		314.50		314.50		314.50		314.50	
							14.63	gpm	0.61	gpm	15.23	gpm
Components	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %
Hydrogen	13.92	24.96	13.92	24.96	13.90	28.81	0.44	0.24	0.02	0.26	0.46	0.24
Methane	13.06	23.42	13.06	23.42	12.86	26.66	4.09	2.27	0.20	2.60	4.28	2.28
Carbon Monoxide	0.66	1.18	0.66	1.18	0.65	1.35	0.10	0.06	0.00	0.06	0.10	0.06
Carbon Dioxide	27.55	49.41	27.55	49.41	20.25	41.99	174.66	96.98	7.29	97.03	181.95	96.98
Water	0.00	0.00	0.00	0.00	0.00	0.00	0.74	0.41	0.00	0.01	0.74	0.39
Nitrogen	0.58	1.03	0.58	1.03	0.57	1.19	0.07	0.04	0.00	0.04	0.07	0.04
Oxygen	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total	55.76	100.00	55.76	100.00	48.24	100.00	180.09	100.00	7.51	100.00	187.60	100.00
	CO ₂ Reduction		27.546 13.6%				Hx132 Duty Refrig Hx4 Duty		1.379 0.048		Total Duty, mmbtu/hr 1.427	

Table IV: Comparison between parameters of anode exhaust gas stream 535, non-condensable anode exhaust gas 815 expelled from the gas separation assembly 300 and collected carbon dioxide stream 865 for a base case and a methanation case.

Stream No.	Base Case						Methanated Case					
	535		815		865		535		815		865	
Name	AO Blwr Out		Recyle Gas		CO2 Export		AO Blwr Out		Recyle Gas		CO2 Export	
Molar flow lbmol/hr	322.96		153.47		145.70		260.05		48.24		187.60	
Mass flow lb/hr	10,217.1		3,429.1		6,359.4		9,691.9		1,160.1		8,095.4	
Temp F	142 °		-45 °		80 °		148 °		-50 °		80 °	
Pres psia	16.50		314.50		80.00		16.50		314.50		80.00	
Average mol wt	31.64		22.34		43.65		37.27		24.05		43.15	
Actual dens lb/ft ³	0.0810		1.6790		0.6199		0.0946		1.8939		0.6124	
Actual vol ft ³ /min	2101.05		34.04		170.98		1707.76		10.21		220.30	
Components	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %	lb-mole/hr	mole %
Hydrogen	77.47	23.98	76.86	50.10	0.59	0.41	14.36	5.52	13.90	28.81	0.46	0.24
Methane	0.27	0.08	0.25	0.18	0.02	0.01	17.14	6.59	12.86	26.66	4.28	2.25
Carbon Monoxide	5.13	1.59	4.95	3.23	0.18	0.13	0.76	0.29	0.65	1.35	0.10	0.58
Carbon Dioxide	214.70	66.88	70.75	46.10	143.95	98.80	202.21	77.76	20.25	41.59	181.95	98.68
Water	24.73	7.68	0.00	0.00	0.94	0.64	24.94	9.59	0.00	0.00	0.74	0.39
Nitrogen	0.65	0.20	0.63	0.41	0.02	0.01	0.65	0.25	0.57	1.19	0.07	0.04
Total	322.96	100.00	153.46	100.00	145.70	100.00	260.05	100.00	48.24	100.00	187.60	100.00
		CO2 Recovery:	67.0%					CO2 Recovery:	90.0%			
		Total Comp kw:	502					Total Comp kw:	390			
		Hx320 Duty:	1.083 mmbtu/hr					Hx320 Duty:	1.379 mmbtu/hr			
		Refrig Hx326 Duty:	0.175 mmbtu/hr					Refrig Hx326 Duty:	0.648 mmbtu/hr			

HP CO2 Sep from AE by Cooling w Comp 2-10-16 v Starway.xlsx

HP CO2 Sep from MethAE by Cooling w Comp 2-29-19.xlsx

[0053] FIG. 5 is a schematic flow diagram of an example method 400 for concentrating and separating carbon dioxide from a flue gas, for example the flue gas produced by the power production system 100 or the power producing gas separation and sequestration system 200.

[0054] The method 400 comprises supplying and processing flue gas from a power generation system at 402, for example a fossil fuel device, facility or installation (e.g., a power plant, boiler or any other combustor such as kilns in a cement factory and coke ovens in the steel industry). The flue gas may include carbon dioxide, water, oxygen, nitrogen and other inert gases. The flue gas may be processed to remove sulfur oxides and other trace species, for example via the trace contaminant/pollutant gas removal device 215

[0055] The flue gas is heated at 402, for example using waste heat from a fuel cell cathode exhaust and/or by oxidizing fuel in the oxidizer, as described herein with respect to the power producing gas separation and sequestration system 200. The preheated flue gas is communicated

to a cathode section of a fuel cell at 406. For example, the preheated flue gas is communicated to the cathode section 4/12/236 of the fuel cell 1/10/235 of Figures 1A, 1B, and 2, respectively. The cathode section 4/14/236 may cause the flue gas to undergo an electrochemical reaction with hydrogen fuel to produce and output power and transfer carbon dioxide to the anode.

[0056] An anode exhaust gas is processed to convert hydrogen included in the anode exhaust gas to methane at 408. For example, the anode exhaust gas including spent fuel, hydrogen, carbon dioxide, water and carbon monoxide is output from the anode section 3/14/237 of the fuel cell 1/10/235 and processed to convert at least a portion of the hydrogen included in the anode exhaust gas to methane so as to produce a methanated anode exhaust gas. As described herein, the methanated anode exhaust gas may include a higher concentration of carbon dioxide relative to the non-methanated anode exhaust gas.

[0057] The methanated anode exhaust gas is communicated to a gas separation assembly at 410. For example, the methanated anode exhaust gas is provided to the gas separation assembly 25/300 for separating carbon dioxide and optionally, water from the methanated anode exhaust gas, as described herein.

[0058] As utilized herein, the terms “approximately,” “about,” “substantially,” and similar terms are intended to have a broad meaning in harmony with the common and accepted usage by those of ordinary skill in the art to which the subject matter of this disclosure pertains. It should be understood by those of skill in the art who review this disclosure that these terms are intended to allow a description of certain features described and claimed without restricting the scope of these features to the precise numerical ranges provided. Accordingly, these terms should be interpreted as indicating that insubstantial or inconsequential modifications or alterations of the subject matter described and claimed are considered to be within the scope of the invention as recited in the appended claims.

[0059] The terms “coupled,” “connected,” and the like as used herein mean the joining of two members directly or indirectly to one another. Such joining may be stationary (e.g., permanent) or moveable (e.g., removable or releasable). Such joining may be achieved with the two members or the two members and any additional intermediate members being integrally

formed as a single unitary body with one another or with the two members or the two members and any additional intermediate members being attached to one another.

[0060] It is important to note that the construction and arrangement of the various exemplary embodiments are illustrative only. Although only a few embodiments have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter described herein. For example, elements shown as integrally formed may be constructed of multiple parts or elements, the position of elements may be reversed or otherwise varied, and the nature or number of discrete elements or positions may be altered or varied. The order or sequence of any process or method steps may be varied or re-sequenced according to alternative embodiments. Other substitutions, modifications, changes and omissions may also be made in the design, operating conditions and arrangement of the various exemplary embodiments without departing from the scope of the present invention. For example, the heat recovery heat exchangers may be further optimized.

WHAT IS CLAIMED IS:

1. A power production system comprising:
 - a flue gas generator configured to generate a flue gas that includes carbon dioxide and oxygen;
 - a fuel supply;
 - a fuel cell assembly that includes:
 - a cathode section configured to receive the flue gas generated by the flue gas generator, and to output cathode exhaust, and
 - an anode section configured to receive fuel from the fuel supply, and to output anode exhaust that contains hydrogen and carbon dioxide;
 - a supplementary air source configured to provide supplementary air to the flue gas before the flue gas is received at the cathode section of the fuel cell assembly;
 - a methanator configured to receive the anode exhaust, convert at least a portion of the hydrogen in the anode exhaust to methane, and output methanated anode exhaust;
 - a chiller assembly configured to cool the methanated anode exhaust to a predetermined temperature so as to liquefy carbon dioxide in the methanated anode exhaust; and
 - a gas separation assembly configured to receive the cooled methanated anode exhaust and separate the liquefied carbon dioxide from residual fuel gas.
2. The power production system of claim 1, wherein the flue gas generated by the flue gas generator includes 3-15% carbon dioxide, 1-20% water, and 3-15% oxygen, with a balance being nitrogen.
3. The power production system of claim 1, further comprising a heat recovery assembly configured to receive the cathode exhaust, recover waste heat from the cathode exhaust, and provide the waste heat to drive the chiller assembly.
4. The power production system of claim 1, wherein the cathode section of the fuel cell assembly is configured to receive exclusively all or part of the flue gas generated by the flue gas generator.

5. The power production system of claim 1, further comprising a water removal assembly configured to receive the methanated anode exhaust, and provide water-separated methanated anode exhaust to the chiller assembly.

6. The power production system of any one of claims 1 to 5, further comprising a compressor configured to compress the methanated anode exhaust before the methanated anode exhaust is provided to the chiller assembly.

7. The power production system of claim 6, wherein the compressor is configured to compress the methanated anode exhaust to at least 200 psi.

8. The power production system of claim 1, wherein the chiller assembly is configured to cool the methanated anode exhaust to a temperature below -40 °C.

9. The power production system of claim 1, further comprising:
an oxidizer configured to:
receive the flue gas from the flue gas generator,
receive residual fuel gas from the gas separation assembly,
oxidize the residual fuel gas to heat the flue gas, and
provide the heated flue gas to the cathode section of the fuel cell
assembly.

10. The power production system of claim 9, further comprising a heat exchanger configured to heat the flue gas from the flue gas generator using waste heat in the cathode exhaust, and provide the heated flue gas to the oxidizer.

11. The power production system of claim 1, further comprising a heat exchanger configured to heat the flue gas from the flue gas generator using waste heat in the cathode exhaust, and provide the heated flue gas to the cathode section of the fuel cell assembly.

12. The power production system of claim 1, further comprising a heat exchanger configured to heat the fuel gas from the fuel supply using waste heat in the cathode exhaust, and provide the heated fuel gas to the anode section of the fuel cell assembly.

13. The power production system of claim 1, wherein the anode exhaust, before methanation, includes 20-25 mol% hydrogen and 65-75 mol% carbon dioxide on a dry basis, and the methanated anode exhaust includes 5-10 mol% hydrogen and 75-85 mol% carbon dioxide on a dry basis.

14. The power production system of claim 1, where the anode section of the fuel cell assembly is configured to receive a part of the residual fuel gas from the gas separation assembly.

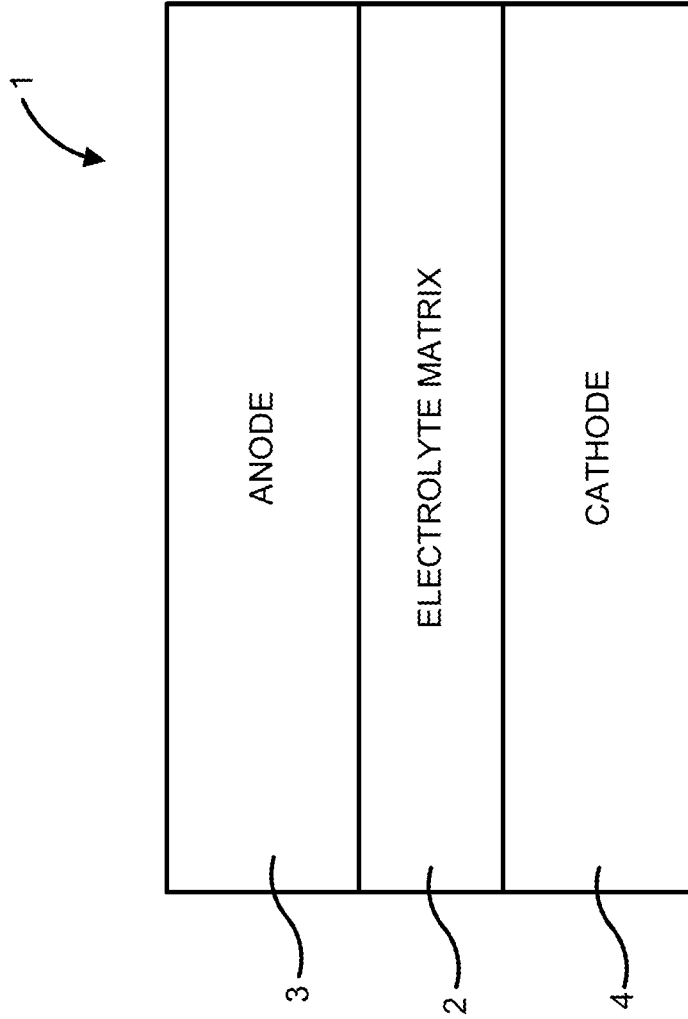
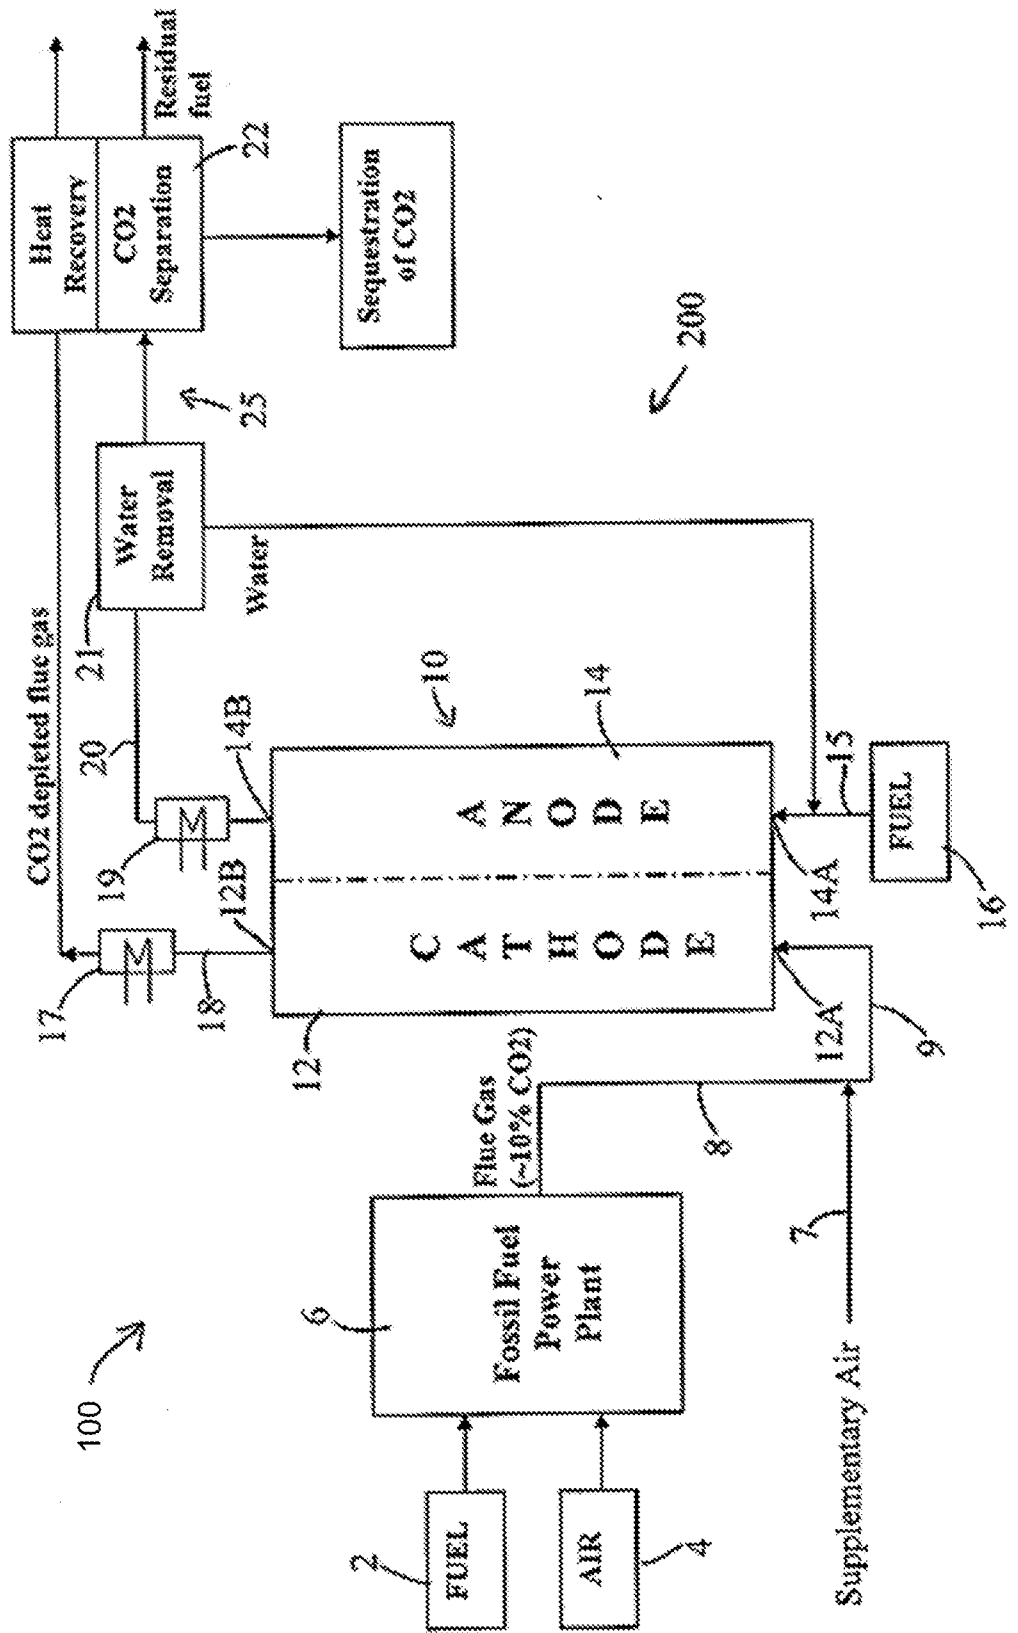


FIG. 1A

FIG. 1B



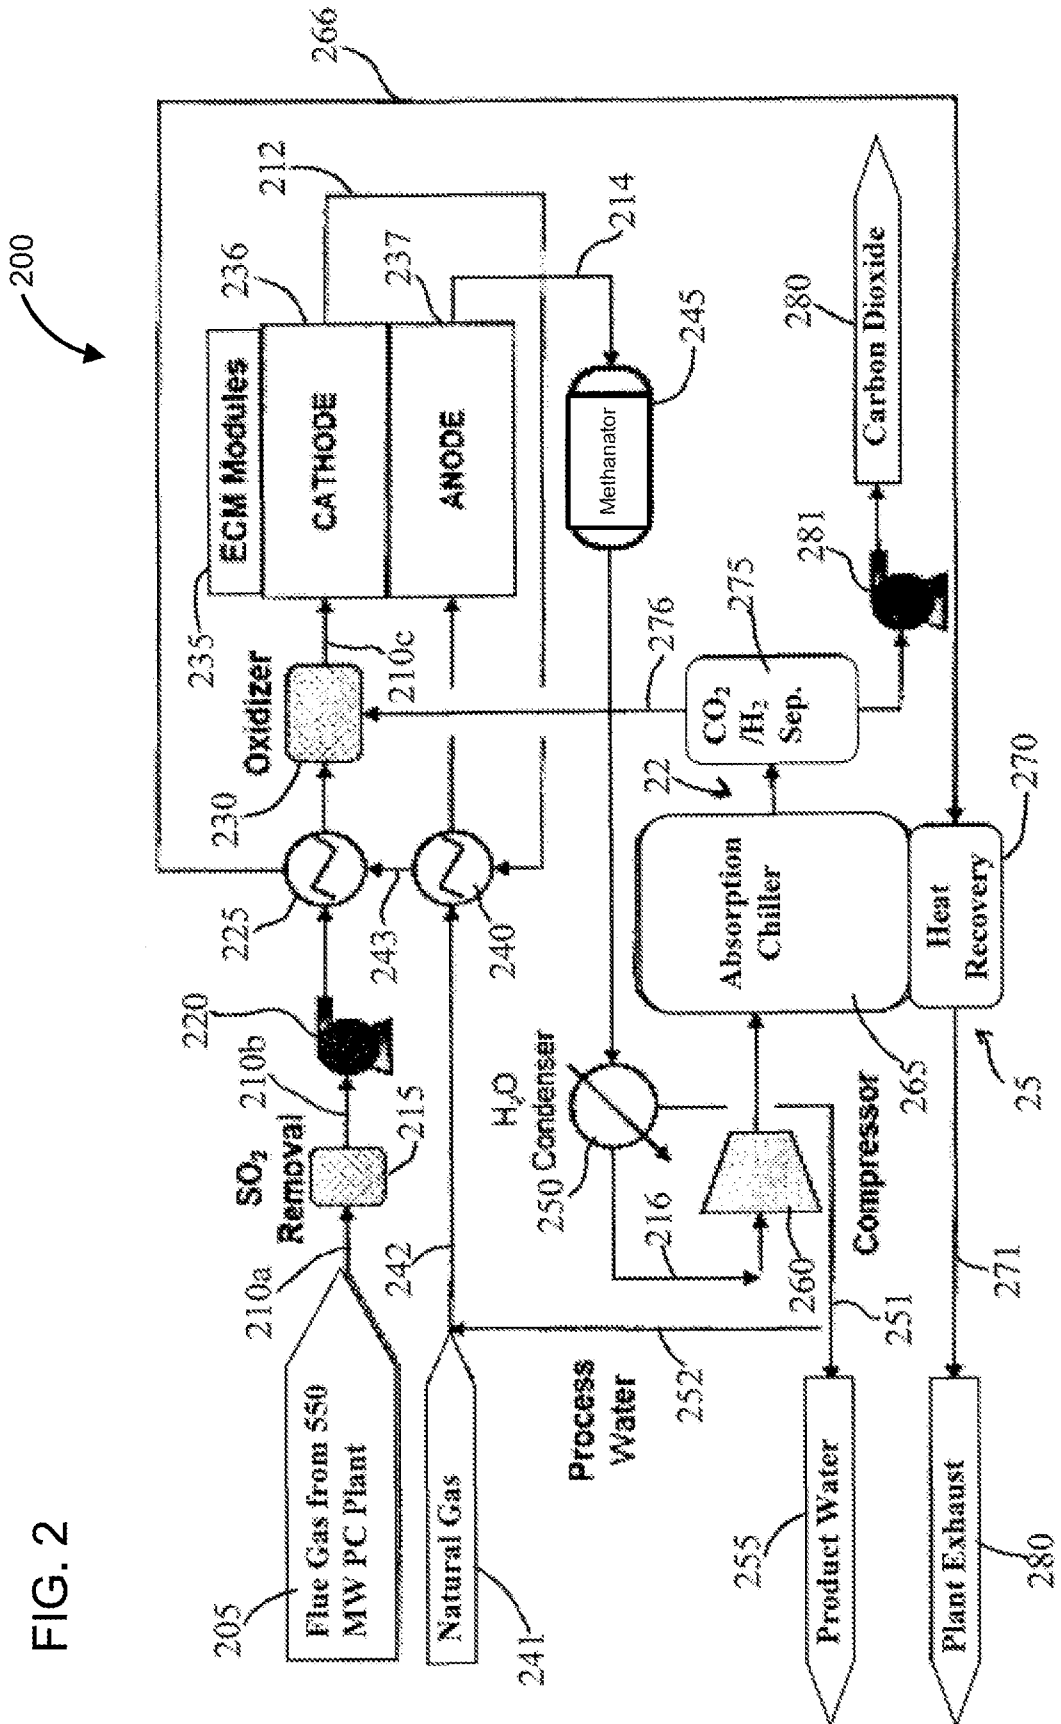


FIG. 2


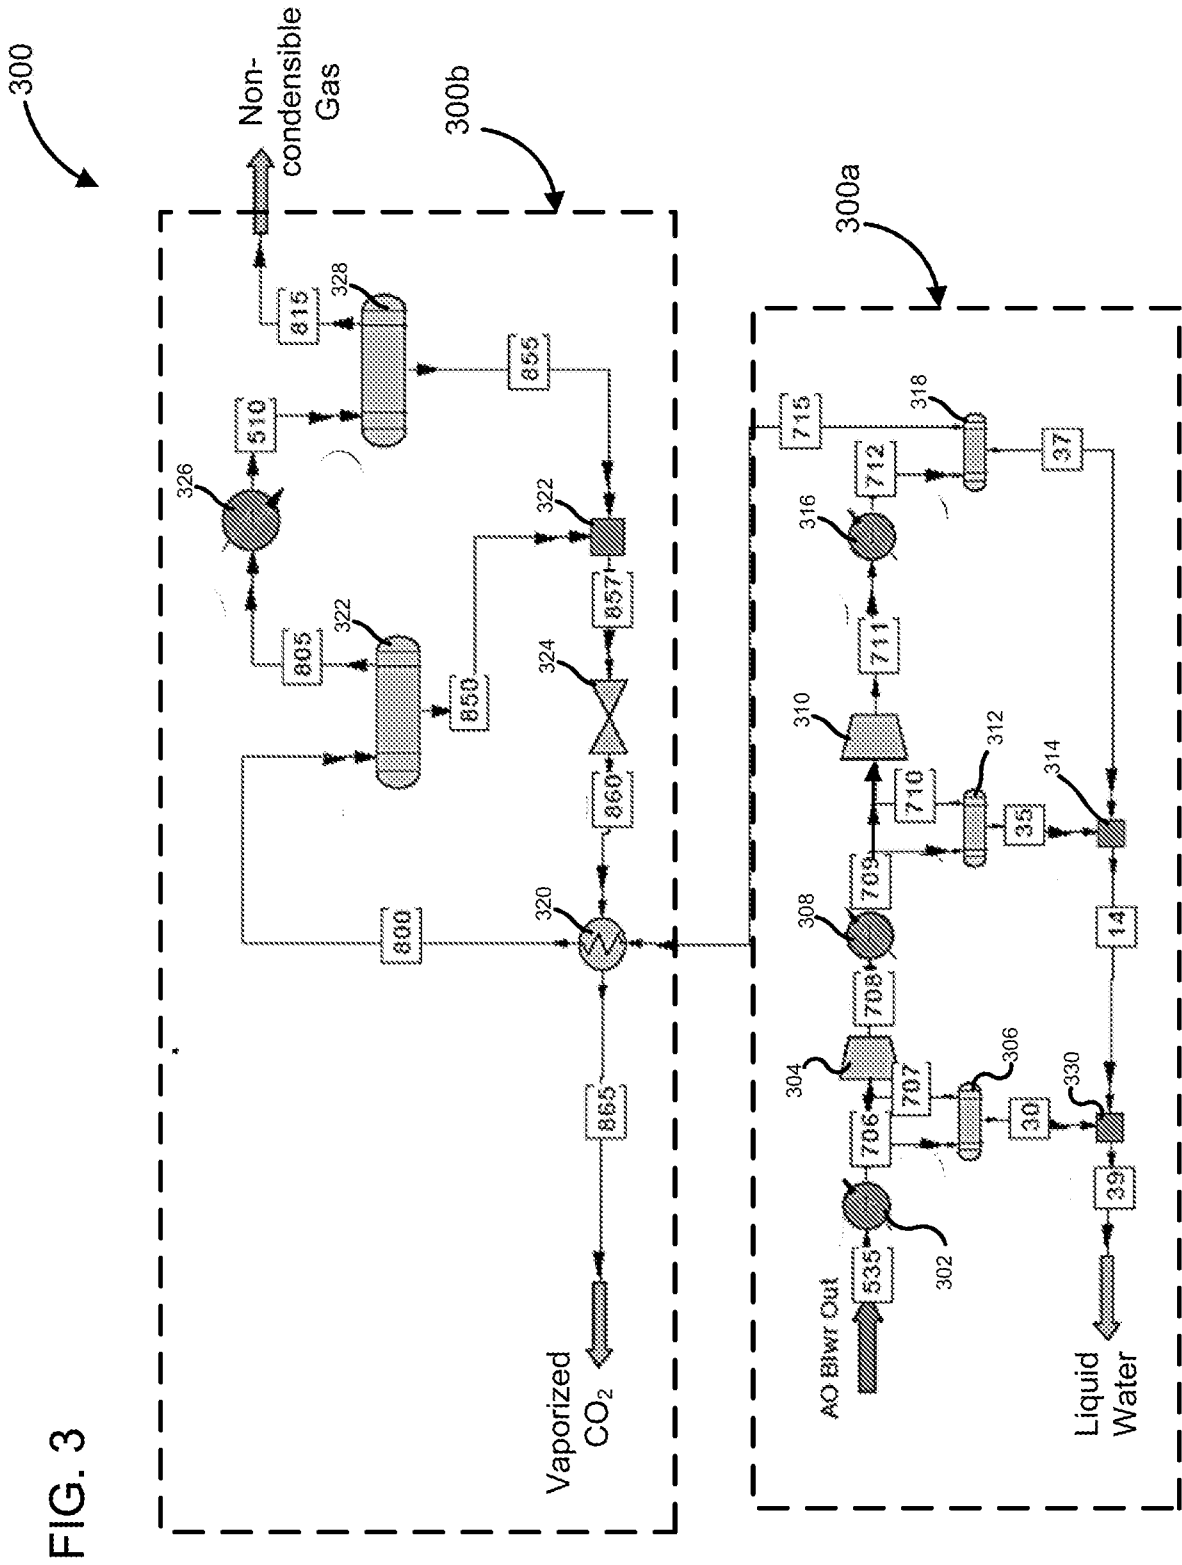


FIG. 4



6/6

FIG. 5

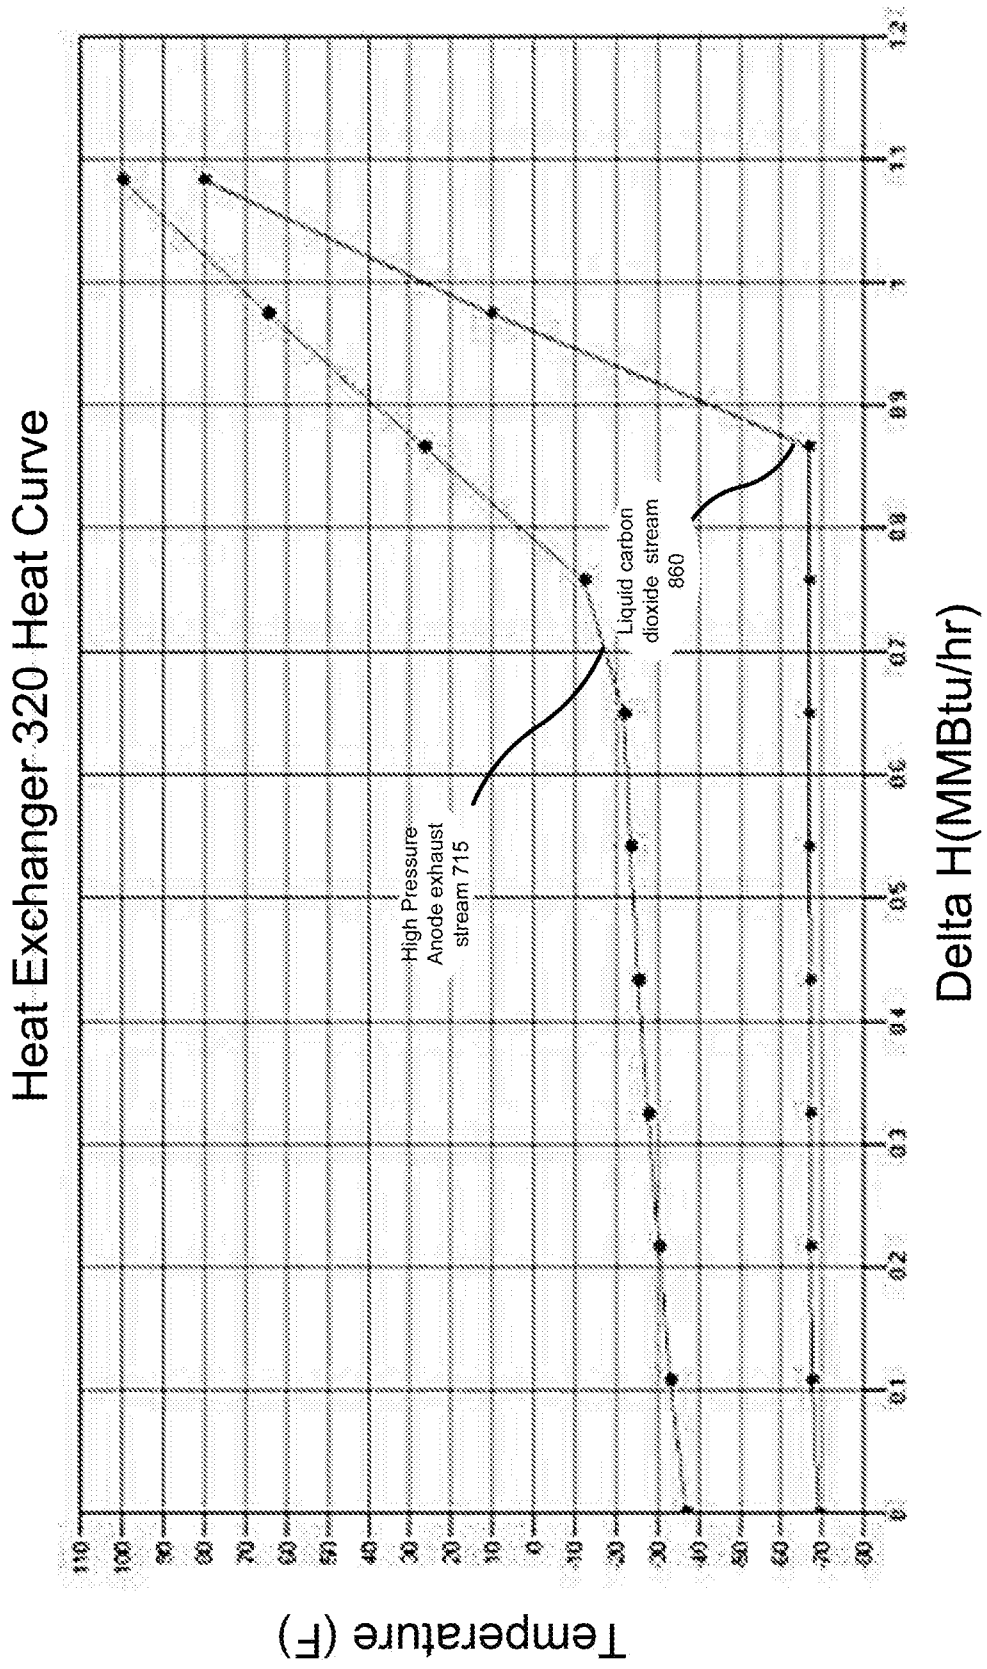