

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 May 2008 (08.05.2008)

PCT

(10) International Publication Number
WO 2008/054307 A1

(51) International Patent Classification:
H01B 9/04 (2006.01) **H01B 13/02** (2006.01)

10 Bräkne-hoby (SE). **OLSSON, Carl-Olof** [SE/SE];
Karlskatan 32B, S-722 14 Västerås (SE).

(21) International Application Number:
PCT/SE2007/050753

(74) Agent: **ABB AB**; Legal Affairs and Compliance, Intellectual Property, Forskargränd 7, S-721 78 Västerås (SE).

(22) International Filing Date: 18 October 2007 (18.10.2007)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0602332-9 3 November 2006 (03.11.2006) SE

(71) Applicant (*for all designated States except US*): **ABB RESEARCH LTD** [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **PATEL, Poorvi** [SE/US]; 1568 Wood bridge Crossing Dr., Chesterfield, MO 63005 (US). **KÄLLSTRAND, Birgitta** [SE/SE]; Hagalidsvägen 19, S-723 38 Västerås (SE). **CIACH, Michael** [SE/PL]; Niezapominajek 11A/1, PL-30-239 Kraków (PL). **STRANDEMO, Elisabeth** [SE/SE]; Tyfongatan 30, S-371 51 Karlskrona (SE). **ÖBERG, Ulf** [SE/SE]; Silkesvägen 16, S-371 61 Lyckeby (SE). **JOHANSSON, Tommy** [SE/SE]; Kullerydsvägen 8, S-370

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: HIGH VOLTAGE CABLE

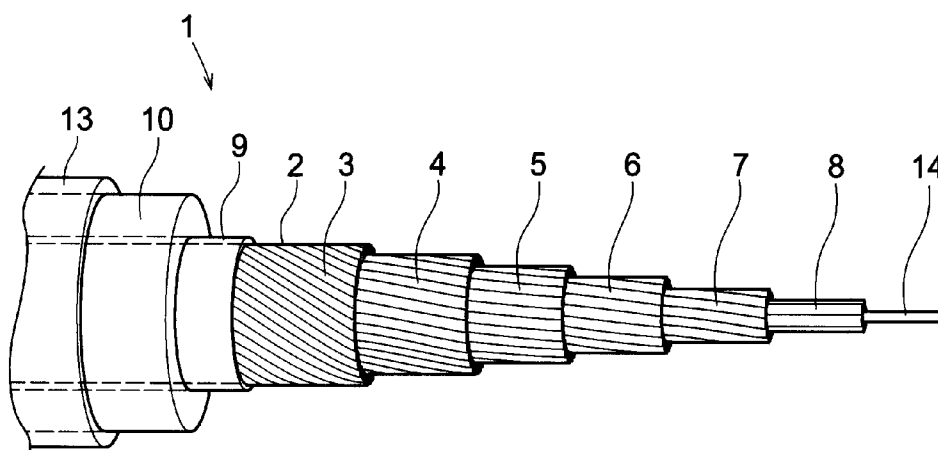

(57) Abstract: An extruded high voltage cable (1) comprising a conductor (2) with at least three concentric layers (3, 4, 5, 6, 7) of helically wound metal wires (11, 12), an extruded inner conducting layer (9) surrounding the conductor (2), and an extruded electrical insulation (10) arranged outside the inner conducting layer (9). The two outermost layers (3, 4) of the conductor (2) have the same lay direction.

WO 2008/054307 A1

High Voltage Cable

TECHNICAL FIELD

5 The present invention relates to an extruded high voltage cable comprising a conductor with at least three concentric layers of helically wound metal wires, an extruded inner semiconducting layer surrounding the conductor, and an extruded electrical insulation. The inventions also relates to
10 a method for manufacturing a high voltage cable.

BACKGROUND ART

An extruded high voltage cable generally comprises a
15 conductor, a first conducting layer arranged around the conductor, an insulation layer comprising a polymer arranged concentrically around the first conducting layer and a second conducting layer arranged around the insulation layer. Usually there are also protective layers arranged concentrically
20 around the second conducting layer. The polymer in the insulating layer generally is a cross-linked polymer, for example, polyethylene, ethylene-propylene rubber (EPM, EPDM) or silicone rubber. The conducting layers are usually made of one of the above mentioned polymers and carbon black. Sometimes a
25 longitudinal semiconducting tape is arranged between the conductor and the first conducting layer to prevent material from the first conducting layer to be pushed into gaps between adjacent wires in the conductor. The longitudinal tape is, for example, made of polyester and carbon black and has a width
30 that is a greater than the circumference of the conductor.

A conductor for an extruded high voltage cable is usually made either by arranging a plurality of metal wires in segments, a so-called segmented conductor, or by stranding together a
35 plurality of metal wires in concentric layers, a so-called concentric lay conductor.

The geometry of a concentric lay conductor may, for example, be arranged according to the following: Six wires are firmly arranged around a single central wire in a first layer. A second layer comprising 12 wires is concentrically arranged around the first layer. A third layer comprising 18 wires is concentrically arranged around the second layer, etc. Each layer has six wires more than the underlying layer. The number of layers in a concentric lay conductor is decided with regard to the required current of the cable. There exist several standards regarding the number of wires in the different layers. Usually the wires of the second, third and each consecutive layer are helically wound around the preceding layer. Instead of a central wire with six surrounding wires in a first layer, a solid conductor or a hollow conductor may, for example, be used.

Arranging the wires in concentric layers creates interstices in the conductor, and the conductor is therefore compacted to increase the fraction of metal in the conductor cross section and to reduce the diameter of the conductor. This compacting is usually made for each layer of wires by a wire drawing type die or by rollers. The compacting could also be done for the complete conductor after the outermost layer has been laid.

For the manufacturing of an extruded high voltage cable the next step after the conductor has been made is to extrude the conducting layers and the insulation layer concentrically around the conductor. The compacted conductor is usually wound on a cable drum and transported to the extrusion line. In a step before the extrusion a longitudinal semiconducting tape may be folded around the conductor to prevent material from the inner conducting layer to be pushed into gaps between adjacent wires in the outer layers of the conductor. The extrusion is made in an extrusion line, where the conductor is fed into an extrusion head where usually the inner conducting layer, the insulation layer, and the outer conducting layer are extruded around the conductor in the same operation step.

During extrusion of the inner conducting layer it is important for the outer layer of the conductor to be tight, i.e. that there are no gaps between adjacent wires in the outer layer.

5 This is especially the case for conductors with a large cross section, as for example between 800-3000 mm². If a loose conductor, i.e. where the outer layer is not tight, is fed to the crosshead of the extrusion line, the outer layer of the conductor may be pushed backwards by the crosshead and when
10 the diameter becomes too large for the crosshead, the outer layer will get stuck and a so-called "bird-cage" structure will be formed in a short time. If this is the case the extrusion line must be stopped immediately. The conductor is exposed to bending when it is transported from the wire
15 drawing machine and after extrusion when the cable is wound on a cable drum.

Occasionally a loose conductor can be run through the extrusion line without an immediate problem, and without being
20 discovered. The inner interface of the inner conducting layer may become irregular due to gaps between adjacent wires in the outer layer of the conductor. This may cause an increase of the electric field at the interface and may result in electrical breakdown at high voltage testing of the cable.

25 To minimize the risk of a loose conductor getting stuck in the extrusion die, the outer surface of the conductor is usually helically wound with a semiconducting tape before the extrusion, or larger tolerances is allowed for the crosshead
30 in the extrusion line, than what would have been necessary if the risk of having a loose conductor would be very low. Large tolerances for the cross head might give a cable where the centering of the conductor in the cable is not as good as if the tolerances of the crosshead would not need to be increased
35 due to the risk of a loose conductor.

SUMMARY OF THE INVENTION

An object of the invention is to provide an improved extruded high voltage cable and method of producing an extruded high
5 voltage cable.

According to a first aspect of the present invention there is provided an extruded high voltage cable according to the features in the characterizing part of independent claim 1.
10 Advantageous embodiments of the invention will be clear from the description below and from the dependent claims.

According to one embodiment of the invention an extruded high voltage cable comprises a conductor with at least three
15 concentric layers of helically wound metal wires. An extruded inner conducting layer surrounds the conductor and an extruded electrical insulation is arranged outside the inner conducting layer. The two outermost layers of the conductor have the same lay direction.

20 The "lay direction" is the helical direction in which the metal wires are wound in each layer. The lay direction can be a right-hand lay or a left-hand lay.

25 An extruded high voltage cable comprising a conductor having the same lay direction in the two outermost layers provides a surface of the conductor that is tight and smooth in order to provide good conditions for the extruded inner conducting layer and the electrical insulation layer. This makes it
30 possible for the conductor to enter the crosshead of the extrusion line without the requirement of taping the outermost layer with conductor tape, which leads to a manufacturing of the cable that is cost effective. Further, it minimizes the risk of an increase of the electric field at the interface
35 between the outer surface of the conductor and the electrical insulation.

According to one embodiment of the invention the length of lay of the outermost layer is shorter than the length of lay of the second outermost layer. This further improves the characteristics of the conductor surface and the interface
5 between the conductor and the insulation of the cable.

The "length of lay" is the distance along the conductor and parallel to the longitudinal axis of the conductor that it takes for a metal wire in the conductor to make one turn
10 around the conductor axis.

According to one embodiment of the invention the length of lay of the outermost layer is shorter than the length of lay of the second outermost layer, and the difference between the
15 length of lay of the outermost layer and the length of lay of the second outermost layer is greater than, or equal to, two times the outer diameter of the conductor. It has been found that this gives an outer surface of the conductor with further improved surface characteristics. This will also avoid
20 problems with wires from outermost layer falling down into the second outermost layer when the conductor is manufactured.

According to one embodiment of the invention at least one of the layers positioned inside the two outermost layers in the
25 conductor is arranged with a lay direction in an opposite direction to the lay direction of the two outermost layers. When arranging one of the layers underlying the two outer layers in an opposite direction to the two outermost layers, the torsion properties during axial loading are improved.
30

According to one embodiment of the invention the conductor comprises at least five concentric layers of helically wound metal wires, and the conductor has a cross section area greater than 700 mm^2 . For conductors larger than 700 mm^2 the
35 arrangement of the two outermost layers of the conductor in the same direction gives a considerable cost saving because it is not necessary to use a layer of tape on the outer surface of the conductor to have a conductor with sufficient surface

characteristics, i.e. with a tight outermost layer of the conductor, for the extrusion process.

5 According to one embodiment the conductor has a cross section area between 800 mm² and 3000 mm².

According to one embodiment of the invention the inner semiconducting layer is arranged directly and in contact with the outermost layer of the conductor.

10

According to one embodiment of the invention the inner semiconducting layer is arranged directly on a longitudinal semiconducting tape arranged in contact with and around the outermost layer of the conductor. This gives a considerable cost saving compared to using helical taping with conductor tape to keep the conductor wires together and to achieve a smooth outer surface of the conductor before the insulation system is extruded on the conductor.

15

20 The material of the conductor is, for example, copper or aluminum. The material of the insulation comprises, for example, cross-linked polyethylene, cross-linked ethylene-propylene rubber (EPM, EPDM) or silicone rubber.

25 According to a second aspect of the invention there is provided a method for manufacturing a high voltage cable according to claim 9. Advantageous embodiments of the method will be clear from the dependent claims 10-17.

30 According to one embodiment of the invention the manufacturing of an extruded high voltage cable comprises manufacturing a conductor by helically winding at least three layers of metal wires around a central conductor, winding the layers of metal wires such that the two outermost layers are wound in the same lay direction. An inner conducting layer is extruded around
35 the outer surface of the conductor, such that it surrounds the conductor, and an insulation layer is arranged outside and circumferential to the inner conducting layer.

According to an embodiment of the invention the method comprises compacting the conductor such that the diameter of the conductor is decreased. The compacting gives a dense
5 conductor with an increased fraction of metal in the conductor cross section.

According to an embodiment of the invention the method comprises helically winding the two outermost layers of the
10 conductor such that the length of lay of the outermost layer is shorter than the length of lay of the second outermost layer.

According to an embodiment of the invention the method
15 comprises winding the two outermost layers of the conductor such that the length of lay of the outermost layer is shorter than the length of lay of the second outermost layer and that the difference between the length of lay (L2) of the outermost
20 layer (3) and the length of lay (L1) of the second outermost layer (4) is greater than, or equal to, two times the outer diameter (D) of the conductor.

According to an embodiment of the invention the method comprises winding at least one of the layers positioned under
25 the two outermost layers in an opposite direction compared to the two outermost layers.

According to an embodiment of the invention the method comprises winding the conductor with at least six layers
30 around a central wire.

According to an embodiment of the invention the method comprises extruding the inner semiconducting layer arranged
directly on a longitudinal semiconducting tape arranged in
35 contact with and around the outermost layer of the conductor.

The invention provides an extruded high voltage cable with an improved interface between the conductor and inner conducting

layer, which results in considerable cost saving in manufacturing of the cable as well as reduced risk of having electrical breakdown in the insulation of the cable when testing the cable after production.

5

BRIEF DESCRIPTION OF THE DRAWING

The invention will be described in greater detail by description of embodiments with reference to the accompanying drawing, wherein

10

Figure 1 shows an extruded high voltage cable according to one embodiment of the invention having the two outer layers of the conductor arranged in the same lay direction,

15

Figure 2 shows an extruded high voltage cable according to one embodiment of the invention where one of the layers of the conductor underlying the two outermost layers are arranged in a different direction than the two outermost layers, and

20

Figure 3 is a cross-section of the extruded high-voltage cable in figure 1,

Figure 4 shows a difference in lay length of the two outermost layers according to one embodiment of the invention.

25

DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 shows a high voltage cable 1 comprising a concentric lay conductor 2. A single central wire 14 is surrounded by a first layer 8 of substantially straight wires. Around the first layer 8 five layers 3, 4, 5, 6, 7 of helically wound metal wires 11, 12 are arranged. The two outermost layers 3, 4 of the conductor are arranged in the same lay direction. In figure 2 the three layers 5, 6, 7 underlying the two outermost layers 3, 4 are arranged in the same lay direction as the two outermost layers. The two outermost layers 3, 4 are laid in a right-hand lay direction. The five layers 3, 4, 5, 6, 7 of

30

35

helically wound wires extend through the length of the cable 1; however, to show the lay direction for each subsequent layer each layer in figure 1 has been cut of a distance at the end. An extruded inner conductive layer 9 is arranged
5 concentrically around and in contact with a longitudinal semiconducting tape (not shown) that is arranged in contact with and concentrically around the outermost layer of the conductor. An insulation layer 10 and an outer conductive layer 13 are concentrically arranged around the inner
10 conductive layer. Instead of a central wire with six surrounding wires in a first layer, a solid conductor or a hollow central conductor may be used.

During manufacturing of the concentric lay conductor 2
15 according to figure 1, a first layer 8 of metal wires is firmly arranged around a single central wire 14. A second layer 7 of metal wires is concentrically and helically wound around the first layer 8. A third layer 6 of metal wires is concentrically and helically wound around the second layer,
20 and so on until a concentric lay conductor with five layers 3,4,5,6,7 of helically wound metal wires is manufactured.

The conductor 2 is compacted by a wire drawing type die or pairs of rollers for each layer of wires to avoid interstices
25 in the conductor 2. When the conductor 2 has been compacted, it is fed through an extrusion die and an inner conducting layer 9, an insulation layer 10, and a concentrically extruded conducting layer 13 is extruded around the conductor 2, such that the inner conducting layer 9 is tightly fixed to the
30 outermost layer of the conductor 2.

Figure 2 shows the extruded high voltage cable 1 according to the above described exemplary embodiment in relation to figure 1 with the difference that one of the layers 5,6,7 underlying
35 the two outermost layers 3,4 are arranged in an opposite lay direction compared to the lay direction of the two outermost layers 3,4.

Figure 3 shows a cross-section of the extruded high voltage cable 1 in figure 1. The cable comprises a conductor 2, where the conductor is a concentric lay conductor with five layers 3,4,5,6,7 of helically wound metal wires 11,12 around a first layer 8 of substantially straight wires arranged around a central wire 14. The six layers of helically wound wires 11, 12 extend through the length of the cable 1. An extruded inner conductive layer 9 is arranged concentrically around and in contact with a longitudinal semiconducting tape (not shown) that is arranged in contact with and concentrically around the outermost layer of the conductor. An insulation layer 10 is arranged concentrically around the inner conducting layer 9 and an outer conducting layer 13 is concentrically arranged around the insulation layer 10. Usually there are also protective layers (not shown), arranged concentrically around the outer conducting layer 13. All conducting, insulation and protective layers extend through the length of the cable.

Figure 4 shows one exemplary embodiment of the invention where the length of lay L2 of the outermost layer 3 is shorter than the length of lay L1 of the second outermost layer 4. The difference (L1-L2) between the length of lay L2 of the outermost layer 3 and the length of lay L1 of the second outermost layer 4 is greater than, or equal to, two times the outer diameter D of the conductor. If, for example, the outer diameter D is 50 mm, the difference between the length of lay L2 of the outermost layer 3 and the length of lay L1 of the second outermost layer should be 100 mm, or greater than 100 mm, to give the wanted properties of the outer surface of the conductor. Only one of the wires 11, 12 in the two outermost layers is shown in figure 4. The layers 3, 4 in figure 4 have a right-hand lay. The layers underlying the three outermost layers 3, 4, 5 of the conductor are not shown in figure 4.

Since only certain preferred embodiments of the present invention have been described, many modifications and changes will be apparent to those skilled in the art without departing from the scope of the invention, such as this is defined in

the appended claims with support from the description and the drawing.

For example, in the description only examples of extruded
5 cables with a conductor with six layers of wires have been
described, but the number of layers may depend on the required
size of the conductor. Also the lay direction of the layers
underlying the two outermost layers may be arranged in a
different lay direction than according to the two examples
10 described above.

CLAIMS

1. An extruded high voltage cable (1) comprising a conductor (2) with at least three concentric layers (3, 4, 5, 6, 7) of helically wound metal wires, an extruded inner conducting layer (9) surrounding the conductor (2), and an extruded electrical insulation (10) arranged outside the inner conducting layer (9), **characterized** in that the two outermost layers (3,4) of the conductor (2) have the same lay direction.

10

2. An extruded high voltage cable (1) according to claim 1, wherein the length of lay (L2) of the outermost layer (3) is shorter than the length of lay (L1) of the second outermost layer (4).

15

3. An extruded high voltage cable (1) according to claim 2, wherein the difference between the length of lay (L2) of the outermost layer (3) and the length of lay (L1) of the second outermost layer (4) is greater than, or equal to, two times the outer diameter (D) of the conductor.

20

4. An extruded high voltage cable (1) according to any of the preceding claims, wherein the conductor (2) comprises at least five layers (3, 4, 5, 6, 7) of helically wound metal wires (11, 12).

25

5. An extruded high voltage cable (1) according to any of the preceding claims, wherein at least one of the layers (5, 6, 7) positioned inside the two outermost layers (3, 4) in the conductor (2) is arranged with a lay direction in an opposite direction to the lay direction of the two outermost layers (3,4).

30

6. An extruded high voltage cable according to any of the preceding claims, wherein the layers (3, 4, 5, 6, 7) of helically wound metal wires are wound around a central conductor (14), and that between the central conductor (14)

35

and the inner-most helically wound layer (7) is a layer of substantially straight wires (8).

7. An extruded high voltage cable (1) according to any of the
5 preceding claims, wherein the conductor (2) has a cross section larger than 700 mm².

8. An extruded high voltage cable (1) according to any of the
10 preceding claims, wherein the inner conducting layer (9) is extruded directly on the conductor (2) such that the inner conducting layer (9) is in contact with the outermost layer (3) of the conductor (2).

9. An extruded high voltage cable (1) according to any of
15 claims 1-7, wherein the inner conducting layer (9) is extruded directly on a longitudinal semiconducting tape arranged around and in contact with the outermost layer (3) of the conductor (2).

20 10. A method for manufacturing an extruded high voltage cable (1) comprising:
- helically winding a conductor (2) of at least three layers (3, 4, 5, 6, 7, 8) of metal wires,
- winding the conductor (2) such that the two outermost layers
25 (3, 4) of metal wires are wound in the same lay direction,
- extruding an inner conducting layer (9) on the outer surface of the conductor (2), such that it surrounds the conductor, and
- extruding an insulation layer, such that it is arranged
30 outside and circumferential to the inner conducting layer (9).

11. A method according to claim 10, comprising compacting the conductor (2) such that the diameter of the conductor is decreased.

35

12. A method according to claim 10 or 11, comprising helically winding the two outermost layers (3, 4) of the conductor such that the length of lay (L2) of the outermost layer (3) is

shorter than the length of lay (L1) of the second outermost layer (4).

13. A method according to claim 12, comprising winding the two
5 outermost layers (3, 4) of the conductor (2) such that the difference between the length of lay (L2) of the outermost layer (3) and the length of lay (L1) of the second outermost layer (4) is greater than or equal to two times the outer diameter (D) of the conductor.

10

14. A method according to any of claims 10-13, comprising manufacturing the conductor (2) by winding the layers (3, 4, 5, 6, 7) of helically wound metal wires around a central conductor (14), and arranging a layer of substantially
15 straight wires between the central conductor (14) and the inner most helically wound layer (7).

15. A method according to any of claims 10-14, comprising winding at least one of the layers (5, 6, 7) positioned under
20 the two outermost layers (3,4) in an opposite direction compared to the two outermost layers.

16. A method according to any of claims 10-15, comprising extruding the inner conducting layer (9) directly on the
25 outermost layer (3) of the conductor (2).

17. A method according to any of claims 10-15, comprising extruding the inner conducting layer (9) directly on a longitudinal semiconducting tape arranged around and in
30 contact with the outermost layer (3) of the conductor (2).

1/2

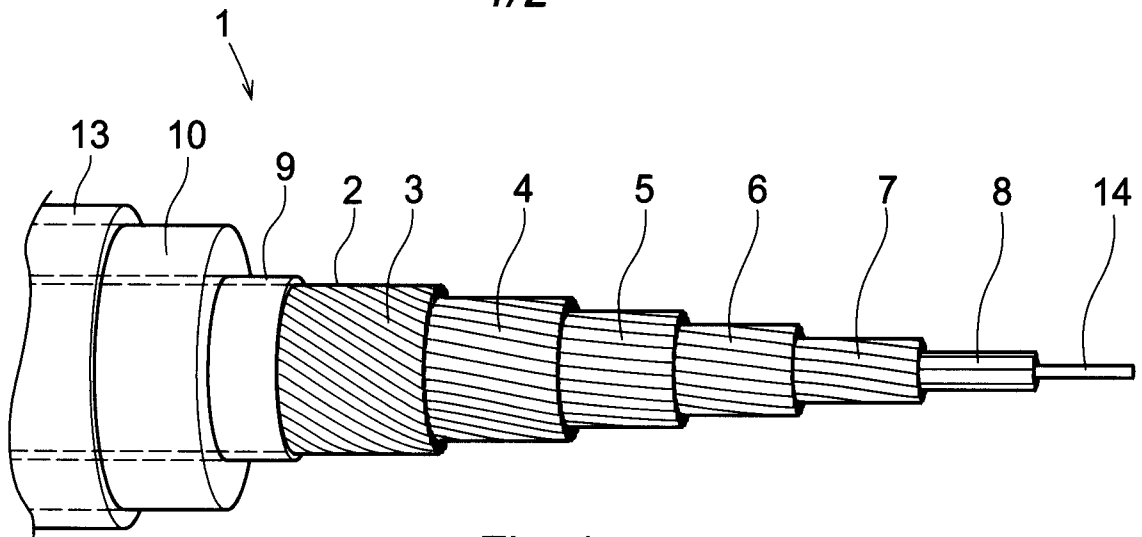


Fig. 1

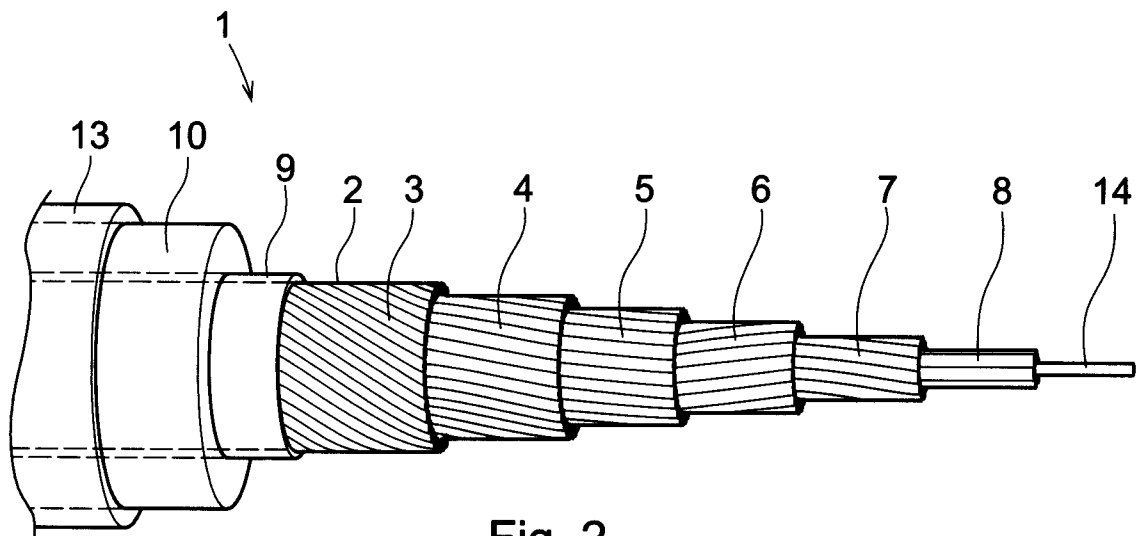


Fig. 2

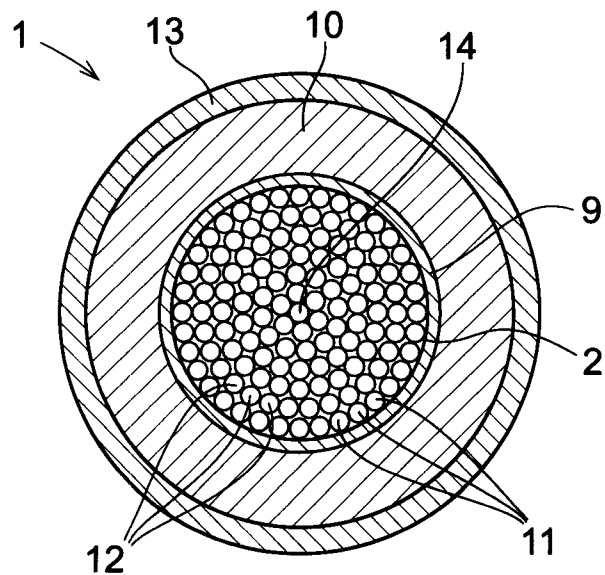


Fig. 3

2/2

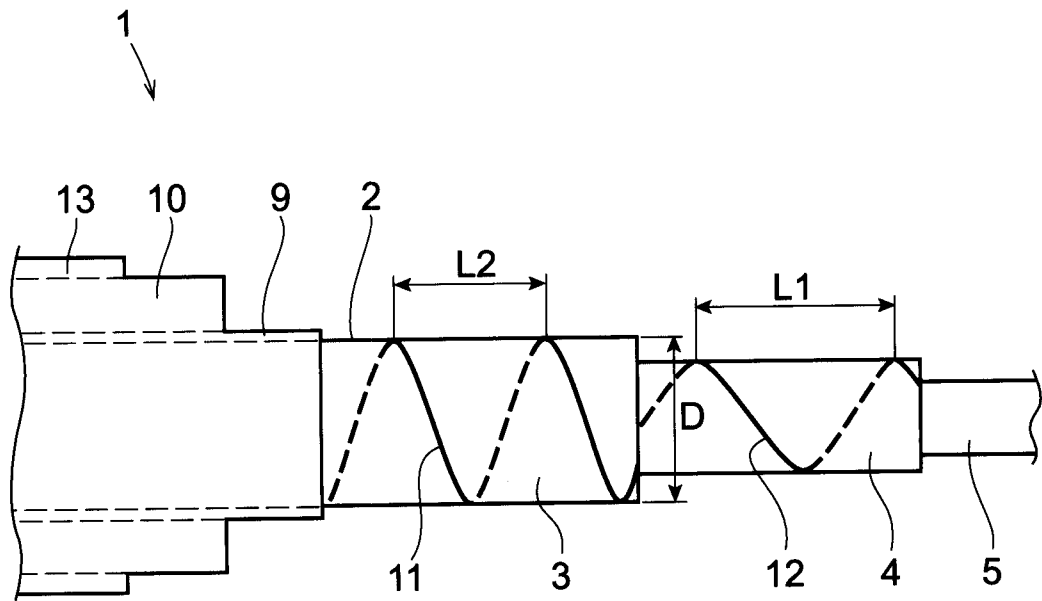


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2007/050753

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1943087 A (F.M. POTTER ET AL), 9 January 1934 (09.01.1934), page 2, line 125 - page 6, line 120, figures 1-3, claims 1,6 -- -----	1-17

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 January 2008

Date of mailing of the international search report

25 -01- 2008

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Magnus Westöö / ABW
Telephone No. +46 8 782 25 00

International patent classification (IPC)**H01B 9/04** (2006.01)**H01B 13/02** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument (service in Swedish) ..

Use the application number as username.

The password is **AOLUYWYUVY**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

29/12/2007

International application No.

PCT/SE2007/050753

US	1943087	A	09/01/1934	DE	662806	C	22/07/1938
				FR	766758	A	03/07/1934
				GB	419175	A	07/11/1934
