



12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification :
22.09.93 Bulletin 93/38

51 Int. Cl.⁵ : **F02B 75/16**, F02B 63/02,
F02B 75/00

21 Application number : **90106916.1**

22 Date of filing : **11.04.90**

54 **Single cylinder engine having multi-functional bracket.**

30 Priority : **13.07.89 US 379485**

43 Date of publication of application :
16.01.91 Bulletin 91/03

45 Publication of the grant of the patent :
22.09.93 Bulletin 93/38

84 Designated Contracting States :
DE FR IT

56 References cited :
EP-A- 0 080 255
EP-A- 0 280 199
US-A- 1 565 110
US-A- 4 838 908

73 Proprietor : **TECUMSEH PRODUCTS**
COMPANY
100 East Patterson Street
Tecumseh Michigan 49286 (US)

72 Inventor : **Bonde, Kevin G.**
11212 Spring Lake Road
Kiel, Wisconsin 53042 (US)
Inventor : **Holschuh, Mark T.**
48 South Kayser Street
Fond du Lac, Wisconsin 54935 (US)
Inventor : **Roller, Lee E.**
6777 Enge Drive
West Bend, Wisconsin 53095 (US)

74 Representative : **Weitzel, Wolfgang, Dr.-Ing.**
Friedenstrasse 10
D-89522 Heidenheim (DE)

EP 0 407 694 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

The present invention relates generally to a single cylinder internal combustion engine and more particularly to such an engine having a plurality of accessory systems counted thereto. Reference is made to EP-A-0 280 199.

Internal combustion engines of the single cylinder air-cooled type are sometimes employed as the power source for lawn mowers and other implements requiring a rotary drive. In such applications various accessory systems are attached to the engine to enhance operator control and to promote safety. Such accessories include, among others, a deadman safety brake, throttle control levers, an electric starter, an alternator, cooling air baffles and finger guards. Each of these accessories is currently assembled to the engine block one at a time during assembly of the engine as a whole. One disadvantage of this prior construction is that a multiplicity of fasteners are employed and certain components whose individual natures lend themselves to automated assembly must nevertheless be assembled using less than optimum automation because of limitations of automating the assembly of whole engines on a build-line.

It would be desirable to provide an improved engine assembly design in which certain accessory components can be preassembled as a single subassembly which can then be assembled to the engine. This and other advantageous features are obtained by the present invention.

The present invention overcomes the problems discussed above by the characterizing features of claim 1.

The bracket to which the various accessories are mounted is generally flat and encircles the drive shaft between the flywheel and the crankcase. Upturned perimetric edges provide for stiffening of the bracket, and several pivot pins upon which the accessories pivot are fixed to the bracket and stand upright therefrom.

The invention, in one form thereof, involves a single cylinder air-cooled internal combustion engine having a crankcase, a crankshaft and a flywheel mounted thereto, and a bracket encircling the crankshaft and attached to the crankcase. A safety brake means selectively engageable with the flywheel for stopping rotation of the engine is provided, and the safety brake means is mounted to the bracket.

It is an object of the present invention to provide an improved internal combustion engine assembly with certain accessories often associated with the engine and usually mounted directly thereto in the vicinity of the flywheel, which can be assembled in a more economical manner.

It is a further object of the present invention to

provide an improved internal combustion engine assembly wherein certain accessories associated therewith can be pre-assembled as a subassembly prior to final assembly to the engine.

Additional objects and advantages of the present invention will be apparent to those skilled in the pertinent art from the following descriptions and the drawings appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an elevational view of an engine, partly in section, particularly showing the subassembly of FIG. 1.

FIG. 2 is a top view of the engine of FIG. 2, with the blower housing removed and the outline thereof shown in dashed lines, and with the flywheel partially cut away to reveal the subassembly of FIG. 1 therebelow.

FIG. 3 is a top view of a subassembly of a bracket and various engine accessory systems mounted thereto in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference to FIGS. 1 and 2, there is illustrated a single cylinder, air-cooled internal combustion engine 10 having a crankcase 12. A vertically oriented crankshaft 14 is disposed in crankcase 12 and has a reduced diameter portion 16 rotatably journaled in upper bearing 18 formed in sleeve 20 which is cast integrally with top wall 22 of crankcase 12. An upper oil seal 24 located in a recess 26 at the top of sleeve 20 engages reduced diameter portion 16 and seals against oil migration from crankcase 12 therepast. Crankshaft 14 has a further reduced diameter portion 28 extending upwardly out of sleeve 20 and includes a tapered section 30 and a threaded section 32 thereabove. Received on portion 28 of crankshaft 14 is a cast flywheel 34 having a tapered bore 36 which is complementary to tapered section 30 and frictionally engaged therewith and retained by a zinc key (not shown). Flywheel 34 is retained on tapered section 30 by a threaded nut 36 threadedly received on threaded section 32 and bearing on washer 38.

Disposed between washer 38 and flywheel 34 is a cup shaped member 40 which is linked via pull starter means (not shown) within cover 42 to a pull starter rope 44. Nut 36 and washer 38 clamp cup shaped member 40 to the top of flywheel 34 for rotation therewith. Attached to cup shaped member 40 radially outwardly thereof is an annular member 46 having a plurality of generally radially extending blades 48 forming a centrifugal air blower. Attached to the peripheral rim 50 of flywheel 34 is an annular ring gear 52 whose teeth 54 extend substantially radially outwardly for drive engagement with the pinion gear 56 of an elec-

tric starter motor, which is described further below.

Engaging the top wall 22 of crankcase 12 at boss 58 for instance is a generally horizontally disposed bracket 60 which encircles crankshaft 14, sleeve 20 and other structure on the top end of crankcase 12. Bracket 60 is preferably constructed of stamped sheet steel with a generally flat bottom wall 62 substantially perpendicular to crankshaft 14 and an upturned inner perimetric edge portion 64 and an upturned outer peripheral edge portion 66. Inner and outer edge portions 64 and 66, respectively, stand upwardly generally perpendicular to bottom wall 62 and serve to add rigidity against flexure to bracket 60 as well as providing structure to which blower housing 68 is attached. Bottom wall 62, in addition to serving structural support functions as described further below, also serves as a finger guard to keep an operator's fingers from coming into contact with the flywheel during operation of the engine.

Referring to FIGS. 2 and 3 in particular, bracket 60 includes an elongated air baffle portion 70 extending alongside and generally parallel to the engine cylinder 72 which serves to block air flow generated by the rotation of air blades 48 from exiting downwardly out of blower housing 68 beside cylinder 72. Instead, air baffle portion 70 causes the air flow to be directed downwardly over cylinder 72, the cooling fins 74 of which help to dissipate heat generated by combustion. Bracket 60 also includes an extended portion 76 which supports a variety of engine accessories, as described in greater detail below. Strengthening ribs are provided in bottom wall 62 for greater rigidity by means of elongated stamped channels 78, 80, 82, 84 and 86.

Three circumferentially spaced holes 88, 90 and 92 through bottom wall 62 provide attachment points at which bracket 60 is attached to crankcase 12 by bolts received therethrough. Each threaded bolt (not shown) is threadedly received in a vertical threaded hole in a boss (not shown) on the top of crankcase 12. A stud 94 which serves as the pivot pin for the safety brake, as described further below, is received in a bore in boss 58 for accurate location of the entire assembly and the brake especially.

Referring to FIG. 3 in particular, bracket 60 is illustrated as part of a subassembly which is preferably assembled separately and apart from the assembly of engine 10 per se. In addition to bracket 60, the subassembly of FIG. 3 includes in the embodiment illustrated herein a safety brake 96 and control lever 98, an electric starter 100, throttle control levers 102, and an alternator 104.

Again referring to FIGS. 1, 2 and 3, safety brake 96 includes pivot stud 94 or pilot pin having a lower portion 106 which extends through a hole in bottom wall 62 of bracket 60 and is received in a corresponding controlled diameter hole in boss 58 of crankcase 12. A shoulder 108 on stud 94 is disposed above bot-

tom wall 62 and supports brake lever 110 which is pivoted on stud 94. A snap ring 112 engaging an annular groove at the top of pivot stud 94 retains brake lever 110 thereon. A coil spring 114 is attached at a first end thereof to brake lever 110 at hole 116 and at a second end thereof to a hole 118 in bracket 60. Spring 114 is so positioned as to generate a moment in brake lever 110 about pivot stud 94 in a clockwise direction as viewed in FIGS. 2 and 3, which causes brake friction pad 120 to be urged against annular inner peripheral surface 122 of flywheel 34. The geometry of brake lever 110, pivot 94, spring 114 and flywheel surface 122 is such that upon actuation of the brake, the rotation of flywheel 34 in a clockwise direction as viewed in FIGS. 2 and 3 causes the braking action to become self-energizing. Brake lever 110 is retracted from the braking position by intermediate control link 124 which is attached at one end to hole 126 of brake lever 110 and at the other end to hole 128 of control lever 98. A cable (not shown) actuated by the operator and attached to hole 130 at the opposite end of control lever 98 applies tension thereto and causes control lever 98 to pivot on pivot pin 132 which is affixed to bottom wall 62 of bracket 60 and stands upright therefrom. Such pivoting in turn applies tension to control link 124 in opposition to tension from spring 114 and generates a moment in brake lever 110 counterclockwise about pivot stud 94, thereby pivoting brake lever 110 and brake friction pad 120 away from flywheel wall 122, disengaging the brake.

Electric starter 100 includes an electric starter motor 134 oriented vertically and located below bottom wall 62 of bracket 60 and attached thereto by nuts 136 received on threaded mounting studs connected with motor 134. The shaft 140 of motor 134 extends upwardly through a hole in bottom wall 62 and has retained thereon for rotation therewith a pinion gear 142 which engages teeth 54 of ring gear 52 on flywheel 34. Bracket 60 in this regard provides a fixed attachment point relative to engine 10 upon which starter motor 134 is attached with precise spacing relative to ring gear 52, which permits an accurate mesh between pinion gear 142 and ring gear 52.

Throttle control lever 102 is pivoted on a stud attached to bottom wall 62 of bracket 60 and extending substantially perpendicular thereto. Lever 102 serves to transmit motion from a bowden cable operated by the operator to the conventional throttle lever of the carburetor (not shown). Bracket 60 and lever 102 in this regard provide a fixed point relative to the engine and carburetor for support of the carburetor control linkage.

Alternator 104 includes a core 144 and windings 146 and is attached to bottom wall 62 by bolts 148 and nuts 150 with spacer sleeves 152 received about bolts 148 between core 144 and bottom wall 62. Core 144 is thereby spaced from bottom wall 62 at a level at which it is properly aligned with flywheel 34 such

that electricity is generated therein by the rotation therepast of the permanent magnet 154 of flywheel 34.

It should be understood that each of the above described accessories, namely safety brake 96 and control lever 98, electric starter 100, throttle control lever 102, and alternator 104 is first assembled and attached to bracket 60 one at a time until as many of the accessories as are desired for a particular engine have been so attached. Then the entire subassembly consisting of bracket 60 and attached accessories is attached to engine 10 as described above by means of bolts received through mounting holes 88, 90 and 92. The pivot stud 94 of the safety brake 96 is somewhat of a special case in that because of the large forces which it must transmit from flywheel 34 to crankcase 12 during braking, stud 94 is piloted directly in crankcase 12 in addition to first being attached to bracket 60 during prior assembly of the subassembly. This also provides for accurate location of the bracket 60 and especially the brake mechanism. The remaining accessories are attached only indirectly to crankcase 12 via intermediate bracket 60. It should also be noted that the advantages to be gained from prior subassembly of the various accessories to a common bracket before final assembly of the engine do not prevent any of the accessories from being designated optional. It is a simple matter to leave off one or more accessories from the bracket during subassembly if it is desired to omit certain accessories from particular engine models.

Claims

1. A single cylinder air-cooled internal combustion engine (10) having a crankcase (12), a crankshaft (14) and a flywheel (34) mounted thereto, said crankcase forming a bearing housing for said crankshaft, characterized by a subassembly comprising a bracket (60) separate from but attached to said crankcase and circling said crankshaft, said bracket having a plurality of accessory elements mounted thereto prior to mounting the subassembly to the crankcase.
2. The engine (10) of claim 1, characterized in that one of said accessory elements is a safety brake means selectively engageable with said flywheel for stopping rotation of the engine, said safety brake means being mounted to said bracket.
3. The engine (10) of claim 2, characterized by a brake lever (110) pivotally mounted to said bracket (60) and carrying a friction brake pad (120), and a control lever (98) pivotally mounted to said bracket and linked to the brake lever by an intermediate control link (124).

4. The engine (10) of claim 1, in which said bracket (60) is characterized by a substantially flat bottom wall (62) substantially perpendicular to the crankshaft (14) and an outer perimetric wall (66) generally perpendicular to the bottom wall.
5. The engine (10) of claim 4, in which said bracket (60) is further characterized by an inner perimetric wall (64) spaced from the outer perimetric wall (66) and extending perpendicular to the bottom wall (62).
6. The engine (10) of claim 1, including a cylinder (72) and a blower housing (68) overlying said crankcase and said cylinder, said bracket (60) characterized by an air baffle portion (70) extending alongside and generally parallel to the engine cylinder and blocking air flow exiting out of the blower housing beside the cylinder.
7. The engine of claim 6 characterized in that said blower housing (68) is attached to and supported by said bracket (60), and said bracket is so disposed as to prevent contact of an operator's fingers with the flywheel (34).
8. The engine (10) of claim 1 characterized by safety brake means (96) being mounted to said bracket (60); a throttle control lever (98) pivotally mounted to said bracket; an electric starter motor (134) mounted to said bracket and having means (56) for drivingly engaging said flywheel; and an alternator (104) mounted to said bracket in electromagnetic proximity to said flywheel.
9. The engine (10) of claim 1 characterized in that said accessory elements are selected from the group consisting of safety brake means (96) selectively engageable with the flywheel for stopping rotation of the engine; a throttle control lever (98) pivotally mounted to said bracket; an electric started motor (134) having means for drivingly engaging said flywheel; and an alternator (104) in electromagnetic proximity to said flywheel.
10. The engine of claim 2, characterized by a stud (94) upon which the safety brake means (96) is mounted, and which serves as the pivot pin for the safety brake means.

Patentansprüche

1. Luftgekühlter Einzylinder-Verbrennungsmotor (10) mit einem Kurbelwellengehäuse (12), einer Kurbelwelle (14) und einem hieran montierten Schwungrad (34), wobei das Kurbelwellengehäuse ein Lagergehäuse für die Kurbelwelle bildet,

gekennzeichnet durch eine Baueinheit mit einer Konsole (60), die vom Kurbelwellengehäuse getrennt, aber an diesem befestigt ist, die Kurbelwelle umgibt und eine Mehrzahl von Zubehörelementen aufweist, die hieran montiert sind, bevor die Baueinheit am Kurbelwellengehäuse montiert wurde.

2. Motor (10) nach Anspruch 1, dadurch gekennzeichnet, daß eines der Zubehörelemente eine Sicherheitsbremse ist, die selektiv mit dem Schwungrad in Eingriff bringbar ist, um das Umlaufen des Motors abzustoppen, und die an der Konsole montiert ist.
3. Motor (10) nach Anspruch 2, gekennzeichnet durch einen Bremshebel (110), der schwenkbar an der Konsole (60) gelagert ist und einen Bremsklotz (120) trägt, und durch einen Schalthebel (98), der schwenkbar an der Konsole gelagert und mit dem Bremshebel durch ein Zwischenglied (124) verbunden ist.
4. Motor (10) nach Anspruch 1, wobei die Konsole (60) gekennzeichnet ist durch einen im wesentlichen ebenen Boden (62), der im wesentlichen senkrecht zur Kurbelwelle (14) angeordnet ist sowie durch eine äußere Umfangswand (66), die im wesentlichen senkrecht zum Boden verläuft.
5. Motor (10) nach Anspruch 4, wobei die Konsole (60) weiterhin gekennzeichnet ist durch eine innere Umfangswand (64), die zur äußeren Umfangswand (66) einen Abstand einnimmt und sich senkrecht zum Boden (62) erstreckt.
6. Motor (10) nach Anspruch 1, mit einem Zylinder (72) und einem Gebläsegehäuse (68), das die Kurbelwelle und den Zylinder umgibt, wobei die Konsole (60) gekennzeichnet ist durch ein Luftleitorgan (70), das sich entlang dem Zylinder und im wesentlichen parallel hierzu erstreckt und die Luftströmung, die aus dem Gebläsegehäuse neben dem Zylinder austritt, absperrt.
7. Motor nach Anspruch 6, dadurch gekennzeichnet, daß das Gebläsegehäuse (68) an der Konsole (60) befestigt und von dieser getragen ist, und daß die Konsole derart angeordnet ist, daß sie eine Berührung eines Fingers einer Betätigungsperson durch das Schwungrad (34) unterbindet.
8. Motor (10) nach Anspruch 1, dadurch gekennzeichnet, daß die Sicherheitsbremse (96) an der Konsole (60) montiert ist, daß ein Drosselschalthebel (98) schwenkbar an der Konsole gelagert ist, daß ein elektrischer Startermotor (134) an der Konsole gelagert ist und Mittel zum Antreiben des

Schwungrades aufweist, und daß in elektromagnetischer Nähe zum Schwungrad ein Wechselstromgenerator (104) an der Konsole gelagert ist.

9. Motor (10) nach Anspruch 1, dadurch gekennzeichnet, daß die Zubehörelemente ausgewählt sind aus Bauteilen, umfassend eine Sicherheitsbremse (96), die selektiv mit einem Schwungrad zum Anhalten des Motors in Eingriff bringbar ist, einem Drosselschalthebel (98), der schwenkbar an der Konsole gelagert ist, einen elektrisch gestarteten Motor (134) mit Mitteln zum Antreiben des Schwungrades, und einem Wechselstromgenerator (104), der in elektromagnetischer Nähe des Schwungrades angeordnet ist.
10. Motor nach Anspruch 2, gekennzeichnet durch einen Zapfen (94), auf welchem die Sicherheitsbremse (96) gelagert ist, und der als Schwenkzapfen für die Sicherheitsbremse dient.

Revendications

1. Moteur à combustion interne monocylindre à refroidissement par air (10) comportant un carter (12), un vilebrequin (14) et un volant (34) monté sur celui-ci, ce carter formant un logement porteur pour ce vilebrequin, caractérisé par un sous-ensemble comprenant une console (60) séparée du carter mais fixée à celui-ci et entourant le vilebrequin, cette console comportant un certain nombre d'éléments annexes montés sur celle-ci avant le montage du sous-ensemble.
2. Moteur (10) selon la revendication 1, caractérisé en ce que l'un des éléments annexes est un frein de sécurité pouvant s'engager sélectivement sur le volant pour stopper la rotation du moteur, ce frein de sécurité étant monté sur la console.
3. Moteur (10) selon la revendication 2, caractérisé par un levier de frein (110) monté en pivotement sur la console (60) et portant un patin de frein à friction (120), et par un levier de commande (98) monté en pivotement sur la console et relié au levier de frein par une tige de liaison de commande intermédiaire (124).
4. Moteur (10) selon la revendication 1, dans lequel la console (60) est caractérisée par une paroi de fond essentiellement plate (62) cette paroi de fond étant essentiellement perpendiculaire au vilebrequin (14), et par une paroi périmétrique extérieure (66) généralement perpendiculaire à la paroi de fond.
5. Moteur (10) selon la revendication 4, dans lequel

la console (60) est en outre caractérisée par une paroi périmétrique intérieure (64) espacée de la paroi périmétrique extérieure (66) et s'étendant perpendiculairement à la paroi de fond (62).

5

6. Moteur (10) selon la revendication 1, comprenant un cylindre (72) et un carter de ventilateur (68) recouvrant le carter de moteur et le cylindre, la console (60) étant caractérisée par une partie de déflecteur d'air (70) disposée généralement parallèlement le long du cylindre du moteur et bloquant à proximité du cylindre le débit d'air sortant du ventilateur. 10
7. Moteur selon la revendication 6, caractérisé en ce que le carter de ventilateur (68) est fixé à la console (60) et supporté par celle-ci, et en ce que cette console est disposée de manière à empêcher que les doigts d'un opérateur puissent venir en contact avec le volant (34). 15 20
8. Moteur (10) selon la revendication 1, caractérisé en ce que le frein (96) est monté sur la console (60), en ce qu'un levier de commande des gaz (98) est monté en pivotement sur la console, en ce qu'un démarreur électrique (134) est monté sur la console et comporte des moyens (56) destinés à venir en prise d'entraînement avec le volant, et en ce qu'un alternateur (104) est monté sur la console à proximité électromagnétique du volant. 25 30
9. Moteur (10) selon la revendication 1, caractérisé en ce que les éléments annexes sont choisis dans le groupe comprenant un frein de sécurité (96) pouvant s'engager sélectivement sur le volant pour stopper la rotation du moteur, un levier de commande des gaz (98) monté en pivotement sur la console, un démarreur électrique (134) comportant des moyens destinés à venir en prise d'entraînement avec le volant, et un alternateur (104) à proximité électromagnétique du volant. 35 40
10. Moteur selon la revendication 2, caractérisé en ce qu'il comporte un goujon (94) sur lequel est monté le frein de sécurité (96), ce goujon servant d'axe de pivot pour le frein de sécurité. 45

50

55

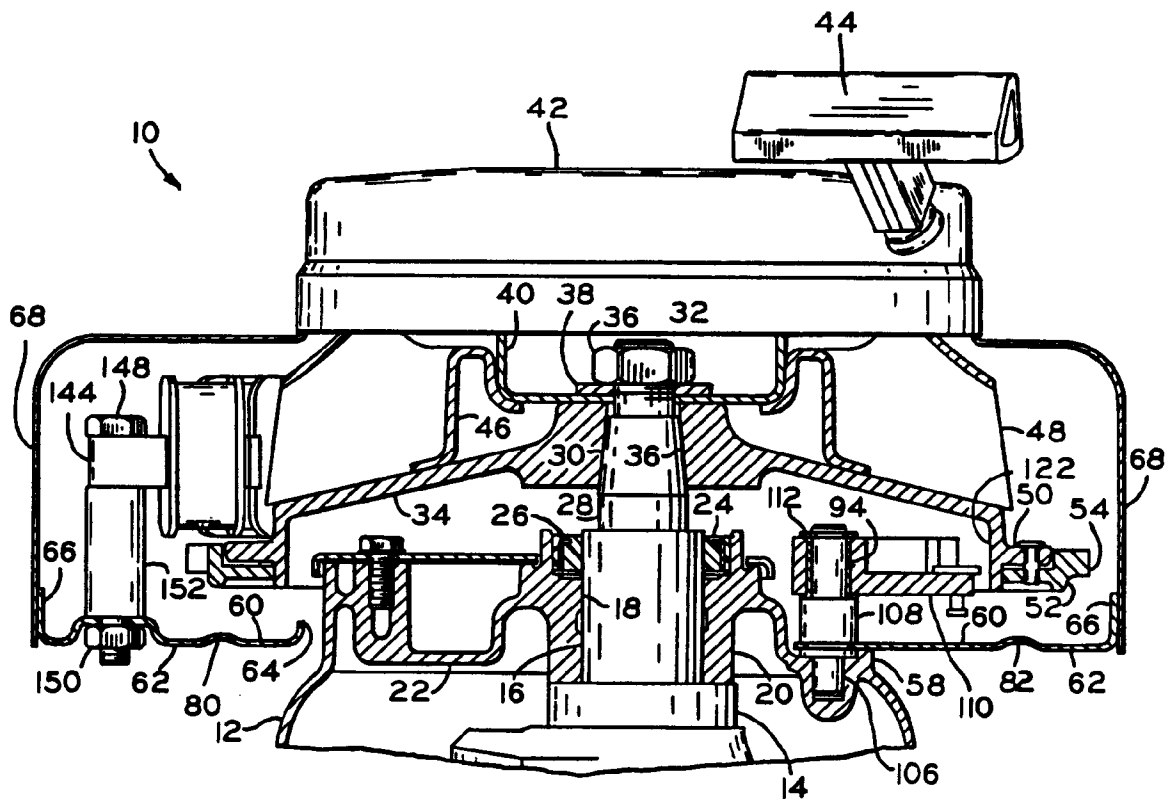


FIG. 1

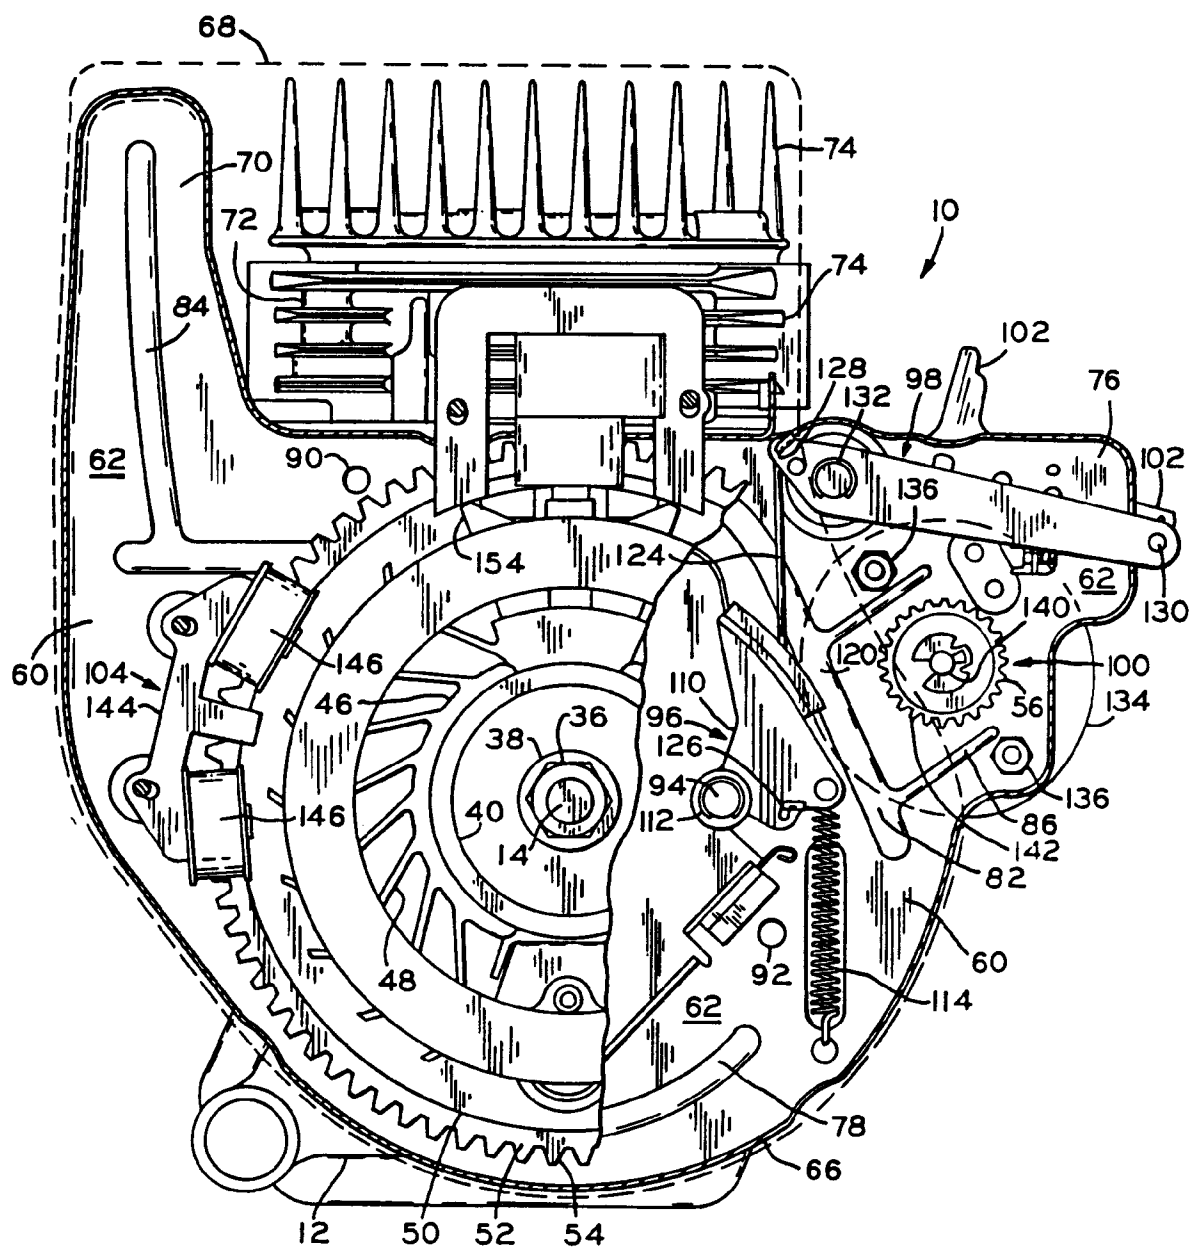


FIG. 2

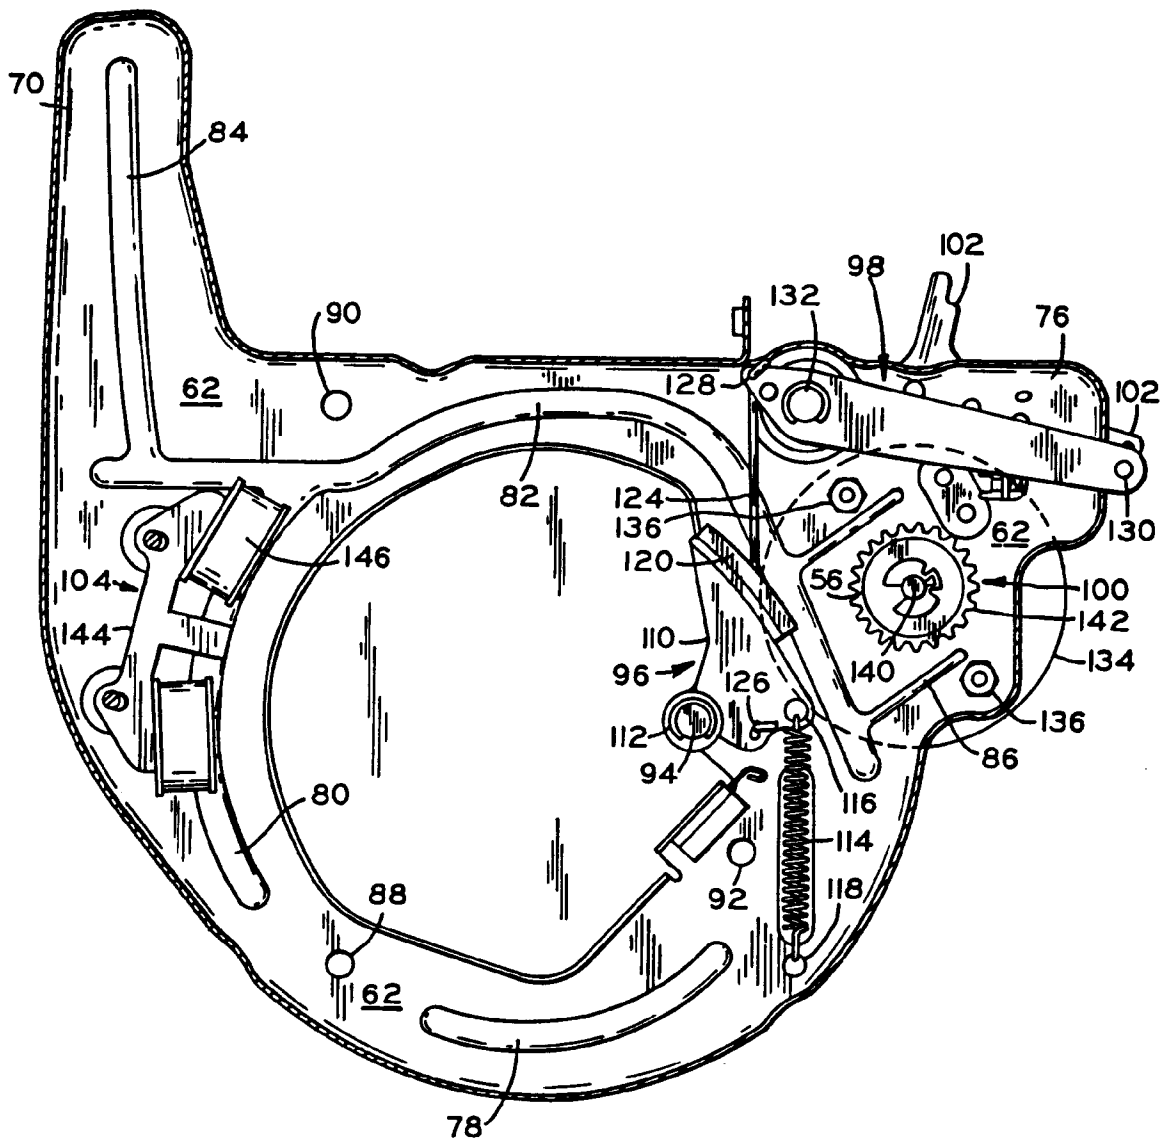


FIG. 3