



(86) Date de dépôt PCT/PCT Filing Date: 2014/09/24
(87) Date publication PCT/PCT Publication Date: 2016/03/31
(85) Entrée phase nationale/National Entry: 2017/03/21
(86) N° demande PCT/PCT Application No.: CN 2014/087310
(87) N° publication PCT/PCT Publication No.: 2016/045013

(51) Cl.Int./Int.Cl. *D01F 6/44* (2006.01),
C08L 23/00 (2006.01), *D01D 5/08* (2006.01),
D01F 1/10 (2006.01)
(71) Demandeurs/Applicants:
HUANG, KAI-LI, CN;
CHEN, YUAN-TE, CN;
CHEN, YUAN-JUNG, CN
(72) Inventeurs/Inventors:
HUANG, KAI-LI, CN;
CHEN, YUAN-TE, CN;
CHEN, YUAN-JUNG, CN
(74) Agent: ADE & COMPANY INC.

(54) Titre : FIBRES CONTROLANT L'ENVIRONNEMENT, METHODE DE FABRICATION ASSOCIEE ET TISSUS LES INTEGRANT
(54) Title: ENVIRONMENT-CONTROLLING FIBERS, METHOD MANUFACTURING THE SAME AND FABRICS USING THE SAME

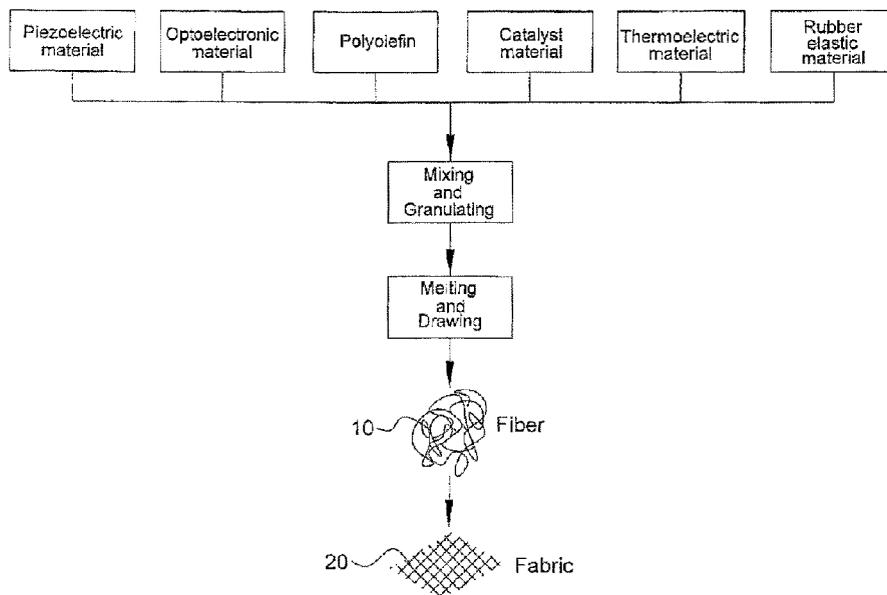


FIG.1

(57) **Abrégé/Abstract:**

Provided is a green-energy environmental control fiber, manufacturing method thereof and fabric made therefrom. In the method, a polyolefin material, a photoelectric material, a thermoelectric material, a piezoelectric material and a catalytic material undergo a melt-blending and a melt-spinning process to produce a fiber. A fabric is weaved from the fiber and applied to various environmental control products or organic agricultural environmental control products. Green energy such as solar energy, solar thermal energy, wind energy, hydraulic energy, geothermal energy and the like renewable energies are utilized to stimulate an effect of a special material in the fiber of the fabric, so as to reduce or eliminate pollutants in the environment to enable a self-cleaning function, thus improving an environmental condition or promoting vegetation growth.

ABSTRACT

The invention discloses environment-controlling fibers, method manufacturing the same and fabrics using the same, which adopts polyolefin material, optoelectronic material, thermoelectric material, piezoelectric material and catalyst material, to make fibers and fabric by melting, mixing, drawing and weaving. The fabrics are used in all kinds of environmental control products or for organic agriculture. To use green energy such as solar light energy, solar thermal energy, wind energy, hydro energy, geothermal energy and other renewable energy to stimulate the function of the special material within the fibers, so that the fabrics can remove pollutants in the environment and produce self-purification function to achieve the purpose of improving the environmental conditions or promote plant growth.

ENVIRONMENT-CONTROLLING FIBERS, METHOD MANUFACTURING THE SAME AND FABRICS USING THE SAME

FIELD OF INVENTION:

5 【0001】 The invention relates to fibers for controlling environment by green energy,
method manufacturing the same and fabrics made by the same, which are applied to form organic
environments for the farming industry such as the green energy control greenhouse and the green
energy control factory for agricultural plant, or applied to environmental control equipment for
the life such as the fabrics for environment control by green energy for health cares, for
10 promoting the indoor air quality, for filtering fumes, for geotextile for planting, for removing fog,
for cleaning the air, and for environmental pollution control. Using the environmental energy,
such as solar energy, solar heat energy, wind energy, hydro energy, geothermal energy and other
renewable energy, the fiber materials receive the various types of radiation of green energy to
15 produce free electronic effects, through the fibers composed of optoelectronic materials,
thermoelectric materials and piezoelectric materials having increasing effects on the natural
energy of green energy radiated waves thus to act on various kinds of catalyst materials in fibers
and effectively promote the functions of catalyst materials, so that the catalyst fibers and fabrics
produce favorable lights, water oxygen anion or far- infrared light by the green energies to
control pests and diseases, and to remove, settle, decompose and clean the pollutants to have a
good environment for plant growth.

20 BACK GROUND:

 【0002】 In response to the increasing demand for food and the food crisis, human beings
have tried to increase food production by using various agricultural methods such as genetically
modified, chemical pesticides, chemical fertilizers and growth hormones, and microbial
fertilizers. In order to solve the problem of food demand and food crisis, the above-mentioned
25 agricultural methods are also accompanied by a large number of pesticide uses, so that
environmental pollution is becoming increasingly serious. The poor environment caused by
pollution is directly to human health damage, and later accompanying with climate change and
the increase in new pests and diseases of plant, but also reduce crop yields. Under the vicious
cycle of soil acidification, the food crisis has not been fundamentally lifted. The requirements of
30 increase of production and organic planting, result in problems to be overcome for the quality and
quantity of agricultural environment and crops. Good natural environment resources are limited,
in order to sustainable development of agriculture, fundamentally solve the problem of human
food shortage and improve food safety and health, so human beings should learn the nature of the
natural environment of endless natural circulation principle. To sustainably use the green
35 energies, maximize the effectiveness of transformation of the green energies, to use the principle
of natural interaction between material properties and the green energies, by the natural way can
create a suitable control for organic environment for agricultural productions, so as to have the
opportunity to fundamentally solve the aforementioned problems of vicious cycle caused by
traditional agricultural processes and to meet the requirement and safety for food.

40 【0003】 Although known techniques include the addition of functional materials such as

catalysts to the fabric, the function of deodorizing and antibacterial will be produced by the action of the catalyst material. However, one of the known techniques is to coat functional materials on the surface of the fabric, not only the functional material can't be effectively increased to play its effectiveness, and after a period of time it will fall off, so the economic benefits of such technology is not high. Other techniques, such as U.S. Patent No. 4,784,909 discloses fiber added with copper so as to produce the function of antibacterial deodorization. For another example, U.S. Patent No. 6,540,807 discloses fabric added with thermoplastic resin and antibacterial agent to have antibacterial function. For another example, the U.S. patent No. 5,690,922 discloses the fiber added with metal phosphate and metal hydroxide to have deodorant function. However, the previously known traditional techniques, functional materials in fibers only can act in a limited effective space because they are not effectively amplified. Moreover, although the industry develop LED lights emitting blue and red light to promote the growth of fruits and vegetables for the cultivation, but the use of LED lights needs electric power and expensive equipment, relatively results in high cost, and not only result in the problems of energy consumption, and can't control pests and diseases of plant, but also finally the cultivation must still rely on pesticides or biological control, or needs to install net to isolate pest, closed plastic shed and glass greenhouse, etc. which can't reach effective control for environment.

【0004】 Therefore, in order to achieve effective control of agricultural production and energy conservation, the present inventors believe that it is necessary to make use of the green energy source which exists in nature and endlessly to convert the green energy and create a suitable crop growth environment. Such as the use of green energy, the use of the sunlight one kind of the green energy, and the use by converting and amplifying the sunlight into light waves required for the plant growth, will increase the organic crop production in network rooms. Through the energy band effect of crystal in the fiber material, the fiber material receives the green energy and amplifies the performance of the catalyst material in the fiber material, not only convert the sunlight and increase the required light, but minimizes the humidity of air, which is conducive to plant growth, and can prevent plant diseases and remove pollutants in the environment. Moreover, the fiber material can be used with natural plant essential oils to avoid the pests, and thus achieve the purpose of a large number of organic cultivation. The above is the concept of the present invention, the motivation of research and development for the inventor, and is also worthy to research and develop the agricultural materials for green energy control, and can really achieve organic agriculture planting and environmental pollution control, so as to really improve the problems of the current traditional organic agricultural materials for environmental control and the problem of energy consumption for food production.

35 SUMMARY OF THE INVENTION:

【0005】 The first object of the present invention is to provide environment-controlling fibers and fabrics having the functions of controlling environment by using green energy to increase the growth of organic agricultural plants. To use the special material properties of the environment-controlling fibers can increase the plant-growth-required light wave, transfer the harmful light waves or increase the time of exposure of light, decompose moisture in the air to

minimize water molecules (water oxygen anion) to promote effectiveness of absorption of water, produce far-infrared light to provide plants with required lights and remove pollutants in the environment, so as to upgrade the effectiveness of sun, water, air and soil on the quality and quantity of the organic plant production. The technical means of the present invention is that the fiber is made of polyolefin material as the base material. The polyolefin material is mixed with optoelectronic material (material having function of converting sunlight to be long-lasting fluorescent or/and phosphorescent) having the function of optoelectronic effect for light conversion and storage, piezoelectric material having the function of piezoelectric effect by coupling the stress field and the electric field, thermoelectric material capable of receiving external heat radiation to produce far infrared rays, and catalyst material capable of accelerating the chemical reaction rate. When the fiber receives the outside green energy, such as solar energy, through the effectiveness of optoelectronic material (such as the material having the function for accumulating long-lasting fluorescent or/and phosphorescent) can produce spectrum (wavelength about 400~700nm) required by plant growth, converse harmful UV light to be the light with wavelength of 400~700nm required for the growth of plants, and storage the light energy for the plant to grow at night to promote plant growth. When the fiber receives outside green energies such as solar thermal energy or geothermal energy, through the effectiveness of thermoelectric materials, it can produce infrared energy amplitude with a wavelength of 4~14 μ m in the environment to promote the growth of plants. When the fiber receives the outside of the green energy such as wind energy, through the effectiveness of piezoelectric material, it can produce piezoelectricity in the environment to decompose the hydraulic energy of air humidity to produce water oxygen anion and form an environment like rain forest ecology, and promote the effectiveness of water absorption of the plants. The catalytic material is resonated by the optoelectronic effect, the thermoelectric effect and the piezoelectric effect to amplify the amplitude of energies to activate the free electrons, and to increase the catalysis activity of the electron and electron-hole at a bigger energy amplitude level in the material, so that the catalysis activity of the catalyst material is increased to have more effectiveness to remove environmental pollutants.

【0006】 The second object of the present invention is to provide environment-controlling fibers and fabrics having the functions to remove the biological contaminant. The technical means of the present invention are the fibers as above-mentioned first purpose mixed with the catalyst material which can remove the biological pollutants in the environment. Through equipping with the catalyst material, the fibers and their fabrics have the function of restraining the source of biological pollution in the environment, and thus achieve the effectiveness and purpose of restraining the pollution sources such as fungi, bacteria and viruses in the environment.

【0007】 The third object of the present invention is to provide environment-controlling fibers and fabrics having the functions to remove the chemical contaminant in the environment. The technical means of the present invention are the fibers as above-mentioned first purpose mixed with catalyst material which can remove chemical contaminants, and can remove

formaldehyde (HCHO), the total volatile organic compounds (TVOCs), carbon monoxide (CO), carbon dioxide (CO₂), ozone (O₃), acetic acid, acetaldehyde, ammonia, positive and negative ions (F⁻, Cl⁻, NO₃⁻, PO₄³⁻, SO₄²⁻, NH₄⁺) and other chemical pollutants in the environment.

5 【0008】 The fourth object of the present invention is to provide environment-controlling fibers and fabrics having the functions to remove physical contaminant in the environment. The technical means of the present invention are the fibers as above-mentioned first purpose mixed with catalyst material which can settle physical pollution sources in the environment, and can settle the physical pollution sources from air to the ground, such as pollen, PM_{2.5}, PM₁₀ and other suspended particles.

10 【0009】 The fifth object of the present invention is to provide environment-controlling fibers and fabrics having phytoncide for pest control. The technical means of the present invention are the fibers as above-mentioned four purposes respectively mixed with natural plant essential oils which can control and avoid from insects, and can produce plant phytoncide to facilitate plant growth.

15 【0010】 The sixth object of the present invention is to provide safety environment-controlling fibers and fabrics having the function of flame resistant and conductive antistatic. The technical means of the present invention are the fibers as above-mentioned five projects mixed with fireproof materials and conductive antistatic the material to have safety function.

20 【0011】 The seventh object of the present invention is to provide woven fabrics applied with the environment-controlling fibers of the present invention. The woven fabrics can be woven fabrics used to assist the cultivation for plants, can be woven fabrics used by the plant factory, can be woven fabrics as gratings for plant growth, can be woven fabrics used by various types of environmental control equipment for the life, can be woven fabrics used for health care, can be
25 woven fabrics used to promote quality of indoor air, can be woven fabrics used to filter fumes, can be woven fabrics as geotextiles, can be woven fabrics used to remove fog, can be woven fabrics to clean air, or can be woven fabrics for controlling environmental pollution.

BRIEF DESCRIPTION OF THE DRAWINGS:

30 【0012】 Fig.1 is a schematic view of a first embodiment of the manufacturing method of the present invention.

 【0013】 Fig.2 is a schematic view of a second embodiment of the manufacturing method of the present invention.

 【0014】 Fig.3 is a schematic view of a third embodiment of the manufacturing method of the present invention.

35 【0015】 Fig.4 is a schematic view of cross-sectioned of fiber of the present invention.

 【0016】 Fig.5 is a schematic view of woven fabric for agriculture of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

40 【0017】 The environment-controlling fiber developed by the present invention has the energy transmission ability when the fiber receives the outside green energy. The fibers produces optoelectronicity through the optoelectronic material, produces piezoelectricity through the

piezoelectric material, and produces resonant effect through the thermoelectric material (far-infrared ray material) to increase the amplitude and activation of energy to excite the catalyst material, so as to increase catalytic effect on the activity of electron and electronic hole at the energy level, and effectively enhance the catalytic performance of catalyst to catalytic and control the environmental pollutant, and produce light with wavelength of 400~700nm (such as the far-infrared ray with the wavelength of 4~14 μ m) and decompose water in the air (humidity) to produce water oxygen anion. Thus, the woven fabric 20 woven by the fibers of the present invention has the function of increasing the effect by resonance and friction so as to produce an environmental control function, and the woven fabric 20 can be used for organic agriculture, or gratings for plant growth (referring to Fig. 5). Moreover, the woven fabric 20 of the present invention can be used for health cares, for promoting the indoor air quality (such as fabric filter for air conditioner), equipped on the device for filtering fumes (such as fabric filter for filtering fumes), as geotextile for planting (such as geotextile pad bedding under or on the soil for planting), for removing fog (such as fabric filter equipped on washing tower for removing fog), for cleaning air (such as fabric filter for cleaning air), for changing air (such as window screen), and for environmental pollution control (such as the filter of industrial water washing equipment for producing positive and negative ions to remove TVOCS. The basic characteristics of the technology for fiber of the present invention is mixing the polyolefin (such as polypropylene and polyethylene, etc., by the hydrocarbon materials to reduce the environmental pollution) with optoelectronic materials, piezoelectric materials, thermoelectric materials and catalyst Materials, by an air-cooled granulation equipment with twin-screw, the above materials were melted, mixed and granulated to be granular processing materials, and then melting the granular processing materials and drawing to be fibers by a melt drawing processing technology. So the woven fabric by the fibers of the present invention receives external sunlight, air flow, heat, energy of vibration and friction of fibers, air humidity and other natural energy, through the optoelectronic materials to produce optoelectronicity, piezoelectric material to produce piezoelectric effect and through thermoelectric materials to produce thermoelectric effect (produce far-infrared ray). Through the thermoelectric effect, the piezoelectric effect, the photocatalytic effect, the redox effect, the free electron effect, the catalytic effect and the slow release to amplify the natural energy and apply to the catalyst materials, the catalyst materials can fully exert its effectiveness. The ratio of weight of each material can be adjusted according to the requirement of the user. The main concept of the invention is to integrate the optoelectronic material, the piezoelectric material, the thermoelectric material and the catalyst material to the fiber so that when the fiber receives the natural energy, the catalyst material in the medium can produce the increasing of amplitude of effect. First, the fibers of fabrics can produce far-infrared ray with wavelength range of 4~14 μ m and decompose water of moisture (humidity) to produce water oxygen anion. Second, the fibers of fabrics can produce light effect to increase plant growth and limit the wavelength of sunlight at 400~700nm, and increase the long afterglow for the night brightness. Third, the fibers of fabrics can inhibit the biological pollution sources such as the total bacteria and mold in the air to reduce plant diseases. Fourth, the fibers of fabrics can reduce chemical pollution source in the air (such

as air vapor pollutants: HCHO, TVOCs, O₃, CO, CO₂, SO_x, NO_x, C_xH_y, HCl, CS₂, CFC_s and C_mH_nX_x, etc.), or can settle the physical pollution in the air such as airborne particulate pollen, PM_{2.5}, PM₁₀ and other suspended particles. Fifth, the fibers of fabrics can avoid insects so that plants prevent from pest hazards and infectious bacteria. Sixth, the fibers of fabrics have the safety functions of fireproof and anti-static by conductive. The environment-controlling fiber of the present invention has excellent performance function, which can be used for weaving fabric to be applied to agriculture for environmental control by the green energies such as applied to greenhouse room, gratings for plant growth and the like, and can be applied to all kinds of equipment for environmental control by green energy such as fabrics for health care, for promoting the quality of indoor, for filtering oil smoke, for removing fog, for planting such as geotextile, for cleaning air, applied to be window screen and for controlling environmental pollution, i.e. for widely used by agriculture, industry, fisheries, animal husbandry and the people's livelihood.

【0018】 The optoelectronic effect of the optoelectronic material used in the preset invention is that when the electromagnetic radiation (such as ultraviolet light) irradiates to the optoelectronic material, the photon is absorbed to excite the free electron. The optoelectronic material is mainly the material can receive sunlight and convert the light to be fluorescent or/and phosphorescence, and store them for long-lasting, and such material basically is Zn₂SiO₄, CaSiO₃, SiO₂, TiO₂, (SrBaMg)₃Si₂O₇, CaWO₄, MgWO₄, LiAl₅O₈:Mn⁴⁺, CaAl₂O₄:Eu²⁺,Dy³⁺, CaAl₁₂O₁₉:Mn⁴⁺, SrAl₂O₄:Eu²⁺,Dy³⁺, Sr₄Al₁₄O₂₅:Eu²⁺,Dy³⁺, SrAl₁₂O₁₉:Eu²⁺,Dy³⁺, BaMg₂Al₁₆O₂₇, CeMgAl₁₁O₁₉, MgAl₂O₄, GdAlO₃, Y₂O₃, YVO₄, SrB₄O₇F, MgGa₂O₄, MgGa₂O₄, BeO, MgO, Al₂O₃, GeO₂SnO₂ZnO, Sc₂O₃, La₂O₃, Sm₂O₃, Gd₂O₃, Dy₂O₃, ZrO₂, CdS or WO₃.

【0019】 The piezoelectric effect of the piezoelectric material used in the present invention is that the atoms are specially arranged in the lattice of the piezoelectric material so as to have coupling effect between the stress field and the electric field. The piezoelectric material is basically quartz, cadmium sulfide, zinc oxide, aluminum nitride, ferroelectric crystal, barium titanate crystal, lithium niobate, tantalum niobate, barium niobate crystal, potassium dihydrogen phosphate, ammonium dihydrogen phosphate, lead hydrogen phosphate, deuterium lead phosphate, bismuth titanate crystals, barium titanate ceramics, lead zirconate titanate PZT, and the like.

【0020】 The thermoelectric material used in the present invention is the far-infrared rays producing material for receiving external thermal radiation to produce far-infrared rays with the spectrum of 4-14μm wavelength which is greater than the wavelength of visible light and has strong heat effect of heat sensing energy. The thermoelectric material is basically Al₂O₃, ZrO₂, MgO, TiO₂, SiO₂, ZrC, SiC, B₄C, TaC, TiB₂, ZrB₂, CrB₂, TiSi₂, MoSi₂, WSi₂, Si₃N₄, TiN, Fe₂O, high temperature bamboo charcoal, prepared long charcoal, Maifan stone, Guiyang stone, volcanic rocks or jade.

【0021】 The catalyst material used in the present invention is catalyst agent which provides another reaction path by a lower activation energy and is capable of accelerating the chemical reaction rate, and is the substance with the quality, composition and chemical properties

remaining unchanged before and after the chemical reaction. The catalyst material can be catalyst metal, such as gold, platinum, palladium, silver, iron, copper, titanium, nickel, tungsten, zinc, manganese, germanium, bismuth, ruthenium, osmium, iridium, molybdenum, praseodymium, neodymium, promethium or carbon nanotubes. The catalyst material can be oxidized metal catalyst, such as germanium oxide, zinc oxide, silicon oxide, titanium oxide, alumina, iron oxide, palladium oxide, magnesium oxide, zirconium oxide, nickel oxide, tin oxide, manganese oxide, Chromium oxide, cerium oxide, neodymium oxide or yttrium oxide.

【0022】 The natural plant essential oil used in the present invention can be tea tree oil, neem leave oil, lemon oil, methyl salicylate oil, camphor oil, clove oil, peppermint oil, eucalyptus citriodora oil, citronella oil, cubeb litsea oil, salvia officinalis oil, eucalyptus oil, rose oil, jasmine oil, geranium oil, rose geranium oil, ylang oil, frankincense oil, patchouli oil, rosemary oil, helichrysum oil, thyme oil, pine oil, cedar oil, cade oil, sandal wood oil, ocimum basilicum oil, lime oil, orange citrus sinensis oil, bitter orange oil, bitter orange leaf oil, orange flower oil, chamomile oil, myrrh oil, amaranth oil, white Melaleuca oil, ginger oil and so on.

【0023】 The flame retardant and fireproof material is antimony trioxide, magnesium hydroxide, red phosphorus, molybdenum compound, zinc borate, zinc stannate, decabromodiphenyl oxide, octabromo-ether, organic silicon or carbon black.

【0024】 The conductive antistatic material used in the present invention is polyether, quaternary ammonium salt, sulfonate, betaine, conductive carbon black, carbon fiber, metal fiber, nickel-plated metal carbon fiber or nano carbon tube.

【0025】 The basic characteristics of the environment-controlling fiber of the invention are that the material is mixing the polyolefin with optoelectronic materials, piezoelectric materials, thermoelectric materials and catalyst materials, adding rubber elastic material (such as Ethylene-Propylene-Diene Monomer, EPDM) whether or not determined by the ratio of each other material and the requirement of strength, by an air-cooled granulation equipment with twin-screw, the above materials were melted, mixed and granulated to be granular processing materials, and then melting the granular processing materials and drawing to be fibers each with Danni number of 50~50000den by a melt drawing processing technology. Wherein, the polyolefin may be polypropylene having a melt flow rate (MFR) in the range of 0.1~50g/10min, or may be polyethylene having a melt flow rate (MFR) in the range of 0.1~50g/10 min. The characteristic of the optoelectronic material is light storage ($0.3\sim0.32\text{ mcd/m}^2$), and whose particle size distributing at $10\text{nm}\sim0.1\mu\text{m}$. The piezoelectric material has the following characteristics: the piezoelectric coefficient is (10^{-12}C/N) 0.1~1000, and the particle size distributing at $10\text{nm}\sim0.1\mu\text{m}$. The characteristics of thermoelectric materials are: the emissivity of far-infrared ray with wavelength range of $4\sim14\mu\text{m}$ is 0.85~0.99%, and the particle size distribution is $10\text{nm}\sim0.1\mu\text{m}$. The EPDM has a Mooney viscosity (ML1 + 4, 125 degrees Celsius) of 20~70. As shown in Fig. 4, in a preferred embodiment, the surface of the fiber 10 is integrally formed with at least two ridges 11 viewed from the cross section of the fiber 10, the length of the ridges 11 extend along the axial direction of the fiber 10, the top of the ridges 11 extending in a curve, and the two ridges 11 are smoothly connected with a Curved depression 12. When the fiber

receive external sunlight, through the interactions of the optoelectronic material 30, piezoelectric material 31, thermoelectric material 32 and catalyst material 33, the sunlight will be converted to required color light for plant growth, the curvatures of the ridges 11 scatter the color light out to the plant to promote plant growth.

5 【0026】 As shown in Fig. 1, the basic characteristics of the method for producing the environment-controlling fiber to achieve the above-mentioned first to fourth objects of the present invention are mainly preparing polyolefin by weight of 70~95% as a base material, such as polypropylene chips or polyethylene chips (melt flow rate, MFR is in the range of 0.1~50g/10min) (the following corresponding examples of the present invention are preparing
10 polypropylene having a melt flow rate of 5g/10min and by weight ratio of 70 % or 80%), preparing optoelectronic material by weight ratio of 1~10% (the following examples of the present invention are exemplified the optoelectronic material by weight ratio of 10% and with particle size distribution of 0.3 μ m), preparing piezoelectric material by weight ratio of 1~5% (the following examples of the present invention are exemplified the piezoelectric material by weight
15 ratio of 2% and with particle size distribution of 1 μ m), preparing thermoelectric material by weight ratio of 1~5% (the following examples of the present invention are exemplified the thermoelectric material by weight ratio of 2% with particle size distribution of 1 μ m), preparing catalyst material by weight ratio of 1~5% (the following examples of the present invention are exemplified the catalyst material by weight ratio of 3% with particle size distribution of 0.3 μ m), and depending on requirement for the ductility, strength and hardness of the fiber to choose
20 whether to add rubber elastic material (such as Ethylene- Diene Monomer, EPDM) (the following examples of the present invention are illustrated by taking EPDM by weight ratio of 3% with Mooney viscosity of 60). The above-mentioned materials were melted and mixed by the air-cooled granulation equipment with twin-screw, and were granulated to be granular processing materials, and then melting the granular processing materials and drawing to be fibers each with
25 Danni number of 50~50000 den by a melt drawing processing technology, wherein the granulation temperature is 160~250 degrees Celsius in gradually increasing mode when using polypropylene as the base material, the granulation temperature is 260~350 degrees Celsius in gradually increasing mode when using polyethylene as the bas material, the plurality of granular processing materials were made with the average particle diameter less than 2~10 mm, and the plurality of granular processing materials are to be formed fibers by spinning, cooling, thermally stretching and heating through a single screw extruder. Wherein when the polypropylene is used as the base material, the spinning temperature is 160~250 degrees Celsius in gradually increasing mode, and when the polyethylene is used as base material, the spinning temperature is 160~350
30 degrees Celsius in gradually increasing mode, the later cooling temperature is 20~50 degrees Celsius, the drawing times rate is 3~8 times, the hot water extension temperature of 80~120 degrees Celsius, and the winding speed is 40~180 rpm. If polypropylene was used as base material in the embodiment of the present invention, the granulation temperature was gradually increased by 180/200/210/220/230/240 degrees Celsius, the fiber spinning temperature was gradually increased by 200/210/ 220/230/240/250 degrees Celsius, the cooling temperature was
40

25 degrees Celsius, the hot water extension temperature was 100 degrees Celsius, the drawing times ratio is 6 times and the winding speed is 120 rpm. The melt drawing processing technology is carried out by heating and melting the granular processing material, extruding it into the cooling water from the spinneret, cooling it in the cooling water and winding at a constant speed at the same time, then hot stretching and winding by several times of speed in hot water, at this stage of the processing of minimizing and solidifying the molten material at the same time resulting in the fiber formed, then winding the finished fiber.

【0027】 As shown in Fig. 2, the basic characteristics of the method for producing the environment-controlling fiber to achieve the above-mentioned fifth object of the present invention are mainly using polyolefin by weight of 65~94% as a base material (the following corresponding example of the present invention is preparing polypropylene having a melt flow rate of 5g/10 min and by weight ratio of 80%), using functional material by weight ratio of 5~25% including optoelectronic material by weight ratio of 1~5%, piezoelectric material by weight ratio of 1~5%, thermoelectric material by weight ratio of 1~5%, catalyst material by weight ratio of 1~5% and rubber elastic material by weight ratio of 1~5% (in one embodiment of the present invention, the optoelectronic material is by weight ratio of 2% with particle size distribution of 0.3 μ m, the piezoelectric material is by weight ratio of 2% with particle size distribution of 1 μ m, the thermoelectric material is by weight ratio of 2% with particle size distribution of 1 μ m, the catalyst material by weight ratio of 3% with particle size distribution of 0.3 μ m, and the rubber elastic material (EPDM) by weight ratio of 3% with Mooney viscosity of 60, i.e. the functional material is by weight ratio of 12% including optoelectronic material, piezoelectric material, thermoelectric material, catalyst material and EPDM), and using natural plant essential oils by weight ratio of 1~10% (the following corresponding test example of the present invention is preparing natural plant essential oils by weight ratio of 8%).

【0028】 As shown in Fig. 3, the basic characteristics of the method for producing the environment-controlling fiber to achieve the above-mentioned sixth object of the present invention are mainly using polyolefin by weight of 55~92% as a base material (the following corresponding example of the present invention is preparing polypropylene having a melt flow rate of 5g/10min and by weight ratio of 70%), using functional material by weight ratio of 5~25% including optoelectronic material by weight ratio of 1~5%, piezoelectric material by weight ratio of 1~5%, thermoelectric material by weight ratio of 1~5%, catalyst material by weight ratio of 1~5% and rubber elastic material by weight ratio of 1~5% (in one embodiment of the present invention, the optoelectronic material is by weight ratio of 2% with particle size distribution of 0.3 μ m, the piezoelectric material is by weight ratio of 2% with particle size distribution of 1 μ m, the thermoelectric material is by weight ratio of 2% with particle size distribution of 1 μ m, the catalyst material by weight ratio of 3% with particle size distribution of 0.3 μ m, and the rubber elastic material (EPDM) by weight ratio of 3% with Mooney viscosity of 60, i.e. the functional material is by weight ratio of 12% including optoelectronic material, piezoelectric material, thermoelectric material, catalyst material and EPDM), using natural plant essential oils by weight ratio of 1~5% (the following corresponding test example of the present invention is

preparing natural plant essential oils by weight ratio of 3%), using fireproof material by weight ratio of 1~10% with particle size distribution of 10nm~0.1 μ m (the following examples of the present invention are illustrated by using fireproof material by weight of 10%), and using the conductive antistatic material by weight ratio of 1~5% with particle size distribution of 10nm~0.1 μ m (the following examples of the present invention are illustrated by using the conductive antistatic material by weight ratio of 5%).

【0029】 In the first embodiment (Example 1) of the present invention, using polypropylene by weight ratio of 80% (melt flow rate is 5g/10 min), powder (particle size: 0.3 μ m) of optoelectronic material ($\text{Sr}_4\text{Al}_4\text{O}_{25}:\text{Eu}^{2+}, \text{Dy}^{3+}$) by weight ratio of 10%, powder (particle size 1 μ m) of piezoelectric material (barium titanate ceramic) by weight ratio of 2%, powder (particle size: 1 μ m) of thermoelectric material (containing Al_2O_3 by weight ratio of 35.92%, MgO by weight ratio of 33.86%, Fe_2O by weight ratio of 16.10%, TiO_2 by weight ratio of 12.26% and SiO_2 by weight ratio of 2.86%) by weight ratio of 2%, powder (particle size: 0.3 μ m) of catalyst material (containing gold by weight ratio of 30% / titanium oxide by weight ratio of 30% / zinc oxide by weight ratio of 40%) by weight ratio of 3% and EPDM (Mooney viscosity of 60) by weight ratio of 3%. The above-mentioned materials were kneaded by twin-screw with cooling air and granulated by granulation temperature of 180/200/210/220/230/240 degrees Celsius increasing gradually to produce a plurality of granular processing materials (with average particle size of about 5 mm), then the granular processing materials were mixed to be melt processing materials by a single screw at a mixing temperature of 200/210/220/230/240/250 by gradually increasing mode, and then the melt processing materials were made to be fibers by spinning, cooling at 25 degrees Celsius, hot-stretched at 100 degrees Celsius, and winding at 120 rpm. The results of the present invention are as followings.

【0030】 The tensile strength and tear strength test results of example 1 are shown in Table 1. The tensile strength is gradually decreased accompanying with the increase of the content quantity of the optoelectronic material, the piezoelectric material, the thermoelectric material, the catalyst material and the EPDM, but remains in the required tensile strength. The optoelectronic material, the piezoelectric material, the thermoelectric material, the catalyst material and the EPDM added in the example 1 of the present invention are preferably 20~30% by weight ratio (the total weight ratio is 20% for the example in Table 1). Light storage effect ($\text{Sr}_4\text{Al}_4\text{O}_{25}:\text{Eu}^{2+}, \text{Dy}^{3+}$ for emitting blue and green light with wavelength of 488nm) has an effectiveness lasting for 956 minutes. The effectiveness of uptake for chlorophyll and carotenoids is the highest at the wavelength of 400~520nm, and the photosynthesis is the most affected. The light with 610~720nm wavelength promotes photosynthesis and growth rate of plant (Such as $\text{CaAl}_2\text{O}_9:\text{Mn}^{4+}$ for emitting red light with wavelength of 656nm).

Mesh	Danni number(d)	tensile					tear strength(longitude/latitude)
50*50	200	57.5/50.5 (kgf/cm ²)					9.9/11.9 (kgf/cm ²)
Blue-Green light(488nm)/Sample 20g /after sunlight irradiation for 30 minutes							
Time(min)	0	10	30	60	120	956 (estimated brightness)	
Storage brightness	1850	122	32	18	5.6	0.32(mcd/m ²)	

【0031】 The results of the far-infrared ray emissivity test of Example 1 are shown in Table 2. In the far-infrared ray emissivity test, the average emissivity of the far-infrared ray with wavelength of 3-15 μ m at 50 degrees Celsius was 0.968. In the environment of 5 degrees Celsius, its average emissivity of far-infrared ray with wave length of 3-15 μ m was 0.918.

Test item	Test Temperature	Result	Test way
far-infrared ray 3-15 μ m average emissivity	50 $^{\circ}$ C	0.968	Infrared thermal radiometer, heat and electric coupling
	5 $^{\circ}$ C	0.918	

【0032】 The results of the far-infrared experiment of Example 1 are described in Table 3. The far-infrared human physiological experiment of the fabricated woven fabric of the present invention was carried out and the temperature was raised to 2.9 degrees Celsius after 30 minutes on a health care fabric.

Test item		Result $^{\circ}$ C	
Blood flow of back of body	Before usage	34.8	* Human Physiology Experiment (1) Ambient temperature: room temperature. (2) Subject: Male, 30 years old, 1 person. (3) Test time: Adaptation period: 20 minutes (before using sample) Test period: 30 minutes (after using sample) (4) Subjects posture: Same postures at adaptation and test periods. (5) Measuring point: the center of the back * Measuring instrument (1) Laser flow imaging instrument: Moor Doppler Imager(LDI-V5.0) (2) Infrared digital thermal imager: Thermal Infrared-Ray digital camera
	After sleeping on the sample for 30 mins	45.7	
	Difference amount (%)	31.3	
Temperature of back of body test by infrared thermal image	Before usage	28.6	
	After sleeping on the sample for 30 mins	31.5	
	Difference amount (%)	10.1%	

10 【0033】 The results of the negative ion experiments of Example 1 are shown in Table 4. The test was carried out with the woven fabric of the present invention, and 2858 anions (number/cc) in the air were increased under dynamic friction.

Test item	result		Test way
	Blank value	Sample	
negative ion (number/cc)	400	3258	ITC-201A-temperature:20 $^{\circ}$ C; humidity:65%RH; Friction way: rotation speed: 400rpm/min

15 【0034】 The results of the washing fastness test of Example 1 are shown in Table 5. The washing fastness test showed good fastness before and after the test, and the amount of negative ions was not reduced by washing.

Test item	Sample	Result	Test way
After washed 20 times: Dynamic-Average negative ion concentration	1	2896(Ions/cc)	Sample size=10*10 CM (1 Sheet) Wind speed: 5.15CMM(182CFM); ICMM(M ³ /min)=35.3CFM Negative ion release number analyzer (INTL: ITC-201A) Test object: relative negative ion content Test way for ion number: ion dynamic conversion method Time of determination of detection: 0.25sec/1cycle Test conditions: Temperature 25 $^{\circ}$ C Humidity 72% RH Water washing method: AATCC61-A2, washed 20 times
	2	2988(Ions/cc)	
	3	2796(Ions/cc)	
	4	3258(Ions/cc)	
	5	2968(Ions/cc)	
	6	3568(Ions/cc)	

【0035】 The results of the test for the removal of contaminants by the fabric of Example 1

are shown in Table 6, Table 7 and Table 8. Test way: test at the both sides of the fabric which are the inlet and outlet respectively in an air channel, the size of the frame of the sample fabric is 24" * 24" * 2", the area of the sample fabric is 1M² (4 fabric sheets stacked and the area of each sheet is 1M²), Wind speed is 1M/S, temperature is 26 degrees Celsius, and humidity is 62% RH.

- 5 【0036】 The total volatile organic Compound (TVOCS) removal test results in Example 1 are shown in Table 6.

Test No.	TVOCS					
	n-Hexane	Benzene	Toluene	Hexamethyl cyclotrisiloxane	Octamethylcyclotetrasiloxane	
Conc.	ug/m ³	ug/m ³	ug/m ³	ug/m ³	ug/m ³	
CAS NO.	000110-54-3	000071-43-2	000108-88-3	000541-05-9	000556-67-2	
1	Inlet	15.6	17.7	183.0	20.2	15.1
	Outlet	0	0	34.6	0	0
	Eff.(%)	100%	100%	81%	100%	100%
2	Inlet	13.5	19.7	175.0	21.2	18.5
	Outlet	0	0	22.4	0	0
	Eff.(%)	100%	100%	87%	100%	100%
3	Inlet	32.9	26.9	179.0	27.7	29.7
	Outlet	0	0	23.1	0	0
	Eff.(%)	100%	100%	87%	100%	100%

- 【0037】 The results of the indoor air quality (contaminant removal test) of Example 1 are shown in Table 7. The test equipment is referred to Table 7-1.

Test No.	Contaminant removal test 1						
	CO ₂	CO	O ₃	TVOC	HCHO	RH	
Unit	ppm	ppm	ppm	ppm	ppm	%	
1	Inlet	558	0.8	0.09	0.658	0.025	65
	Outlet	482	0.3	0.02	0.288	0.015	64
	Eff.(%)	13.6%	62.5%	77.8%	56.2%	40.0%	1.5%
2	Inlet	649	0.8	0.09	0.636	0.028	62
	Outlet	565	0.2	0.03	0.288	0.015	64
	Eff.(%)	12.9%	75.0%	66.7%	54.7%	46.4%	-3.2%
3	Inlet	576	0.8	0.09	0.668	0.032	64
	Outlet	514	0.2	0.02	0.276	0.015	65
	Eff.(%)	10.8%	75.0%	77.8%	58.7%	53.1%	-1.6%
Test No.	Contaminant removal test 2						
	Temp	PM ₁₀	PM _{2.5}	Bacteria	Fungi		
1	Inlet	26.5	97	38	1617	153	
	Outlet	26.4	73	15	33	17	
	Eff.(%)	0.4%	24.7%	60.5%	98.0%	88.9%	
2	Inlet	27.4	93	42	1708	185	
	Outlet	27.3	66	16	83	25	
	Eff.(%)	0.4%	29.0%	61.9%	95.1%	86.5%	
3	Inlet	27.4	59	66	1008	127	
	Outlet	27.2	43	20	17	8	
	Eff.(%)	0.7%	27.1%	69.7%	98.3%	93.7%	

Item	Analyzer Model	Resolution	Range
CO ₂	PPMonitor SAS	1 ppm	0~5000ppm
CO	PPMonitor SAS	0.1 ppm	0~100ppm
O ₃	PPMonitor SAS	0.01 ppm	0~1ppm
TVOC	ppb RAE+PGM-7240	10 % of reading or 20ppb	0~9999 ppb
HCHO	PPMonitor SAS	0.001ppm	0~10ppm
RH	PPMonitor SAS	0.01%	0-100%
Temp	PPMonitor SAS	0.01□	-40°C to 128°C
PM ₁₀	TSI 8520 DustTrak	±0.1 % of reading or ± 0.001 mg/ m ³	0.001 ~ 100mg/m ³
PM _{2.5}	TSI 8520 DustTrak	±0.1 % of reading or ± 0.001 mg/ m ³	0.001 ~ 100mg/m ³
Bacteria	BURKARD	N/A	N/A
Fungi	BURKARD	N/A	N/A

【0038】 Table 8 shows the results of the test for the positive and negative ion contaminant removal efficiency in air for the Example 1.

Test No.	Unit	Cation & Anion					
		F ⁻	Cl ⁻	NO ₃ ⁻	PO ₄ ³⁻	SO ₄ ²⁻	NH ₄ ⁺
1	Inlet	0.135	0.212	0.39	<0.012	0.349	6.84
	Outlet	<0.012	0.067	0.043	<0.012	0.132	5.47
	Eff.(%)	100.0%	68.4%	89.0%	N/A	62.2%	20.0%
2	Inlet	0.135	0.15	0.112	<0.012	0.287	6.71
	Outlet	<0.012	0.054	0.011	<0.012	0.112	5.32
	Eff.(%)	100.0%	64.0%	90.2%	N/A	61.0%	20.7%
3	Inlet	0.135	0.221	0.84	<0.012	0.271	6.23
	Outlet	<0.012	0.081	0.058	<0.012	0.063	5.11
	Eff.(%)	100.0%	63.3%	93.1%	N/A	76.8%	18.0%

【0039】 Table 9 shows the Antibacterial test results of Example 1 which has the 5 Antibacterial rate of 99.9% (R%).

Test way: ASTM E2149-01			
Bacteria	Number of Bacteria after 0 hour(CFU/ml)	Number of Bacteria after 1 hour(CFU/ml)	Antibacterial rate (%)
Klebsiella pneumoniae	3.2×10 ⁵	<5.0	99.9
Veterans	2.8×10 ⁵	<5.0	99.9
Escherichia coli	3.5×10 ⁵	<5.00	99.9
Staphylococcus aureus	5.6×10 ⁵	<5.0	99.9
Resistant Staphylococcus aureus(MRSA)	2.1×10 ⁵	<5.0	99.9
Pseudomonas aeruginosa	5.2×10 ⁵	<5.0	99.9
Bacillus subtilis	3.6×10 ⁵	<5.0	99.9

【0040】 Table 10 shows the mildew test results.

Test item and way for mildew	Degree	Status and degree of growth of bacteria on the sample	Way of judge
JIS Z2911	Degree	Growth status of Sample	Degree: status of growth
Aspergillus niger	0	No growth	0: No growth
Bulb shell	0	No growth	1: Growth not over 1/3 area
Cercospora	0	No growth	2: Growth over 2/3 area
Penicillium	0	No growth	
White ringworm	0	No growth	

【0041】 In the second embodiment (Example 2) of the present invention, using

polypropylene by weight ratio of 80% (melt flow rate is 5g/10 min), powder (particle size: 0.3 μ m) of optoelectronic material (Sr₄Al₁₄O₂₅: Eu²⁺, Dy³⁺) by weight ratio of 2%, powder (particle size 1 μ m) of piezoelectric material (barium titanate ceramic) by weight ratio of 2%, powder (particle size: 1 μ m) of thermoelectric material (containing Al₂O₃ by weight ratio of 35.92%, MgO by weight ratio of 33.86%, Fe₂O by weight ratio of 16.10%, TiO₂ by weight ratio of 12.26 % and SiO₂ by weight ratio of 2.86 %) by weight ratio of 2%, powder (particle size: 0.3 μ m) of catalyst material (containing gold by weight ratio of 30% / titanium oxide by weight ratio of 30% / zinc oxide by weight ratio of 40%) by weight ratio of 3%, EPDM (Mooney viscosity of 60) by weight ratio of 3%, and plant essential oil material (containing Eucalyptus oil by weight ratio of 20%, lemon oil by weight ratio of 30% and tea tree oil by weight ratio of 50%) by weight ratio of 8%. The above-mentioned materials were kneaded by twin-screw with cooling air and granulated by granulation temperature of 180/200/210/220/230/240 degrees Celsius increasing gradually to produce a plurality of granular processing materials (with average particle size of about 5 mm), then the granular processing materials were mixed to be melt processing materials by a single screw at a mixing temperature of 200/210/220/230/240/250 by gradually increasing mode, and then the melt processing materials were made to be fibers by spinning, cooling at 25 degrees Celsius, hot-stretched at 100 degrees Celsius, and winding at 120 rpm.

【0042】 Table 11 shows the physical properties of the fabric of Example 2.

Mesh	Danni number (d)	Area of Sample	Weight of sample
50*50	200	1m ²	98g

20 【0043】 Table 12 shows the test results of avoidance rate for the dust mite for Example 2 which having the avoidance rate of 90.3%.

Test item	Result		Test way
	Control group	Control group	
European dust mites	1	2015	JIS L1920: 2007 Avoidance test Invasion prevent way
	2	1897	
	3	1998	
	4	1975	
	5	1895	
	Average	1956	
	Avoidance rate (%)	90.3%	

25 【0044】 Table 13 shows the test results of the measurement of the essential oil component by gas chromatography mass spectrometer (GC/MS) for Example 2. The sample was positioned in 1 cubic meters of closed box and processed with test operation for 1 hour. Then we obtained the result of the essential oil component shown in Table 13. The test method is by the gas chromatography mass spectrometer (GC/MS).

NO.	Compounds	CAS NO.	Test result	Test limit	Unit
1	α -terpinen	000099-86-5	21.30	1	mg/kg
2	terpinen-4-ol	0000562-74-3	212.58	1	mg/kg
3	α -Pinene	000080-56-8	46.25	1	mg/kg
4	1,2,4-Trimethylbenzene	000095-63-6	1.20	1	mg/kg
5	γ -Terpinen	000099-85-4	386.75	1	mg/kg
6	Ethylbenzene	000100-41-4	2.05	1	mg/kg
7	terpinolene	000586-62-9	9.88	1	mg/kg
8	n-Decane	000124-18-5	3.56	1	mg/kg
9	β - Pinene	000127-91-3	12.50	1	mg/kg
10	Limonene	000138-86-3	288.16	1	mg/kg
11	α -Cedrene	000469-61-4	18.90	1	mg/kg
12	Thujopsene	000470-40-6	12.39	1	mg/kg
13	1,8-Cineole	000470-82-6	298	1	mg/kg
14	n-Undecane	001120-21-4	2.68	1	mg/kg
15	4-methyl-Decane	002847-72-5	2.01	1	mg/kg
16	α - Thujene	002867-05-2	1.01	1	mg/kg
17	γ -Muurolene	030021-74-0	5.67	1	mg/kg
18	Benzene,1-methyl-4-	000535-77-3	25.56	1	mg/kg

【0045】 Table 14 shows the results of the analysis of pollutant removal in air for Example 2. The sample with area of 1m^2 was positioned in 1m^3 closed space under 6.5 CMM air volume for the test of removal number of contaminant per minute.

Item (in the air)	Sample	Air volume	Removal number/min	Unit	Test way
Total carbon monoxide concentration	1m^2	6.5CMM	68	ppm	JEM1467
Total carbon dioxide concentration	1m^2	6.5CMM	50	ppm	JEM1467
Total ozone concentration	1m^2	6.5CMM	0.4	ppm	JEM1467
Total acetic acid concentration	1m^2	6.5CMM	125	ng	JEM1467
Total formaldehyde concentration	1m^2	6.5CMM	350	ng	JEM1467
Total acetaldehyde concentration	1m^2	6.5CMM	250	ng	JEM1467
Total ammonia concentration	1m^2	6.5CMM	15.6	ng	JEM1467
Total volatile organic compounds	1m^2	6.5CMM	450	ng	JEM1467
Total suspended particulates ($10\mu\text{m}$)	1m^2	6.5CMM	1.35	mg/m ³	JEM1467
Total suspended particulates ($2.5\mu\text{m}$)	1m^2	6.5CMM	1.98	mg/m ³	JEM1467
Total bacterial concentration	1m^2	6.5CMM	16	CFU/m ³	JEM1467
Total fungal concentration	1m^2	6.5CMM	18	CFU/m ³	JEM1467

【0046】 In the third embodiment (Example 3) of the present invention, using 5 polypropylene by weight ratio of 80% (melt flow rate is 5g/10min), powder (particle size: $0.3\mu\text{m}$) of optoelectronic material ($\text{Sr}_4\text{Al}_4\text{O}_{25}$: Eu^{2+} , Dy^{3+}) by weight ratio of 2%, powder (particle size $1\mu\text{m}$) of piezoelectric material (barium titanate ceramic) by weight ratio of 2%, powder (particle size: $1\mu\text{m}$) of thermoelectric material (containing Al_2O_3 by weight ratio of 35.92%, MgO by weight ratio of 33.86%, Fe_2O by weight ratio of 16.10%, TiO_2 by weight ratio of 12.26 % and 10 SiO_2 by weight ratio of 2.86 %) by weight ratio of 2%, powder (particle size: $0.3\mu\text{m}$) of catalyst material (containing gold by weight ratio of 30% / titanium oxide by weight ratio of 30% / zinc

oxide by weight ratio of 40%) by weight ratio of 3%, EPDM (Mooney viscosity of 60) by weight ratio of 3%, plant essential oil material (containing Eucalyptus oil by weight ratio of 20%, lemon oil by weight ratio of 30% and tea tree oil by weight ratio of 50%) by weight ratio of 3%, fireproof materials with particle size about 0.5 μ m (containing magnesium hydroxide by weight ratio of 90% and Antimony trioxide by weight ratio of 10%) by weight ratio of 10%, and conductive antistatic materials with average particle diameter about 0.2 μ m (conductive carbon black) by weight ratio of 5%. The above-mentioned materials were kneaded by twin-screw with cooling air and granulated by granulation temperature of 180/200/210/220/230/240 degrees Celsius increasing gradually to produce a plurality of granular processing materials (with average particle size of about 5mm), then the granular processing materials were mixed to be melt processing materials by a single screw at a mixing temperature of 200/210/220/230/240/250 by gradually increasing mode, and then the melt processing materials were made to be fibers by spinning, cooling at 25 degrees Celsius, hot-stretched at 100 degrees Celsius, and winding at 120 rpm.

15 【0047】 Table 15 shows the test results of toxic gas content for Example 3 which meet the requirements. The Toxic Gas value of this report refers to the toxic gas content produced by the combustion test for 4 minutes. ABD0031 (2005) ISSUE compliances F requirements which is tested by Detection tube and measured to have the result with HF<100, HCl<150, HCN<150, SO₂<100, XO₂<100 and CO<1000.

Sample item	Sample Size (mm) (L*W*T)	Toxic gas (ppm)					
		HCl	HF	SO ₂	XO ₂	HCN	CO
Sample-1	75.0*74.0*2.80	1	0	0	2	1	300
Sample-2	75.0*75.0*2.51	1	0	0	1	1	200
Sample-3	73.0*75.0*2.48	0.5	0	0	2	2	250
Average		0.8	0	0	1.7	1.3	250.0

20 【0048】 Table 16 shows the results of Horizontal Combustion Test for Example 3 which compliance with the requirement (referring to FAR 25.853 (b), (Amdt.25-116, 2004) & Appendix F Par I (a) (1) (ii)). Flame time is less than or equal to 15 Secs, Drip flame time is less than or equal to 5 Secs; Burn length is less than or equal to 8 inches (203.2mm).

Sample item	Sample Size (mm)(L*W*D)	Combustion status					
		Flame time (sec)	Average (sec)	Drip flame time (sec)	Average (sec)	Burn length in(mm)	Average in(mm)
Sample-1	305.0*76.0*3.28	0	0	0	0	5(127.0)	4(114.3)
Sample-2	305.0*76.0*3.44	0		0		4(114.3)	
Sample-3	305.0*76.0*3.15	0		0		4(101.6)	

25 【0049】 Table 17 shows the results of the vertical combustion test for Example 3 which meet the requirements (referring to Appendix F Amdt.25-111 of FAR 25.853, Te(10))

= $te(11.5)-te(1.5)$).

Sample Item	Sample Size (mm)(L*W*D)	Flame status						
		te(1.5) (sec)	te(11.5) (sec)	te(10) (sec)	te(f) (sec)	d(f) (in) (mm)	Burn speed (in/min) (mm/min)	Average in(mm) (mm/min)
Sample1	305.0*76.0*3.77	0	0	0	0	1/42	0	0
Sample2	305.0*76.0*3.02	0		0		1/4	0	
Sample3	305.0*76.0*2.56	0		0		1/4	0	

5 **【0050】** Table 18 shows the test results Smoke concentration for Example 3 which show Compliance. D_m is the maximum value of the measured smoke concentration for the sample within 4 minutes test. ABD0031 (2005) issues F regulatory requirements that the maximum smoke concentration within 4 minutes of test time in flame or flawless test conditions should not exceed the gauge values listed in Table 19.

Sample item	Sample Size (mm)(L*W*D)	Test result		
		Test value (D_m)	Average (D_m)	Time of Maximum D_m
Sample-1	74.0*75.0*2.29	22	19	4'00''
Sample-1	73.0*73.0*2.96	17		4'00''
Sample-1	75.0*73.0*2.99	18		3'58''

Test components	D_m
Airducting	100

10 **【0051】** Table 20 shows the result of antistatic test for Example 3 which shows $R=5.8 \times 10^3 \Omega$.

Test item	Result	Test way and condition
Antistatic test -Surface Resistivity	$R=5.8 \times 10^3 \Omega/cm$	EN 1149-2:1996

15 **【0052】** The embodiments as described above are only possible embodiments of the present invention, which are not intended to limit the scope of the invention, and where equivalents are made will meet the contents, features and spirit of the invention as set forth in the following claims. The present invention is specifically defined in the structural features of the claims, which is not found in the prior arts, and has practicality and progress to be allowable for patent.

NUMBERED ELEMENTS

【0053】 fiber 10; ridge 11; curved depression 12; fabric 20; optoelectronic material 30; piezoelectric material 31; thermoelectric material 32; catalyst material 33.

WHAT IS CLAIMED IS:

1. A method for manufacturing environment-controlling fibers comprising the steps of:

preparing a specific amount of processing material including a specific amount of polyolefin as a base material, a specific amount of optoelectronic material, a specific amount of piezoelectric material, a specific amount of thermoelectric material and a specific amount of catalyst material;

melting and mixing the specific amount of processing material to be a specific amount of granular processing material; and

melting and drawing the specific amount of granular processing material to obtain the fibers, so that the optoelectronic material can receive energies outside the fibers to produce optoelectronic effect, the piezoelectric material can receive energies outside the fibers to produce piezoelectric effect, the thermoelectric material can receive energies outside the fibers to produce thermoelectric effect, and the catalyst material can be resonated by the optoelectronic effect, the thermoelectric effect and the piezoelectric effect to increase amplitudes of the energies so as to increase the catalysis activity of the catalyst material.

2. The method as claimed in claim 1, wherein the specific amount of polyolefin is by weight ratio of 70~95% having a melt flow rate of 5g/10min; the specific amount of optoelectronic material is by weight ratio of 1%~10%; the specific amount of piezoelectric material is by weight ratio of 1%~5%, the specific amount of thermoelectric material is by weight ratio of 1%~5% and the specific amount of catalyst material is by weight ratio of 1%~5%; the specific amount of processing material further includes a specific amount of rubber elastic material, and the specific amount of rubber elastic material is by weight ratio of 1%~5%.

3. The method as claimed in claim 1, wherein the specific amount of processing material further includes amount of natural plant essential oil by weight ratio of 1~10% and amount of rubber elastic material by weight ratio of 1~5%; the specific amount of polyolefin is by weight ratio of 65~94% having a melt flow rate of 5g/10min; the specific amount of optoelectronic material is by weight ratio of 1~5%; the specific amount of piezoelectric material is by weight ratio of 1~5%, the specific amount of thermoelectric material is by weight ratio of 1~5% and the specific amount of catalyst material is by weight ratio of 1~5%.

4. The method as claimed in claim 1, wherein the specific amount of processing material further includes amount of natural plant essential oil by weight ratio of 1~5%, amount of fireproof material by weight ratio of 1~10%, amount of conductive antistatic material by weight ratio of 1~5% and amount of rubber elastic material by weight ratio of 1~5%; the specific amount of polyolefin is by

weight ratio of 55~92%; the specific amount of optoelectronic material is by weight ratio of 1~5%; the specific amount of piezoelectric material is by weight ratio of 1~5%, the specific amount of thermoelectric material is by weight ratio of 1~5% and the specific amount of catalyst material is by weight ratio of 1~5%.

5 5. The method as claimed in claim 4, wherein the fireproof material is selected at least one from the group consisting of magnesium hydroxide, antimony trioxide, red phosphorus, molybdenum compounds, zinc borate, zinc stannate, decabromodiphenyl oxide, octabromo-ether, organic silicone and carbon black; the conductive antistatic material is selected from the group consisting of
 10 conductive carbon black, polyether, quaternary ammonium salt, sulfonate, betaine, carbon fiber, metal fiber, nickel-plated metal carbon fiber and nano carbon nanotube.

6. The method as claimed in any one of claims 1 to 5, wherein the polyolefin material is selected from the group consisting of polypropylene and polyethylene; the optoelectronic material is selected at least one from the group consisting of Zn_2SiO_4 , $CaSiO_3$, SiO_2 , TiO_2 , $(SrBaMg)_3Si_2O_7$, $CaWO_4$, $MgWO_4$, $LiAl_5O_8:Mn^{4+}$, $CaAl_2O_4:Eu^{2+}, Dy^{3+}$, $CaAl_{12}O_{19}:Mn^{4+}$, $SrAl_2O_4:Eu^{2+}, Dy^{3+}$,
 15 $Sr_4Al_{14}O_{25}:Eu^{2+}, Dy^{3+}$, $SrAl_{12}O_{19}:Eu^{2+}, Dy^{3+}$, $BaMg_2Al_{16}O_{27}$, $CeMgAl_{11}O_{19}$, $MgAl_2O_4$, $GdAlO_3$, Y_2O_3 , YVO_4 , SrB_4O_7F , $MgGa_2O_4$, BeO , MgO , Al_2O_3 , GeO_2SnO_2ZnO , Sc_2O_3 , La_2O_3 , Sm_2O_3 , Gd_2O_3 , Dy_2O_3 , ZrO_2 , CdS and WO_3 ; the piezoelectric material is selected at least one from the group consisting of quartz, cadmium sulfide, zinc oxide, aluminum nitride, ferroelectric crystal, barium titanate crystal, lithium niobate, tantalum niobate, barium niobate crystal, potassium dihydrogen phosphate,
 20 ammonium dihydrogen phosphate, lead hydrogen phosphate, deuterium lead phosphate, bismuth titanate crystals, barium titanate ceramics, lead zirconate titanate (PZT); the thermoelectric material is selected at least one from the group consisting of Al_2O_3 , ZrO_2 , MgO , TiO_2 , SiO_2 , ZrC , SiC , B_4C , TaC , TiB_2 , ZrB_2 , CrB_2 , $TiSi_2$, $MoSi_2$, WSi_2 , Si_3N_4 , Fe_2O , bamboo charcoal, prepared long charcoal, Maifan stone, Guiyang stone, volcanic rocks and jade; the catalyst material is selected at least one
 25 from the group consisting of gold, platinum, palladium, rhodium, Copper, titanium, tungsten, zinc, manganese, germanium, bismuth, ruthenium, iridium, molybdenum, chromium, lanthanum, cerium, praseodymium, neodymium, Promethium, carbon nanotubes, germanium oxide, zinc oxide, Titanium, alumina, iron oxide, palladium oxide, magnesium oxide, zirconium oxide, nickel oxide, tin oxide, manganese oxide, chromium oxide, cerium oxide, neodymium oxide and yttrium oxide.

30 7. Fibers manufactured by the method as claimed in claim 1 containing the polyolefin, the optoelectronic material for receiving energies outside the fibers to produce optoelectronic effect, the piezoelectric material for receiving energies outside the fibers to produce piezoelectric effect, the

thermoelectric material for receiving energies outside the fibers to produce thermoelectric effect, and the catalyst material being resonated by the optoelectronic effect, the thermoelectric effect and the piezoelectric effect to increase amplitudes of the energies so as to increase the catalysis activity of the catalyst material.

5 8. Fibers as claimed in claim 7, wherein the fibers each has the Danni number of 50~50000den.

9. Fibers as claimed in claim 7, wherein the fibers each is integrally formed with at least two ridges viewed from a cross section of the fiber, a length of each ridge extends along an axial direction of the fiber, a top of each ridge extends in a curve.

10 10. A fabric made by the fibers as claimed in claim 7, the fabric is selected from the groups
10 consist of a fabric used by greenhouse of farming industry for controlling environment by natural green energies, a fabric used by factory of farming industry for controlling environment by natural green energies, a fabric to be light gratings for planting, a fabric for human life, a fabric for health cares, a fabric for promoting the quality of indoor air, a fabric for filtering fumes, a fabric to be geotextile for planting, a fabric for removing fog, a fabric for cleaning air, and a fabric for
15 controlling environmental pollution.

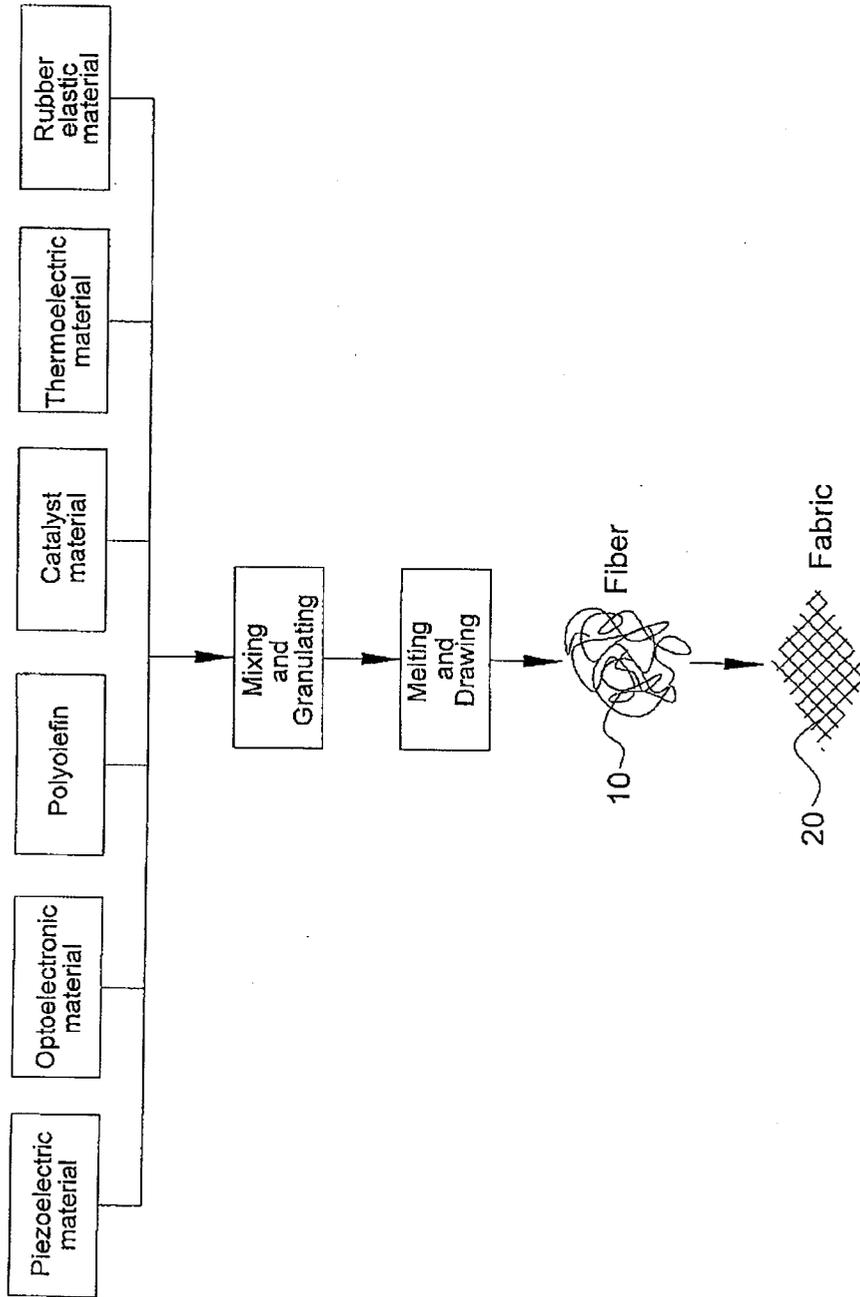


FIG.1

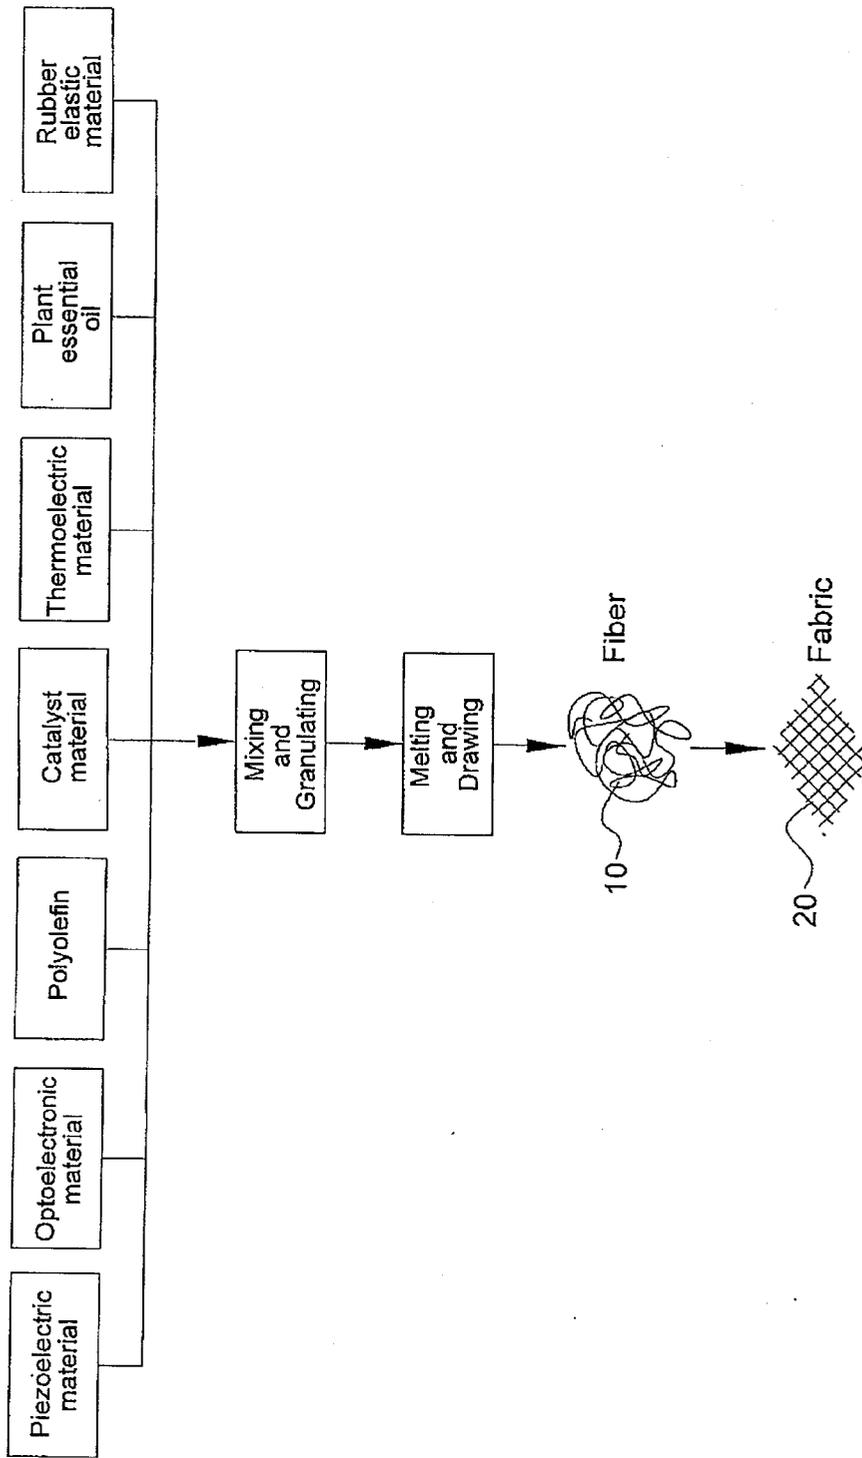


FIG.2

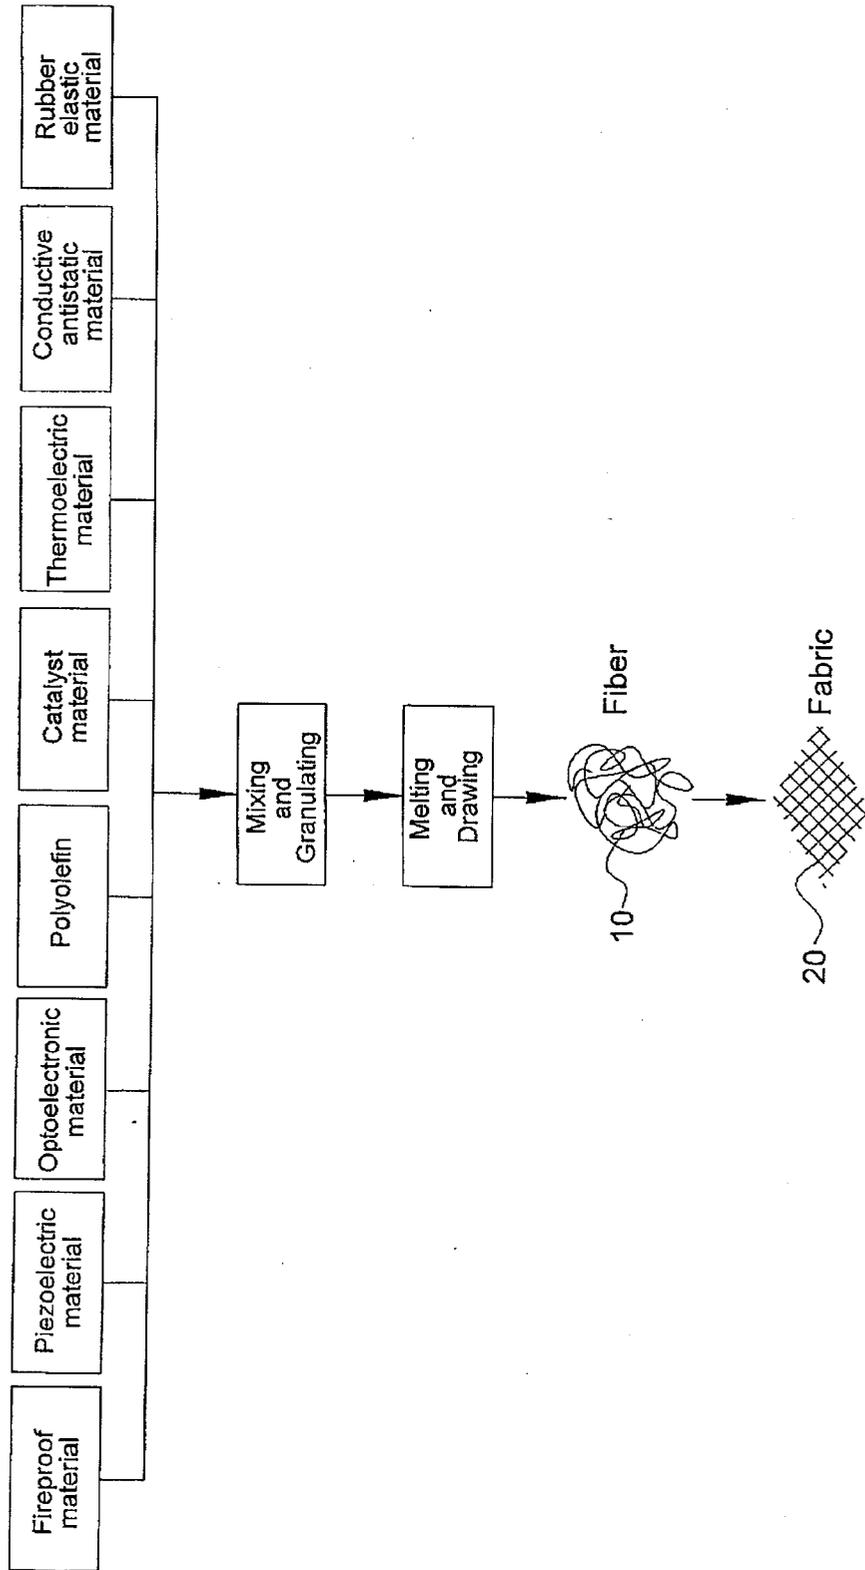


FIG.3

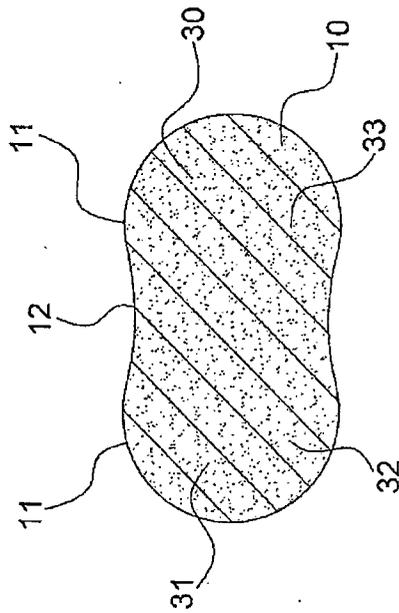


FIG. 4

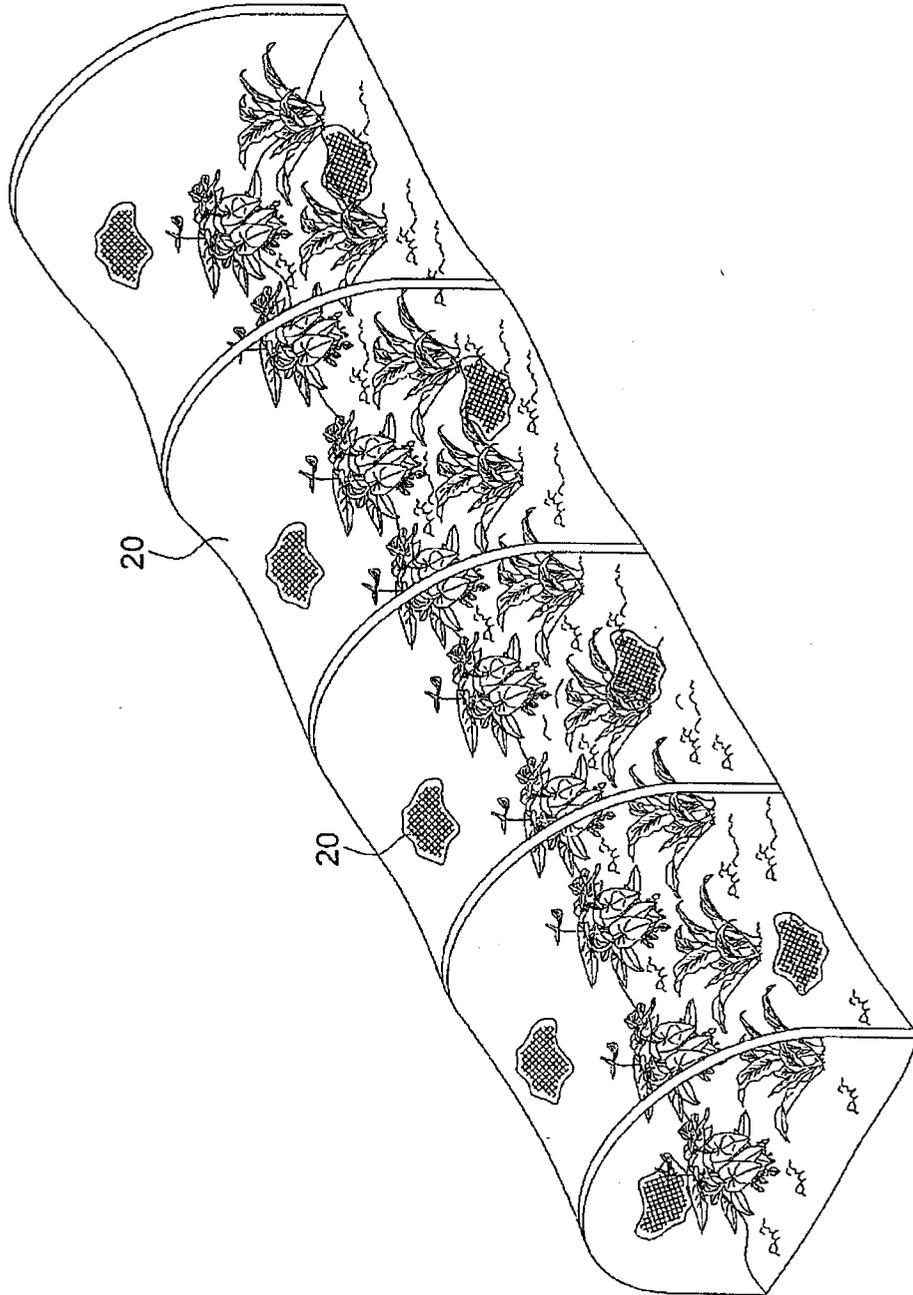


FIG.5

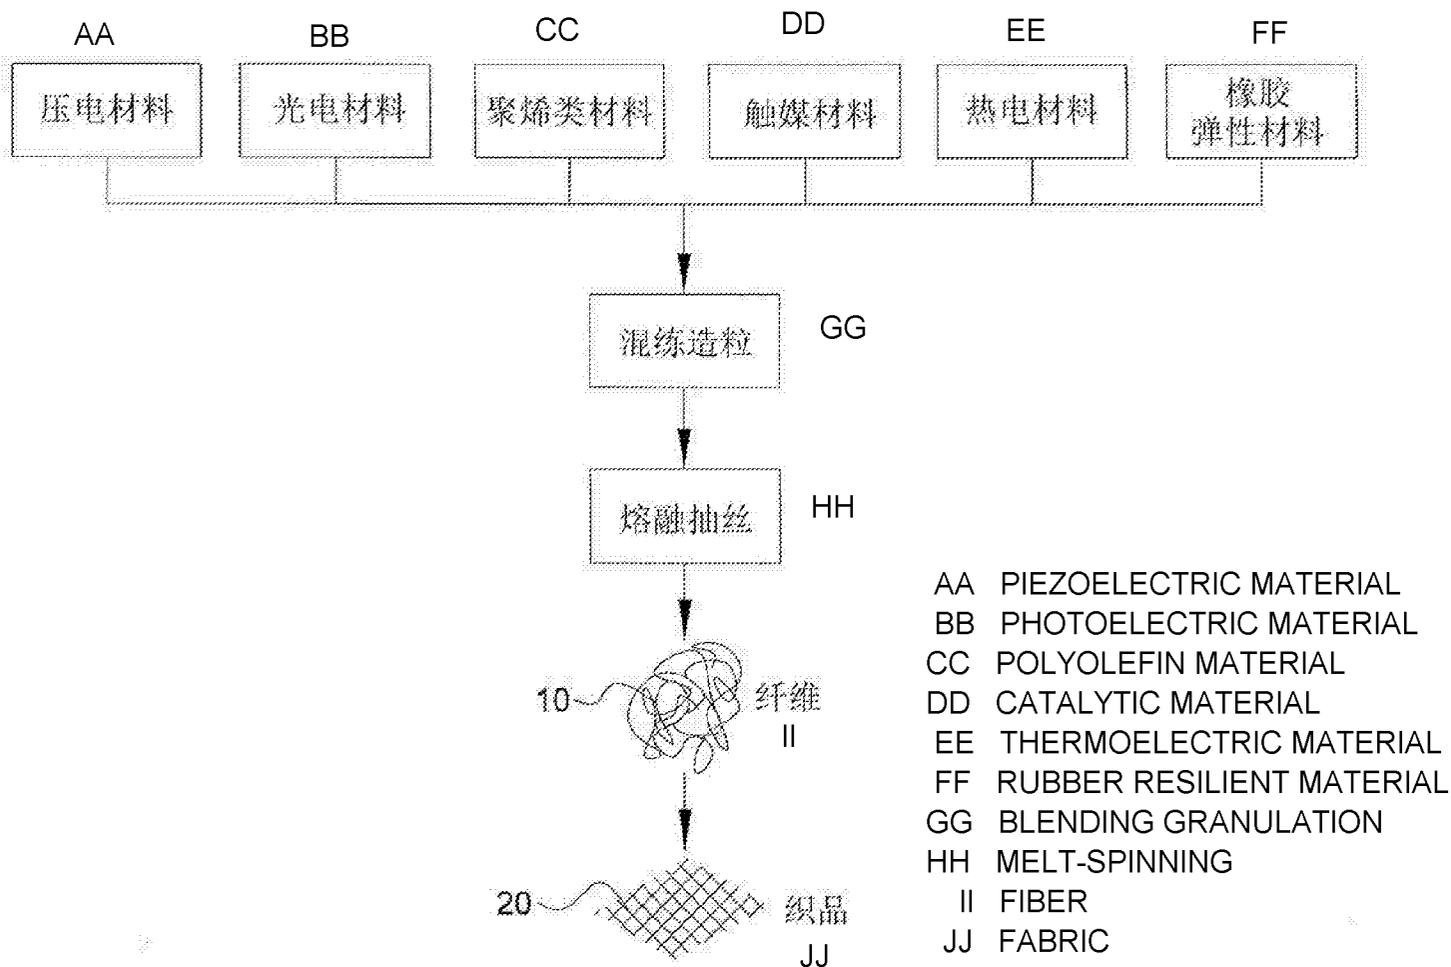


图1 / FIG. 1