



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C08G 63/48, B32B 15/08	A1	(11) International Publication Number: WO 93/20123 (43) International Publication Date: 14 October 1993 (14.10.93)
(21) International Application Number: PCT/US93/02677 (22) International Filing Date: 6 April 1993 (06.04.93) (30) Priority data: 07/862,983 6 April 1992 (06.04.92) US (71) Applicant: COURTAULDS PERFORMANCE FILMS [US/US]; State Road 683, Whitby Acres, Fieldale, VA 24089 (US). (72) Inventors: GARDESKI, Thomas, F. ; 1259 East Louis Way, Tempe, AZ 85284 (US). NOVAK, Diane, G. ; 16935 East Redfield Road, Gilbert, AZ 85234 (US).		(74) Agents: FARBER, Michael, B. et al.; Sheldon & Mak, 10990 Wilshire Boulevard, Suite 440, Los Angeles, CA 90024 (US). (81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: A HIGH PERFORMANCE EPOXY BASED LAMINATING ADHESIVE (57) Abstract A process for producing an improved three-dimensional polymeric adhesive material comprises: (1) reacting a starting polymer containing an active hydrogen or hydroxy function with a polyfunctional nucleophile to form an adduct product; and (2) reacting the adduct product with a polyelectrophile to generate a three-dimensional polymeric adhesive material. Preferably, the starting polymer is a high molecular weight polyester, the polyfunctional nucleophile is a polyisocyanate, and the polyelectrophile is at least one polyepoxide. The present invention also encompasses processes for bonding at least two substrates by generating the adhesive material between them, as well as the adhesive material itself. The invention is particularly suitable for bonding electronic components such as printed circuit boards.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

A HIGH PERFORMANCE EPOXY BASED LAMINATING ADHESIVECROSS-REFERENCES

This application is a continuation-in-part of Application Serial No. 07/483,266, by Thomas F. Gardeski and Diane G. Novak, filed February 15, 1990, which is, in turn, a continuation of Application Serial No.

5 07/153,141, by Thomas F. Gardeski and Diane G. Novak, filed February 8, 1988, and now abandoned, both of which are also entitled "A High Performance Epoxy Based Laminating Adhesive." These two applications are hereby incorporated in their entirety by this reference.

10

BACKGROUND OF THE INVENTION

This invention is directed to three-dimensional polymeric adhesive materials and methods for producing
15 such materials.

During the past quarter century, the rapid growth of the electronic circuits industry has resulted in the development of higher performance construction
20 materials. However, the development of high performance adhesive materials and systems to bond the construction materials together has not kept pace. This lack of higher performance adhesive materials is particularly

felt in the assembly of electronic components for use in severe environmental conditions, such as under-the-hood automotive and military applications. Adhesive materials and systems that are currently available meet some of the requirements for such properties as peel strength, chemical resistance, moisture resistance, high temperature stability, dimensional stability, especially in the Z-axis direction, and ease of processing. However, these materials and systems typically fail to meet one or more of these requirements. Therefore, a need exists for an adhesive material that meets all of the requirements for use under severe environmental conditions while retaining ease of application.

15

SUMMARY

We have developed a three-dimensional adhesive material and a process for preparing it that meets these needs and provides an improved adhesive for use under severe environmental conditions, particularly in the assembly of electronic components.

One aspect of the present invention is a process for producing a three-dimensional polymeric adhesive material. The process comprises:

(1) reacting a starting polymer containing an active hydrogen or hydroxy function with a polyfunctional nucleophile to form an adduct product; and

(2) reacting the adduct product with a polyelectrophile to generate a three-dimensional polymeric adhesive material.

5 The starting polymer can contain an active hydrogen and have a maximum acid value of 2. Such a starting polymer can be selected from the group consisting of polycarboxylic acids, polyesters, polyamides, polyacrylics, polyfunctional phenolic resins,
10 and mixtures thereof. Preferably, in this alternative, the starting polymer is a high molecular weight polyester.

 Alternatively, the starting polymer can be a
15 polyfunctional hydroxy-containing polymer having a hydroxy number of at least 10. Preferably, the polyfunctional hydroxy-containing polymer is selected from the group consisting of polyols, polyesters, polyurethanes, and mixtures thereof.

20

 Preferably, the polyfunctional nucleophile is a polyfunctional nitrogen-containing compound. More preferably, the polyfunctional nitrogen-containing compound is selected from the group consisting of
25 polyamines, polyaziridines, polyisocyanates, and mixtures thereof. Most preferably, the polyfunctional nitrogen-containing compound is a polyisocyanate.

Preferably, the polyelectrophile comprises at least one polyepoxide. More preferably, the polyepoxide is selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof. Most preferably, the polyepoxide comprises a mixture of bisphenol A-epichlorohydrin epoxies and novolac epoxies.

Preferably, when the polyelectrophile comprises at least one polyepoxide, the step of reacting the adduct product with the at least one polyepoxide comprises heating a mixture of the adduct product and the at least one polyepoxide to a temperature between about 250°F and about 400°F.

15

Preferably, when a high molecular weight polyester and at least one polyepoxide are used to form the three-dimensional polymeric material, the high molecular weight polyester comprises from about 50% to about 90% by weight of the three-dimensional polymeric adhesive material and the polyepoxide comprises from about 10% to about 50% by weight of the three-dimensional polymeric adhesive material.

25

Another aspect of the present invention is a process for bonding at least two substrates. The process comprises the steps of:

(1) reacting a starting polymer containing an

active hydrogen or hydroxy function with a polyfunctional nucleophile to form an adduct product;

(2) mixing the adduct product with a polyelectrophile to generate a bonding precursor;

5 (3) applying the bonding precursor between the substrates prior to the reaction between the adduct product and the polyelectrophile; and

(4) reacting the adduct product with the polyelectrophile to generate a three-dimensional polymer
10 adhesive material between the substrates, thereby bonding the substrates.

Typically, the substrates are selected from the group consisting of film substrates, foil substrates, and
15 hardboard substrates.

Another aspect of the present invention is a three-dimensional adhesive produced by the process described above. In general, the adhesive comprises:

20 (1) at least two linear polymer moieties, each moiety comprising a polymer containing nucleophilic nitrogen atoms capable of reaction with an electrophile; and

(2) cross-links between the nitrogens of the
25 polymer moieties, each cross-link comprising a polymer linked to the nitrogen atoms of the polymer moieties through reaction of an electrophile with the nitrogen atoms.

Preferably, the linear polymer moieties are selected from the group consisting of polycarboxylic acids, polyesters, polyamides, polyacrylics, polyfunctional phenolic resins, and mixtures thereof.

5

Preferably, the linear polymer moieties are formed by reaction of a hydroxy-containing polymer with a polyfunctional nitrogen-containing nucleophile.

10

Preferably, the polyfunctional nitrogen-containing nucleophile is selected from the group consisting of polyamines, polyaziridines, polyisocyanates, and mixtures thereof.

15

One preferred version of the three-dimensional polymeric adhesive of the present invention comprises:

(1) at least two linear urethane linked polymer moieties, each moiety comprising a hydroxy-terminated polyester linked in urethane linkage by an aromatic isocyanate; and

20

(2) cross-links between the nitrogens of the urethane linked polymer moieties, each cross-link comprising a phenyl-containing polymer linked to the nitrogen atoms of the urethane linkages by $-CH_2-CHOH-$ linkages, with the methylene groups of the linkages being bonded directly to the nitrogen atoms such that the cross-links form a three-dimensional polymeric structure.


25

7


In this version, the cross-links preferably comprise at least one polyepoxide selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof.

5

More preferably, the polyepoxide comprises a mixture of bisphenol A-epichlorohydrin epoxies having the formula

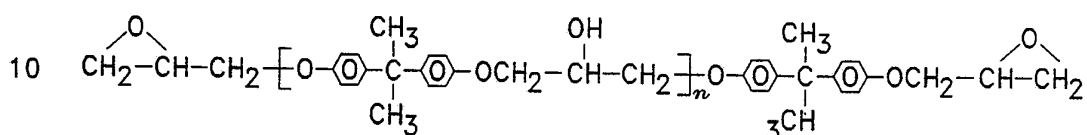

and novolac epoxies having the formula

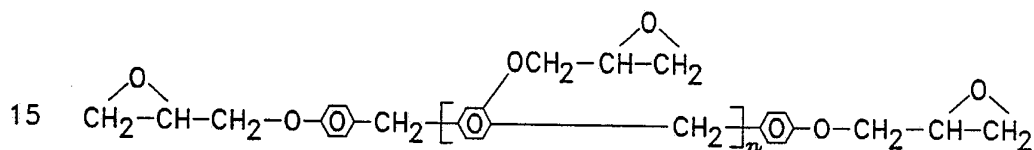

wherein n is an integer from 1 to about 20, n being independently chosen for the bisphenol A-epichlorohydrin epoxies and for the novolac epoxies.

20

The adhesive material of the present invention can be used to bond at least two substrates, thereby forming a composite structure. A composite structure formed according to the invention comprises:

25

- (1) at least two bondable substrates; and
- (2) a three-dimensional polymeric adhesive material in adhesive contact with each of the substrates such that each of the substrates is bonded to at least

SUBSTITUTE SHEET

one other substrate by the adhesive material, the adhesive material comprising:

(a) at least two linear polymer moieties, each moiety comprising a polymer containing nucleophilic nitrogen atoms capable of reaction with an electrophile; and

(b) cross-links between the nitrogens of the polymer moieties, each cross-link comprising a polymer linked to the nitrogen atoms of the polymer moieties through reaction of an electrophile with the nitrogen atoms.

DESCRIPTION

15 I. The Adhesive Production Process

One aspect of the present invention is a process for producing a three-dimensional polymeric adhesive material. The polymeric adhesive material produced by this process has improved peel strength, chemical resistance, moisture resistance, high temperature stability, and dimensional stability. It is easy to process and is particularly suitable for use with electronic construction materials, such as printed circuit boards. In general, this process comprises:

(1) reacting a starting polymer containing an active hydrogen function or hydroxy function with a polyfunctional nucleophile to form an adduct product; and

(2) reacting the adduct product with a polyelectrophile to generate a three-dimensional polymeric adhesive material.

5 The starting polymer can contain an active hydrogen, with a maximum acid value of 2. Such polymers can be polycarboxylic acids, polyesters, polyamides, polyacrylics, polyfunctional phenolic resins, or mixtures thereof.

10

 Alternatively, the starting polymer can be a polyfunctional hydroxy-containing polymer having a hydroxy number of at least 10. The polyfunctional hydroxy-containing polymer can be a polyol, a polyester, 15 a polyurethane, or a mixture thereof.

20

 Preferably, the starting polymer is a high molecular weight polyester with hydroxyl end-group functionality of the alcohol type.

 The polyfunctional nucleophile can be a polyfunctional nitrogen-containing compound. Such compounds include polyamines, polyaziridines, polyisocyanates, and mixtures thereof. Preferably, the 25 polyfunctional nitrogen-containing compound is a polyisocyanate.

A particularly suitable starting polymer is a

polyester resin such as DuPont 49002 base. A particularly suitable polyelectrophile is a polyfunctional isocyanate sold by Mobay Chemical Corp., Pittsburgh, Pennsylvania, under the name of Mondur MRS, which is a polymethylene polyphenylene ester of isocyanic acid.

Carbon atoms of alkyl and/or aryl moieties within the starting polymer or polyfunctional nucleophile can be optionally substituted with methyl and/or C₂-C₅ alkyl. The terms "starting polymer" and "polyfunctional nucleophile", as used herein, include compounds optionally substituted with methyl and/or C₂-C₅ alkyl.


The reaction of the starting polymer with the polyfunctional nucleophile takes place slowly at room temperature and takes place more rapidly at about 250°F. Typically, this reaction is performed in a solvent, such as a 90%:10% mixture of methylene chloride:cyclohexanone.

20

The second stage of the process comprised is reacting the adduct product with a polyelectrophile to generate the three-dimensional polymeric adhesive material. The polyelectrophile is preferably a polyepoxide. More preferably, it is a polyepoxide selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, or a mixture thereof. Most preferably, the polyelectrophile is a


mixture of a bisphenol A-epichlorohydrin epoxy, such as Celanese Epi-Rez-5132, and a novolac epoxy, such as Dow DEN 438. The bisphenol A-epichlorohydrin epoxy has the following structure:

5

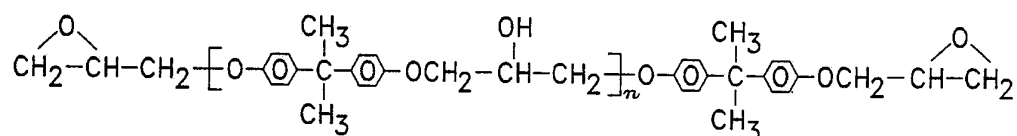

10

wherein n is an integer from 1 to about 20. The novolac epoxy has the following structure:

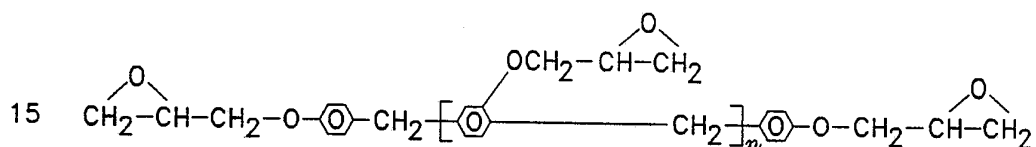

15

wherein n is an integer from 1 to about 20. The values of n are independently chosen for the bis-epi and novolac epoxies.

20


Preferably, when a high molecular weight polyester and at least one polyepoxide are used to form the three-dimensional polymeric material, the high molecular weight polyester comprises from about 50% to about 90% by weight of the three-dimensional polymeric adhesive material and the polyepoxide comprises from about 10% to about 50% by weight of the three-dimensional polymeric adhesive material.

25

The reaction of the adduct product and the polyelectrophile preferably takes place at a temperature from about 250°F to about 400°F. The first and second stage reactions are depicted below:

5

1st Stage:

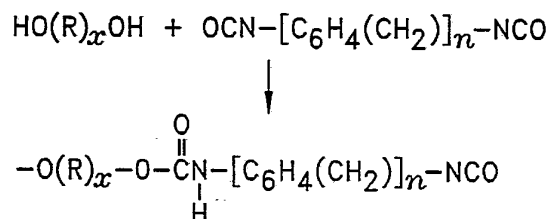


10

where R represents the ester repeat unit and x represents the number of ester repeat units and n represents the number of organic aromatic repeat units in the isocyanate component.

15

2nd Stage:

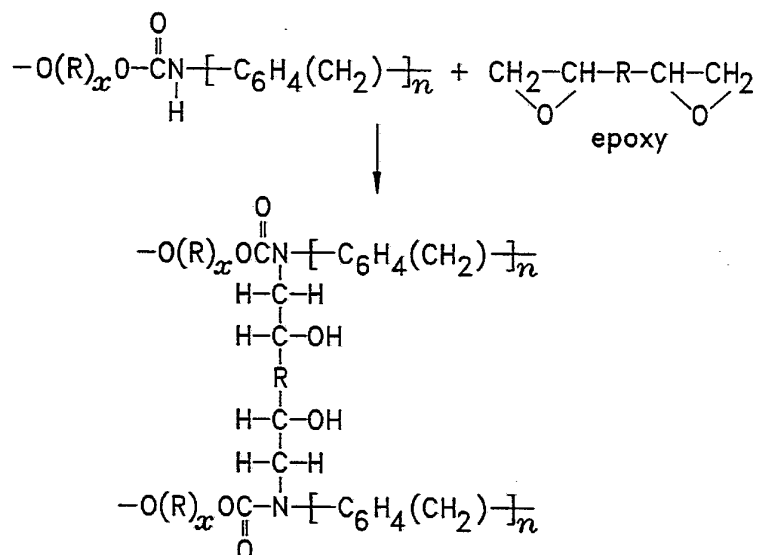

20

25

The pressure at which the reaction occurs is generally not critical. The reaction typically takes place at atmospheric pressure.

5

The reaction typically occurs in an aprotic, moderately polar solvent or a mixture of such solvents. Exemplary solvents are a mixture of methylene chloride and cyclohexanone or methyl ethyl ketone, or a mixture of
10 methylene chloride and cyclohexanone together with methyl ethyl ketone. However, suitable solvents are not to be limited to these combinations; the choice of solvent is generally not critical.

15 II. Use of the Adhesive for Bonding

The process of producing the adhesive of the present invention can be incorporated into a process for bonding at least two substrates. In general, this
20 bonding process comprises of the steps of:

(1) reacting a starting polymer with a polyfunctional nucleophile to form an adduct product, as described above;

(2) mixing the adduct product with a
25 polyelectrophile to generate a bonding precursor;

(3) applying the bonding precursor between the substrates prior to a reaction between the adduct product and the polyelectrophile; and

(4) reacting the adduct product with the polyelectrophile to generate a three-dimensional polymeric adhesive material between the substrates, thereby bonding the substrates.

5

The substrates used for this procedure can be film substrates, foil substrates, or hardboard substrates. A typical example of a film substrate is polyimide film. The substrates can be of the same materials or different materials. The substrates can be electronic circuit boards or other electronic structural components.

10

III. The Adhesive Compound

15

Another aspect of the invention is an improved three-dimensional polymeric adhesive material comprising:

(1) at least two linear polymer moieties, each moiety comprising a polymer containing nucleophilic nitrogen atoms capable of reaction with an electrophile; and

20

(2) cross-links between the nitrogens of the polymer moieties, each cross-link comprising a polymer linked to the nitrogen atoms of the polymer moieties through reaction of an electrophile with the nitrogen atoms.

25

Preferably, the adhesive comprises:

(1) at least two linear urethane linked polymer moieties, each moiety comprising a hydroxy-terminated polyester linked in urethane linkage by an aromatic isocyanate; and

(2) cross-links between the nitrogen of the urethane linked polymer moieties, each cross-link comprising a phenyl-containing polymer linked to the nitrogen atoms of the polyurethanes by $-\text{CH}_2\text{-CHOH}-$ linkages with the CH_2 moieties being located adjacent to the nitrogen atoms.

As disclosed above, this adhesive material can be formed in situ for bonding at least two substrates.

The substrates can be film substrates, foil substrates, or hardboard substrates.

When at least two or more substrates are bonded by the adhesive of the present invention, a composite material can be formed. The composite material comprises:

(1) at least two bondable substrates; and
(2) the three-dimensional polymeric adhesive material of the present invention in adhesive contact with each of the substrates such that each of the substrates is bonded to at least one other substrate by the adhesive material.

The invention is illustrated by the following example. The example is for illustrative purposes and is not to be construed as limiting the scope of the invention in any manner.

5

Example

An example of the adhesive material of the present invention includes the following components:

10 (1) a polyester resin having a solids content of 17-20% comprised of Dupont 49002 base in a solvent mixture of 90%: 10% (w/w) methylene chloride: cyclohexanone;

(2) an epoxy novolac at 85% solids content
15 composed of Dow DEN 438-EK85 in methyl ethyl ketone;

(3) a bis-epi epoxy composed of Celanese Epi-
Rez 5132 at 100% solids content; and

(4) a polyfunctional isocyanate used as a
curative component, Mondur MRS from Mobay Chemical Corp.

20

The components can be combined according to either of the following two procedures:

(1) The adhesive coating composition is made by adding 80% by solids of the polyester component, 10%
25 by solids of the epoxy novolac, 10% by solids of the bis-epi epoxy, and 1.2 parts by weight of the isocyanate in an open container without agitation. The composition is then agitated well for 1 to 5 minutes. The container is

then capped with an airtight lid for 30 minutes to allow for the onset of the isocyanate/polyester reaction.

(2) The polyester and isocyanate are combined, thoroughly mixed, and then allowed to stand at room temperature for a minimum of 30 minutes prior to the epoxy addition to allow onset of the isocyanate/polyester reaction.

The adhesive coating composition is then applied by means of the reverse roll coating technique to a 1 mil polyimide film to yield a 1 mil dry coat weight. Drying (i.e., removal of the solvents) is accomplished through a 75-foot, 3-zone oven at 212°F and 25 feet per minute. The coated substrate is then positioned next to the treated side of a 1 ounce copper foil, where the copper foil surface is treated with Oak CMC-111 compound to enhance bondability. The polyimide film and copper foil are heated to a temperature of 225°F to 400°F with an applied pressure of 80 psi (pounds/square inch) to 120 psi through a coater/laminator combining station as part of a continuous operation. The resulting roll is brought onto a six inch core, left at room temperature for 1 to 7 days, then post cured as follows: 2 hours at 150°F, 2 hours at 275°F, and 2 hours at 350°F.

25

A composite structure was prepared according to the first of the above procedures. The resulting composite structure exhibited the properties shown in

Table 1 when tested per ANSI/IPC-FC-232B and 241B procedures:

TABLE 1

PROPERTIES OF ADHESIVE COMPOSITE STRUCTURE

Initial Peel	20 pli ^a
Peel After Solder	21 pli
Chemical Resistance:	
Methyl Ethyl Ketone	21 pli
Toluene	20 pli
Isopropyl Alcohol	21 pli
Trichloroethylene/Methylene Chloride	21 pli
Solder Float	Pass
Aging (96 hours at	No Bond
275°F in air circulating oven)	Strength Change

pli = pounds per linear inch

ADVANTAGES OF THE INVENTION

The present invention provides an adhesive system with extremely balanced properties and the added benefit of superior Z-axis stability through a unique curing mechanism. More specifically, the present invention provides an epoxy-based laminating adhesive that can be continuously processed and cured without the

evolution of byproducts to provide a flexible bond-ply with superior overall properties, including excellent Z-axis stability. The adhesive material is applicable to film substrates such as polyimide, foil substrates such as copper, and hardboard substrates, such as FR4 (fiberglass impregnated hardboard). The adhesive of the present invention also possesses superior peel strength, chemical resistance, moisture resistance, and temperature stability. It is particularly suitable for use in the bonding of electronic construction materials, such as those intended for use in severe environmental conditions. In particular, the adhesive of the present invention is suitable for use in under-the-hood automotive and military applications.

Although the present invention has been described in considerable detail with reference to certain preferred versions thereof, other versions are possible. Therefore the spirit and scope of the pending claims should not be limited to the description of the preferred versions contained herein.

We claim:

1. A process for producing a three-dimensional polymeric adhesive material comprising:

(a) reacting a starting polymer containing an active hydrogen or hydroxy function with a polyfunctional nucleophile to form an adduct product; and

(b) reacting the adduct product with a polyelectrophile to generate a three-dimensional polymeric adhesive material.

2. The process of claim 1 wherein the starting polymer contains an active hydrogen and has a maximum acid value of 2.

3. The process of claim 2 wherein the starting polymer is selected from the group consisting of polycarboxylic acids, polyesters, polyamides, polyacrylics, polyfunctional phenolic resins, and mixtures thereof.

4. The process of claim 3 wherein the starting polymer comprises a high molecular weight polyester.

5. The process of claim 1 wherein the starting polymer is a polyfunctional hydroxy-containing polymer having a hydroxy number of at least 10.

6. The process of claim 5 where the polyfunctional hydroxy-containing polymer is selected from the group consisting of polyols, polyesters, polyurethanes, and mixtures thereof.

5

7. The process of claim 6 where the polyfunctional hydroxy-containing polymer is a polyester.

8. The process of claim 1 wherein the polyfunctional nucleophile is a polyfunctional nitrogen-containing compound.

10

9. The process of claim 8 wherein the polyfunctional nitrogen-containing compound is selected from the group consisting of polyamines, polyaziridines, polyisocyanates, and mixtures thereof.

15

10. The process of claim 9 wherein the polyfunctional nitrogen-containing compound is a polyisocyanate.

20

11. The process of claim 1 wherein the polyelectrophile comprises at least one polyepoxide.

12. The process of claim 11 wherein the polyepoxide is selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof.

25

13. The process of claim 12 wherein the polyepoxide comprises a mixture of bisphenol A-epichlorohydrin epoxies and novolac epoxies.

5 14. A process for producing a three-dimensional polymeric adhesive material comprising:

(a) reacting a starting polymer comprising a high molecular weight polyester with a polyisocyanate to form an adduct product; and

10 (b) reacting the adduct product with at least one polyepoxide selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof, to generate a three-dimensional polymeric adhesive material.

15 15. The process of claim 14 wherein the high molecular weight polyester comprises from about 50% to about 90% by weight of the three-dimensional polymeric adhesive material and the polyepoxide comprises from
20 about 10% to about 50% by weight of the three-dimensional polymeric adhesive material.

25 16. The process of claim 14 wherein the polyepoxide comprises a mixture of bisphenol A-epichlorohydrin epoxies and novolac epoxies.

17. The process of claim 14 wherein the step of reacting the adduct product with the at least one

polyepoxide comprises heating a mixture of the adduct product and the at least one polyepoxide to a temperature between about 250°F and about 400°F.

5 18. A process for bonding at least two substrates comprising the steps of:

 (a) reacting a starting polymer containing an active hydrogen or hydroxy function with a polyfunctional nucleophile to form an adduct product;

10 (b) mixing the adduct product with a polyelectrophile to generate a bonding precursor;

 (c) applying the bonding precursor between the substrates prior to the reaction between the adduct product and the polyelectrophile; and

15 (d). reacting the adduct product with the polyelectrophile to generate a three-dimensional polymer adhesive material between the substrates, thereby bonding the substrates.

20 19. The process of claim 18 wherein the substrates are selected from the group consisting of film substrates, foil substrates, and hardboard substrates.

25 20. The process of claim 18 wherein the starting polymer is selected from the group consisting of polycarboxylic acids, polyesters, polyamides, polyacrylics, polyfunctional phenolic resins, and mixtures thereof.

21. The process of claim 20 wherein the starting polymer comprises a high molecular weight polyester.

5 22. The process of claim 18 wherein the polyfunctional nucleophile is a polyfunctional nitrogen-containing compound selected from the group consisting of polyamines, polyaziridines, polyisocyanates, and mixtures thereof.

10 23. The process of claim 22 wherein the polyfunctional nitrogen-containing compound is a polyisocyanate.

15 24. The process of claim 18 wherein the polyelectrophile comprises at least one polyepoxide selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof.

20 25. The process of claim 24 wherein the polyepoxide comprises a mixture of bisphenol A epichlorohydrin epoxies and novolac epoxies.

25 26. A three-dimensional polymeric adhesive material comprising:

 (a) at least two linear urethane linked polymer moieties, each moiety comprising a hydroxy-

25

terminated polyester linked in urethane linkage by an aromatic isocyanate; and

(b) cross-links between the nitrogens of the urethane linked polymer moieties, each cross-link comprising a phenyl-containing polymer linked to the nitrogen atoms of the polyurethanes by $-\text{CH}_2-\text{CHOH}-$ linkages, with the methylene groups of the linkages being bonded directly to the nitrogen atoms such that the cross-links form a three-dimensional polymeric structure.


10

27. The polymeric adhesive material of claim 26 wherein the cross-links comprise at least one polyepoxide selected from the group consisting of bisphenol A-epichlorohydrin epoxies, novolac epoxies, and mixtures thereof.

15

28. The polymeric adhesive material of claim 27 wherein the polyepoxide comprises a mixture of bisphenol A-epichlorohydrin epoxies having the formula


20

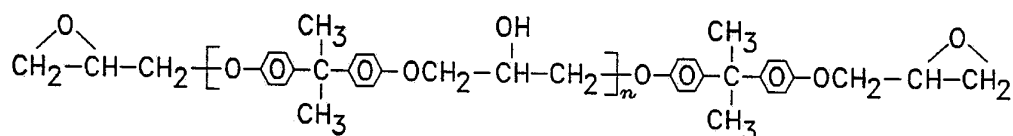

25

26

and novolac epoxies having the formula

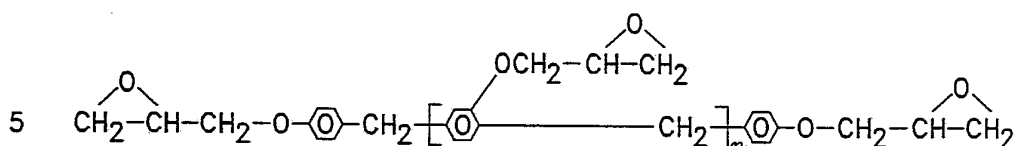

wherein n is an integer from 1 to about 20, n being
independently chosen for the bisphenol A-epichlorohydrin
10 epoxies and for the novolac epoxies.

29. A three-dimensional polymeric adhesive
material comprising:

(a) at least two linear polymer moieties, each
15 moiety comprising a polymer containing nucleophilic
nitrogen atoms capable of reaction with an electrophile;
and

(b) cross-links between the nitrogens of the
polymer moieties, each cross-link comprising a polymer
20 linked to the nitrogen atoms of the polymer moieties
through reaction of an electrophile with the nitrogen
atoms.

30. The polymer adhesive material of claim 29
25 wherein the linear polymer moieties are selected from the
group consisting of polycarboxylic acids, polyesters,
polyamides, polyacrylics, polyfunctional phenolic resins,
and mixtures thereof.

SUBSTITUTE SHEET

31. The polymer adhesive material of claim 30 wherein the linear polymer moieties are formed by reaction of a hydroxy-containing polymer with a polyfunctional nitrogen-containing nucleophile.

5

32. The polymer adhesive material of claim 31 wherein the polyfunctional nitrogen-containing nucleophile is selected from the group consisting of polyamines, polyaziridines, polyisocyanates, and mixtures thereof.

10

33. A composite structure comprising:

(a) at least two bondable substrates; and

(b) a three-dimensional polymeric adhesive

15

material in adhesive contact with each of the substrates such that each of the substrates is bonded to at least one other substrate by the adhesive material, the adhesive material comprising:

20

(i) at least two linear polymer moieties, each moiety comprising a polymer containing nucleophilic nitrogen atoms capable of reaction with an electrophile; and

25

(ii) cross-links between the nitrogens of the polymer moieties, each cross-link comprising a polymer linked to the nitrogen atoms of the polymer moieties through reaction of an electrophile with the nitrogen atoms.

34. The composite material of claim 33 wherein the bondable substrates are selected from the group consisting of film substrates, foil substrates, and hardboard substrates.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/02677**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(5) :C08G 63/48; B32B 15/08
US CL :528/66, 83, 84, 87, 272, 297; 525/437, 438, 440; 428/458, 413
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 528/66, 83, 84, 87, 272, 297; 525/437, 438, 440; 428/458, 413

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,873,307 (FEDERICI ET AL) 10 OCTOBER 1989. See Claims.	1-34

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	
A document defining the general state of the art which is not considered to be part of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
E earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
O document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

26 MAY 1993

Date of mailing of the international search report

19 JUL 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

E. ROLLINS BUFFALOW

Telephone No. (703) 308-2351