

(12) **Patent Application Publication**
Thorne et al.

(43) **Pub. Date:** **Nov. 16, 2006**

Related U.S. Application Data

(60) Provisional application No. 60/680,670, filed on May 13, 2005. Provisional application No. 60/706,581, filed on Aug. 9, 2005.


Publication Classification

(52) U.S. Cl. 606/180

(57) **ABSTRACT**

An apparatus, system and method are presented by which certain surgical procedures normally done by powered surgical handpieces may be accomplished by powered arthroscopic handpieces, thus obviating the need to use powered surgical handpieces.

(22) Filed: **Mar. 29, 2006**

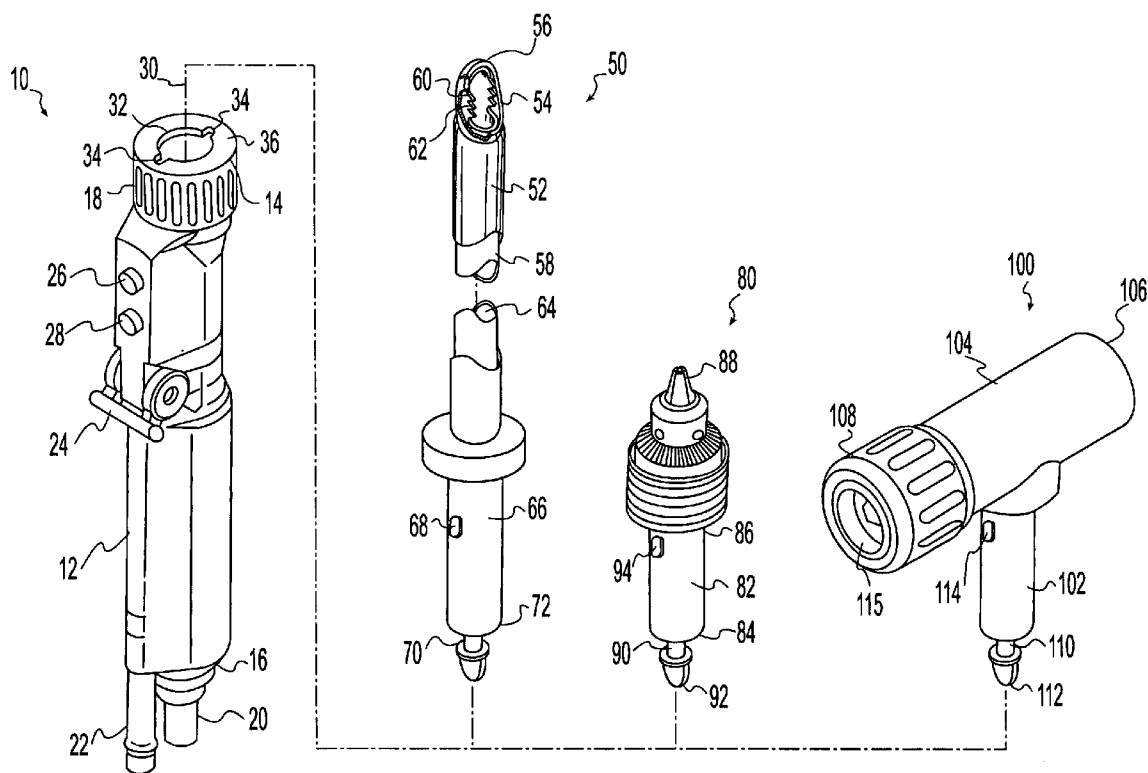

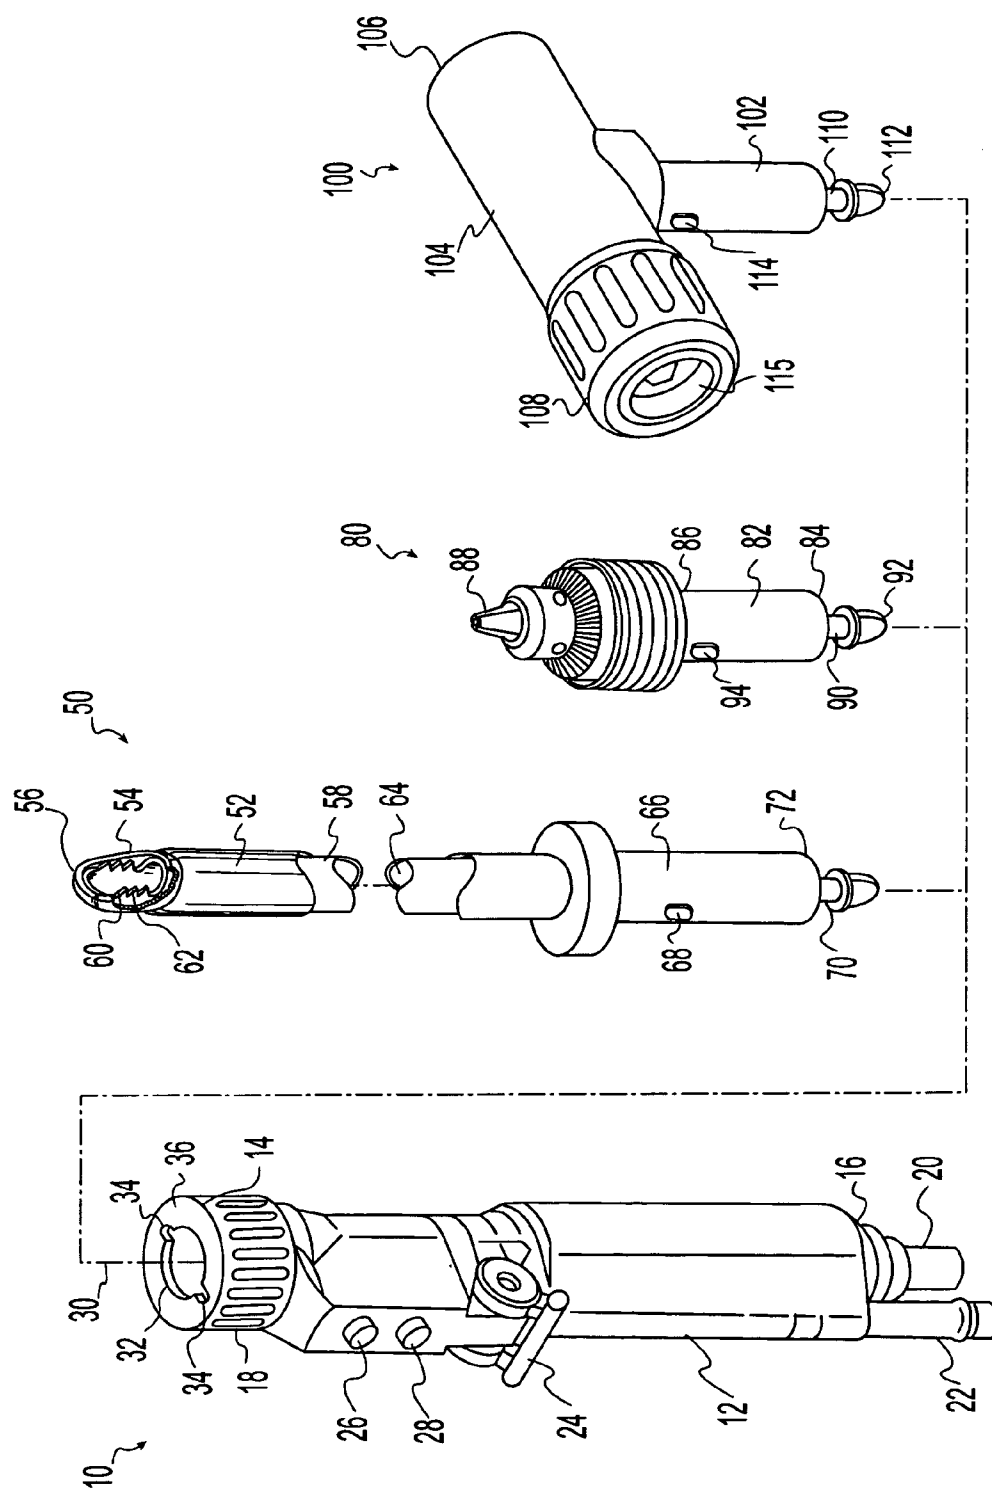


Fig. 1

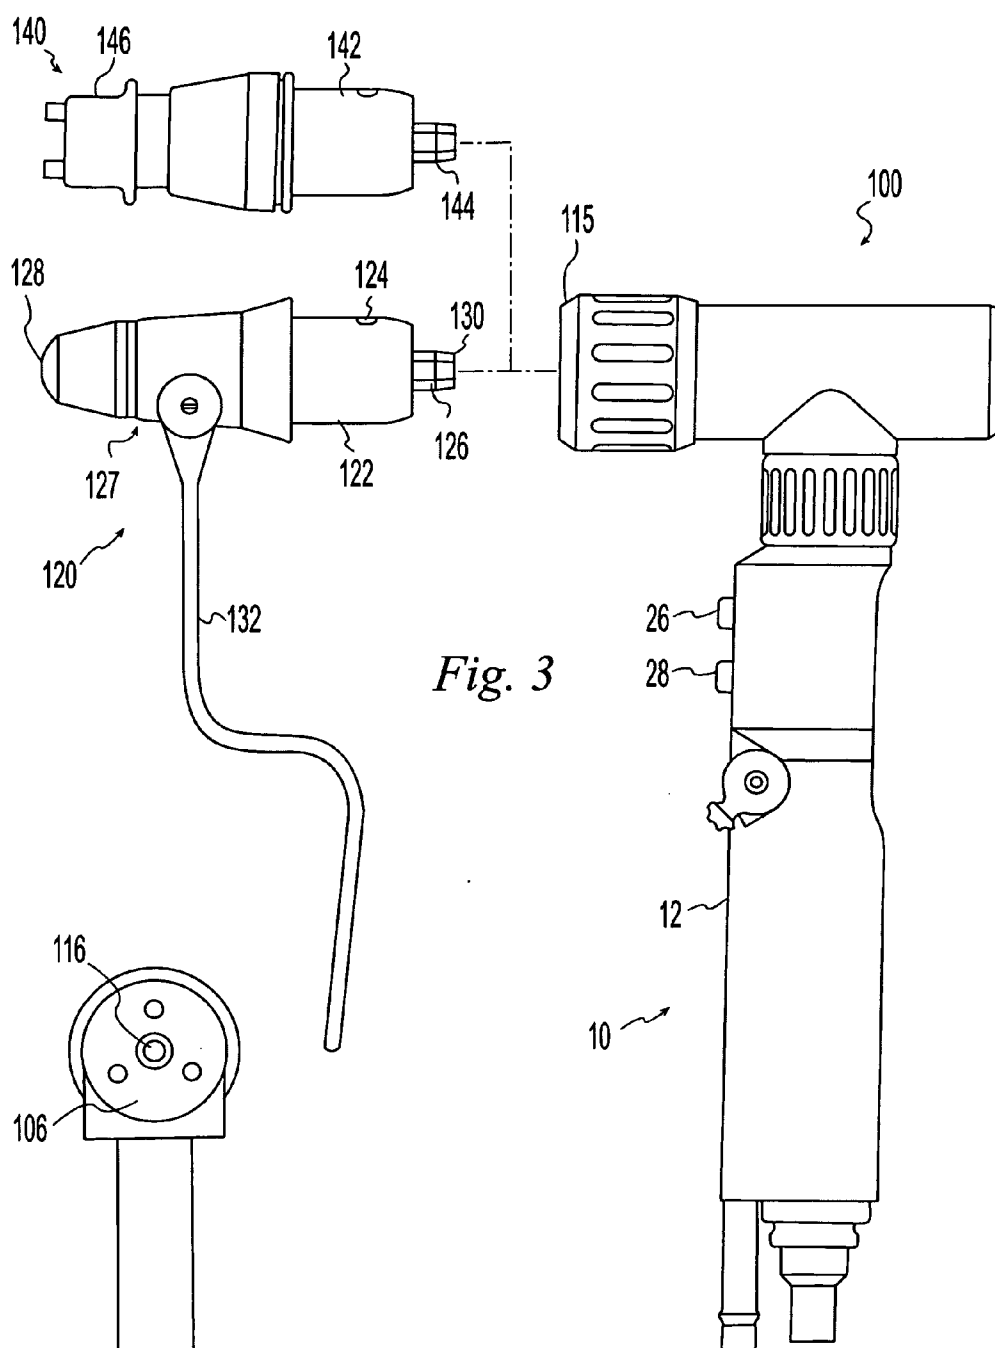


Fig. 3




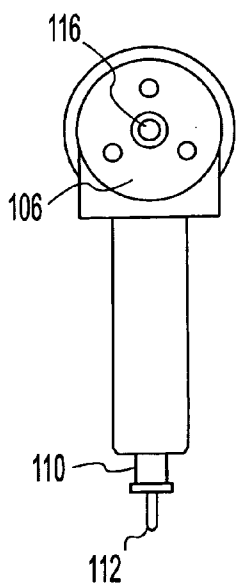


Fig. 2

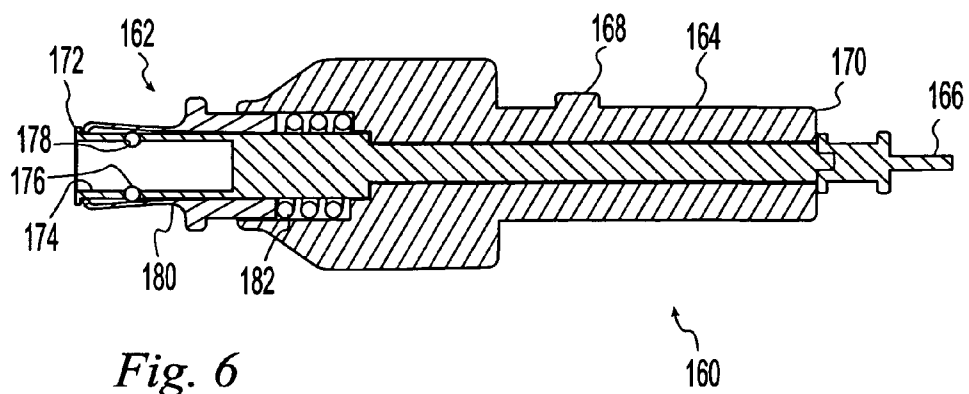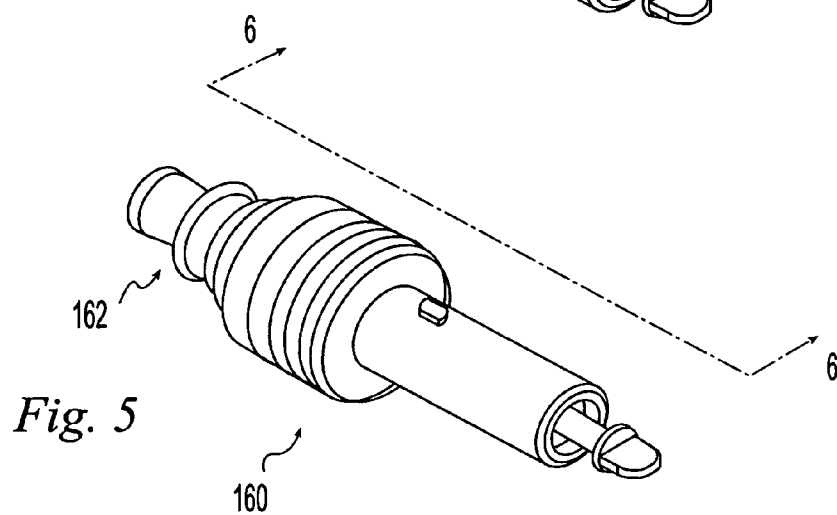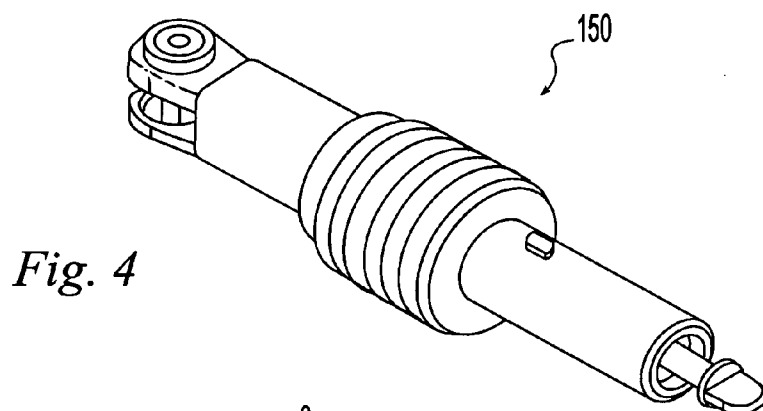

ATTACHMENTS FOR ARTHROSCOPIC SHAVER HANDPIECES

FIELD OF THE INVENTION

[0001] The invention relates to powered handpieces and attachments used to perform surgical procedures.

BACKGROUND

[0002] Surgical procedures are often performed using instruments attached to handpieces which are powered either electrically or pneumatically. Powered handpieces generally fall into two groups: powered surgical handpieces and powered arthroscopic/endoscopic handpieces.

[0003] Powered surgical handpieces are generally used in open surgical procedures and have bodies in the form of pistol grip or pencil grip type structures. These bodies move a variety of instruments (e.g. saws, drills, reamers, pins, wires, etc.) attachable to the bodies in order to treat tissue during a surgical procedure. Each of the instruments has a distal working end which actually performs a function (e.g. sawing, drilling, reaming, etc.) and a proximal connecting end which enables the instrument to be attached to the handpiece providing the motive force. The movements are generally in the form of oscillating, rotating, or reciprocating movements of the instruments. A variety of instruments may be directly secured to the drive motor in the body of the handpiece or a common handpiece may have a variety of attachments interposed between the body and the instrument such that the same body may, by simply changing the attachments, create a variety of motions to the instrument (e.g. oscillation, rotation, reciprocation).

[0004] One type of powered surgical handpiece includes pin drivers and wire drivers. This type of handpiece includes a pistol grip and has a cannulated shaft transversely attached to the pistol grip. The shaft has a bore extending completely through it and is adapted to receive and grip an elongated pin or wire. The bore is designed to coaxially receive a range of diameters of pins/wires. A selectively actuated chuck grips the pin/wire which can then be rotated about the axis of the bore to drive the distal tip of the pin/wire into a bore. The grip can be released to enable the handpiece to be either removed or repositioned to drive the pin/wire further into the bone.

[0005] Powered arthroscopic/endoscopic handpieces are generally used in closed surgical procedures and have bodies in the form of pencil type structures which, in the current state of the art, are generally electrically powered to operate shaver blades or burs secured to the distal end of the handpiece. These handpieces will be referred to as arthroscopic handpieces throughout this specification. The term "arthroscopic" as used herein is intended to broadly include endoscopic devices and procedures in general. Shaver blades generally include a stationary tubular outer member having a cutting window situated at its distal end and a rotatable tubular inner member also having a cutting window situated at its distal end. The inner and outer members are sometimes referred to individually and collectively as shaver blades. Either of the cutting windows may be formed in a variety of shapes and may or may not include teeth depending upon the degree of aggressiveness desired and the particular surgical procedure for which the shaver blade is designed. Rotation of the inner member within the outer

member causes the resection of any tissue which penetrates into the lumen of the inner member as it rotates. The lumen of the inner member is at its proximal end attached to a vacuum in order to aspirate the resected tissue as well as irrigation fluid and other tissue which may be at the surgical site. Powered arthroscopic handpieces are generally used during arthroscopic procedures in which the surgical site is commonly inflated with fluid in order to provide distention and visibility to imaging instruments also at the surgical site. It will also be understood that an arthroscopic handpiece, modified in accordance with the teachings of this invention, could also be used in open surgical procedures.

[0006] It is often necessary to use a powered surgical handpiece in the same procedure as an arthroscopic handpiece, thus requiring two separate powered handpieces to be prepared and presented for use.

SUMMARY

[0007] The subject invention relates to an apparatus, system and method by which certain surgical procedures normally done by powered surgical handpieces may be accomplished by powered arthroscopic handpieces, thus obviating the need to use powered surgical handpieces.

[0008] The subject invention also relates to an apparatus, system and method by which pin and/or wire driving surgical procedures normally done by dedicated powered surgical handpieces may be accomplished by powered arthroscopic shaver handpieces, thus obviating the need to use powered surgical handpieces.

[0009] The subject invention also relates to an apparatus, system and method by which a pencil grip type arthroscopic handpiece may be easily converted to a pistol grip type handpiece.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Various examples of the present invention will be discussed with reference to the appended drawings. These drawings depict only illustrative examples of the invention and are not to be considered limiting of its scope.

[0011] **FIG. 1** is an exploded perspective view of an arthroscopic shaver handpiece and modular attachments according to the present invention;

[0012] **FIG. 2** is a side elevation view of one of the attachments of **FIG. 1**;

[0013] **FIG. 3** is an exploded front elevation view of the handpiece of **FIG. 1** assembled with one of the attachments of **FIG. 1** and shown with additional modular attachments;

[0014] **FIGS. 4 and 5** are perspective views of additional modular attachments for use with the handpiece of **FIG. 1**; and

[0015] **FIG. 6** is a cross sectional view taken along line 6-6 of **FIG. 5**.

DESCRIPTION OF THE ILLUSTRATIVE EXAMPLES

[0016] As shown in **FIG. 1**, a conventional arthroscopic handpiece **10** includes a body **12**, a distal end **14**, a proximal end **16**, and a collet **18**. The handpiece **10** also includes at its proximal end **14** a power cord **20** and a vacuum tube **22**. The

vacuum tube 22 is joined by an internal channel (not shown) to the distal end 14 of the handpiece 10. A vacuum control lever 24 controls the degree of vacuum applied through the internal channel to the distal end 14. The arthroscopic handpiece 10 includes a motor and drive shaft (not shown), which motor is operated by a control system (not shown) and controlled by control buttons 26 and 28. The drive shaft rotates about an axis 30. Modular attachments are inserted through an opening 32 in the collet 18 to engage the drive shaft. By rotating the collet 18, opposed keyways 34 are aligned with internal grooves (not shown) to receive or release corresponding keys formed on the modular attachments. When fully inserted into the collet 18, the modular attachments will engage the motor drive shaft and will be retained by rotation of the collet 18 about the axis 30 to trap the keys behind the front flange 36 of the collet 18.

[0017] An arthroscopic shaver blade 50 includes a stationary tubular outer member 52 having a cutting window 54 situated at its distal end 56 and a rotatable tubular inner member 58 also having a cutting window 60 situated at its distal end. The illustrative inner member 58 includes optional teeth 62 for aiding in gripping and cutting tissue at a surgical site. Rotation of the inner member 58 within the outer member 52 resects tissue which penetrates into the lumen 64 of the inner member 58 as it rotates. The inner and outer members 58, 52 are mounted to a housing 66 which is mountable to the arthroscopic handpiece 10. The housing 66 is sized to fit through the opening 32 in the collet 18 of the handpiece 10 and includes a radially extending key 68 engageable with the keyways 34 of the collet 18. The inner member 58 is connected to a drive shaft 70 that extends through the housing 66 to engage the motor drive shaft of the arthroscopic handpiece 10. The lumen 64 of the inner member 58 communicates with the proximal end 72 of the housing which in turn communicates with the inner channel and vacuum tube 22 of the arthroscopic handpiece 10. Tissue resected by the shaver blade 50 and irrigation fluid are aspirated from the surgical site through the vacuum tube 22. The arthroscopic handpiece 10 may similarly be used with a bur (not shown) with an annular vacuum channel as is known in the art.

[0018] A variety of modular attachments may be substituted for the shaver blade 50 to convert the arthroscopic handpiece to surgical handpiece applications. For example, FIG. 1 illustrates a Jacobs chuck assembly 80 which serves as a drive shaft extension and adapter able to receive in its distal end a variety of instruments which would not otherwise be able to be operated by the arthroscopic handpiece 10. The assembly includes a housing 82 having a proximal end 84 and a distal end 86 to which is secured a distal chuck 88. The housing 82 contains a drivable shaft 90 and other components adapted to operatively connect the shaft 90 to the distal chuck 88. The drivable shaft 90 has a proximal end 92 configured to be operatively engaged with the motor drive shaft in the arthroscopic handpiece 10. In the preferred embodiment, the motor drive shaft is rotatable about the axis 30 of the handpiece 10. The diameter of the housing 82 is sized to be received within the opening 32 of the collet 18. The exterior surface of housing 82 is provided with a radially extending key 94 adapted to be received through either of the diametrically opposed keyways 34 in the collet 18. When so assembled, the Jacobs chuck assembly 80 may be operated in a conventional manner to attach selected instruments such as drill bits, reamers, drivers, etc. so that

the handpiece 10 may be used like a drill rather than a shaver. In addition to the convenience of being able to drive powered surgical instruments with an arthroscopic handpiece, for certain procedures, the ability to use a pencil type grip may enhance the ergonomics over the use of a pistol grip powered surgical handpiece.

[0019] FIG. 1 also illustrates a transverse attachment 100 for the arthroscopic handpiece 10. The transverse attachment 100 includes a longitudinal housing 102 and a transverse body 104, having a proximal end 106 and a distal end 108 to which may be secured another attachment or instrument. The transverse attachment 100 contains a drivable shaft 110 and other drive transmission components adapted to operatively and transversely connect it and the arthroscopic handpiece 10 to an attachment or instrument. The drivable shaft 110 has a proximal end 112 configured to be operatively engaged with the motor drive shaft in the arthroscopic handpiece 10. As with the other illustrative attachments of FIG. 1, the longitudinal housing is adapted to be received within the circular opening 32 of the collet 18 and includes a radially extending key 114. The transverse attachment 100 includes a collet 115 which may be engaged directly with an instrument (such as a drill bit, reamer, saw blade, etc.) to drive the instrument or which may be engaged with another, intermediate attachment (such as a chuck, adapter, wire driver, reciprocating saw drive, oscillating saw drive, etc.) that is engaged with an instrument.

[0020] The transverse attachment 100 may be cannulated to accommodate a wire or pin driver and to permit use with cannulated drill bits that are driven over a guide wire. As seen in FIG. 2, the transverse attachment 100 may include a throughbore 116 extending from the proximal end 106 to the distal end 108 and through the collet 115 for receiving pins, wires, guide wires, etc.

[0021] FIG. 3, illustrates alternative modular attachments for use with the transverse attachment 100 including a wire driver 120 and a rotary instrument driver 140. The wire driver 120 includes a housing 122 and drivable shaft 126 compatible with the collet 115 of the transverse attachment 100. In the illustrative wire driver, the housing 122 is locked in the collet 115 by way of a locking detent 124 that receives a ball (not shown) in the collet 115. The wire driver 120 further includes an internal wire collet (not shown) mounted in the wire driver body 127. The wire collet communicates with the distal end 128 and is connected to the drivable shaft 126. A longitudinal through bore extends from the distal end 128 to the proximal end 130 through the wire collet and the drivable shaft 126 to communicate with the through bore 116 of the transverse attachment. An actuator 132 is operably connected to the wire chuck and pivots relative to the wire driver body 127. When the wire driver 120 is mounted in the transverse attachment 100, the actuator 132 is positioned adjacent the body 12 of the arthroscopic handpiece 10 convenient to the control buttons 26, 28 in pistol grip fashion. The actuator 132 may be operated to cause the wire chuck to selectively grip and release a wire. When the wire is gripped, the shaft 126 can be driven to rotate the wire about the axis of the bore 116 to drive the distal tip of the wire into a surgical site. When the wire is released, the wire driver 120 can be removed or repositioned to drive the wire further into the surgical site.

[0022] The rotary instrument driver 140 of FIG. 3 includes a housing 142 and drive shaft 144 compatible with

the collet **115** of the transverse attachment **100**. The driver shaft **144** connects to a distal drive collet **146** adapted to receive an instrument normally associated with powered surgical handpieces. Thus, the rotary instrument driver **140** converts the collet **115** of the transverse attachment **100** to a different style collet **146** to adapt the transverse attachment for use with different instruments.

[0023] While the transverse attachment **100** has been illustrated in use with two different attachments, any number of attachments and instruments may be used with the transverse attachment **100** including, by way of example only, drill attachments, saw attachments, wire and pin driver attachments, etc.

[0024] The transverse attachment **100** also serves to convert the pencil grip style arthroscopic handpiece **10** into a pistol grip style handpiece. For certain procedures the use of a pistol grip style handpiece may have enhanced ergonomics over the use of a pencil grip powered handpiece. For example, for drilling pilot holes, it may be desirable to engage the transverse attachment **100** with the arthroscopic handpiece **10** to convert it to a pistol grip style and then engage a drill bit drive attachment with the transverse attachment.

[0025] FIG. 4 illustrates an exemplary sagittal saw attachment **150** adapted to engage the arthroscopic handpiece **10** and convert it from shaver operation to sagittal saw operation.

[0026] FIG. 5 illustrates an exemplary rotary instrument driver attachment **160** with a quick connect chuck **162** for rapidly connecting and disconnecting various rotary instruments generally associated with powered surgical handpieces.

[0027] FIG. 6 illustrates the inner mechanism of the attachment **160**. The attachment includes a housing **164**, drivable shaft **166**, and key **168** similar to the attachments of FIG. 1. The drivable shaft **166** extends through the attachment from the proximal end **170** to the distal end **172** and defines an instrument receiving bore **174** in the quick connect chuck **162** at the distal end **172**. One or more locking balls **176** are disposed in transverse bores **178** communicating with the instrument receiving bore **174**. An outer sleeve **180** surrounds the drive shaft **166** at the distal end **172** and is mounted for axial translation along the drive shaft **166** between a first position in which the sleeve **180** presses the locking balls **176** into the instrument receiving bore **174** and a second position spaced from the locking balls **176**. A spring **182** biases the sleeve **180** toward the first position. Moving the sleeve proximally against spring tension allows the balls **176** to move away from the instrument receiving bore **174** to admit or release an instrument, while allowing the spring **182** to bias the sleeve **180** distally causes the sleeve **180** to engage the balls **176** and lock the instrument in place.

[0028] The illustrative attachments may be driven directly from the motor in the arthroscopic handpiece **10** or they may be geared up or down by appropriate components in the attachments in order to alter the output speed and torque from that provided by the motor. The gear ratio may be different for different attachments in order to obtain the speed and torque required for each attachment.

[0029] The attachments may also include a variety of identification systems (e.g. magnets, radiofrequency identi-

fication "RFID" devices or chips, Hall sensors, optical devices, etc.) in order to convey information to the handpiece and the control system so that appropriate signals may be generated by the control system to optimize the use of the attachments for certain procedures requiring varying speeds and torques. The signals may also alter the operation of the handpiece buttons (e.g. toggle, momentary on/off, etc.).

[0030] The attachments may be variously configured for a variety of instruments such as a reciprocating saw for a reciprocating saw attachment, a sagittal saw for a sagittal saw attachment, assorted drills, reamers, pins, taps, screw drivers, etc. for rotary drive attachments, and any other suitable instruments. The instrument driven by the attachment may be a fixed integral part of the attachment or it may be modular and releasably attachable to the distal end of the attachment via a chuck, collet, and/or other mechanism.

[0031] It will be understood that the novel attachments described above inherently produce a novel arthroscopic system and novel method for performing surgery. It will be understood that during a normal arthroscopic surgery an arthroscopic shaver (or bur) will be used during certain portions of the procedure. Depending upon the procedure, at some point the need may arise for a powered surgical handpiece and its associated instrument (drill, reamer, coring reamer, saw, pin, wire, etc.) such that the use of the arthroscopic shaver must be discontinued and a portion of the procedure must be continued with the powered surgical handpiece. With the present invention, the surgeon may simply remove the arthroscopic shaver from the surgical site at a selected point in the procedure and replace the shaver blade with one of the attachments described above. The attachment may have an instrument already secured to it or an instrument or additional attachment may need to be attached to the attachment as described above. The surgery may then continue with the now modified arthroscopic shaver handpiece, thus obviating the need to prepare, sterilize, or use any powered surgical handpiece. Clearly the use of the powered arthroscopic handpiece and the arthroscopic handpiece/attachment assembly may be alternated as necessary during the procedure.

[0032] Although examples of attachments for arthroscopic shaver handpieces and their use have been described and illustrated in detail, it is to be understood that the same is intended by way of illustration and example only and is not to be taken by way of limitation. Accordingly, variations in and modifications to the attachments for arthroscopic shaver handpieces and their use will be apparent to those of ordinary skill in the art, and the following claims are intended to cover all such modifications and equivalents.

What is claimed is:

1. A pin/wire driver for attachment to the distal end of an arthroscopic pencil grip shaver handpiece having an axis, comprising:

- a body having a first axis and an axially aligned through-bore for receiving a pin or wire;
- a collet means for securing a pin or wire within said throughbore to prevent longitudinal motion of said pin or wire within said throughbore while enabling rotation of said pin or wire about said first axis;
- a shaver adapter housing transversely attached to said body and having a second axis transverse to said first

axis, said housing adapted to be received within the distal end of the arthroscopic shaver handpiece so said first axis is transverse to the axis of said handpiece;

a drivable shaft means axially aligned within said shaver adapter housing and having a proximal end engageable with the drive shaft within said handpiece and a distal end adapted to rotate said pin or wire about said first axis.

2. A transverse attachment for converting a pencil grip handpiece to a pistol grip handpiece, the pencil grip handpiece including a drive means, the transverse attachment comprising:

a first member having a distal end and a proximal end, said proximal end adapted to be received within the distal end of the pencil grip handpiece, said first member comprising a driven means operatively engageable with the drive means in said pencil grip handpiece; and

a second member transversely fixed to said distal end of said first member, said second member having a distal end and a proximal end and having a drive means in operative engagement with said driven means, said second member comprising engagement means adapted to operatively engage an instrument to be driven.

3. The transverse attachment of claim 2 wherein said second member is cannulated to receive a wire or pin.

4. The transverse attachment of claim 2 wherein said second member is adapted to receive one of a plurality of different attachments capable of being driven by said handpiece via said adapter.

5. An attachment for use with a powered arthroscopic shaver handpiece having a drive shaft comprising:

an instrument for performing a surgical procedure, said instrument having a working end and a connecting end;

a body having a distal end attachable to said connecting end of said instrument and a proximal end selectively attachable to the arthroscopic shaver handpiece; and

a drivable drive shaft operatively secured within said body, said drivable drive shaft having a proximal end adapted to engage said drive shaft and a distal end adapted to drive said instrument.

6. An attachment according to claim 5 wherein the instrument is a drill.

7. An attachment according to claim 5 wherein the instrument is a bur.

8. An attachment according to claim 5 wherein the instrument is a sagittal saw.

9. An attachment according to claim 5 wherein the instrument is a reciprocating saw.

10. An attachment according to claim 5 wherein the instrument is a coring reamer.

11. An attachment according to claim 5 wherein the instrument is a reamer.

12. An attachment according to claim 5 wherein the instrument is a tap.

13. A method of performing an arthroscopic surgical procedure comprising the steps of:

providing an arthroscopic shaver handpiece;

providing a shaver blade, attaching the shaver blade to the handpiece and using the handpiece to run the shaver blade during a predetermined portion of the surgical procedure;

removing the shaver blade from the handpiece;

providing an attachment according to claim 5;

attaching the attachment to the handpiece to run the attachment during a predetermined portion of the surgical procedure.

14. An attachment for use with a powered arthroscopic shaver handpiece having a drive shaft comprising:

a body having a distal end attachable to a predetermined instrument and a proximal end selectively attachable to the arthroscopic shaver handpiece; and

a drivable drive shaft operatively secured within said body, said drivable drive shaft having a proximal end adapted to engage said drive shaft and a distal end adapted to drive said predetermined instrument.

15. In combination:

a pencil grip arthroscopic handpiece;

an arthroscopic shaver having a connecting portion engageable with the arthroscopic handpiece to drive the arthroscopic shaver;

a modular attachment having a connecting portion engageable with the arthroscopic handpiece alternatively to the arthroscopic shaver for driving a powered surgical instrument.

16. The combination of claim 15 wherein the attachment comprises a saw attachment and the powered surgical instrument comprises a saw blade.

17. The combination of claim 15 wherein the attachment comprises a rotary chuck attachment and the powered surgical instrument comprises a drill bit.

18. The combination of claim 15 wherein the attachment comprises a rotary chuck attachment and the powered surgical instrument comprises a reamer.

19. The combination of claim 15 wherein the attachment comprises a rotary chuck attachment and the powered surgical instrument comprises a fastener driver.

20. The combination of claim 15 wherein the attachment comprises a rotary chuck attachment and the powered surgical instrument comprises a tap.

21. The combination of claim 15 wherein the attachment comprises a rotary chuck attachment and the powered surgical instrument comprises a wire.

22. The combination of claim 15 wherein the attachment comprises a wire driver attachment and the powered surgical instrument comprises a wire.

23. The combination of claim 15 wherein the attachment comprises a transverse attachment having an input portion connectable to the arthroscopic handpiece along a first axis and an output portion connectable to a surgical instrument along a second axis transverse to the first axis to convert the arthroscopic handpiece from a pencil grip to a pistol grip arrangement.

24. The combination of claim 23 further comprising a modular attachment having a connecting portion engageable with the transverse attachment for driving a powered surgical instrument.

25. The combination of claim 23 wherein the transverse attachment is cannulated along the second axis.

26. The combination of claim 25 further comprising a wire driver engageable with the transverse attachment along

the second axis and able to receive a wire through the cannulation.

* * * * *