



(22) Date de dépôt/Filing Date: 2001/04/25

(41) Mise à la disp. pub./Open to Public Insp.: 2001/11/15

(45) Date de délivrance/Issue Date: 2004/12/14

(30) Priorité/Priority: 2000/05/15 (09/570,618) US

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> E06B 3/48, E06B 3/50


(72) Inventeur/Inventor:  
WHITLEY, L. BLAKE, US

(73) Propriétaire/Owner:  
OVERHEAD DOOR CORPORATION, US

(74) Agent: MOFFAT & CO.

(54) Titre : PORTE ARTICULEE A OUVERTURE VERS LE HAUT AVEC PROFIL ENTRE-PANNEAUX RESISTANT AU PINCEMENT

(54) Title: UPWARD ACTING SECTIONAL DOOR WITH PINCH RESISTANT EDGE PROFILE BETWEEN DOOR PANELS

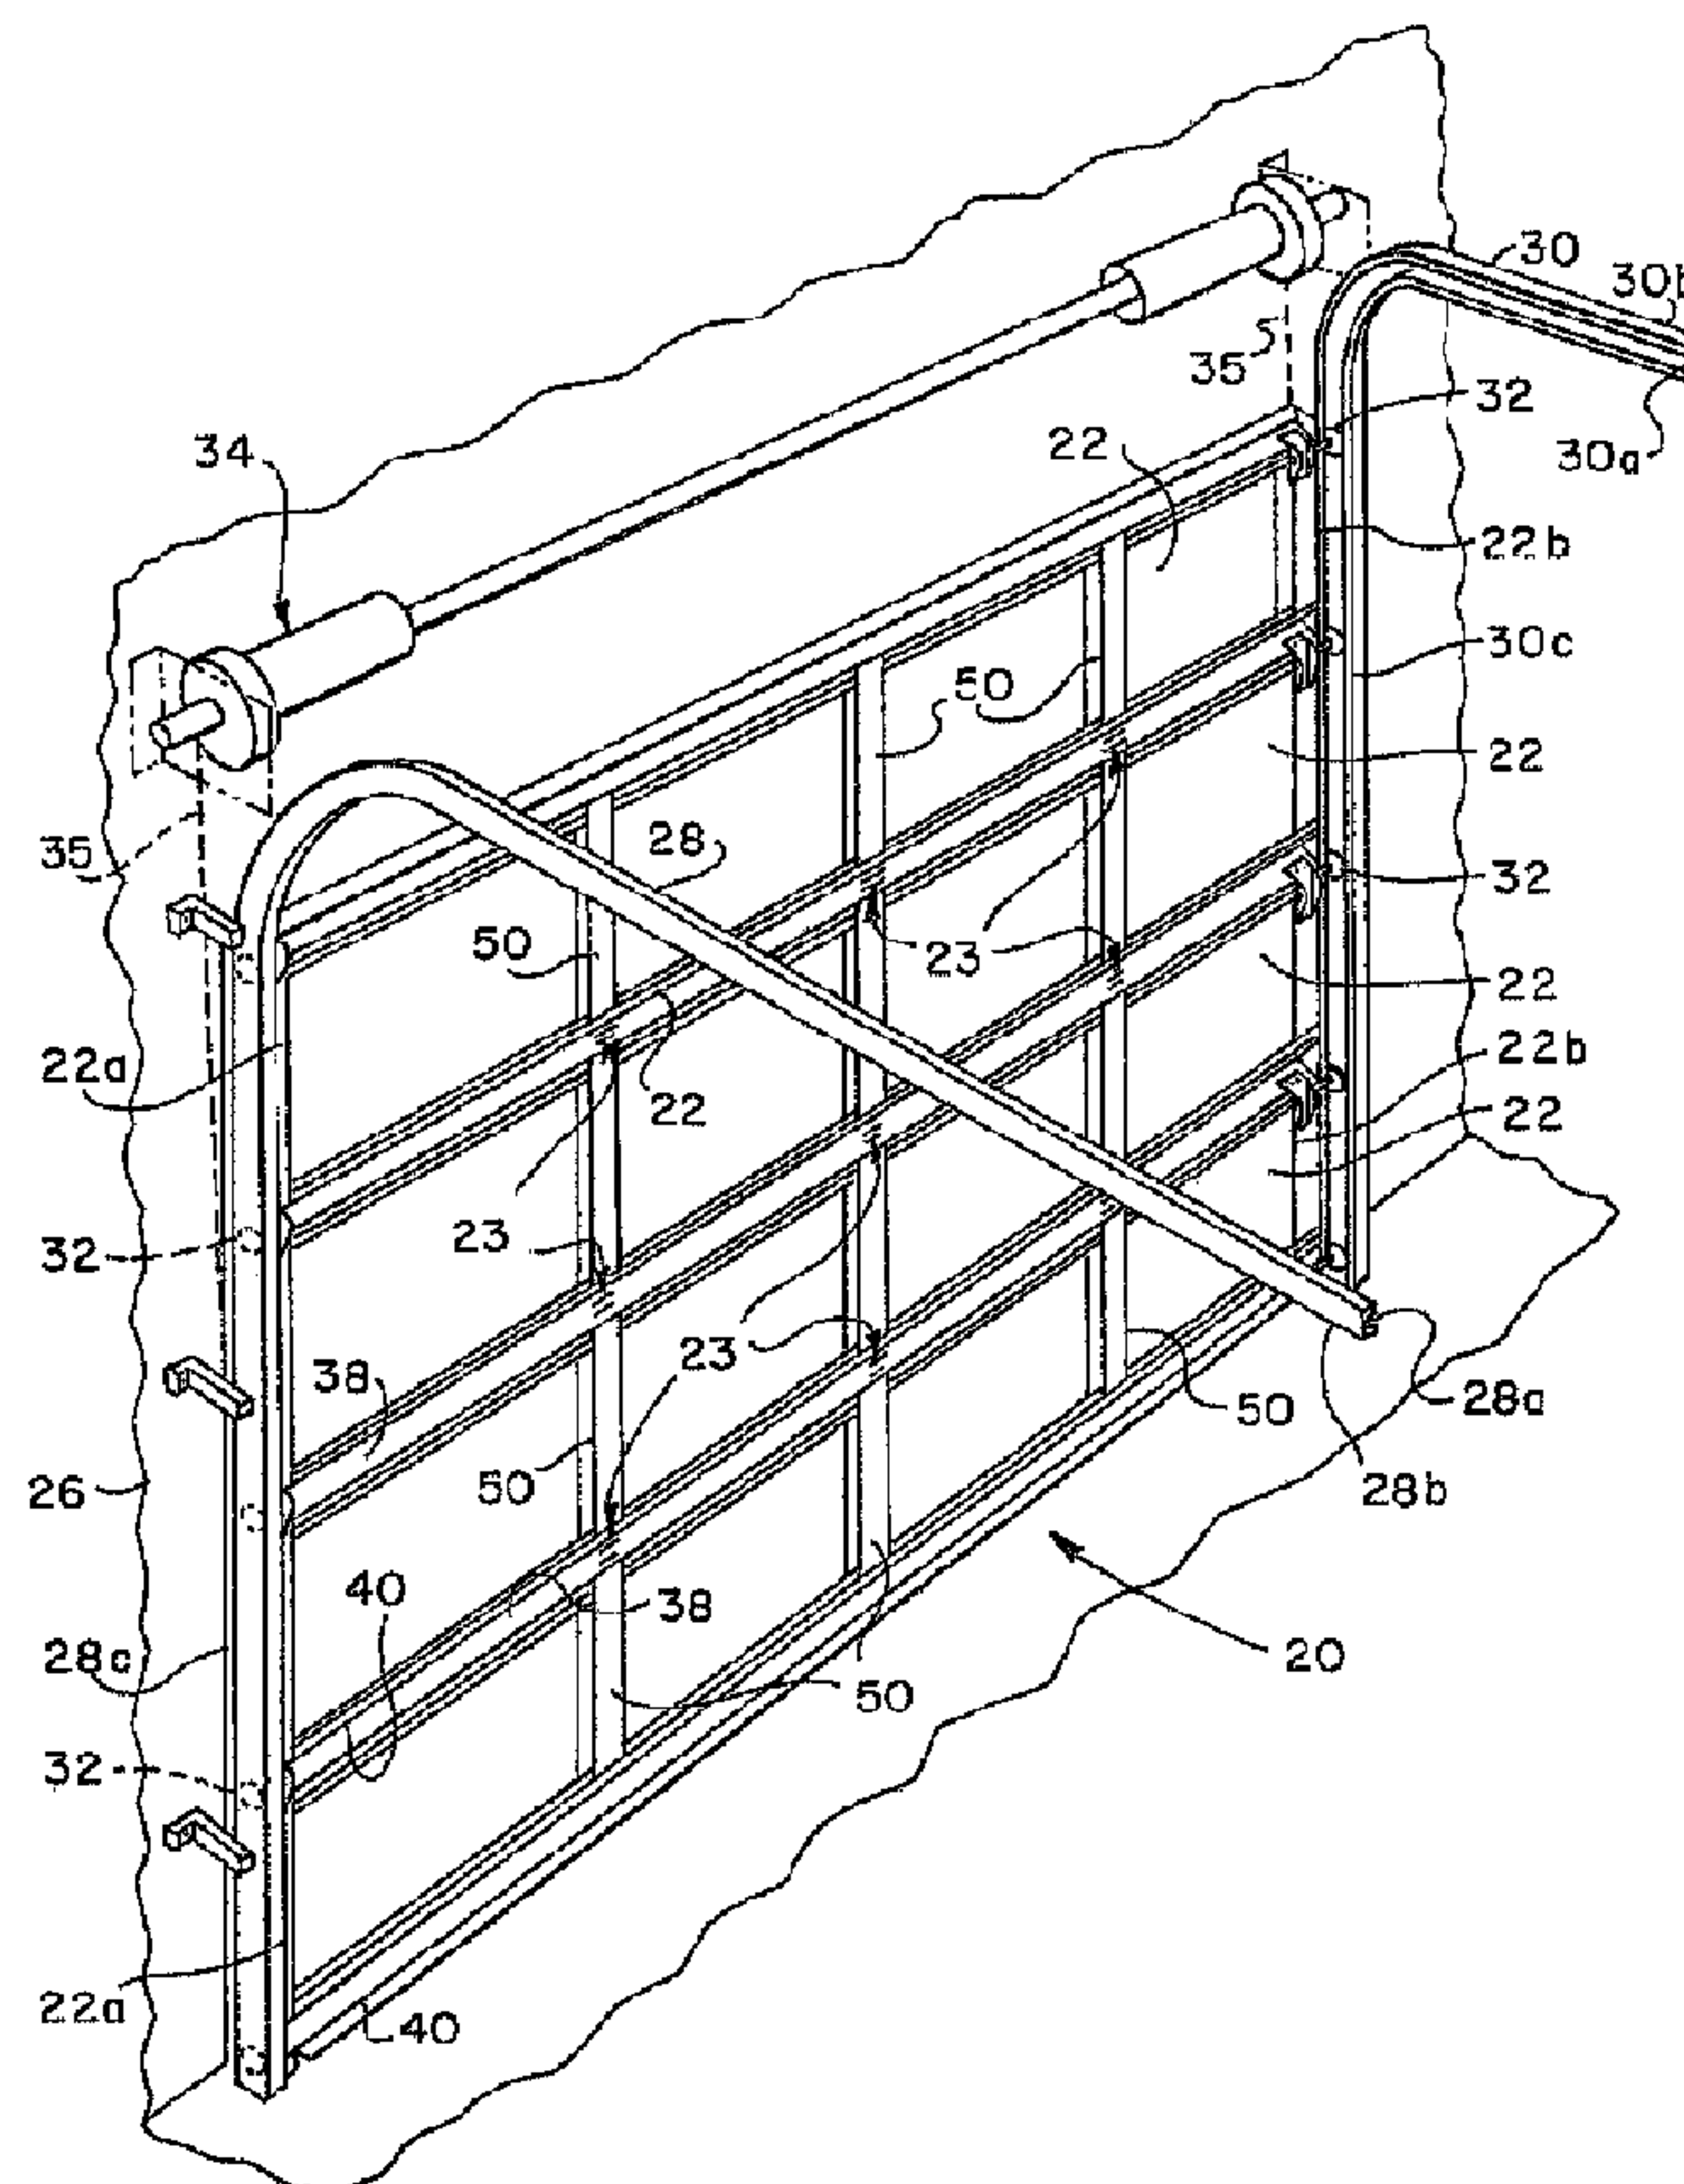

(57) Abrégé/Abstract:

A sectional upward acting door includes interconnected door panels which are formed with generally planar outer and inner wall parts and upper and lower edges which cooperate to provide a pinch resistant joint between door panels when they are pivoted relative to each other. Spaced apart snap together hinge assemblies and snap in place guide roller support brackets may be used



**(57) Abrégé(suite)/Abstract(continued):**

to assemble the door by moving the panels into assembly with each other between the door guide tracks. The panel edge profiles are formed by a convex surface on an upper edge of one panel and a cooperating concave multiple planar segment surface on the lower edge of the adjacent panel. An elongated seal strip may be secured in a groove in the lower edge of one panel and engageable with the apex of the upper edge of the adjacent panel. The panels are formed with inclined wall parts spaced inwardly of the pinch resistant edge profiles for supporting the hinge assemblies within a recess so that the hinge assemblies do not protrude inwardly of the generally coplanar inner wall parts of the panels. The hinge assemblies include opposed hinge plates with separate or integrally formed hinge pins on one hinge plate and the other hinge plate is formed with opposed elastically deflectable retainer tabs which allow the hinge pin to be snapped into a bearing bore in the other hinge plate to facilitate connecting the door panels to each other.

## ABSTRACT OF THE DISCLOSURE

A sectional upward acting door includes interconnected door panels which are formed with generally planar outer and inner wall parts and upper and lower edges which cooperate to provide a pinch resistant joint between door panels when they are pivoted relative to each other. Spaced apart snap together hinge assemblies and snap in place guide roller support brackets may be used to assemble the door by moving the panels into assembly with each other between the door guide tracks.

The panel edge profiles are formed by a convex surface on an upper edge of one panel and a cooperating concave multiple planar segment surface on the lower edge of the adjacent panel. An elongated seal strip may be secured in a groove in the lower edge of one panel and engageable with the apex of the upper edge of the adjacent panel. The panels are formed with inclined wall parts spaced inwardly of the pinch resistant edge profiles for supporting the hinge assemblies within a recess so that the hinge assemblies do not protrude inwardly of the generally coplanar inner wall parts of the panels. The hinge assemblies include opposed hinge plates with separate or integrally formed hinge pins on one hinge plate and the other hinge plate is formed with opposed elastically deflectable retainer tabs which allow the hinge pin to be snapped into a bearing bore in the other hinge plate to facilitate connecting the door panels to each other.

TITLE: UPWARD ACTING SECTIONAL DOOR WITH PINCH RESISTANT  
EDGE PROFILE BETWEEN DOOR PANELS

#### FIELD OF THE INVENTION

The present invention pertains to an upward acting multipanel or sectional door with pinch resistant edge profiles between the door panels and wherein the panels are  
5 interconnected by hinge assemblies which may be snapped together to facilitate assembly of the door.

#### BACKGROUND

Multipanel or so-called sectional garage doors and the like have been developed with panel edge profiles between  
10 adjacent door panels which are adapted to minimize pinching a person's fingers between the panels when the door moves to a closed position. Although various configurations of door panels with pinch resistant edge profiles are known in the prior art, there has been a continuing need to provide an  
15 improved sectional door construction wherein a pinch resistant edge profile is provided between adjacent door panels or sections while satisfying other desiderata in the

construction, assembly and operation of multipanel or sectional upward acting garage doors, in particular.

One improvement which has been sought in the development of sectional upward acting doors is the provision of door panels which may be fabricated economically while providing a suitable shape or profile of the upper and lower edges of the panels to minimize the chance of pinching a person's fingers between adjacent panels at the outer or inner side of the door during movement of the panels between door open and closed positions.

Another problem which has not been satisfactorily solved by prior art sectional door designs is the provision of a panel configuration, with or without a pinch resistant edge profile, which also provides for minimizing or eliminating hinge parts which project from the plane of the inner side of the door panel. Accordingly, there has been a need and desire to provide sectional doors wherein the door panels may be stored and shipped to an installation site as substantially flat panels without irregular thickness caused by hinge members or guide member support parts projecting from the plane of the panels.

Still further, there has been a need to provide sectional door assemblies wherein the door panels may be easily connected to each other during assembly of the door at its installation site. In this regard, it has also been deemed desirable to provide for hinge assemblies for interconnecting adjacent door panels wherein the hinge leaves may be easily connected to each other and wherein the hinge leaves may be preassembled to the respective panels, if desired, prior to shipment of the door to the installation site. Furthermore, it has been deemed desirable to provide panel guide member

support brackets which permit substantially lateral assembly of the panels between the door guide tracks.

Other desiderata in the art of sectional upward acting doors have been provided by the present invention, as will be appreciated by those skilled in the art upon reading the detailed description which follows in conjunction with the drawing.

#### SUMMARY OF THE INVENTION

The present invention provides an improved sectional upward acting door which includes door panels having cooperating edge profiles which minimize pinching action therebetween when moving between door open and closed positions.

In accordance with one aspect of the present invention, a sectional upward acting door is provided with door sections or panels which are preferably constructed of rolled or extruded metal or plastic and have cooperating edge profiles wherein the panel edges coact in such a way as to minimize a pinching action therebetween and which edges have a configuration which facilitates interconnecting the door panels by improved hinge assemblies which, preferably, do not project inwardly beyond the inner plane of the door panel. The configuration of the door panels is also advantageous with respect to the configuration of and fabrication of multiple door types which include uninsulated panels as well as insulated panels of varying insulation thickness.

In accordance with another aspect of the present invention, a sectional upward acting door is provided which includes improved hinge assemblies for interconnecting the adjacent door panels, which hinge assemblies are adapted to cooperate with the door panels to be disposed substantially

within a channel or trough space formed between adjacent panels when the door is in a closed position to eliminate projection of the hinge assemblies from the inner side or plane of the door panels.

5       In accordance with yet another aspect of the present invention hinge assemblies, particularly useful for interconnecting panels of a multipanel or sectional type door, are provided wherein opposed leaves of the hinge assemblies may be "snapped" or pushed together to facilitate ease of  
10 assembly of respective door panels to each other. In this way, the door hinge parts or leaves may be assembled to the respective panels prior to shipment to the installation site and the door panels may be interconnected onsite by merely "stacking" the door panels one on top of the other, during  
15 which process the hinge parts or leaves automatically interengage with each other to form hinge assemblies between adjacent panels.

Still further, the present invention provides an improved sectional or multipanel garage door and the like which  
20 includes hinge assemblies which may be easily snapped or pushed together and also includes improved door guide member support brackets which may also be quickly assembled to a door panel by a snap-in or push-in type motion to assemble the guide member support brackets to structural members of a door  
25 panel. In this way the door panels may be assembled substantially laterally with respect to the door guide tracks which receive the aforementioned guide members. Accordingly, an improved door assembly method is also provided which avoids a requirement to preassemble the guide member support brackets  
30 to the door panels, thus providing for easier packing and shipping. Moreover, the door panels do not require to be assembled by lifting the panels into positions required by

prior art door panels with preassembled guide member support brackets and which must be connected to the guide tracks by inserting the door panels into the horizontal overhead run portion of the guide tracks. Accordingly, the door panels being  
5 fitted to a door opening may be assembled by stacking the panels vertically or inserting the panels through the horizontal sections of the guide tracks, if desired. A major advantage of the configuration of the improved sectional door is that the door panels no longer require that the hinge components be fastened  
10 to the panels after they have been put in place adjacent each other in the door opening or in the overhead horizontal run portion of the guidetracks.

According to one aspect of the present invention then, there  
15 is provided a sectional upward acting door including interconnected door panels, the panels comprising generally planar rectangular members each having a generally planar outer wall part and generally planar inner wall parts spaced from the outer wall part, an elongated upper edge of the panel including  
20 an upwardly projecting convex surface extending at an angle with respect to the outer wall part and including a curvilinear portion adjacent to and contiguous with a generally planar wall portion, and an inclined wall part extending from the generally planar wall portion, an elongated lower edge of the panel  
25 including a tip portion contiguous with the outer wall part, a concave part of the lower edge and a further inclined wall part extending from the concave part, the upper and lower edges being cooperable with each other between adjacent interconnected panels to form a pinch resistant joint when the adjacent panels are  
30 pivoted relative to each other, and plural hinge assemblies spaced apart along and interconnecting adjacent ones of the panels, the hinge assemblies including opposed hinge plates which are operable to engage upon moving adjacent panels toward each other to thereby pivotably connect the adjacent panels, the hinge  
35 plates being connected by fasteners to the inclined wall part of one panel adjacent its upper edge and the inclined wall part

adjacent the lower edge of an adjacent panel, respectively, whereby the hinge assemblies are disposed substantially entirely between the outer wall part and the inner wall parts of the panels, respectively, and form a pivot connection between  
5 adjacent panels.

According to another aspect of the invention, there is provided a sectional upward acting door comprising interconnected door panels, each of the panels comprising generally planar  
10 rectangular members, each having a generally planar outer wall part and generally planar inner wall parts spaced from the outer wall part, an elongated upper edge of the panel including an upwardly projecting convex surface extending inwardly with respect to the outer wall part toward the inner wall part and  
15 including a first planar segment inclined with respect to the outer wall part, a further surface inclined with respect to the first planar segment and with respect to the outer wall part, a second planar segment contiguous with and inclined with respect to the further surface and the outer wall part, a curvilinear  
20 portion having a first radius of curvature and disposed adjacent to and contiguous with the second planar segment and an apex of the upper edge, the apex being curvilinear and having a second radius of curvature less than the first radius of curvature, the apex being contiguous with a generally planar wall portion  
25 extending substantially parallel to the outer wall part, an elongated lower edge of the panel including a downwardly projecting curvilinear tip portion contiguous with the outer wall part and a concave part of the lower edge formed by plural planar segments inclined with respect to the outer wall part at  
30 successively increasing acute angles of inclination with respect to the outer wall part, the upper and lower edges being cooperable with each other between adjacent interconnected panels to form a pinch resistant joint when the adjacent panels are pivoted relative to each other.

According to a further aspect of the invention, there is provided a sectional upward acting door including interconnectable door panels, the panels comprising generally planar rectangular members having respective upper and lower  
5 edges, the panels being adapted to be interconnected to each other by plural hinge assemblies spaced apart along and interconnecting adjacent ones of the panels and forming a pivot connection between adjacent panels, respectively, the hinge assemblies including opposed hinge plates adapted to be  
10 interconnected to each other by moving one panel adjacent to another panel, the hinge plates including cooperating parts which engage upon moving the one panel adjacent the another panel in one direction thereby pivotably connecting the panels, the cooperating parts preventing disengagement of the panels from  
15 each other during movement of the door between open and closed positions in a direction opposite the one direction.

According to another aspect of the invention, there is provided a method for assembling a sectional upward acting door  
20 wherein the door is operable to be supported for movement between open and closed positions between a pair of opposed spaced apart guide tracks, the door including plural, generally planar panel members adapted to be connected to each other along opposed edges of adjacent panel members and the door including plural hinge  
25 assemblies including, respectively, opposed hinge plates adapted to be connected to upper and lower edges of adjacent panels, respectively, and plural guide member support brackets also adapted to be connected to the panels, respectively, the method comprising the steps of: placing a first panel between the guide  
30 tracks and connecting the first panel to the guide tracks; placing a second panel between the guide tracks and adjacent to the first panel wherein an edge of the first panel is adjacent an edge of the second panel; moving the panels toward each other to connect the panels by engaging the hinge plates of the hinge  
35 assemblies with each other, respectively; and mounting at least

two support brackets on the second panel with opposed guide members connected to the support brackets to support the second panel between the guide tracks.

5        According to a still further aspect of the invention, there is provided a hinge assembly for interconnecting panels of a multipanel door, the hinge assembly comprising: opposed hinge plates including means for mounting the hinge plates on adjacent panels of a multipanel door, respectively, a hinge pin on one of  
10 the hinge plates, at least one bearing bore on the other of the hinge plates for receiving the hinge pin in response to moving the one hinge plate toward the other hinge plate in one direction and an elastically deflectable retainer on the other hinge plate operable in response to engagement with the hinge pin during  
15 assembly of one panel of the door to an adjacent panel to deflect to provide for insertion of the hinge pin in the at least one bearing bore, the retainer being engageable with the hinge pin to prevent disengagement of the hinge plates from each other by any force applied through the hinge pin in a direction opposite  
20 the one direction during movement of the panels between door open and door closed positions.

      According to another aspect of the invention, there is provided a hinge assembly for interconnecting panels of a  
25 multi-panel door, the hinge assembly comprising: opposed hinge plates including means for mounting the hinge plates, respectively, on adjacent panels of a multipanel door; one of the hinge plates including an elongated hinge pin; the other of the hinge plates including a bearing part comprising opposed  
30 upstanding wall parts formed with opposed hinge pin retainer fingers inclined toward each other to form a slot opening toward a bearing bore for the hinge pin, the opposed fingers being elastically deflectable to allow the hinge pin of the one hinge plate to be moved in one direction into the bearing bore and the  
35 fingers being characterized such that, upon the hinge pin of the

one hinge plate passing through the slot, the fingers are operable to retain the hinge plates connected to each other and the fingers are not operable to be deflected by any force applied through the hinge pin to allow removal of the hinge pin from the bearing bore by urging the hinge pin in a direction opposite the one direction.

Those skilled in the art will further appreciate the above-mentioned features and advantages of the present invention together with other important aspects thereof upon reading the detailed description which follows in connection with the drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a perspective view of an improved sectional upward acting door in accordance with the invention;

FIGURE 2 is an exploded perspective view of two adjacent door panels, including the bottom panel of the sectional door shown in FIGURE 1;

FIGURE 3 is a detail perspective view of two adjacent panels of the door shown in FIGURE 1 together with one embodiment of a hinge assembly for interconnecting the panels;

25

FIGURE 4 is a detail section view taken normal to the panel hinge pivot axis and showing the configurations of the cooperating edges of the door panels which provide the pinch resistant profile;

FIGURE 5 is a section view of a fully insulated door panel in accordance with the invention with a rear skin or backer member removed therefrom;

FIGURE 6 is a section view of a partially insulated door panel in accordance with the invention;

FIGURE 7 is a section view of another partially insulated door panel in accordance with the invention;

FIGURE 8 is a detail section view similar to FIGURE 4 showing another embodiment of a door panel in accordance with the invention;

FIGURE 9 is an exploded perspective view of one preferred embodiment of a hinge assembly in accordance with the present invention;

FIGURE 10 is a perspective view of the hinge assembly shown in FIGURE 9 assembled and connected to adjacent door panels;

FIGURE 11 is an exploded perspective view of a first alternate embodiment of a hinge assembly in accordance with the invention;

FIGURE 12 is a view of the hinge assembly of FIGURE 11 in an assembled condition;

FIGURE 13 is an exploded perspective view of a second alternate embodiment of a hinge assembly in accordance with the present invention;

FIGURE 14 is a perspective view of the hinge assembly of FIGURE 13 in an assembled condition;

FIGURE 15 is developed plan view of one of the hinge leaves of the hinge assembly shown in FIGURES 13 and 14;

FIGURE 16 is a detail section view taken from the line 16-16 of FIGURE 14 and showing the upper hinge leaf rotated to an alternate position;

FIGURE 17 is a perspective view of two adjacent door panels shown connected by one embodiment of hinge assemblies in accordance with the invention and also showing two opposed guide member support brackets in accordance with the invention;

FIGURE 18 is an end elevation of one of the end stiles for supporting the guide member support brackets shown in FIGURE 17;

FIGURE 19 is a detail side elevation of a part of the end stile shown in FIGURES 17 and 18;

FIGURE 20 is a detail view showing the configuration of one of the guide member bracket support tabs for the stile member shown in FIGURES 18 and 19;

FIGURE 21 is a rear elevation of a guide member support bracket;

FIGURE 22 is a detail section view taken generally along the line 22-22 of FIGURE 20;

FIGURE 23 is a perspective view of an uninsulated door panel in accordance with the present invention;

FIGURE 24 is a detail view of a portion of the panel shown in FIGURE 23 on a larger scale;

FIGURE 25 is a section view taken generally along the line 25-25 of FIGURE 23; and

FIGURE 26 is a detail section view taken generally along the line 26-26 of FIGURE 25.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the description which follows, like parts are marked throughout the specification and drawing with the same reference numerals, respectively. The drawing figures may not necessarily be to scale and certain features of the invention

may be shown in generalized form in the interest of clarity and conciseness.

Referring to FIGURE 1, there is illustrated a sectional upward acting door in accordance with the invention and generally designated by the numeral 20. The door 20 comprises a plurality of interconnected, generally planar door panels 22 which are configured to have edge profiles which cooperate with each other between adjacent door panels to provide for minimizing pinching of a person's fingers, for example, when the door panels are moved relative to each other between open and closed positions of the door. The door panels 22 are interconnected by improved hinge assemblies in accordance with the invention, one embodiment of which is illustrated in FIGURE 1 and designated by the numeral 23. The hinge assemblies 23 are spaced apart between opposite side edges 22a and 22b of the respective door panels 22, as illustrated in FIGURE 1. The sectional door 20 is also supported for movement between the closed position shown, which closes an opening in a wall 26, and an open position by spaced apart guide tracks 28 and 30.

Opposed guide members 32 are mounted on the door 20 at spaced apart positions on panels 22 in a manner to be described in further detail herein and are retained in generally channel shaped grooves 28a and 30a formed in the guide tracks 28 and 30, respectively, in a known manner for supporting the door in its open and closed positions and for guiding the door during movement therebetween. The guide tracks 28 and 30 are configured to include horizontal run portions 28b and 30b for storing the door 20 in its open position and vertical run portions 28c and 30c for supporting the door in its closed position. A suitable counterbalance mechanism 34 is mounted on wall 26 generally above and

adjacent to the door 20 and is connected to the door by spaced  
apart depending cables or similar suitable flexible members  
35, also in a known manner. Operator mechanism for moving the  
door 20 between open and closed positions may be of a  
5 conventional type, not shown.

Referring to FIGURES 2 and 3 and FIGURE 2, in particular,  
10 two adjacent panels 22 are shown in an exploded view wherein  
the hinge assemblies 23 are positioned spaced apart from each  
other and are adapted to interconnect the panels. Each of the  
panels 22 has an upper longitudinal edge 38 and a lower,  
generally parallel longitudinal edge 40. The panels 22 are  
15 preferably reinforced by structural members comprising opposed  
end stiles 42 and 44 having rearwardly facing flanges 43 and  
45, respectively, and lateral flanges 46 and 47, respectively,  
for closing the side edges 22a and 22b of the panels. The  
stiles 42 and 44 are adapted to support guide member support  
20 brackets, not shown in FIGURE 2, for supporting the guide  
members 32 shown in FIGURE 1. The guide member support  
brackets are preferably a type to be described in further  
detail herein. Intermediate reinforcing members or stiles 50,  
see FIGURE 1, may also be secured to the panels 22 and  
25 extending between the edges 38 and 40 of each panel.  
Intermediate stiles 50 are used, particularly, if the door  
panels are uninsulated whereby the panels require the  
additional support which otherwise is provided by insulation  
material.

30 Referring further to FIGURES 3 and 4, each panel 22 may  
be formed of a rolled or extruded metal or plastic sheet  
including a generally planar outer wall 52 extending between

the top edge 38 and bottom edge 40. The top edge 38 of each panel is formed by a first inwardly sloping generally planar surface 54 which is contiguous with the outer surface 52 and also with a concave curvilinear surface 56, as shown in FIGURE 4 in particular. Upper edge 38 is also formed by a further upwardly and rearwardly inclined surface 58, FIGURE 4, which forms an angle "m" with planar surface 52 in a range of about 19° to 20°. Surface 58 is contiguous with a second upwardly and rearwardly inclined surface 60 which forms an angle "n" with the surface 52 of between about 23° to 25°. Surface 60 is contiguous with a convex curvilinear surface 62 having a substantially constant radius and which is also contiguous with a convex curvilinear surface 64 of significantly smaller radius of curvature with respect to surface 62 at the apex of the edge 38. Curvilinear surface 64 is further contiguous with a generally vertically extending planar surface 66 which is substantially parallel to surface 52 of panel 22 and is also contiguous with an inclined surface 68, preferably forming an angle of about 45° with respect to surface 52. Inclined surface 68 extends between vertical surface 66 and an inner, generally planar and downwardly extending wall part 70 which is parallel to surfaces 52 and 66.

Inner wall part 70 is intersected by a portion of panel 22 forming a groove 72 which extends generally normal to inner wall part 70 and outer panel wall part or surface 52. Finally, the upper end of each panel 22, preferably terminates in a further portion of inner wall part 74 which extends to a downwardly facing edge 74a. Generally planar inner wall part 74 is offset slightly toward outer wall part or surface 52 from inner wall part 70 or may be substantially coplanar with inner wall part 70. As further shown in FIGURE 4, as well as FIGURE 3, a generally planar reinforcing plate 76 extends

along and is contiguous with inclined surface 68 for supporting suitable threaded fasteners for securing a lower leaf or plate member of the hinge assembly 23 to the inclined surface 68 of panel 22 in the manner shown in FIGURES 3 and 4.

5 Referring still further to FIGURE 4, in particular, the lower edge 40 of each panel 22 is defined by a circular radius convex tip 78 contiguous with the outer wall part or surface 52 and with a generally planar upwardly inclined surface 80 which extends inwardly from the surface 52 at an angle in the  
10 range of about  $11^{\circ}$  to  $12^{\circ}$  with respect to the planar surface 52. Planar surface 80 is contiguous with a second planar surface 82 which extends inwardly toward the inner wall of panel 22 and at an angle of about  $24^{\circ}$  to  $25^{\circ}$  with respect to surface 52. A third generally planar surface 84 extends at a  
15 further steeper angle with respect to surface 52 to an elongated groove or recess 86 which extends the length of the edge 40 and is adapted to receive a resilient elastomeric seal member 88 forcibly retained therein or by means such as a suitable adhesive. As shown in FIGURE 2, a flexible,  
20 elongated bottom edge seal strip 91 may be retained in groove 86 of the lowermost panel 22 to seal the bottom edge of door 20 against a floor surface, if desired.

A still further inclined surface 90 extends from groove 86 at an angle of about  $60^{\circ}$  with respect to surface 52 to an  
25 inner lower panel wall part 92 which extends upwardly toward wall part 70 and is coplanar therewith. Inner surface or wall part 92 is intersected by a transverse groove 94 extending normal thereto. Finally, a generally planar wall part 96 extends parallel to wall part 92 and may be slightly offset  
30 therefrom toward surface 52. Wall part 96 terminates at an upwardly facing edge 96a, viewing FIGURE 4. A generally planar reinforcing plate 98 extends along the inside surface of panel

wall part or surface 90 and is suitably adhered thereto to form a reinforcement for threaded fasteners adapted to secure the upper leaf or plate of hinge assembly 23 to the panel at the surface 90. The parts aforescribed for edges 38 and 40  
5 extend between side edges 22a and 22b of each panel 22.

Several benefits are achieved by the configurations of the cooperating top edges 38 and bottom edges 40 of the panels 22. As will be appreciated from viewing FIGURES 3 and 4, the configurations of the panel edges 38 and 40 provide for a  
10 cavity, generally designated by numeral 100 and defined generally by the surfaces or wall parts 66, 68 and 90 when the panels are mounted adjacent to each other and extend substantially coplanar with each other to receive the hinge  
15 assemblies 23 substantially within the confines of the panels. In other words, hinge assemblies 23 do not extend rearwardly of the surfaces or wall parts 70 and 92 to thereby provide a generally flush, unobstructed inner surface of the door 20. Pivot axis 102, FIGURE 4, of each hinge assembly 23 is  
20 disposed between the inner surface of the door 20 defined by the panel surfaces or wall parts 70 and 92 and the outer surface or wall part 52. This location of the hinge pivot axis also minimizes the clearance requirements for the door 20 when the panels 22 articulate with respect to each other.

The geometry of the portion of the edge 38 defined by the  
25 surfaces 58, 60 and 62 is generally convex but not curved throughout its extent, primarily so as to facilitate ease of fabrication. Still further, the configuration of the edge 40 between the tip 78 and the groove 86 is somewhat concave but also not curvilinear, and therefore has no radius of  
30 curvature, also to facilitate fabrication. Thus the panel edge configurations 38 and 40 provide for ease of manufacture of the panels 22, provide adequate clearance between the edges

38 and 40 during articulation of the panels but also minimizes the gap between the edges 38 and 40 to prevent a person's fingers being inserted between the panels from either side of the door 20. The seal member 88 advantageously engages the edge 38 to provide a substantially weathertight seal when the door 20 is in a closed position and cushions the final stage of movement between door panels 22 when moving to the position shown in FIGURES 3 and 4.

As also shown in FIGURES 3 and 4, a variable thickness gap 106 is formed between the edges 38 and 40 in the closed position of the door 20 to provide adequate clearance between the edges 38 and 40 as the panels 22 articulate with respect to each other. However, the gap 106 is of reduced width, particularly at the point where the convex circular tip 78 is disposed adjacent the surfaces 54, 56, 58 to minimize the insertion of any object, including a person's fingers between the panels, and to assist in providing a weathertight joint between panels in the closed position of the door 20. Moreover, the concave, segmented configuration of the edge 40 provided by the surfaces 80, 82 and 84 maintains a sufficiently narrow gap distance between the tip 64 and the seal member 88 as well as the bottom edge 40 to prevent insertion of an object, including a person's fingers, between the door panels 22 from the inner side of the panels when the panels are articulating or pivoting with respect to each other. Moreover, the portion of the overall width of a panel 22 which is required for the portions of the edges 38 and 40 which provide the pinch resistant edge profile is less than about 50% of the overall width or thickness of the panel 22. This arrangement also simplifies manufacturing or fabrication of the panel and strengthens the panel edges against unwanted plastic deflection.

Referring again to FIGURE 3, each hinge assembly 23 includes opposed hinge plates or leaves 110 and 112, both of which are generally channel shaped. Hinge plate 110 includes a base web 110a and spaced apart flanges 110b extending normal to web 110a. Hinge plate 112 includes a base web 112a and spaced apart flanges 112b extending normal to the web 112a. A cylindrical tubular hinge pin 114 extends through suitable bores in the flanges 110b and 112b and may be force fitted in the bores in the flanges 110b to retain the hinge plates 110 and 112 connected to each other. The hinge plates 110 and 112 are suitably connected to adjacent panels 22 by conventional hexhead self-tapping threaded fasteners 116 extending through suitable bores in the webs 110a and 112a and through the wall parts or surfaces 68 and 90 as well as the reinforcing plates 76 and 98 to provide a hinge connection between panels 22.

Referring now to FIGURE 5, the panels 22 may be modified to be further reinforced and to have additional insulative properties by filling a cavity 25 between the top and bottom edges 38 and 40 with a suitable insulative foam material 25a. The cavity 25 is preferably closed by a generally planar sheet backer member 120 formed of steel, plastic or a metal foil Kraft paper composite, for example. Backer member 120 includes opposed generally parallel short flanges 122 and 124 insertable in the grooves 72 and 94. The backer member 120 is preferably secured to the insulative foam 25a and wall parts or surfaces 74 and 96 by a suitable adhesive.

FIGURE 6 illustrates a further modified panel 22 wherein a backer panel or member 126 similar to the backer 120 is provided but is of a configuration which includes a planar wall part 128 which is recessed inwardly toward the surface 52 to reduce the thickness of an insulation foam layer 25b from that of the panel embodiment shown in FIGURE 5. FIGURE 7

illustrates a further embodiment of panel 22 wherein a backer member 130 includes a planar wall part 132 recessed even further toward the surface 52 to further reduce the thickness of an insulation foam layer 25c. The backer members 126 and 130 are otherwise constructed like the backer member 120 including opposed flanges insertable in the grooves 72 and 94 and being adapted to be adhered to the inner wall parts or surfaces 74 and 96.

Referring now to FIGURE 8, an alternate embodiment of a door panel in accordance with the invention is illustrated by showing the upper and lower edges of adjacent panels. The panels of the embodiment of FIGURE 8 are generally designated by the numerals 136 and have outer, generally planar, wall parts or surfaces 52a. Upper and lower panel edges 38a and 40a are formed with cooperative edge surfaces substantially like the panels 22, that is, lower edge 40a includes a tip 78a and contiguous surfaces 80a, 82a and 84a having generally the same geometry with respect to the surface 52a as the corresponding surfaces of the panel 22. However, the panel member portion making up the surfaces 52a, 78a, 80a, 82a and 84a terminates in a flange portion 85 extending generally parallel to surface 52a. Each panel 136 is formed of a second panel part delimited by a flange 87 spaced from the flange 85 and contiguous with an inclined surface 90a which extends to surfaces 92a, 96c, which are intersected by a groove 94a, as shown in FIGURE 8. The panel parts 136a and 136b are secured together at the flanges 85 and 87 by an elongated resilient elastomeric gasket or seal member 88a disposed between flanges 85 and 87, and secured thereto by a suitable adhesive.

Referring further to FIGURE 8, in like manner the edge 38a extends inwardly from outer surface or panel wall part 52a and is formed by a concave curvilinear surface 56a and

contiguous surfaces 58a, 60a and 62a having geometry similar to the surfaces 58, 60 and 62 of the panel 22. However, surface 62a is contiguous with a convex curved apex or tip 64a which is also contiguous with a planar distal flange 89 extending generally parallel to surface 52a. The upper edge of a third panel part 136c is formed by an in-turned flange 91 forming the terminal part of rear panel surface 66a which is contiguous with an inclined surface 68a. Surface 68a terminates in a generally planar inner wall part or surface 70a similar to surface 70. A groove 72a and wall part 74c further define panel part 136c. An elongated elastomeric gasket or seal member 88b is sandwiched between and suitably secured to the flanges 89 and 91 to join the panel parts 136a and 136c together at the upper edge 38a. As shown in FIGURE 8, when adjacent panels 136 are interconnected by hinge assemblies 23, for example, and pivoted to the door closed position wherein the panels are substantially coplanar, the gasket or seal members 88a and 88b engage each other to form a substantially weathertight seal. The panels 136 may be hinge together by a hinge assembly 23 or by other embodiments of improved hinge assemblies in accordance with the invention to be described in further detail herein. One advantage of the panel 136 is the provision of a thermal break between the outer panel part 136a and the inner panel parts 136b and 136c, as provided by the combination gasket and seal members 88a and 88b.

Referring now to FIGURES 9 and 10, a preferred embodiment of a hinge assembly useful with the sectional door 20, as well as certain other sectional doors, is illustrated and generally designated by the numeral 140. The hinge assembly 140 includes upper and lower hinge leaves or plates 142 and 144 adapted to be secured, respectively, to the panel wall parts

or surfaces 90 and 68, as illustrated in FIGURE 10. The upper hinge plate 142 is a substantially channel shaped member having a base web 142a and opposed generally parallel flanges 142b and 142c, FIGURE 9, which extend normal to web 142a and are provided with suitable bores for receiving an elongated cylindrical tubular hinge pin 146 extending between and supported by the flanges 142b and 142c. The hinge pin 146 includes opposed distal ends 146a and 146b which project outwardly from the flanges 142b and 142c, as shown in FIGURE 9. The pin distal ends 146a and 146b may be flared slightly radially outwardly and disposed adjacent suitable reinforcing collars 142e, one shown in FIGURE 9, disposed between the pin distal ends and the flanges 142b and 142c, respectively.

The hinge plate 144 is also a generally channel shaped member having a base web 144a and upturned parallel flanges 144b and 144c spaced apart and extending generally normal to the web 144a. Flange 144b is provided with a pin receiving bore 148 and a generally outwardly flared funnel-like wall portion 150 providing a sloped recess for guiding the distal end 146a of pin 146 into the bore 148. An elastically deflectable pin retainer tab 152 defines part of the bore wall of the bore 148 and also forms part of the guide or wall portion 150 of flange 144b. Flange 144c is provided with a bore 148a coaxial with bore 148, and an outwardly flared funnel wall portion 150a of flange 144c including an elastically deflectable pin retainer tab 152a. Accordingly, flange 144c comprises a mirror image of flange 144b.

Hinge plates 142 and 144 may be secured together to provide the hinge assembly 140, as shown in FIGURE 10, by preferably first securing the hinge plates 142 and 144 to the respective wall parts or surfaces 90 and 68 with fasteners 116, for example. Then, when one panel 22 is desired to be

stacked on top of another panel 22, generally in the position shown in FIGURE 10, the panels are moved relative to each other, while being maintained substantially coplanar, to bring edges 38 and 40 adjacent each other while the opposed distal ends 146a and 146b of pin 146 are guided by the flared wall portions 150 and 150a until the tabs 152 and 152a are deflected sufficiently to allow the pin distal ends to snap into the bores 148 and 148a. The flared portions 150 and 150a are spaced apart sufficiently such that the pin 146 may be inserted therebetween and gradually forcibly engage the flared portions and elastically deflecting flanges 144b, 144c and the tabs 152 and 152a. When the pin 146 is secured to the hinge plate 144, as shown in FIGURE 10, the tabs 152 and 152a engage the pin distal ends 146a and 146b, respectively, to retain the pin 146 in the bores 148 and 148a and secured to the hinge plate 144 to form the hinge assembly 140.

Accordingly, in this way two door panels 22 may be assembled to each other by aligning one panel with the other and inserting the hinge pin distal ends into the bores of the hinge plates 144 in the manner just described to essentially snap the hinge plates 142 and 144 of the hinge assemblies 140 together to form the hinge assemblies and to secure the door panels 22 to each other for pivotal movement about the longitudinal central axes 151 of the hinge pins 146. If it is desired to disassemble the hinge assembly 140, the elastically deflectable tabs 152 and 152a may be deflected outwardly away from each other by a suitable tool, not shown, sufficiently to clear the distal ends 146a and 146b of pin 146 whereby the hinge plate 142 may be lifted out of engagement of the pin 146 with the flanges 144b and 144c by reversing the direction of movement of the hinge pin with respect to the hinge plate 144, as described above. Hinge pin 146 may comprise integral or

separately fabricated trunnions disposed on the flanges 142b and 142c and forming the pin distal ends 146a and 146b, respectively, if desired, instead of use of the continuous tubular pin, as shown.

5 Referring now to FIGURES 11 and 12, a first alternate embodiment of a snap together hinge assembly in accordance with the invention is illustrated and generally designated by the numeral 160. The hinge assembly 160 advantageously utilizes the hinge plate 142 and pin 146 but includes a  
10 substantially modified pin receiving hinge plate or leaf 162. Hinge plate 162 includes a mounting flange 164 comprising a generally flat rectangular plate-like part which is integrally joined with a semicylindrical bearing part 166 having a pin receiving bearing bore 168 formed therein, FIGURE 11, and  
15 extending between opposite sides 166a and 166b of bearing part 166. Bearing part 166 is dimensioned such that hinge plate 162 may be disposed between flanges 142b and 142c, as shown in FIGURE 12. Bearing part 166, FIGURE 11, includes opposed spaced part upstanding wall parts 169 and 170 which are  
20 integrally formed with in-turned opposed pin retainer fingers 171 and 172 which are inclined toward each other to form a somewhat V-shaped slot 173 which opens toward bearing bore 168. The opposed fingers 171 and 172 of the wall parts 169 and 170 are elastically deflectable toward their integral  
25 supporting wall parts 169 and 170 to provide sufficient clearance to allow a hinge pin 146 to be received in pin bearing bore 168. The elastically deflectable parts or fingers 171, 172 are dimensioned to further define the bore 168 so that once the pin 146 has passed through the slot 173  
30 and deflected the fingers 171 and 172 sufficiently to be disposed in the bore 168, the fingers 171 and 172 snap back

into the positions shown in FIGURE 11 to retain the pin 146 in bearing bore 168 and firmly attached to hinge plate 162.

Accordingly, the hinge assembly 160 also forms a snap together hinge, as illustrated in FIGURE 12, whereby movement  
5 of the hinge plate 160 toward the hinge plate 162 somewhat forcibly will enable the hinge pin 146 to momentarily elastically deflect the fingers 171 and 172 sufficiently to allow the pin to move into the bore 168 whereby the tabs then return to their original undeflected positions to retain the  
10 pin in the bore. As with the hinge assembly 140 shown in FIGURES 9 and 10, a suitable tool may be provided to elastically deflect the fingers 171 and 172 to enable the hinge plates 142 and 162 to be separated if it is desired to disassemble the hinge assembly 160.

15 Referring now to FIGURES 13, 14 and 16, a second alternate embodiment of a snap together hinge assembly in accordance with the present invention is illustrated and generally designated by the numeral 180. The hinge assembly 180 advantageously utilizes the lower hinge plate 162 but  
20 includes a one piece hinge plate or leaf 182 having an integral hinge pin 184 formed thereon. Hinge plate 182 includes a generally planar and rectangular web part 186 formed with suitable bores 183 therein for receiving fasteners 116 to secure the hinge plate 182 to the wall part or surface  
25 90, for example, of a panel 22. Web part 186 is integrally joined with a wall part 187 which, in turn, is integrally formed with the pin 184. Opposed hinge locating and restraining tabs 187a and 187b project normal the plane of the wall part 187 and are engageable with opposite end faces 166a  
30 and 166b of the hinge plate 162, FIGURE 14, to restrain axial displacement of the hinge plates relative to each other to prevent lateral disassembly of the hinge members of hinge

assembly 180 when the hinge plates or leaves 162 and 182 are in the position of these members indicated in FIGURE 14 or when the hinge plates are rotated relative to each other during normal movement of the door panels between door open and closed positions of the door.

However, as shown in FIGURE 16, the hinge plates 162 and 182 may be rotated relative to each other so that the restraining tabs 187a and 187b as well as the wall part 187 may be disposed between the fingers 171 and 172, as shown. In this position of the hinge plates 162 and 182 relative to each other, the plates may be separated by sliding the pin 184 out of the bore 168 along the bore axis. The hinge plates 162 and 182 would, normally, be disassembled from the door panels 22 before separation from each other in the manner just described. Tabs 187a and 187b may be integrally formed as part of the entire integral hinge plate 182 by suitable stamping operations, for example.

Referring briefly to FIGURE 15, which is a developed plan view of the hinge plate or leaf 182, the hinge plate 182 may be formed by removing metal to form the irregular shaped opening 189 and the inverted V-shaped recess 191 which corresponds in shape, substantially, to the triangular shaped part 184a of pin 184. Accordingly, when the larger generally rectangular part 184b and part 184a are rolled in opposite directions, the cylindrical hinge pin 184 may be formed and a somewhat chevron-shaped groove or slot 184c, see FIGURE 13, is formed which is advantageous and eliminates, substantially, the chance of snagging the hinge pin 184 by the distal ends of the fingers 171 or 172 when the hinge assembly 180 is working.

As illustrated in FIGURE 14, the hinge assembly 180 may be snapped together at any time, or once the respective hinge plates 162 and 182 have been secured to the respective top and

bottom edges of adjacent door panels in the same manner as the embodiments of FIGURES 9 through 12. The fingers 171, 172 are deflected by forcing the pin 184 into the bearing bore 168 while allowing the fingers 171 and 172 to be elastically returned to their normal working positions shown in FIGURES 13, 14 and 16, thanks to the elastic memory the fingers 171 and 172 retain as being formed of part of the spaced apart wall portions 169 and 170. Thanks also to the provision of the spaced apart tabs 187a and 187b, the hinge plate 182 may not be laterally displaced out of engagement with the hinge plate 162 during normal operation of the hinge assembly 180.

Those skilled in the art will appreciate that the hinge assemblies 140 and 160 are prevented from lateral disengagement since the flanges 142b and 142c of the hinge plate 142 are operable to engage the flanges of plate 144 or, respectively, the opposite side faces 166a and 166b of hinge plate 162. Of course, with respect to all of the embodiments disclosed in FIGURES 9 through 14, these hinge assemblies may be secured to the door panels in the manner that the hinge assembly 23 is secured, that is, by aligning the panels initially and securing the hinge plates to the respective edges of adjacent panels with fasteners 116, for example, with the respective hinge plates already secured to each other to form the hinge assemblies. However, a major advantage of the hinge assemblies 140, 160 and 180 is the provision of the snap together feature which allows the door panels to be prefabricated with the hinge plates of the respective hinge assemblies secured to the respective bottom and top edges of adjacent panels, if desired.

Referring now primarily to FIGURE 17, a portion of the sectional door 20 is illustrated including two adjacent panels 22 which are connected to each other by hinge assemblies 140,

as illustrated. The door 20 is also advantageously provided with spaced apart guide member support brackets 190 secured to the respective end stiles 42 and 44 in a unique manner, as will be described hereinbelow, and also secured to the inclined surface 68 of the panel upper edge, as illustrated, by fasteners 116, respectively. The brackets 190 are each adapted to support a guide member, such as a roller assembly 32, each of which includes a roller 32a supported for rotation on a shaft 32b. Each of the brackets 190 includes a substantially planar base or web part 192 and opposed parallel flanges 194 and 196 which extend normal to the web part 192 and support a substantially tubular bearing member 198 extending therebetween. Tubular bearing member 198 is adapted to support the shaft 32b of a roller assembly 32, as shown in FIGURE 17. The base or web 192 of each bracket 190 also includes an inclined portion 192a adapted to receive the fasteners 116 for securing the brackets, respectively, to the inclined surface 68 of the upper edge of a panel 22, as shown.

As further shown in FIGURE 17, as well as FIGURES 18 through 20, each of the end stiles 42 and 44 is adapted to receive the base or web part 192 of a bracket 190, respectively, secured to the stile by inserting a lower portion of the web 192 into receiving slots formed by laterally displaced and integrally formed retaining tabs 43a, 43b and 45a, 45b formed on the respective flanges 43 and 45. The end stiles 42 and 44 are substantially mirror images of each other and a further description of the end stile 42 is believed to be sufficient to enable one to practice the invention, including provision of the end stile 44.

Referring primarily to FIGURES 18 through 20, the end stile 42, as shown in FIGURE 18, has a cross section which includes the flanges 43 and 46 and a short flange 46f extending

generally parallel to the flange 43. The tabs 43a and 43b are displaced slightly outwardly from the plane of the flange 43 on the side of the flange 43 opposite the side which faces the flange 46f. The tabs 43a and 43b are formed by cutting the flange 43 along lines 43a', 43a'' and 43a''', as well as along lines 43b', 43b'' and 43b''', as also shown in FIGURE 20. Accordingly, the tab 43b is unsupported along the edges which correspond to the lines 43b', 43b'' and 43b''' to allow insertion of a corner of the lower portion of the web 192 of a bracket 190 to be supported by the tab, as also shown in FIGURE 20. Tabs 43a and 43b also prevent lateral displacement of the bracket 190 out of the slots formed by the tabs. Accordingly, a suitable die forming or other metal displacing operation may be performed to form the tabs 43a and 43b on the flange 43 as well as the tabs 45a and 45b on the flange 45 of end stile 44.

Referring now to FIGURE 21, an elevation view of the bracket 190 is shown wherein it is indicated that two integral bosses 192b and 192c are formed on the web 192 suitably spaced from lower edge 192d. Bosses 192b and 192c are preferably formed by displacing and partially shearing the material of the web 192 to form co-linear surfaces 192b' and 192c', respectively, see FIGURES 21 and 22. The bosses 192b and 192c project from the surface 192s of the web 192 in the direction of inclination of the web part 192a and are configured to allow snapping the bosses into the slots in the flange 43 which are formed by displacing the material of the flange 43 to form the tabs 43a and 43b. FIGURE 22 illustrates the manner in which the bracket 190 may be disposed in engagement with the flange 43 of the stile 42 wherein, for example, the tab 43b is shown displaced from the plane of the flange 43 to form the elongated slot and opening 43s adapted to receive the web 192 of a bracket 190 and

whereby the boss 192b may reside in the opening 43s with its edge 192b' engaged with a flange surface 43s'.

Accordingly, by inserting the web 192 of a bracket 190 between the tabs 43a and 43b and the flange 43, for example, the bracket may be forcibly engaged with and retained on the stile 42 by placement of the bosses 192b and 192c in the openings formed by the respective tabs 43a and 43b as shown and described for the tab 43b, for example. In this way, a bracket 190 may be moved into position adjacent the flange 43 or 45 of an end stile and then moved downwardly by sliding action until the bracket web 192 slides between the tabs of the associated flange and until the bosses are forcibly engaged with the flange in the manner described above to essentially lock the bracket 190 to a panel 22. After inserting the web 192 of a bracket 190 into engagement with the associated retaining tabs on a stile 42 or 44 and in the positions shown in FIGURE 17, the fasteners 116 may be applied to retain the bracket firmly attached to a panel 22. When it is desired to remove a bracket 190 from a panel 22, the fasteners 116 are removed and the bracket is then deflected away from the stile flange 43, for example, sufficiently to elastically deflect the tabs 43a and 43b, to allow the bosses to clear the edges 43s' to remove the bracket from the door panel.

Accordingly, an improved assembly method for a sectional door panel may be carried out utilizing one of the hinge assemblies such as a hinge assembly 140, 160 or 180 for interconnecting two adjacent panels and by also utilizing panels configured as illustrated in FIGURE 17, including the guide member retaining and support brackets 190. For example, viewing FIGURES 1 and 17, the lowermost panel 22 of the door 20 may be placed in position between the guide tracks 28 and 30 and connected to the guide tracks by guide members 32 which are connected to panel bottom edge guide member support brackets.

The upper edge 38 of lowermost panel 22 may then be suitably secured in place between the guide tracks 28 and 30 by placing  
5 respective guide members 32, in assembly with each of two opposed support brackets 190, respectively, in the guide tracks 28 and 30 and then sliding the respective brackets along and adjacent to the tracks into engagement with the end stiles 42 and 44 in the manner described above in conjunction with FIGURES  
10 18 through 22. The lowermost panel 22 is now secured between the tracks 28 and 30. The lowermost panel 22 will also, at this time, be provided with spaced apart hinge members 144, for example, secured to the upper edge 38 in the manner previously described while the next panel 22 to be connected to the  
15 lowermost panel 22 is assembled to hinge members 142 at corresponding spacings on the lower edge 40 of the next panel 22.

20 The next panel 22 may then be placed in position by moving the next panel generally laterally into a position between the guide tracks 28 and 30, and just above the lowermost panel 22 and then moving the next panel downward between the guide tracks to snap the hinge members 142 into  
25 engagement with the respective hinge members 144 to form the hinge assemblies 140. While holding the next panel 22 in position between the guide tracks 28 and 30, and substantially coplanar with the lowermost panel 22, the brackets 190, in assembly with guide members 32 may be positioned above the  
30 upper edge 38 of the next panel 22 while placing the guide member rollers 32a in the track grooves 28a and 30a and then moving the brackets downward to be snapped into the slots

formed by the tabs on the respective end stiles 42 and 44. Next panel 22 is now secured between the tracks 28 and 30 and is ready to receive a third panel 22 of the door 20 which is assembled to the door in the same manner just described.

5        Prior to assembly of a third panel to the door 20, brackets 190 may also be firmly secured to the upper edge 38 of the next or second panel by inserting the fasteners 116 in tight engagement with the web part 192a to secure each bracket 190 to the inclined surface 68 of a panel 22, for example.  
10       The above described process is repeated for the third and fourth panels as will be appreciated by those skilled in the art. Accordingly, assembly of the door 20 is easily accomplished with the improved hinge assemblies and guide member support brackets of the present invention as will be  
15       appreciated from the foregoing description read in conjunction with the drawings. In this way the door 20 may be more easily assembled and does not require lifting the door panels 22 overhead for placement between the horizontal run portions 28b and 30b of the door guide tracks 28 and 30.

20       Those skilled in the art will also recognize that the hinge assemblies 160 or 180 may be easily substituted for the hinge assemblies 140 without modifying the assembly process just described. Moreover, disassembly of the door 20 may be carried out by substantially reversing the procedure just  
25       described and which also offers several advantages as will be appreciated by those skilled in the art.

Referring now to FIGURES 23 through 25, a modified door panel 222 is illustrated and is characterized, generally, as a so-called pan type panel. Door panel 222 is used in  
30       applications where no insulating material is provided between the top and bottom edges of the panel such as is provided in the panels shown in FIGURES 5, 6 and 7 herein. Panel 222 includes a

front, generally planar outer wall part or surface 224 extending between a top edge 226 and a bottom edge 228. The configurations of the top edges 226 and 228 are preferably substantially like the edges 38 and 40 of the panels 22.

5 However, in one preferred embodiment of a pan type panel 222, the top edge terminates at a sloping or inclined surface 230 which may be folded back on itself at 232, FIGURE 25, to reinforce a hem or distal edge 233, as illustrated. As further shown in FIGURE 25, the bottom edge 228 terminates at an  
10 inclined inwardly extending surface 234 which is folded back on itself at 236 to define an inner distal edge 237 or hem substantially coplanar with the distal edge 233 in a plane generally parallel to surface 224. Moreover, in the configuration of the panel 222, the groove or recess 86 is  
15 replaced by an inclined surface 84a which is contiguous with planar surface 84 which, as with the panels 22, is contiguous with surface 82. As also shown in FIGURE 25, the top edge 226 is configured to include surfaces 54, 58, 60, 62 and 64.

As shown in FIGURE 23, the panel 222 is provided with  
20 reinforcing end stiles 242 and 244 which extend between the top and bottom edges 226 and 228 in generally the same manner that the end stiles 42 and 44 extend between the top and bottom edges of the panels 22. However, the end stiles 242 and 244 are provided with respective flanges 243 and 245 which have end  
25 portions which overlap and are disposed adjacent to the surfaces 230 and 234. As shown by way of example in FIGURE 24, flange 245 of end stile 244 includes a partially folded portion 245a which extends over and is contiguous with the surface 230. Accordingly, the hinge part 162 is suitably secured to the panel  
30 222, as shown in FIGURE 24 by fasteners 116 which are adapted to extend through the flange portion 245a as well as the surface 230. The opposite end of flange 245 includes a partially folded

portion 245b, FIGURE 23, which overlies and is adjacent to the surface 234 and is adapted to receive the hinge part 182 suitably secured thereto and to the surface 234 by fasteners 116. As shown in FIGURE 23, the end stile 242 is provided with  
5 similar flange portions 243a and 243b which overlap and are adjacent to the surfaces 230 and 234, respectively, and provide additional support for securing the hinge parts 162 and 182, for example, to the panel 222, as shown. The stiles 242 and 244 also include bracket receiving bosses 243c, 243d, 245c and 245d,  
10 respectively, corresponding to the bracket receiving bosses 43a, 43b, 45a and 45b of the stiles 42 and 44.

Referring further to FIGURE 23, as well as FIGURES 25 and 26, one or more intermediate stiles 250, one shown, are adapted to be secured to the panel 222 to reinforce same and extending  
15 between the edges 226 and 228, as shown. Intermediate stile 250 is a somewhat channel shaped member with reentrant distal edges. For example, as shown in FIGURE 26, intermediate stile 250 includes a web 252, opposed flanges 254 and 256 and reentrant flange edges 254a and 256a which are contiguous with the inner  
20 face 224a of outer skin or surface 224 of the panel 222 and may be secured thereto by a suitable adhesive or other fastening means known in the art.

As shown in FIGURE 25, the web 252 includes opposed end parts 252a and 252b which are folded to overlap and be  
25 disposed adjacent to the inclined surfaces 230 and 234, respectively, to provide reinforcement for supporting the hinge parts 162 and 182, as shown. Accordingly, fasteners 116, which are preferably a self tapping threaded type, are secured to the panel 222 at reinforced areas of a panel  
30 provided by the surfaces 230 and 234 and by the stile web parts 252a and 252b, respectively. As shown in FIGURES 23 and 25, at least the flange 256 is relieved at recesses 257a and

257b to provide access for securing the stile 250 to the panel 222.

The construction, assembly, disassembly and use of the door 20 including the door panels 22 or 222 together with the hinge assemblies 23, 140, 160, 180 and the brackets 190 is believed to be within the purview of one of ordinary skill in the art based on the foregoing description. Materials used for fabricating the parts of the door panels and hinge assemblies of the invention may be conventional materials used for such elements. The hinge plates 162 and 162a may be advantageously molded of a suitable polymer material, such as polycarbonate or other high impact resistant plastic. However the hinge plates 162 and 162a may also be fabricated of materials such as glass filled polymers. Although preferred embodiments of a sectional door, door panels, hinge assemblies and other components particularly useful therewith have been described in detail hereinabove those skilled in the art will recognize that various substitutions and modifications may be made to the invention without departing from the scope and spirit of the appended claims.

## WHAT IS CLAIMED IS:

1. A sectional upward acting door including interconnected door panels, said panels comprising generally planar rectangular members each having a generally planar outer wall part and generally planar inner wall parts spaced from said outer wall part, an elongated upper edge of said panel including an upwardly projecting convex surface extending at an angle with respect to said outer wall part and including a curvilinear portion adjacent to and contiguous with a generally planar wall portion, and an inclined wall part extending from said generally planar wall portion, an elongated lower edge of said panel including a tip portion contiguous with said outer wall part, a concave part of said lower edge and a further inclined wall part extending from said concave part, said upper and lower edges being cooperable with each other between adjacent interconnected panels to form a pinch resistant joint when said adjacent panels are pivoted relative to each other, and

plural hinge assemblies spaced apart along and interconnecting adjacent ones of said panels, said hinge assemblies including opposed hinge plates which are operable to engage upon moving adjacent panels toward each other to thereby pivotably connect said adjacent panels, said hinge plates being connected by fasteners to said inclined wall part of one panel adjacent its upper edge and said inclined wall part adjacent said lower edge of an adjacent panel, respectively, whereby said hinge assemblies are disposed substantially entirely between said outer wall part and said inner wall parts of said panels, respectively, and form a pivot connection between adjacent panels.

2. The door set forth in Claim 1 including:  
an elongated groove formed in said lower edge of each

of said panels and adapted to receive an elongated resilient seal strip therein, said seal strip being engageable with said upper edge of an adjacent panel to form a seal between adjacent panels when said door is in a closed position.

5

3. The door set forth in Claim 1 wherein:

said inner wall parts are integrally joined with said inclined wall parts of said upper and lower edges, respectively, said inner wall parts extending toward each other but leaving a substantial gap therebetween; and

10

each of said panels includes a reinforcing backer adapted to be secured to said panel and extending between said inner wall parts to form a closed cavity within said panel between said outer wall part and said inner wall parts.

15

4. The door set forth in Claim 3 wherein:

said inner wall parts are formed with respective grooves extending generally toward said outer wall part and adapted to receive opposed spaced apart flanges of said backer, respectively, for supporting said backer on said panel.

20

5. The door set forth in Claim 3 wherein:

each of said panels are filled with an insulating material between said outer wall part and said inner wall parts and between said outer wall part and said backer.

25

6. The door set forth in Claim 1 wherein:

said upper and lower edges of adjacent panels cooperate with each other to form a variable width gap therebetween extending along said concave planar segment of said lower edge and said convex surface of said upper edge, said gap not increasing as said panels rotate with respect to each other to a

30

point which would permit insertion of a person's finger between said upper and lower edges of adjacent panels.

7. The door set forth in Claim 6 wherein:

5           said variable width gap is provided by said planar segments of said lower edge extending at angles with respect to each other and said outer wall part of said panel, and said upper edge of an adjacent panel is formed by plural contiguous segments which are inclined to each other and to said outer wall part of  
10 said panel and by a curvilinear segment adjacent one of said inclined segments and an apex of said upper edge.

8. The door set forth in Claim 1 wherein:

          said panels are each formed by a first panel part  
15 defining said concave part of said lower edge and said convex surface of said upper edge, a second panel part joined to said first panel part and defining one of said inclined wall parts and an inner wall part, and a third panel part defining the other of said inclined wall parts and another inner wall part, said panel  
20 parts being joined together at cooperating flanges, and elongated elastomeric gasket members interposed said flanges of said panel parts.

9. The door set forth in Claim 8 wherein:

25           said gasket members on respective panels are engageable with each other between adjacent panels to form a seal between said adjacent panels in a closed position of said door.

10. The door set forth in Claim 1 wherein:

30           said hinge assemblies each include a hinge pin on one of said hinge plates, at least one bearing bore on the other of said hinge plates for receiving said hinge pin and an elastically

deflectable retainer on said other hinge plate for retaining said hinge pin in said bearing bore in response to insertion of said hinge pin into said bearing bore.

5           11. The door set forth in Claim 10 wherein:

          said other hinge plate includes a web part, spaced apart flanges secured to said web part and extending generally parallel to each other, a bearing bore formed in each of said flanges and guide surfaces formed on each of said flanges for  
10 guiding opposed distal ends of said hinge pin into said bearing bores, respectively.

          12. The door set forth in Claim 11 wherein:

          said retainer comprises an elastically deflectable tab  
15 formed on each of said flanges for retaining opposite ends of said hinge pin in said bearing bores, respectively.

          13. The door set forth in Claim 10 wherein:

          said retainer includes opposed elastically deflectable  
20 fingers defining a gap therebetween for receiving said hinge pin for deflecting said fingers to allow forcible insertion of said hinge pin into said bearing bore, said fingers being elastically restorable to a position to retain said hinge pin in said bearing bore.

25

          14. The door set forth in Claim 13 wherein:

          said one hinge plate includes opposed parts engageable with said other hinge plate to prevent longitudinal displacement of said hinge plates relative to each other sufficient to  
30 disengage said hinge plates from each other in predetermined positions of said hinge plates with respect to each other.

15. The door set forth in Claim 13 wherein:  
said hinge pin is integrally formed on said one hinge  
plate.

5 16. The door set forth in Claim 15 wherein:  
said hinge pin is formed by opposed pin portions which  
are rolled in opposite directions to form a substantially  
cylindrical hinge pin integral with said one hinge plate.

10 17. The door set forth in Claim 1 including:  
opposed structural members on at least selected ones of  
said panels, said structural members including guide member  
support bracket retaining parts formed thereon, and opposed guide  
member support brackets operable to be slidably engaged with said  
15 structural members and retained thereon for supporting opposed  
guide members for said panels, respectively.

18. The door set forth in Claim 17 wherein:  
said retaining parts are formed on said structural  
20 members by displacing material from a surface of said structural  
members, respectively, to form said retaining parts,  
respectively.

19. The door set forth in Claim 18 wherein:  
25 said guide member support brackets each include a web  
portion and spaced apart bosses formed thereon for engagement  
with said structural members at locations adjacent said retaining  
parts, respectively, to provide for assembly of said guide member  
support brackets to said panels, respectively.

30 20. A sectional upward acting door comprising  
interconnected door panels, each of said panels comprising

generally planar rectangular members, each having a generally planar outer wall part and generally planar inner wall parts spaced from said outer wall part, an elongated upper edge of said panel including an upwardly projecting convex surface extending  
5 inwardly with respect to said outer wall part toward said inner wall part and including a first planar segment inclined with respect to said outer wall part, a further surface inclined with respect to said first planar segment and with respect to said outer wall part, a second planar segment contiguous with and  
10 inclined with respect to said further surface and said outer wall part, a curvilinear portion having a first radius of curvature and disposed adjacent to and contiguous with said second planar segment and an apex of said upper edge, said apex being curvilinear and having a second radius of curvature less than  
15 said first radius of curvature, said apex being contiguous with a generally planar wall portion extending substantially parallel to said outer wall part, an elongated lower edge of said panel including a downwardly projecting curvilinear tip portion contiguous with said outer wall part and a concave part of said  
20 lower edge formed by plural planar segments inclined with respect to said outer wall part at successively increasing acute angles of inclination with respect to said outer wall part, said upper and lower edges being cooperable with each other between adjacent interconnected panels to form a pinch resistant joint when said  
25 adjacent panels are pivoted relative to each other.

21. The door set forth in Claim 20 wherein:

said upper edge of said panel includes an inclined wall part extending between said generally planar and parallel wall  
30 portion and a first inner wall part joined thereto and said lower edge includes an inclined wall part extending between said concave part of said lower edge and a second inner wall part of

said panel, said inclined wall parts forming a recess between adjacent panels for receiving plural hinge assemblies wherein said hinge assemblies are disposed substantially between said outer wall part and said inner wall parts of said panels,  
5 respectively.

22. The door set forth in Claim 21 wherein:

said inner wall parts are integrally joined with said inclined wall parts of said upper and lower edges, respectively,  
10 and said inner wall parts are substantially coplanar and extend toward each other but leave a substantial gap therebetween.

23. The door set forth in Claim 22 wherein:

said inner wall parts each include a groove formed  
15 therein and extending substantially normal to the plane of said inner wall parts, respectively, and each of said panels includes a reinforcing backer secured to said panel and extending between said inner wall parts to form a closed cavity within said panel between said outer wall part and said inner wall parts, said  
20 reinforcing backer including spaced apart flange portions adapted to be inserted in said grooves in said inner wall parts, respectively.

24. A sectional upward acting door including  
25 interconnectable door panels, said panels comprising generally planar rectangular members having respective upper and lower edges, said panels being adapted to be interconnected to each other by plural hinge assemblies spaced apart along and interconnecting adjacent ones of said panels and forming a pivot  
30 connection between adjacent panels, respectively, said hinge assemblies including opposed hinge plates adapted to be interconnected to each other by moving one panel adjacent to

another panel, said hinge plates including cooperating parts which engage upon moving said one panel adjacent said another panel in one direction thereby pivotably connecting said panels, said cooperating parts preventing disengagement of said panels  
5 from each other during movement of said door between open and closed positions in a direction opposite said one direction.

25. The door set forth in Claim 24 wherein:

at least selected ones of said panels include guide  
10 member support brackets mounted on structural members of said selected ones of said panels and being adapted to be connected to said selected ones of said panels, respectively, by moving said brackets into engagement with said selected ones of said panels.

15 26. The door set forth in Claim 25 wherein:

each of said selected ones of said panels includes opposed structural stile members extending along opposed edges of said selected ones of said panels, said stile members including tab members formed thereon for engagement with a part of  
20 respective ones of said guide member support brackets whereby said guide member support brackets may be connected to a panel by sliding said guide member support brackets into engagement with said stile members, respectively.

25 27. The door set forth in Claim 26 wherein:

said guide member support brackets include respective bosses formed thereon engageable with said stile members at said tab members for retaining said guide member support brackets connected to said selected ones of said panels, respectively.

30

28. The door set forth in Claim 24 wherein:

said hinge assemblies include, respectively, a hinge

pin on one of said hinge plates, at least one bearing bore on the other of said hinge plates for receiving said hinge pin and an elastically deflectable retainer on said other hinge plate for retaining said hinge pin in said bearing bore in response to  
5 insertion of said hinge pin into said bearing bore.

29. The door set forth in Claim 28 wherein:

said other hinge plate includes a web part, spaced apart flanges secured to said web part and extending generally  
10 parallel to each other, a bearing bore formed in each of said flanges and guide surfaces formed on each of said flanges for guiding distal ends of said hinge pin into said bearing bores.

30. The door set forth in Claim 28 wherein:

15 said retainer on said other hinge plate includes opposed elastically deflectable fingers defining a gap therebetween for receiving said hinge pin for deflecting said fingers to allow forcible insertion of said hinge pin into said bearing bore, said fingers being elastically restorable to a  
20 position to retain said hinge pin in said bearing bore.

31. A method for assembling a sectional upward acting door wherein said door is operable to be supported for movement between open and closed positions between a pair of opposed  
25 spaced apart guide tracks, said door including plural, generally planar panel members adapted to be connected to each other along opposed edges of adjacent panel members and said door including plural hinge assemblies including, respectively, opposed hinge plates adapted to be connected to upper and lower edges of  
30 adjacent panels, respectively, and plural guide member support brackets also adapted to be connected to said panels, respectively, said method comprising the steps of:

placing a first panel between said guide tracks and  
connecting said first panel to said guide tracks;

placing a second panel between said guide tracks and  
adjacent to said first panel wherein an edge of said first panel  
5 is adjacent an edge of said second panel;

moving said panels toward each other to connect said  
panels by engaging said hinge plates of said hinge assemblies  
with each other, respectively; and

mounting at least two support brackets on said second  
10 panel with opposed guide members connected to said support  
brackets to support said second panel between said guide tracks.

32. The method set forth in Claim 31 wherein:

the step of moving said panels toward each other  
15 comprises lowering said second panel into engagement with said  
first panel by interengaging said hinge plates of respective ones  
of said hinge assemblies with each other by moving said first and  
second panels relative to each other in a direction generally  
parallel to the longitudinal extent of said guide tracks.

20

33. The method set forth in Claim 32 wherein:

the step of connecting said support brackets to said  
second panel comprises sliding said support brackets into  
engagement with said second panel at spaced apart bracket  
25 receiving tabs formed on structural members of said second panel,  
respectively.

34. A hinge assembly for interconnecting panels of a  
multipanel door, said hinge assembly comprising:

30 opposed hinge plates including means for mounting said  
hinge plates on adjacent panels of a multipanel door,  
respectively, a hinge pin on one of said hinge plates, at least

one bearing bore on the other of said hinge plates for receiving said hinge pin in response to moving said one hinge plate toward said other hinge plate in one direction and an elastically deflectable retainer on said other hinge plate operable in response to engagement with said hinge pin during assembly of one panel of said door to an adjacent panel to deflect to provide for insertion of said hinge pin in said at least one bearing bore, said retainer being engageable with said hinge pin to prevent disengagement of said hinge plates from each other by any force applied through said hinge pin in a direction opposite said one direction during movement of said panels between door open and door closed positions.

35. The hinge assembly set forth in Claim 34 wherein:  
said other hinge plate includes a web part, spaced apart flanges secured to said web part and extending generally parallel to each other, a bearing bore formed in each of said flanges and guide surfaces formed on each of said flanges for guiding opposed distal ends of said hinge pin into said bearing bores, respectively.

36. The hinge assembly set forth in Claim 35 wherein:  
said retainer comprises an elastically deflectable tab formed on each of said flanges for retaining opposite ends of said hinge pin in said bearing bores, respectively.

37. The hinge assembly set forth in Claim 34 wherein:  
said other hinge plate includes opposed elastically deflectable fingers defining a gap therebetween for receiving said hinge pin for deflecting said fingers to allow forcible insertion of said hinge pin into said bearing bore, said fingers being elastically restorable to a position to retain said hinge pin in said bearing

bore.

38. The hinge assembly set forth in Claim 37 wherein:

5 said one hinge plate includes opposed parts engageable with said other hinge plate to prevent longitudinal displacement of said hinge plates relative to each other sufficient to disengage said hinge plates from each other in predetermined positions of said hinge plates with respect to each other.

10 39. The hinge assembly set forth in Claim 37 wherein:

said hinge pin is integrally formed on said one hinge plate.

40. The hinge assembly set forth in Claim 39 wherein:

15 said hinge pin is formed by opposed pin portions which are rolled in opposite directions to form a substantially cylindrical hinge pin integral with said one hinge plate.

41. A hinge assembly for interconnecting panels of a multi-panel door, said hinge assembly comprising:

20 opposed hinge plates including means for mounting said hinge plates, respectively, on adjacent panels of a multipanel door;

one of said hinge plates including an elongated hinge pin;

25 the other of said hinge plates including a bearing part comprising opposed upstanding wall parts formed with opposed hinge pin retainer fingers inclined toward each other to form a slot opening toward a bearing bore for said hinge pin, said opposed fingers being elastically deflectable to allow said hinge pin of said one hinge plate to be moved in one direction into  
30 said bearing bore and said fingers being characterized such that, upon said hinge pin of said one hinge plate passing through said slot, said fingers are operable to retain said hinge plates

connected to each other and said fingers are not operable to be deflected by any force applied through said hinge pin to allow removal of said hinge pin from said bearing bore by urging said hinge pin in a direction opposite said one direction.

5

42. The hinge assembly set forth in Claim 41 wherein:

said one hinge plate includes opposed spaced apart parts engageable with said other hinge plate to prevent separation of said hinge plates from each other in a direction generally along  
10 a longitudinal axis of said hinge pin in selected predetermined positions of said hinge plates with respect to each other.

43. The hinge assembly set forth in Claim 41 wherein:

said hinge pin is integrally formed on said one hinge plate.

15

44. The hinge assembly set forth in Claim 43 wherein:

said hinge pin is formed by opposed pin portions which are rolled in opposite directions to form a substantially cylindrical hinge pin integral with said one hinge plate.

1/15

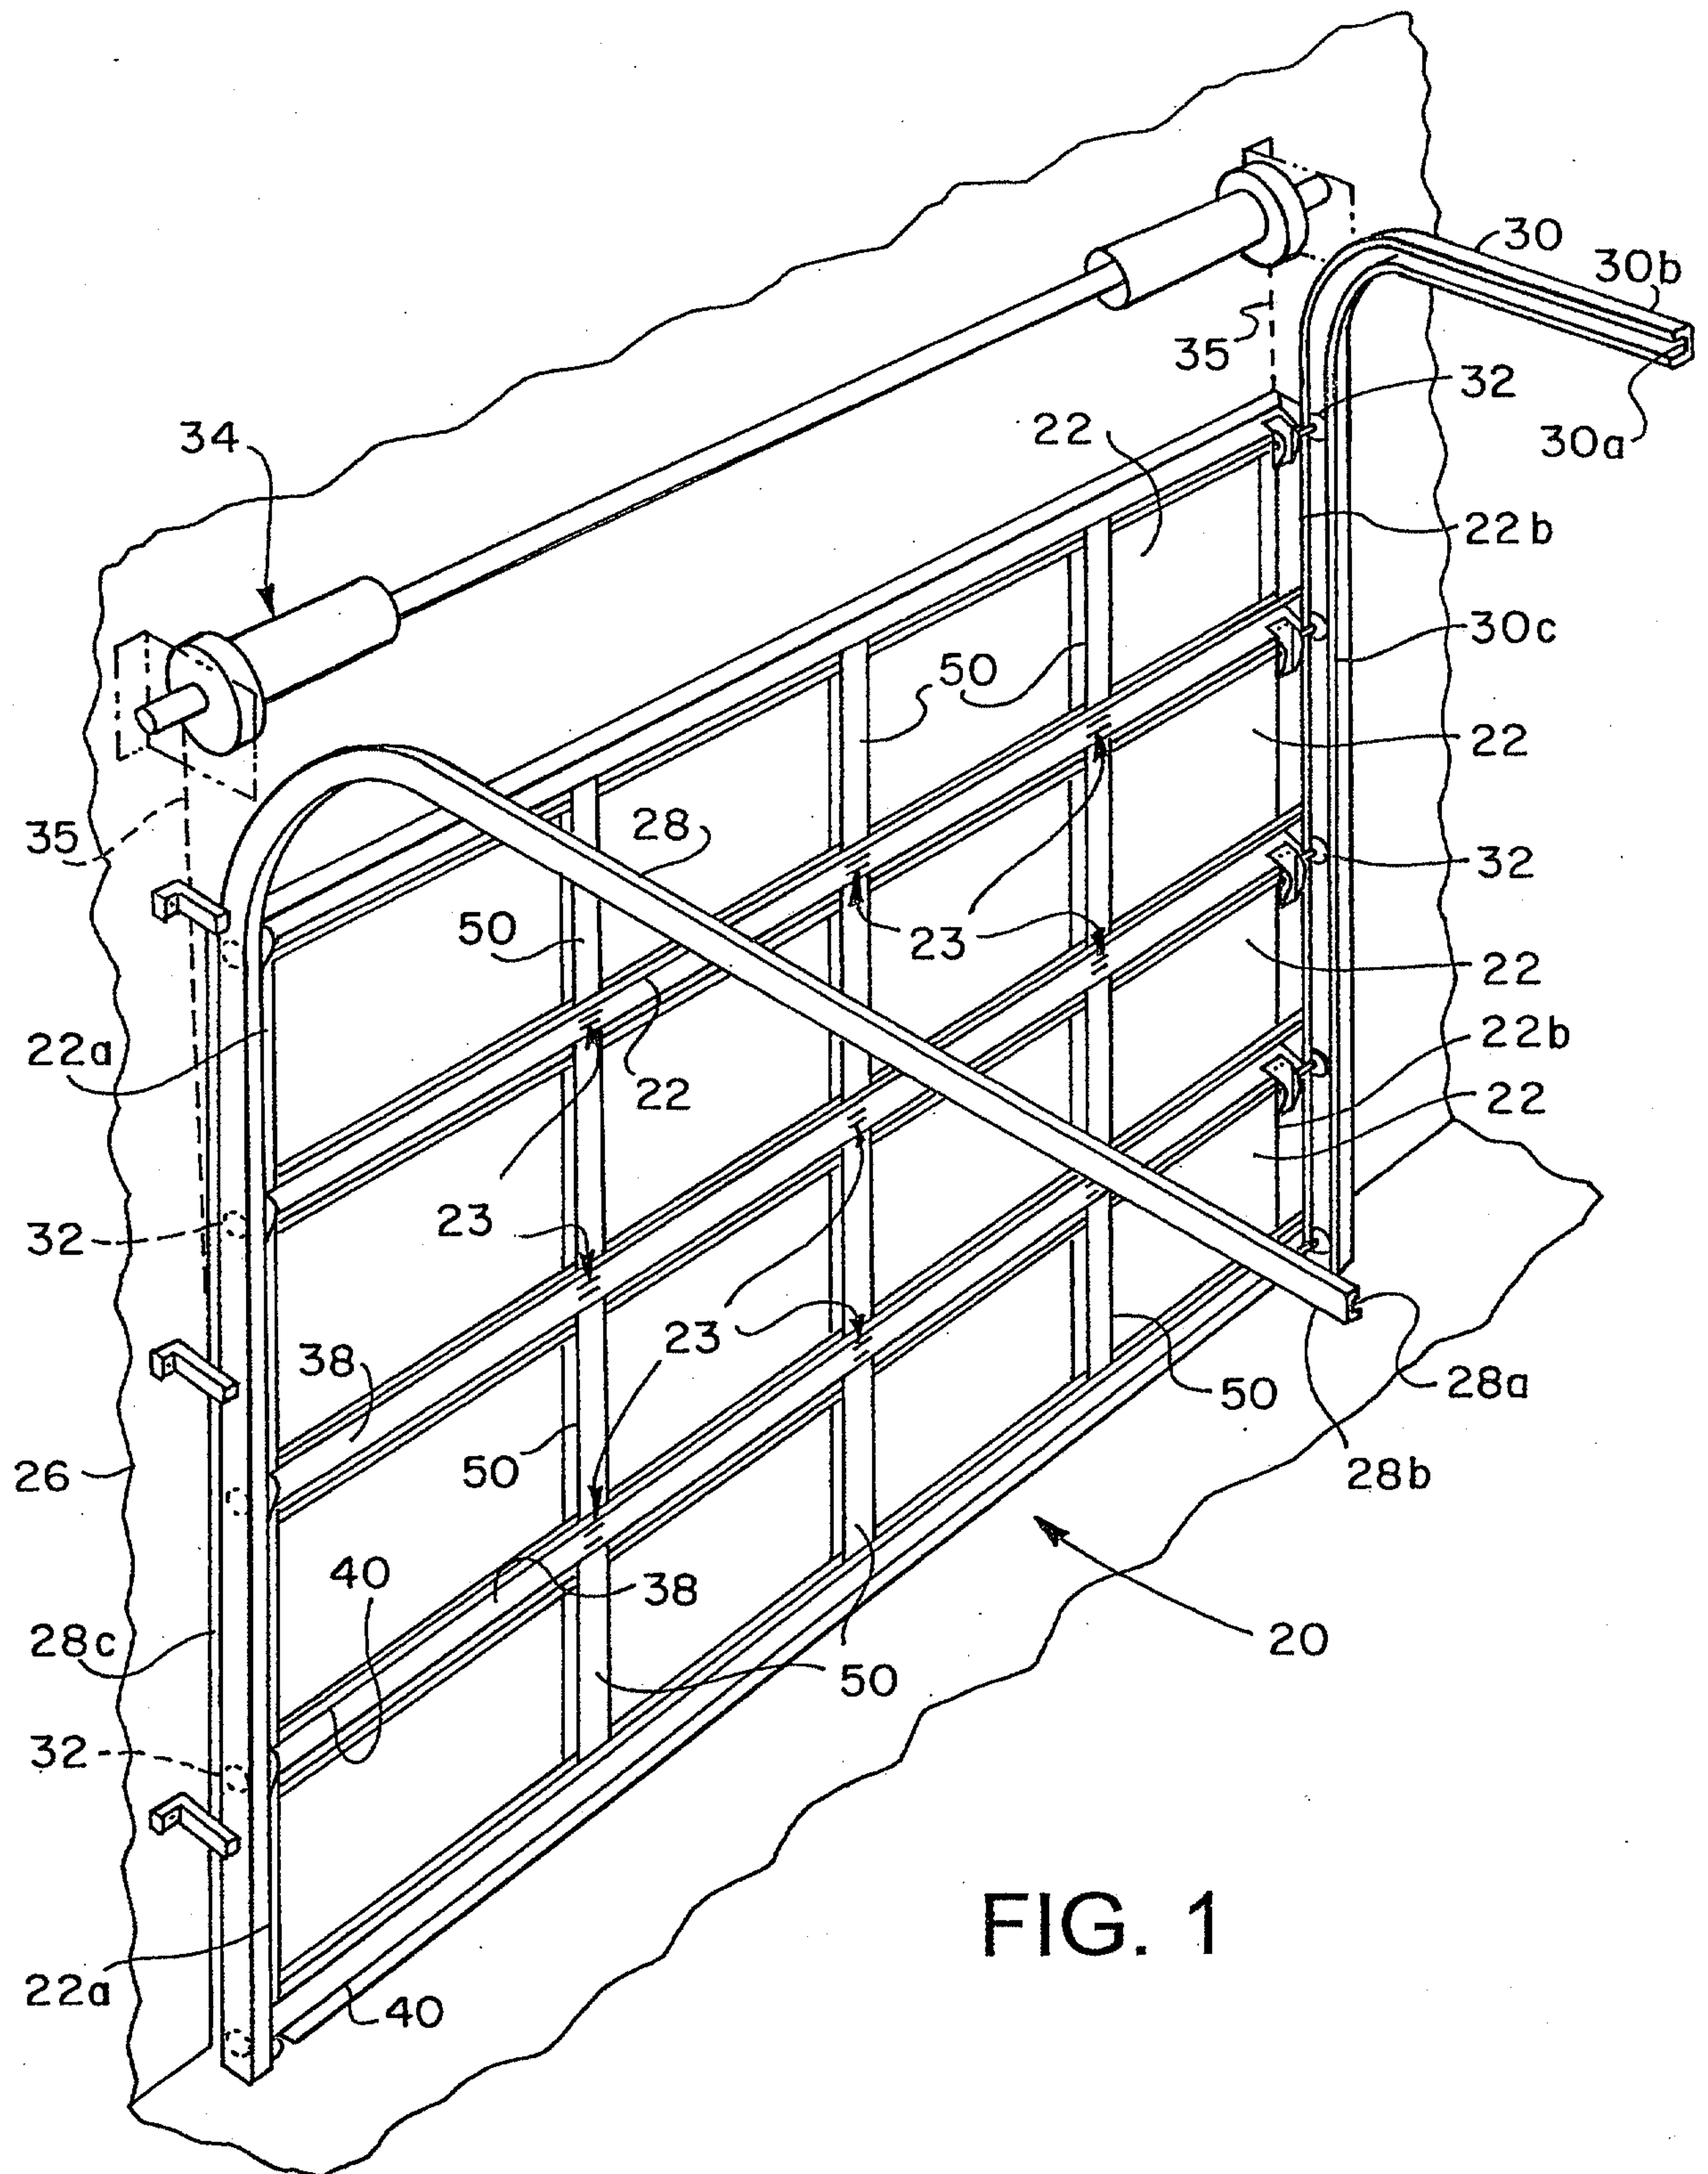


FIG. 1

2/15

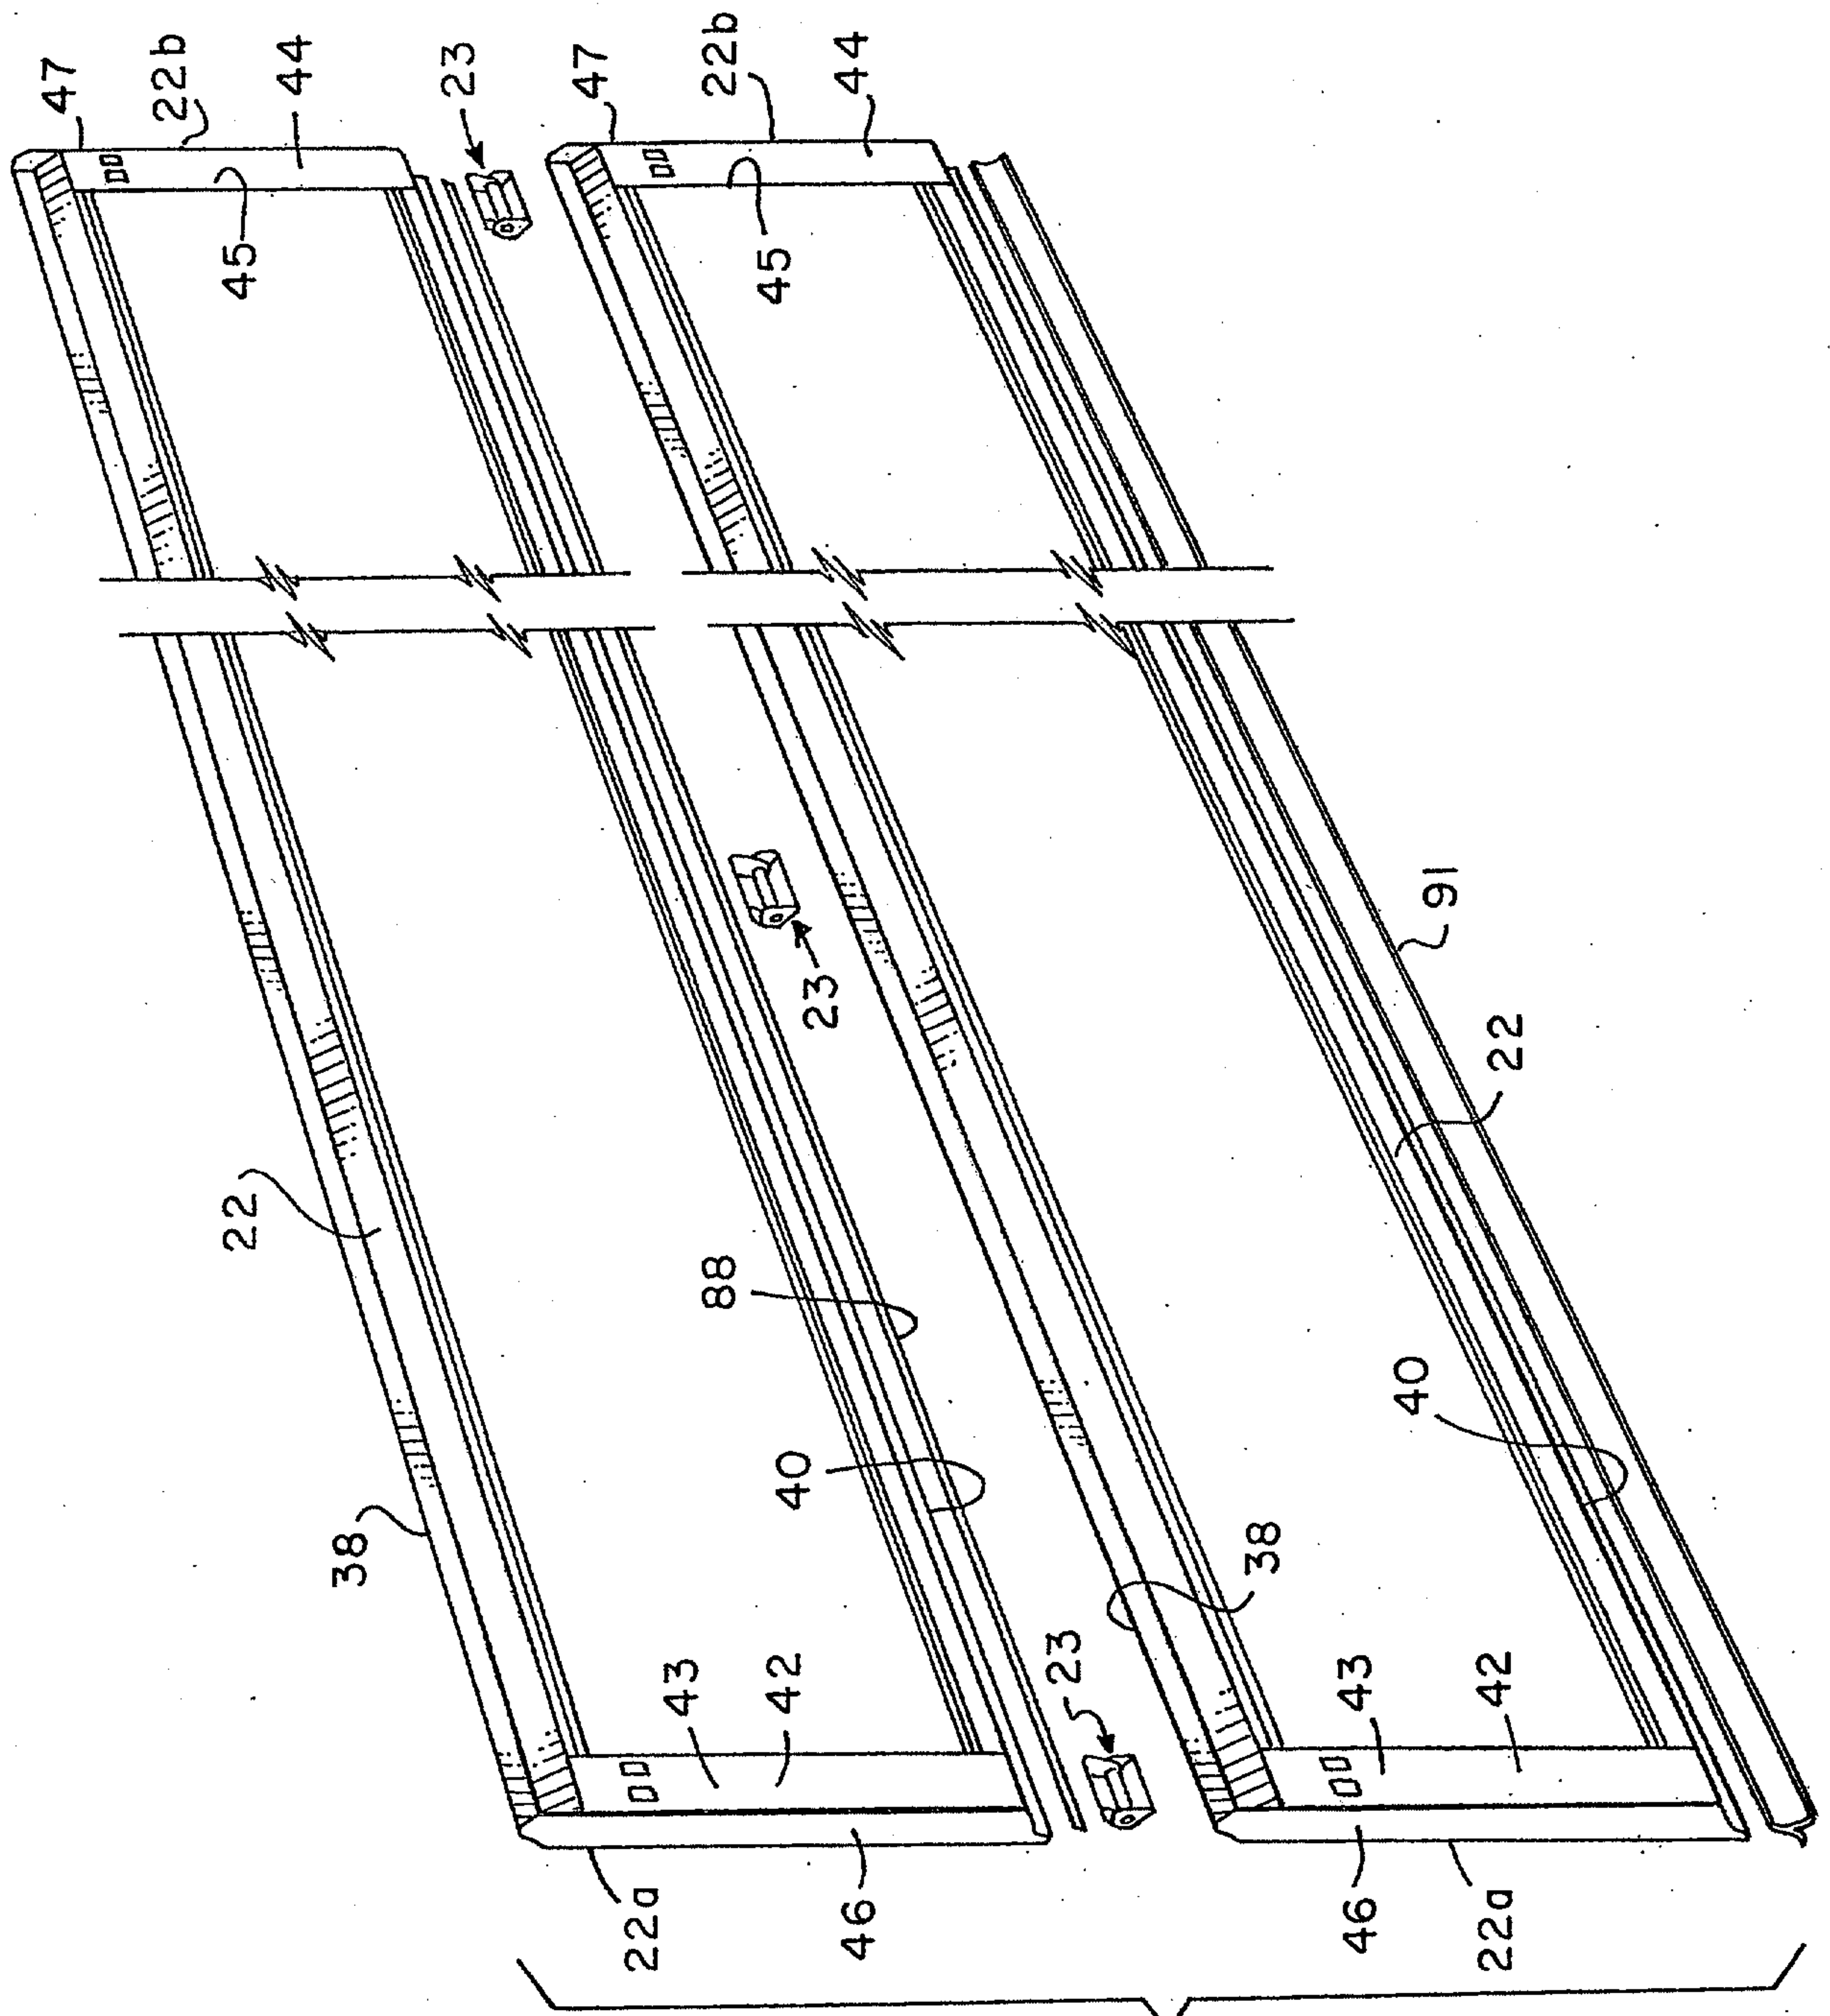
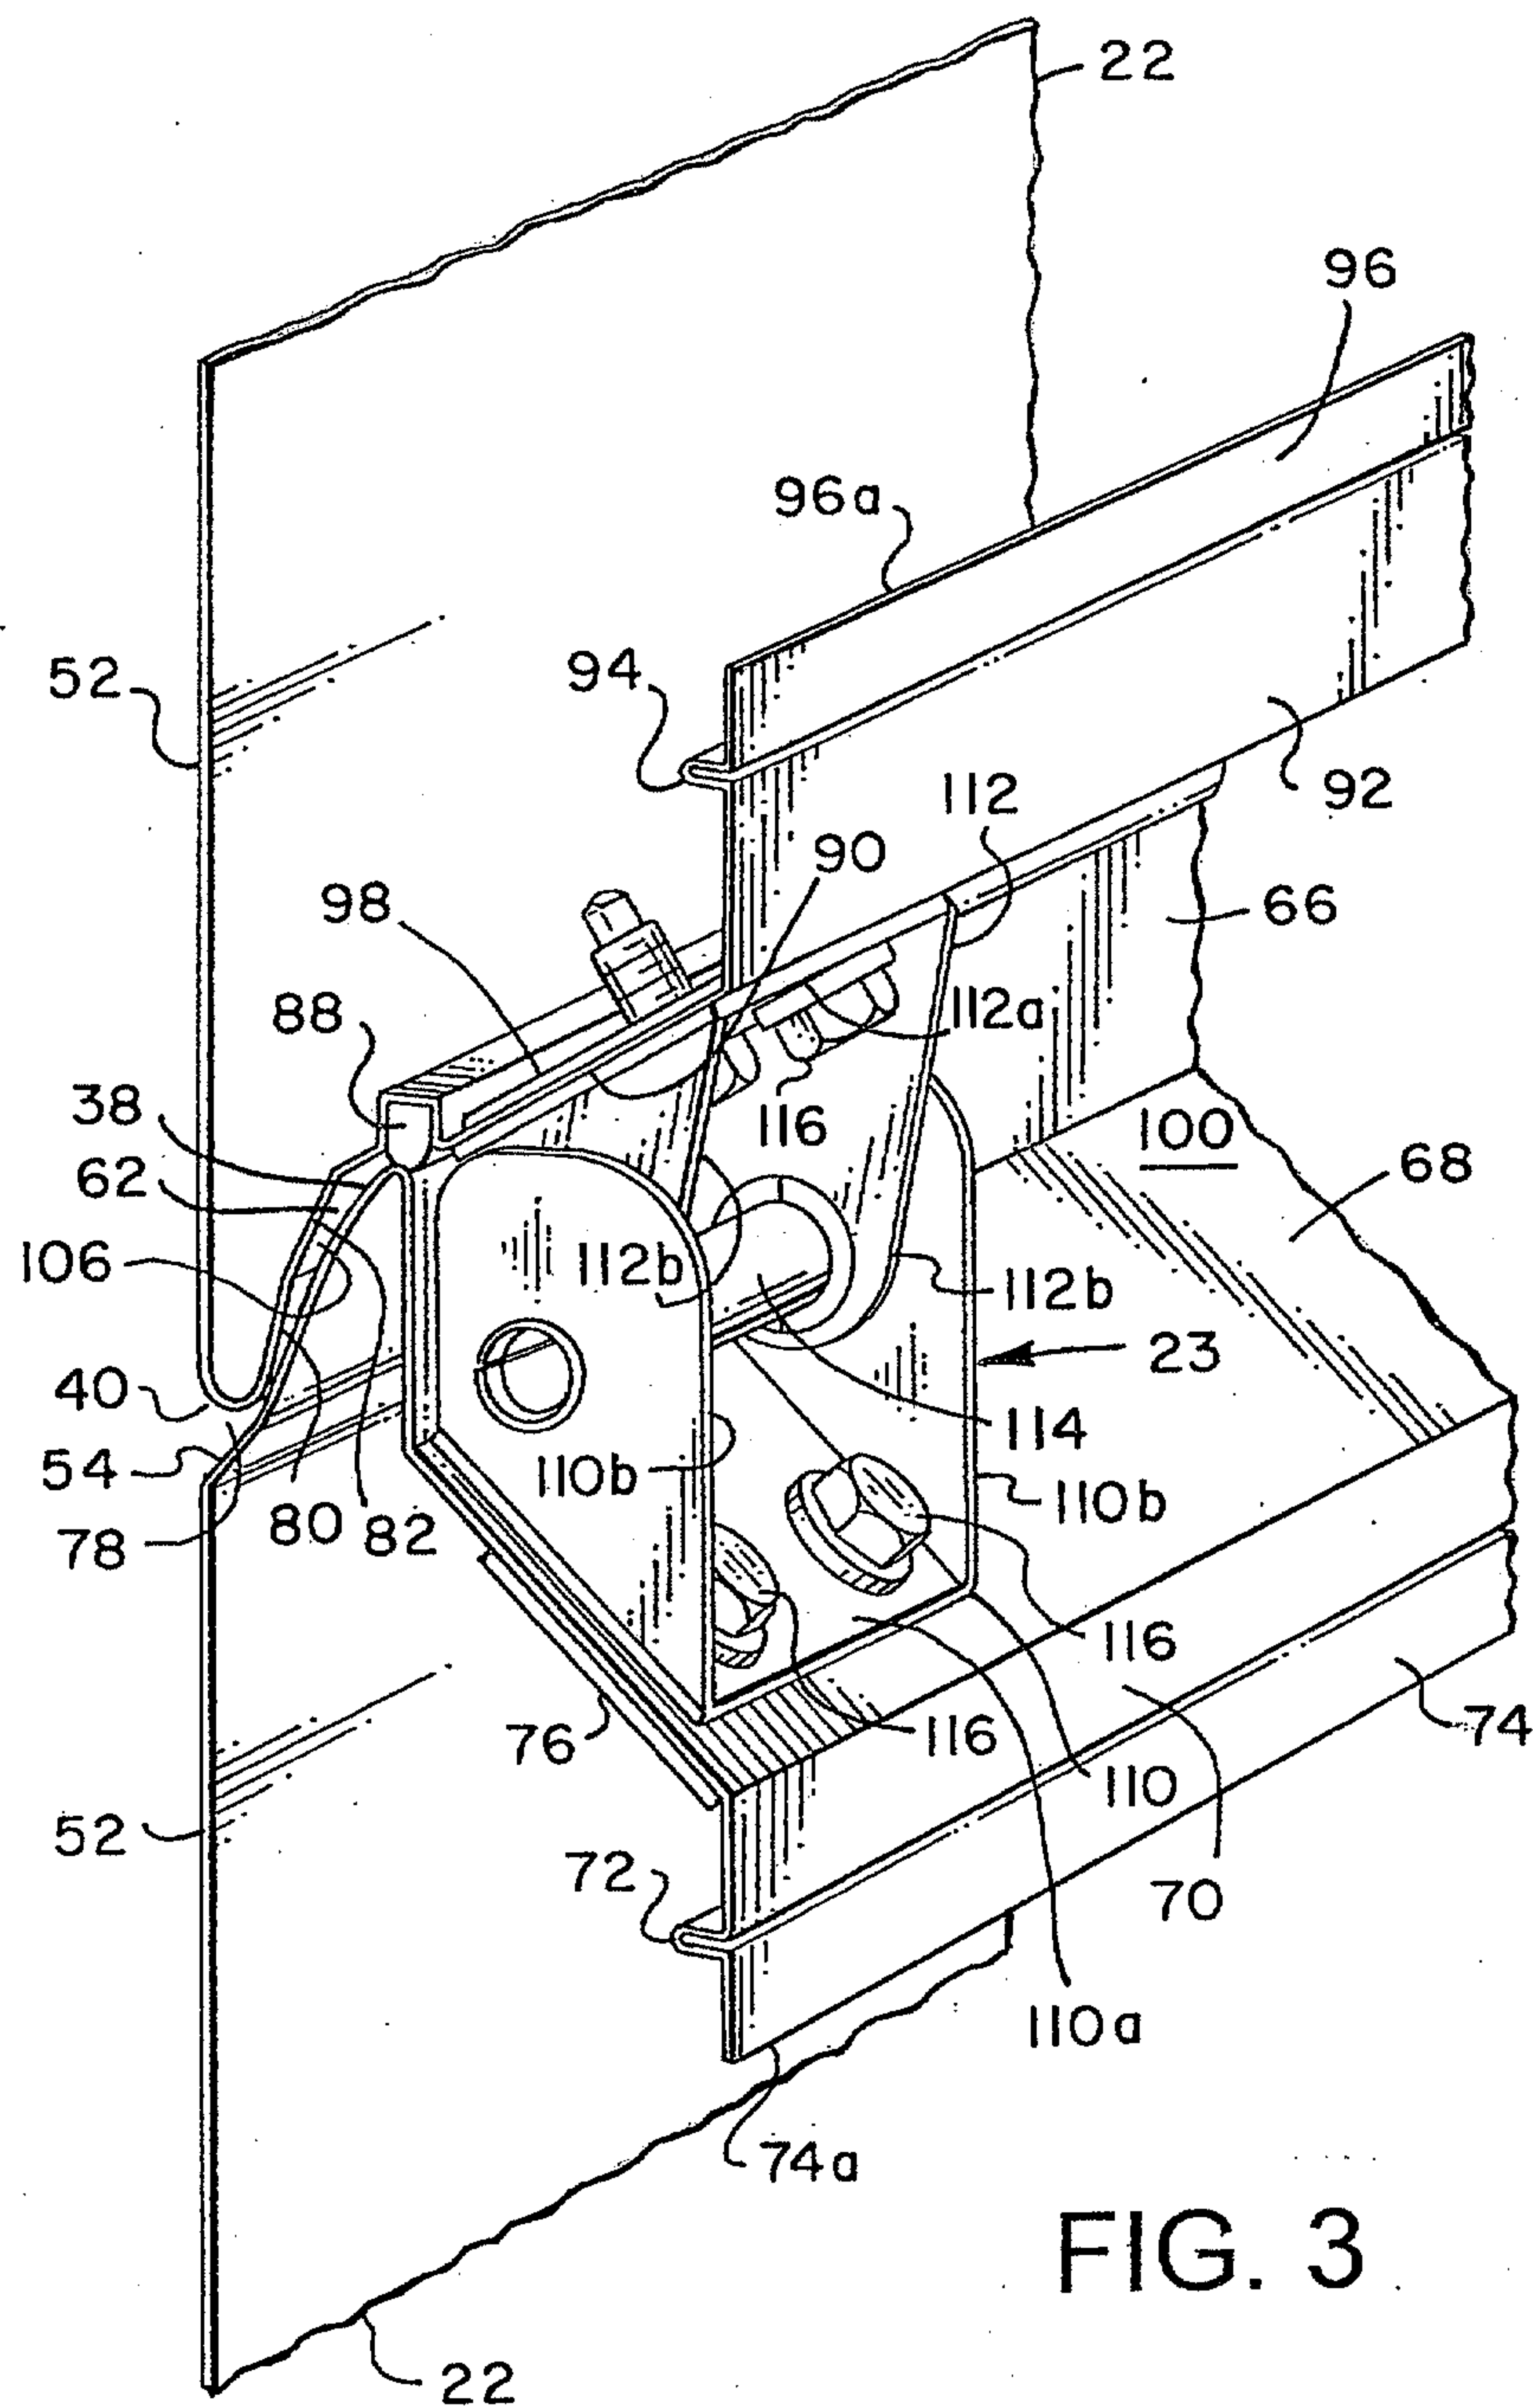
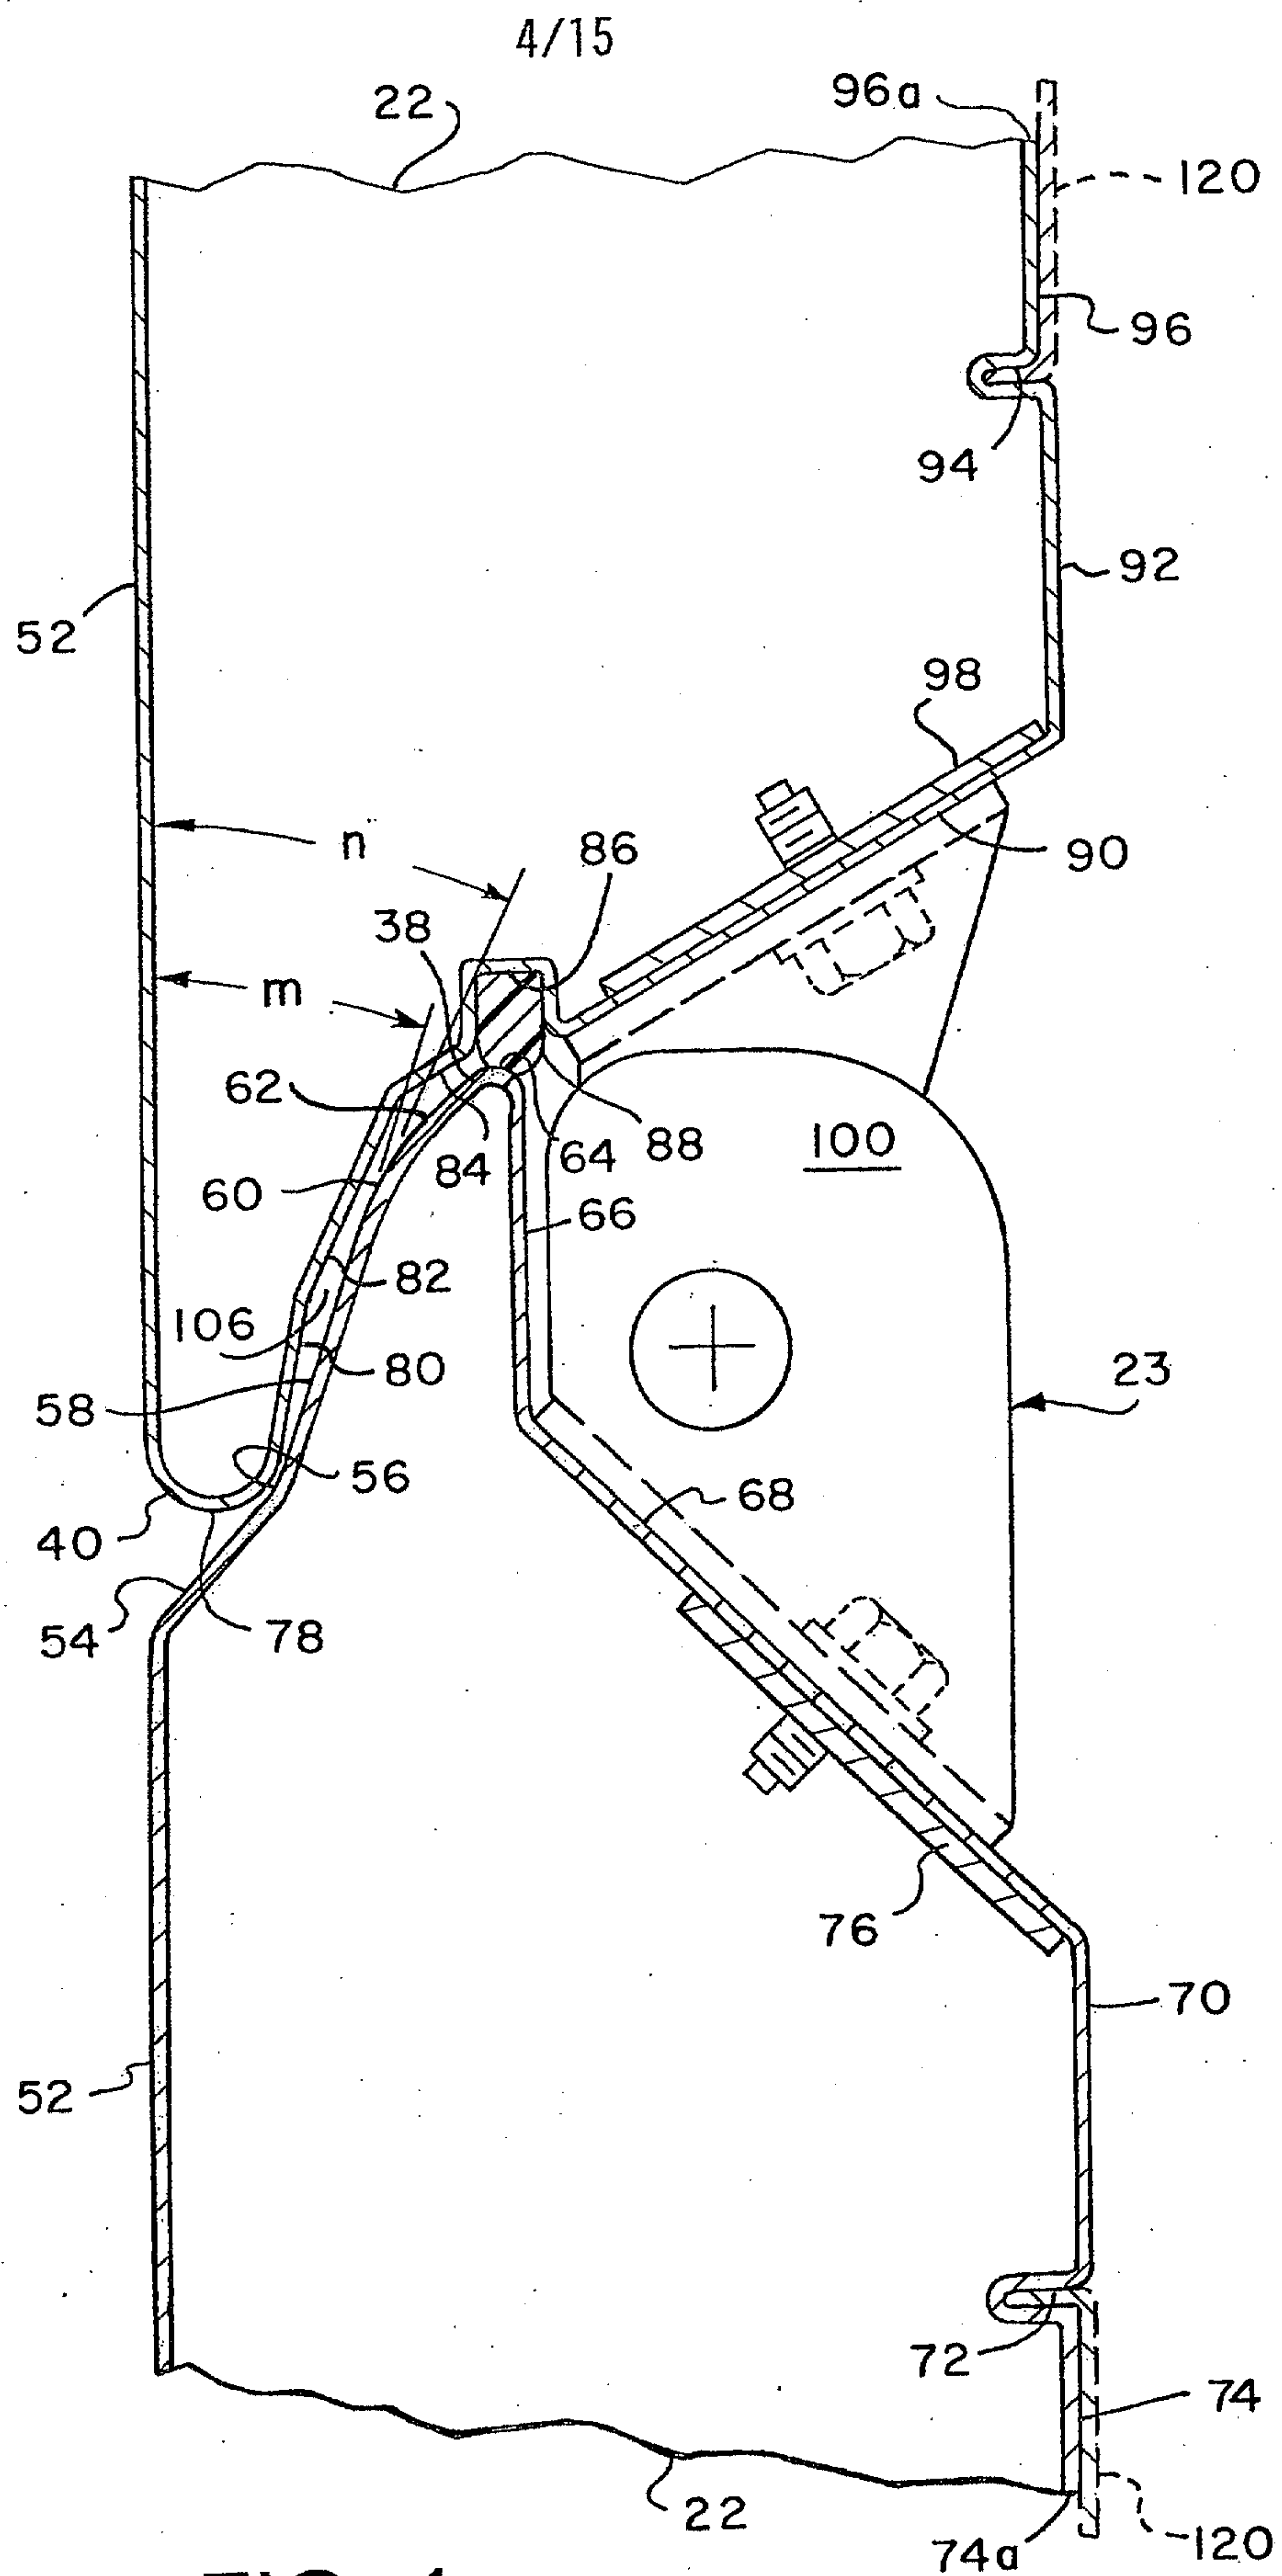


FIG. 2

3/15





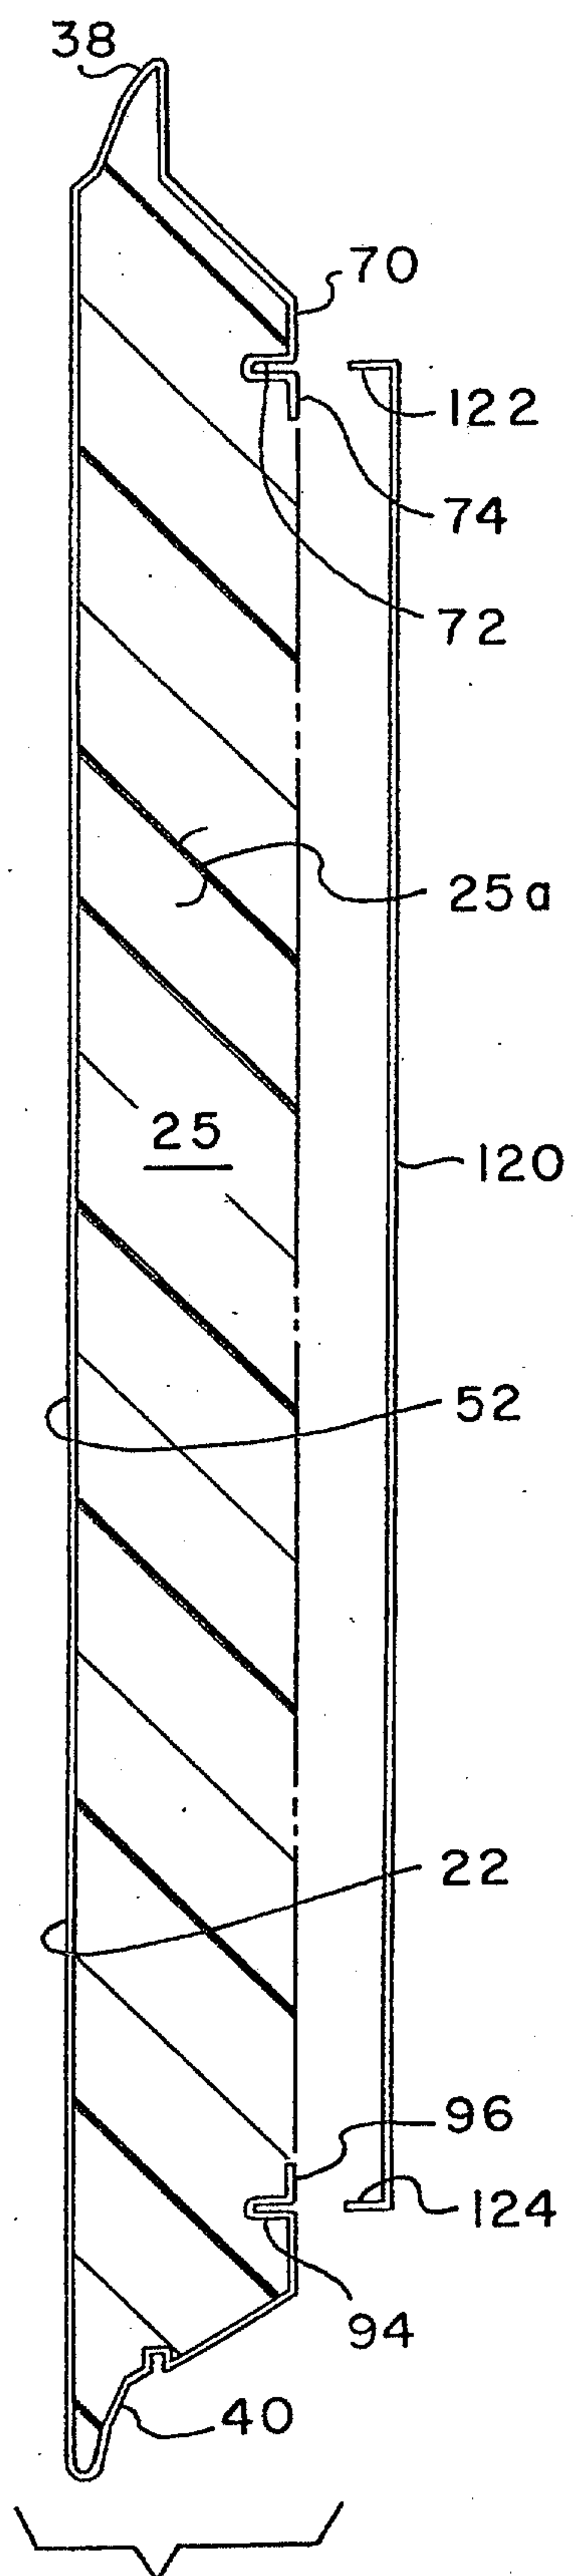


FIG. 5

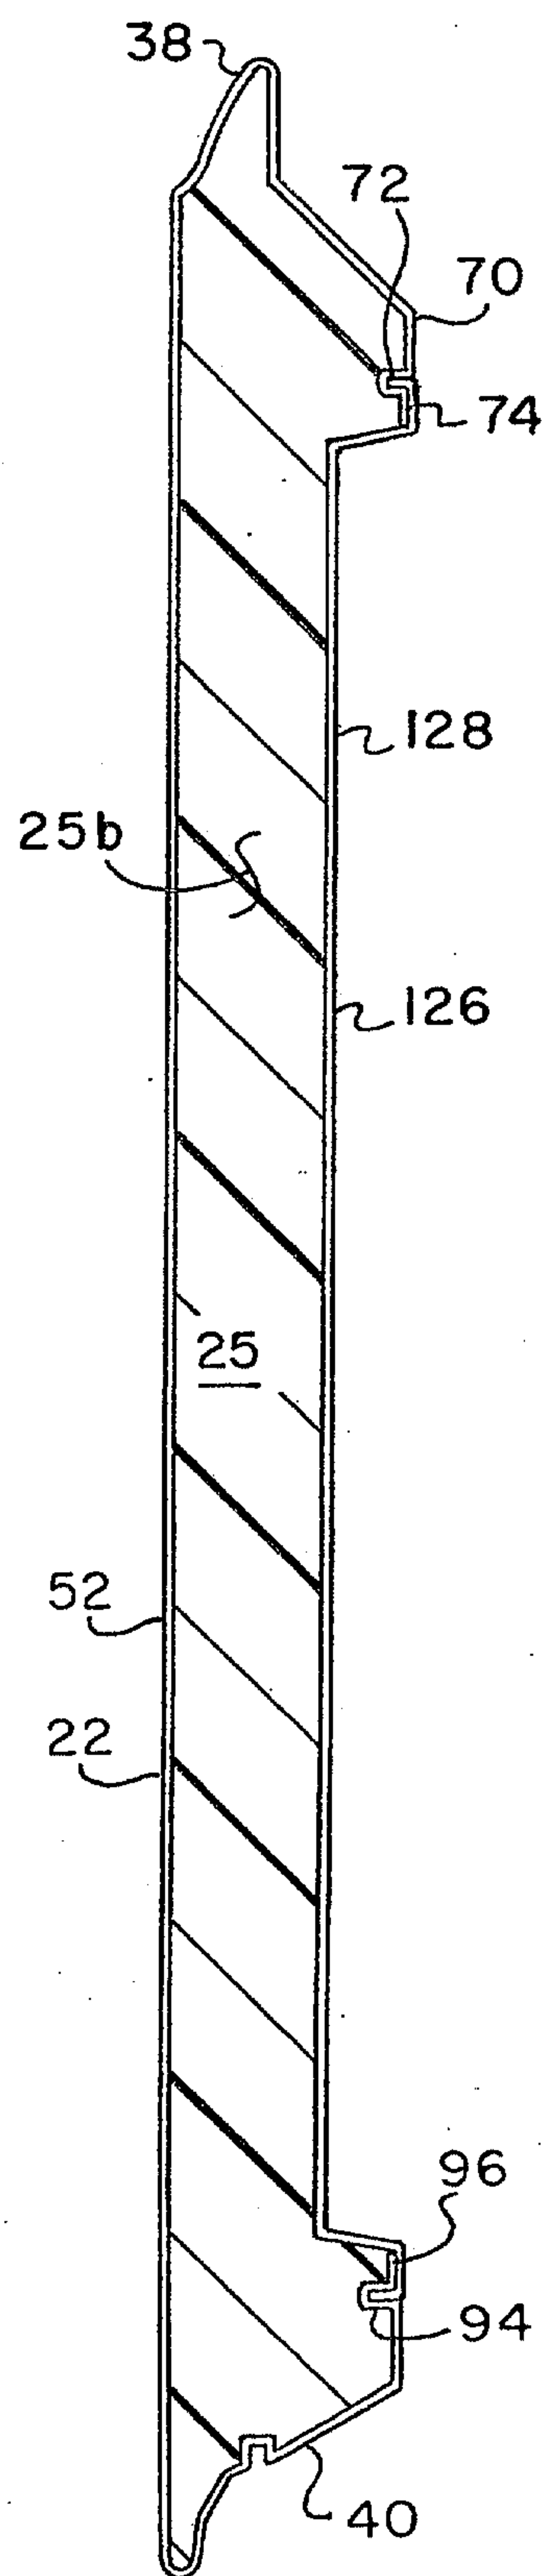


FIG. 6

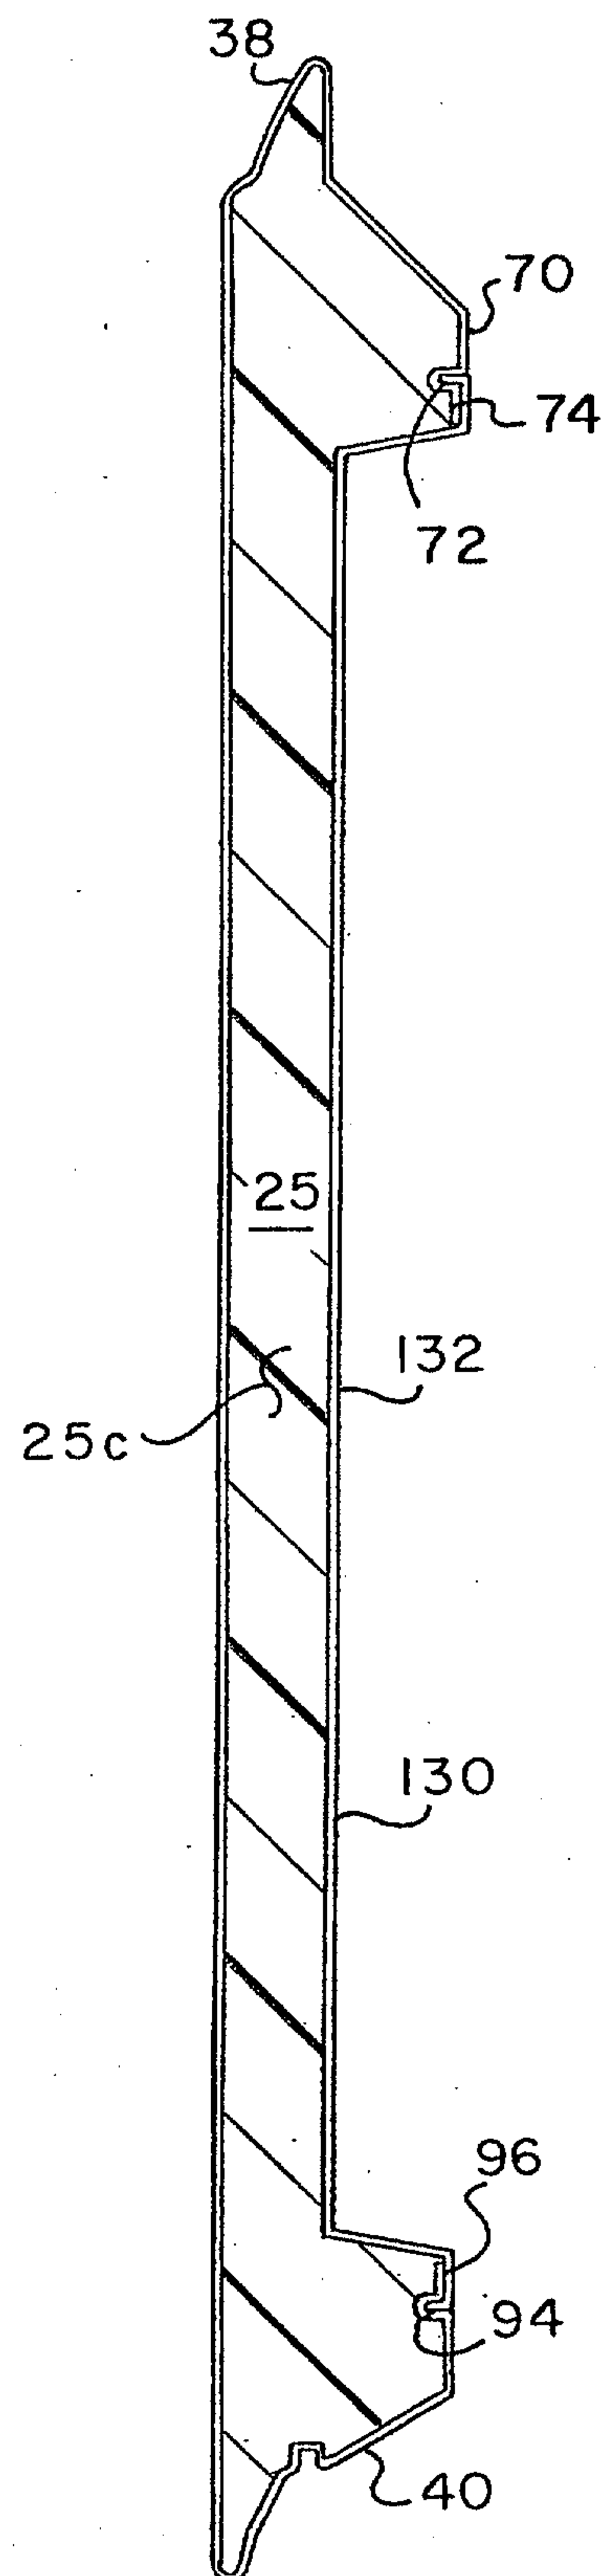


FIG. 7

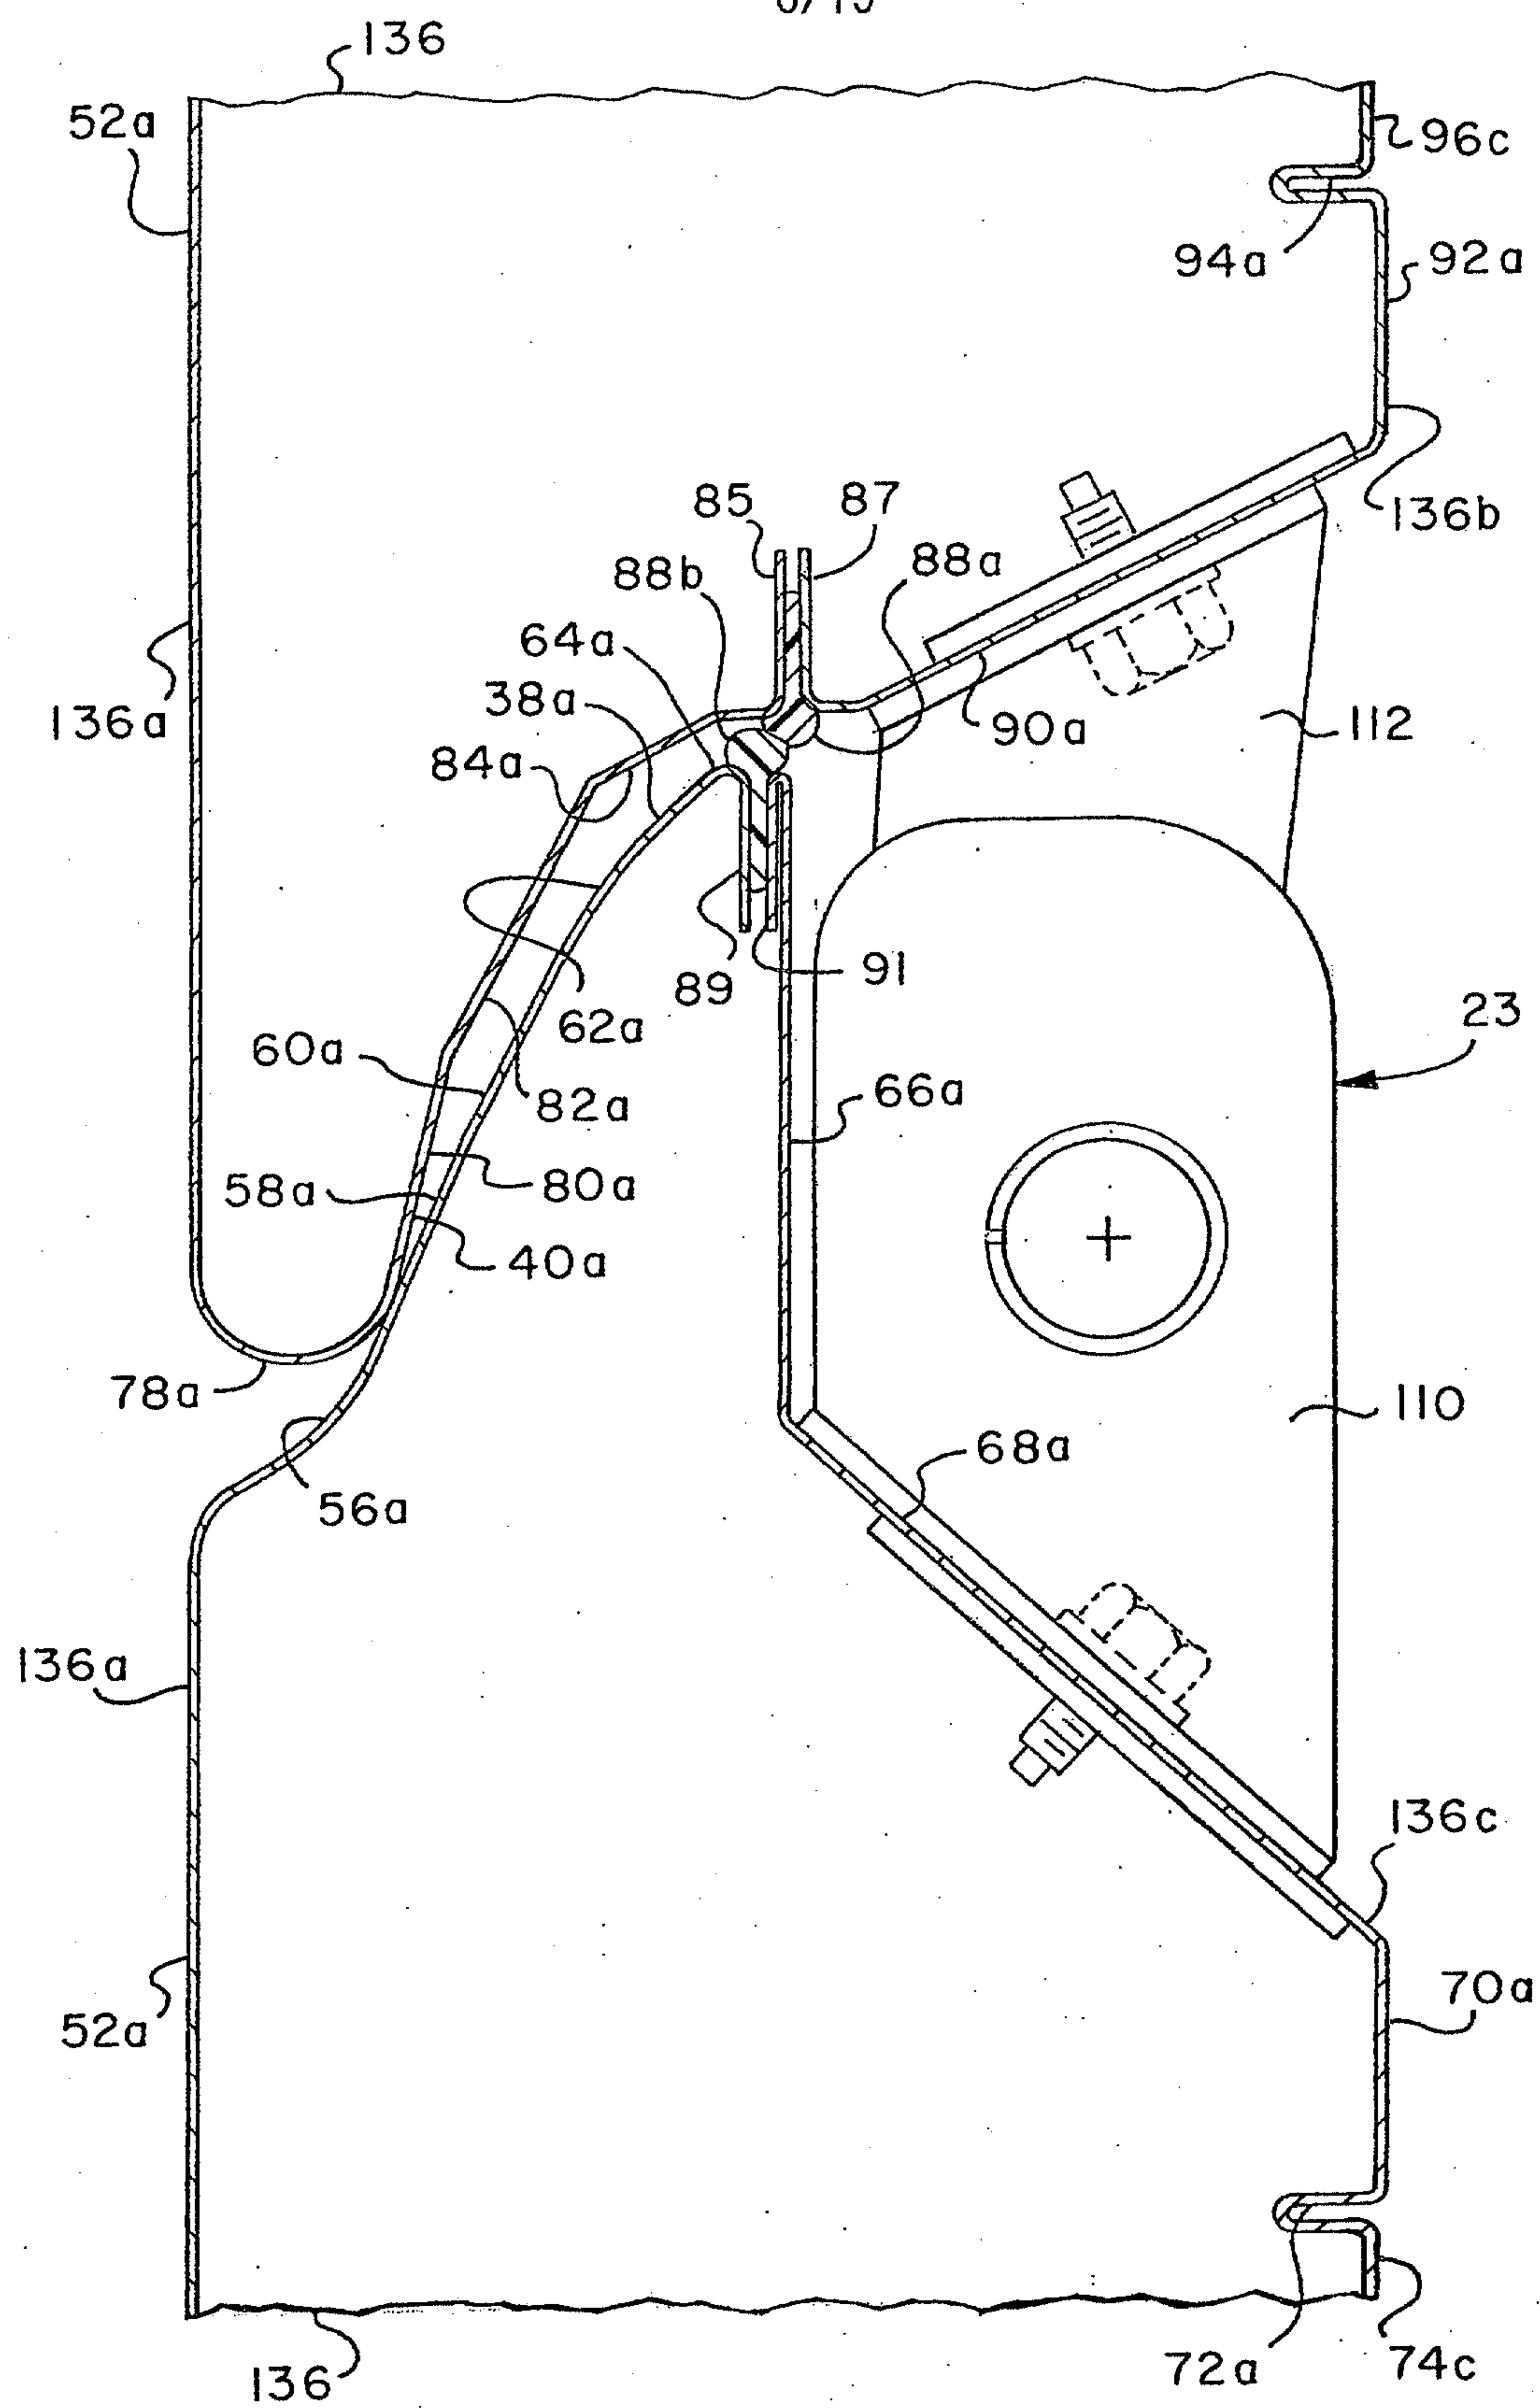


FIG. 8

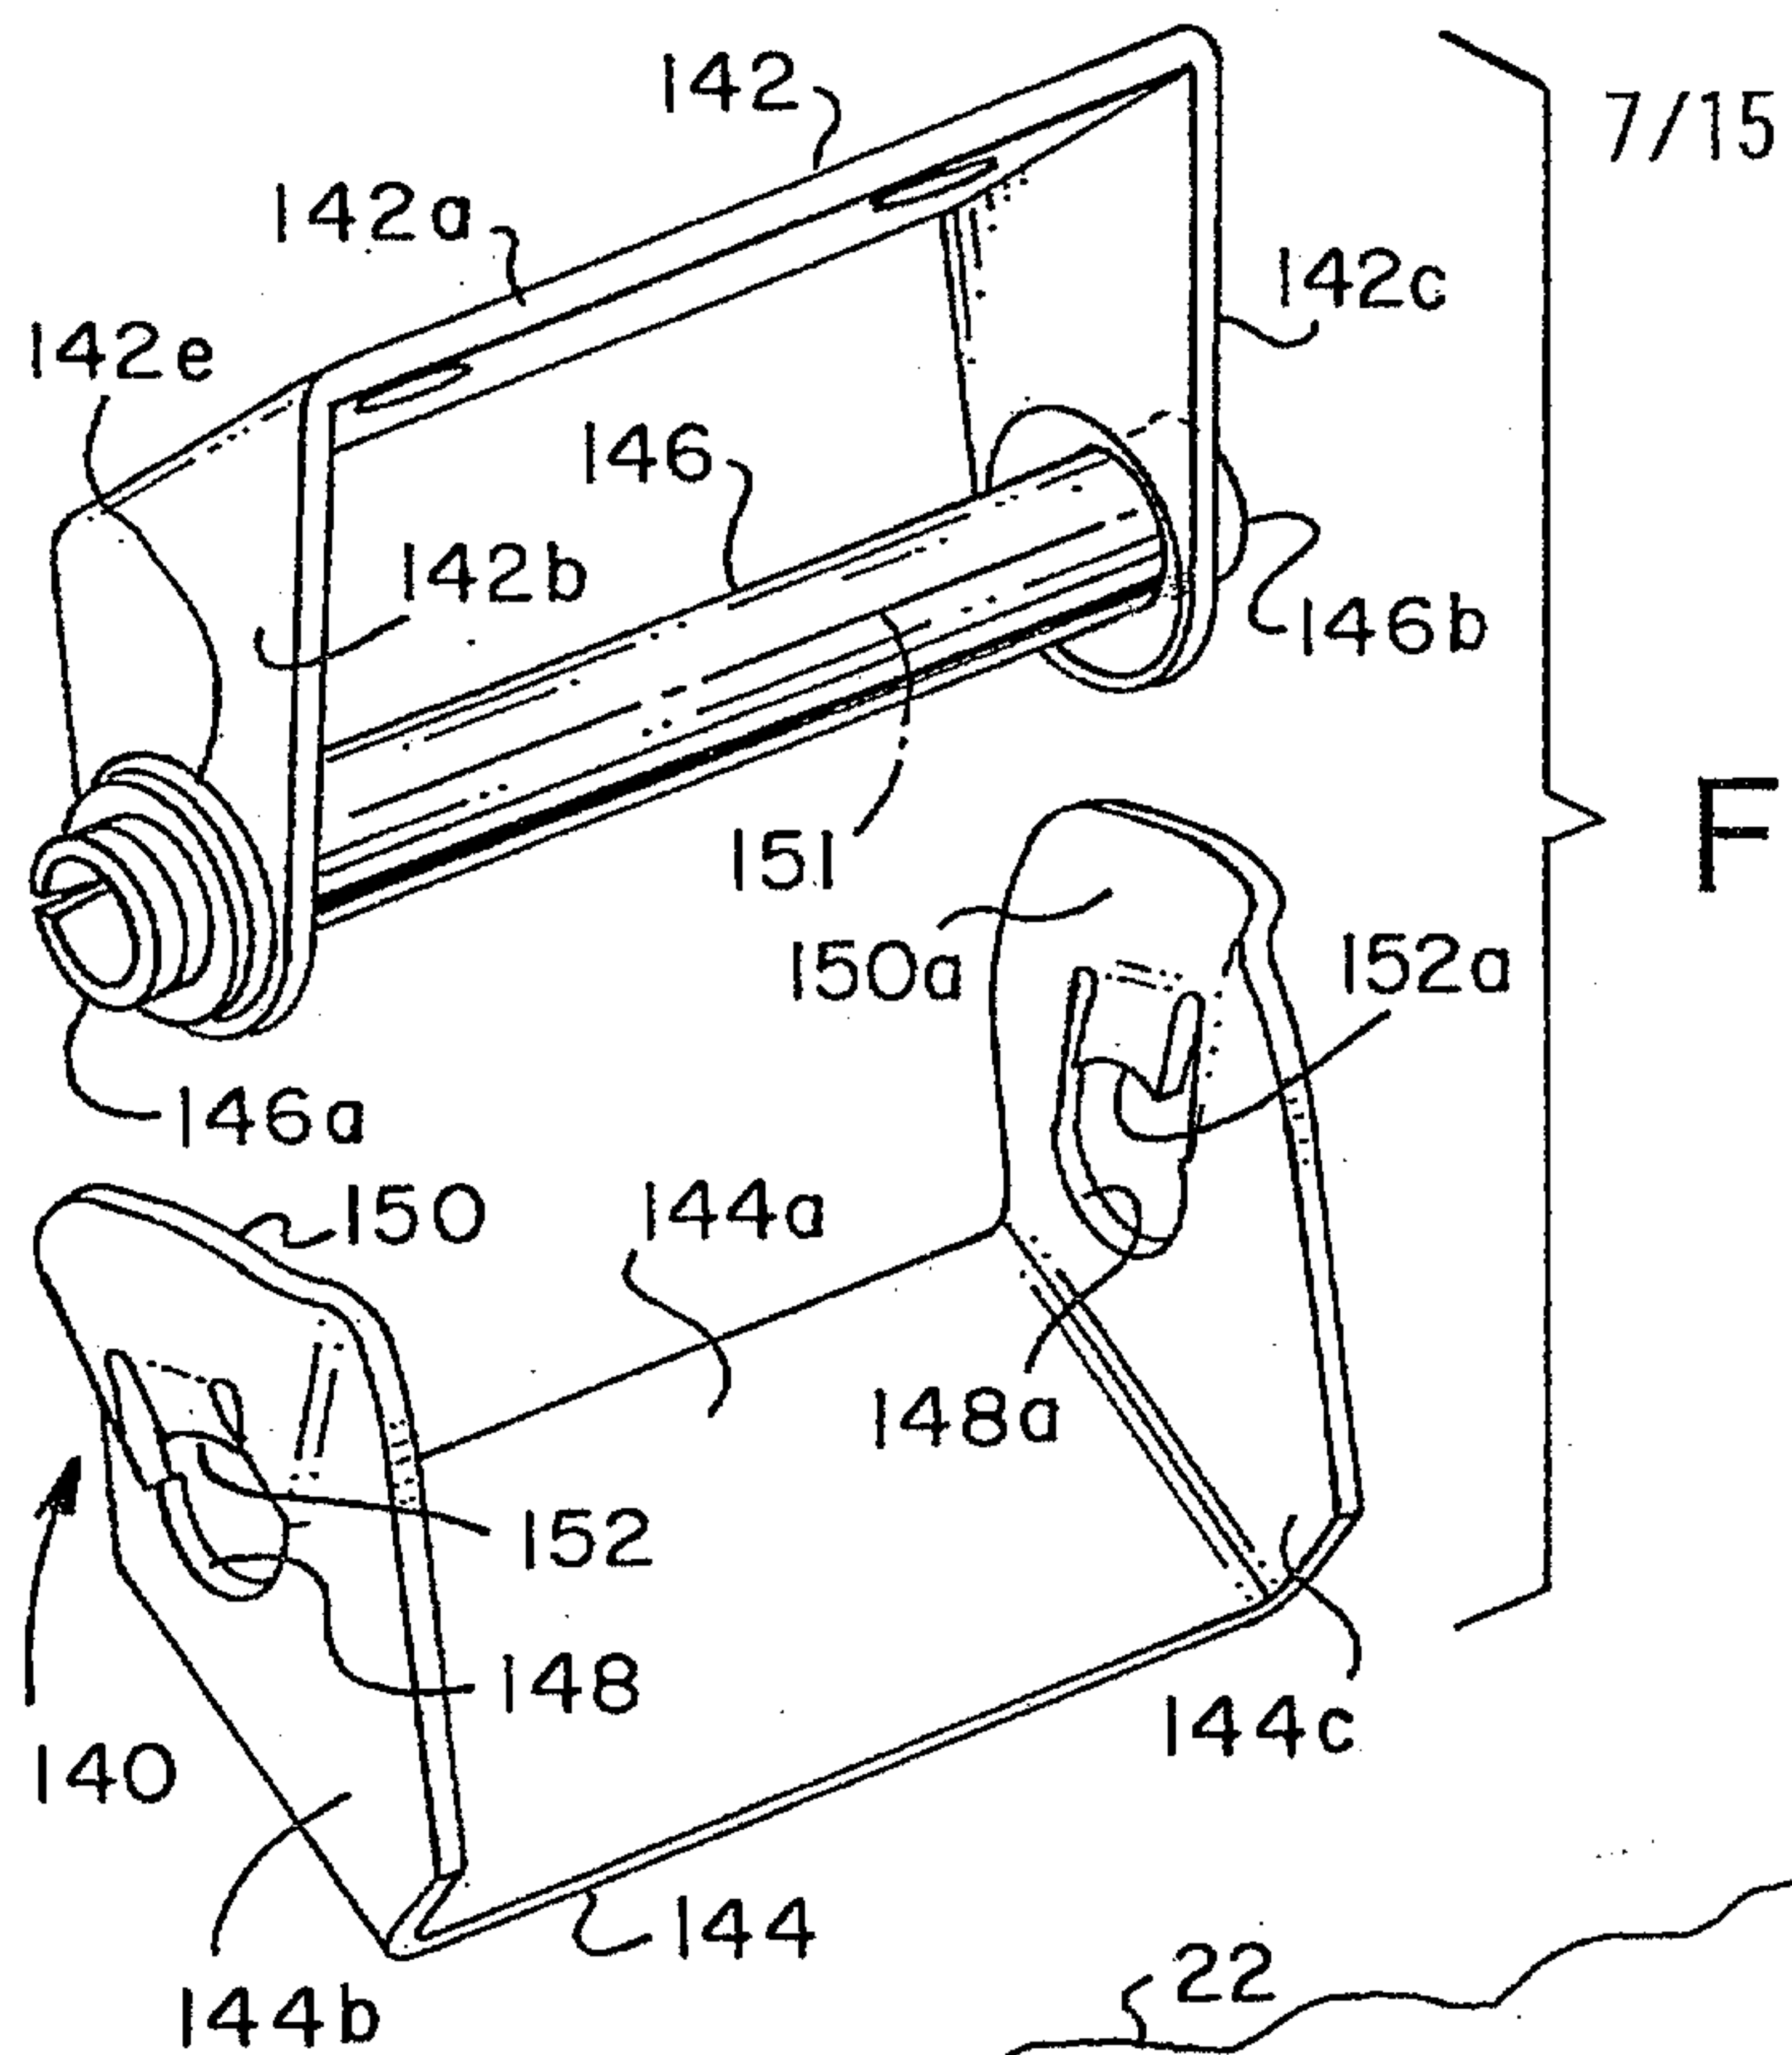


FIG. 9

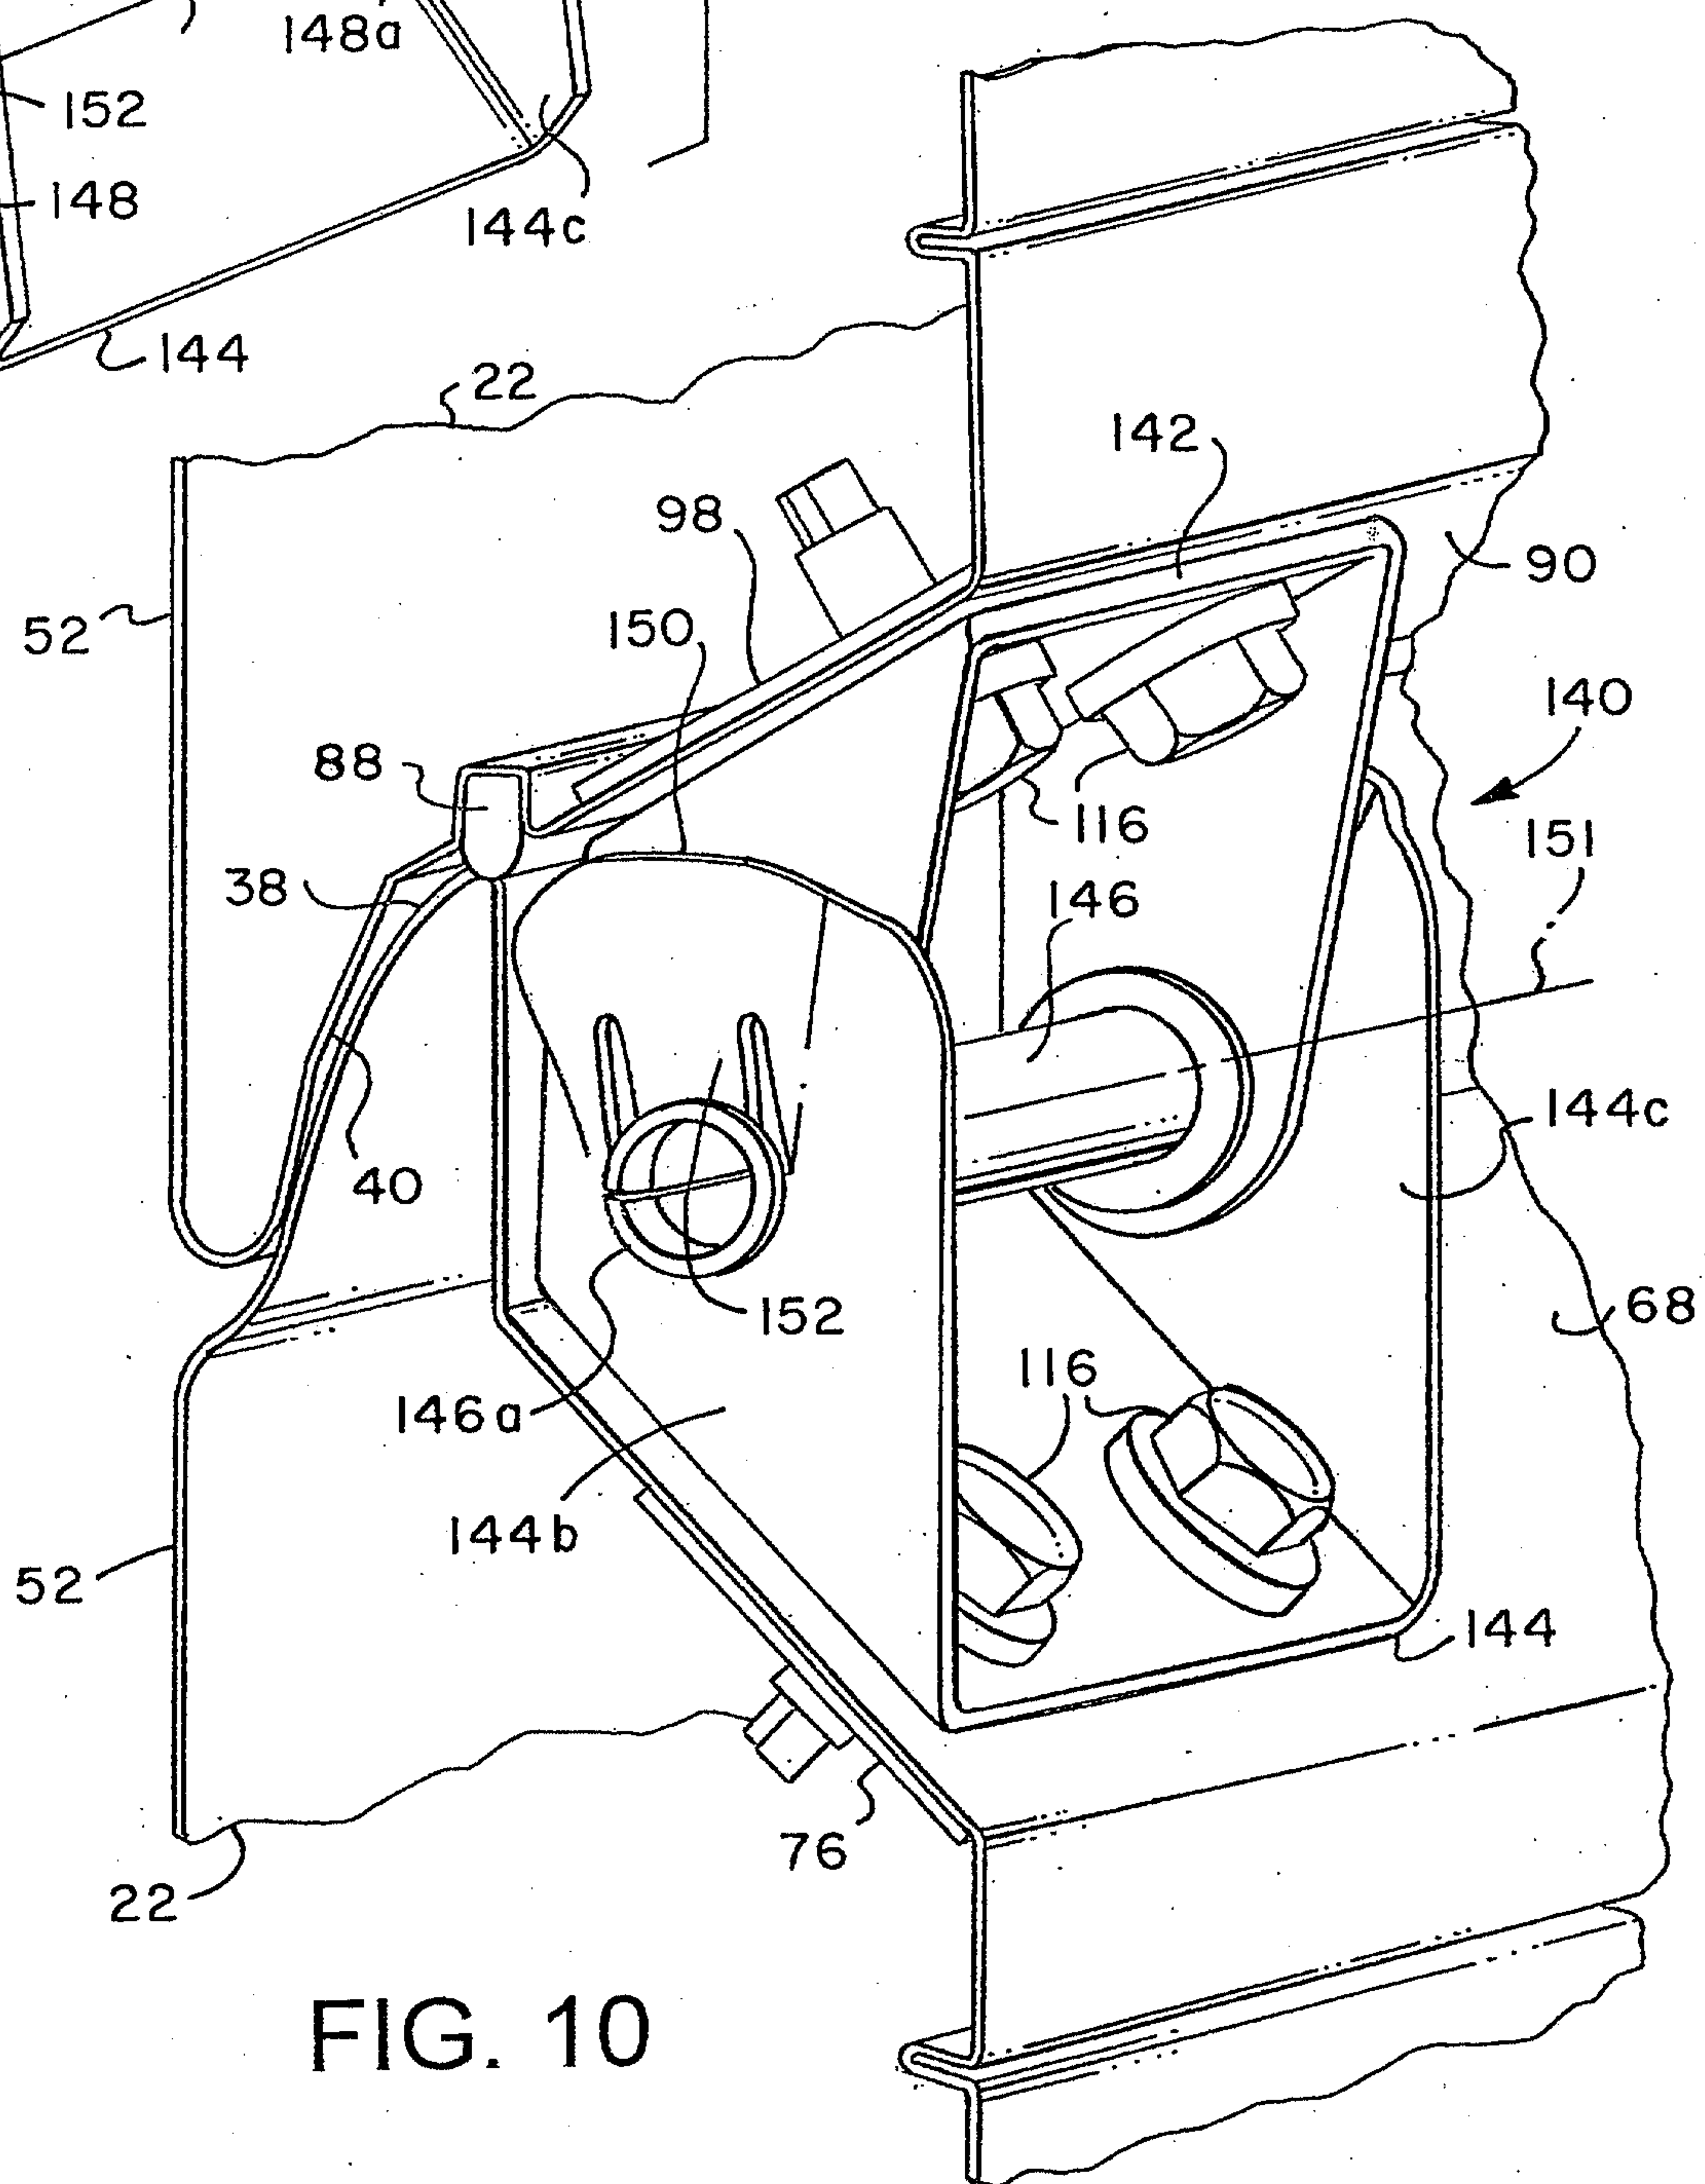


FIG. 10

8/15

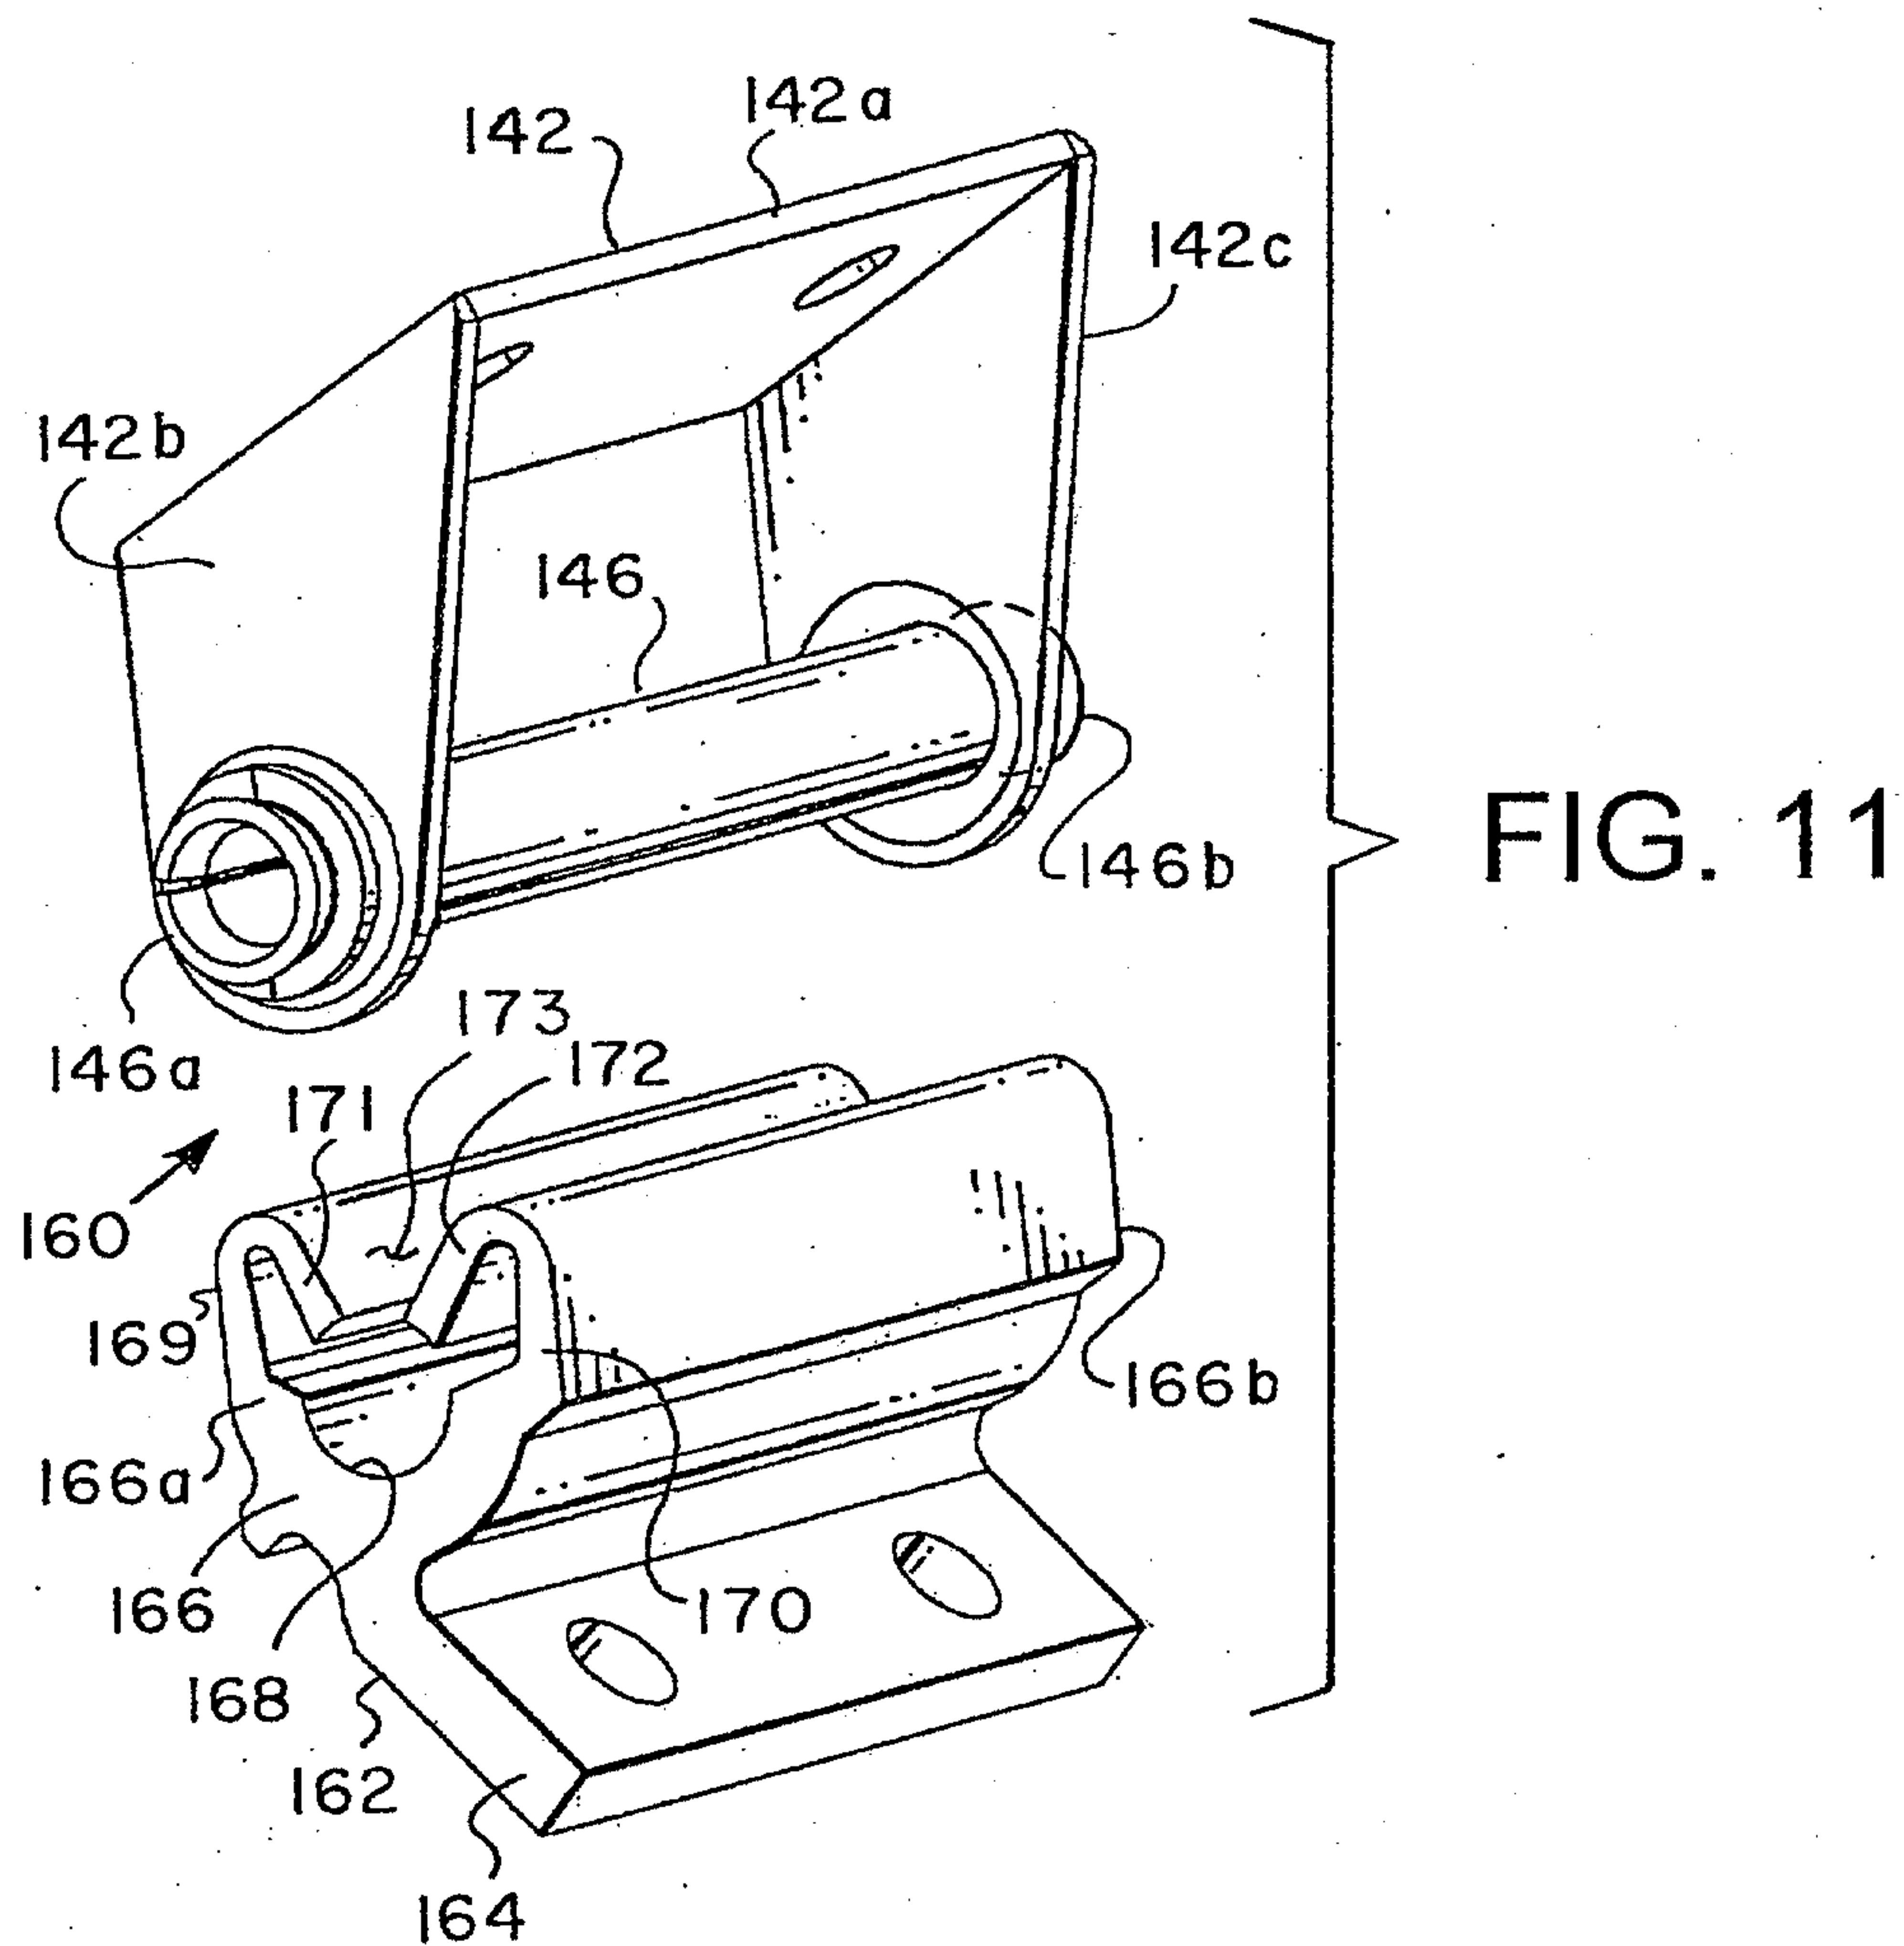


FIG. 11

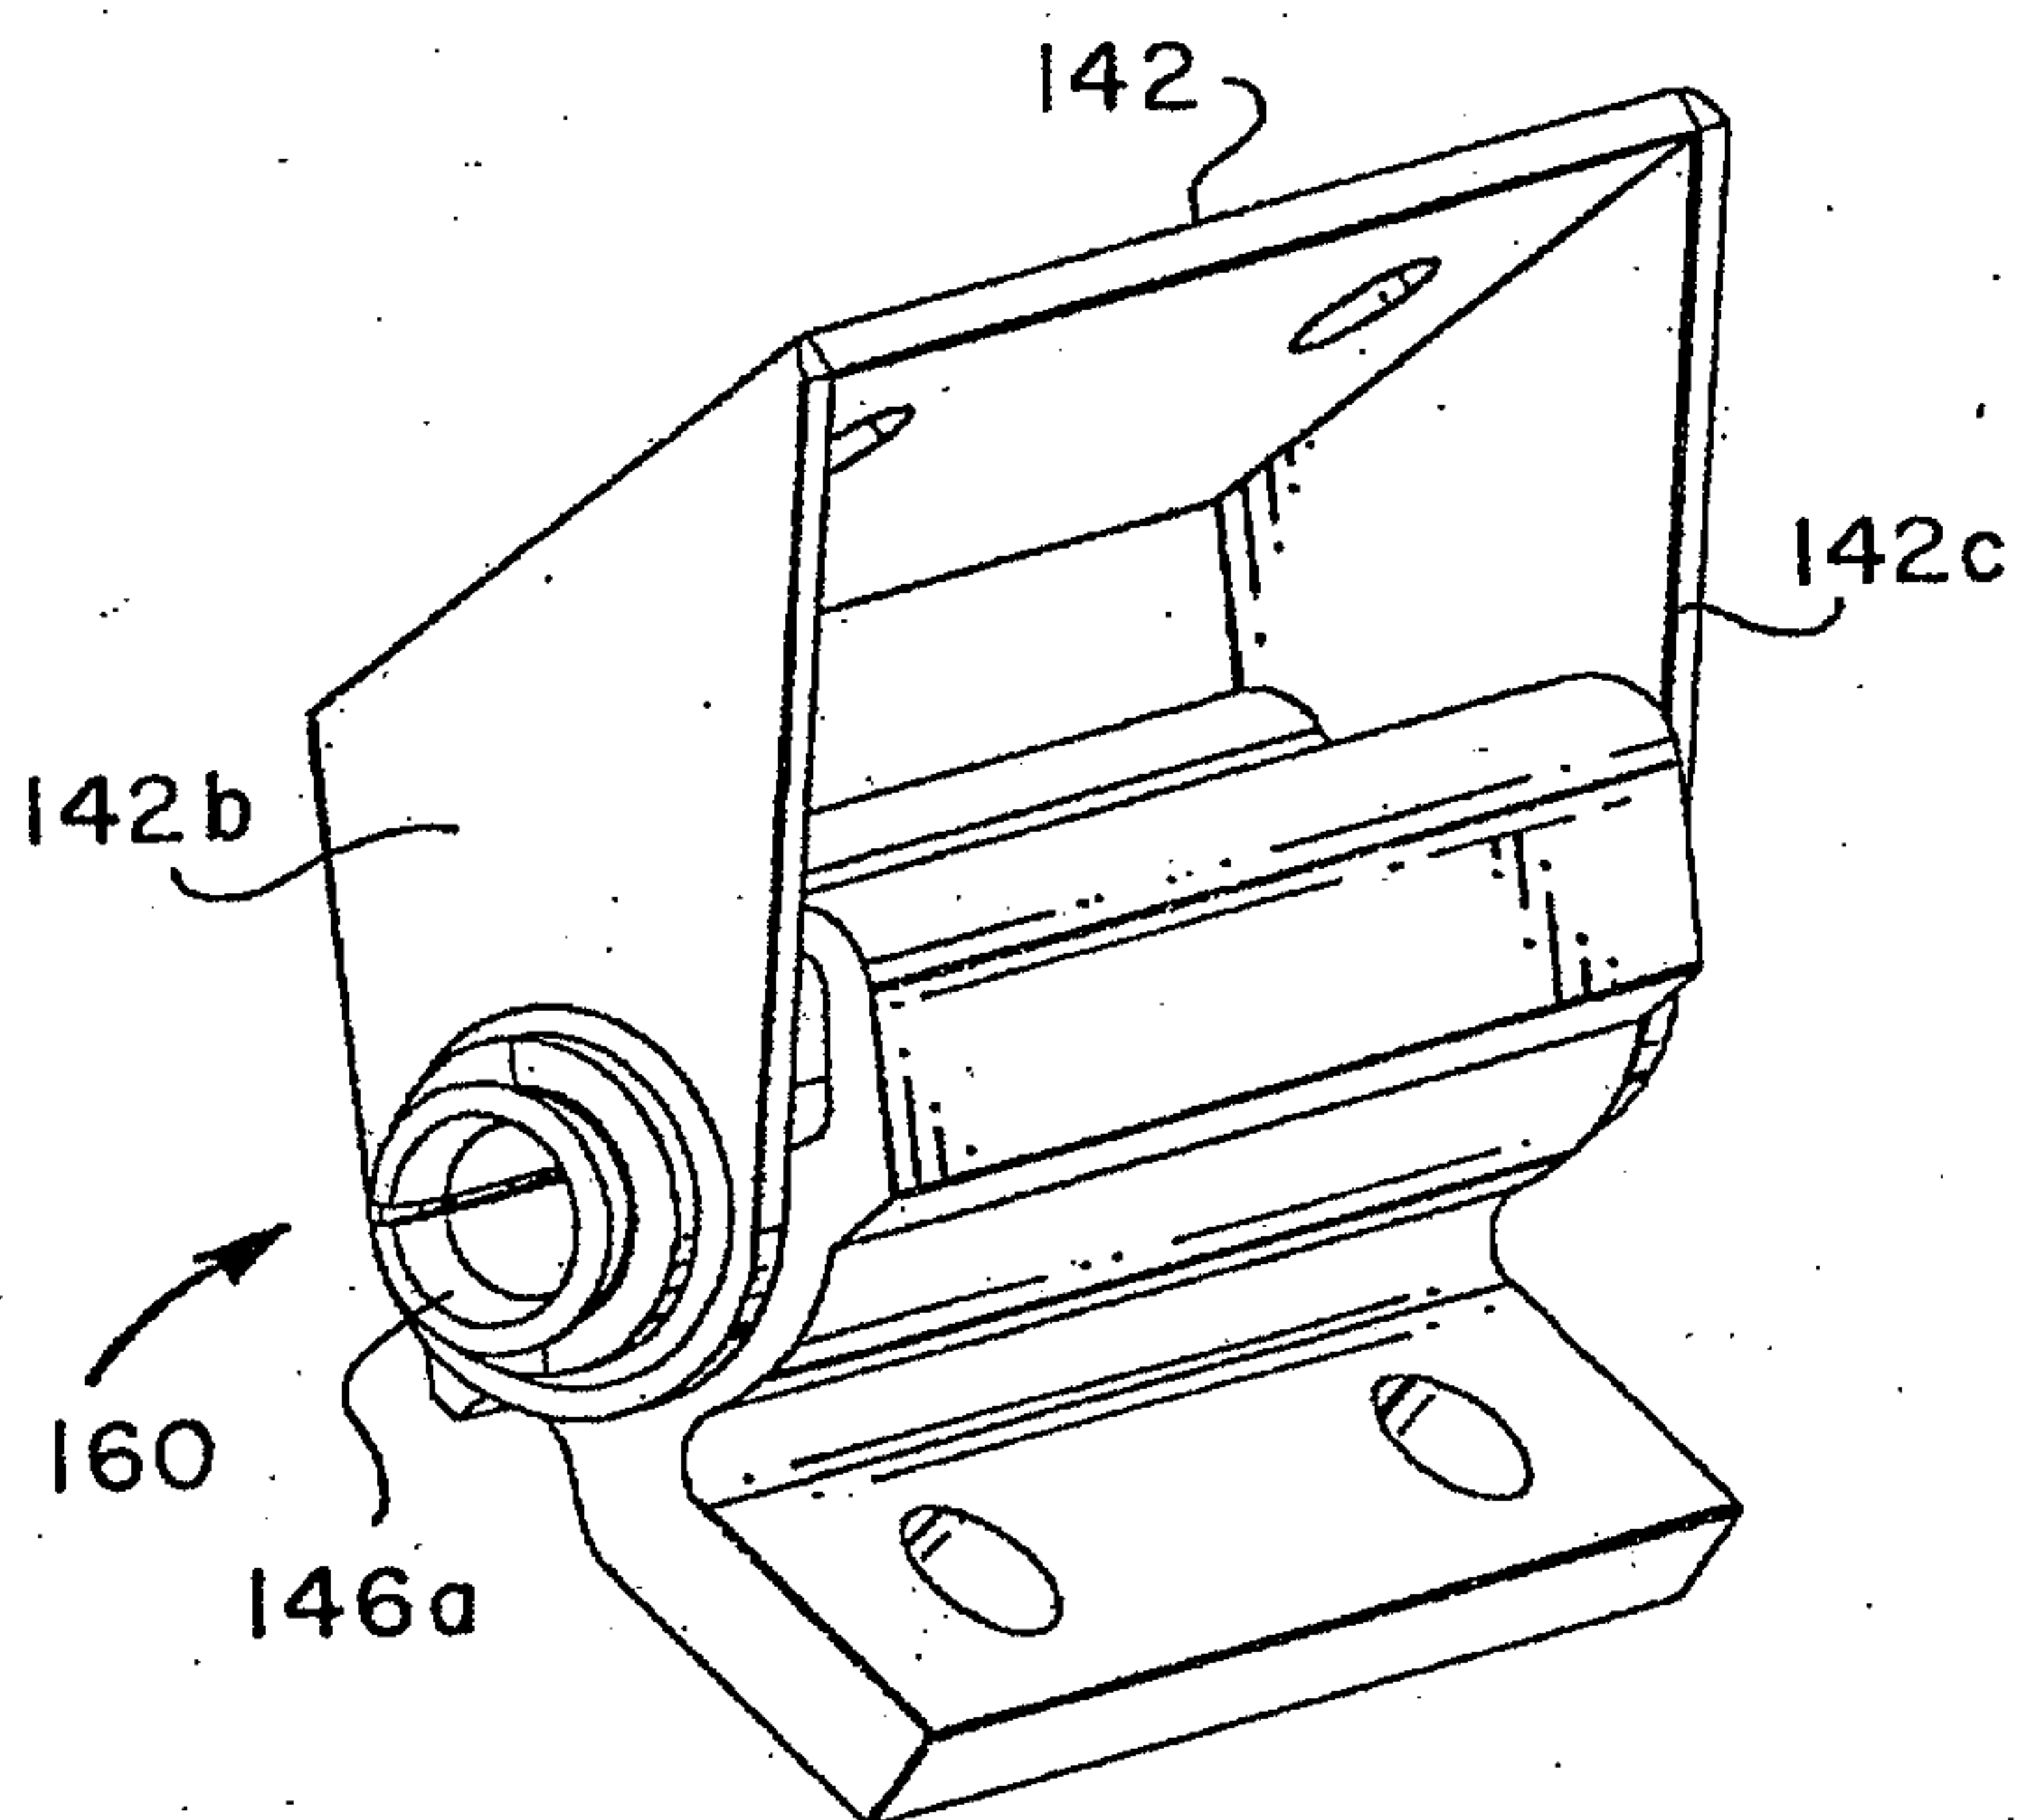


FIG. 12

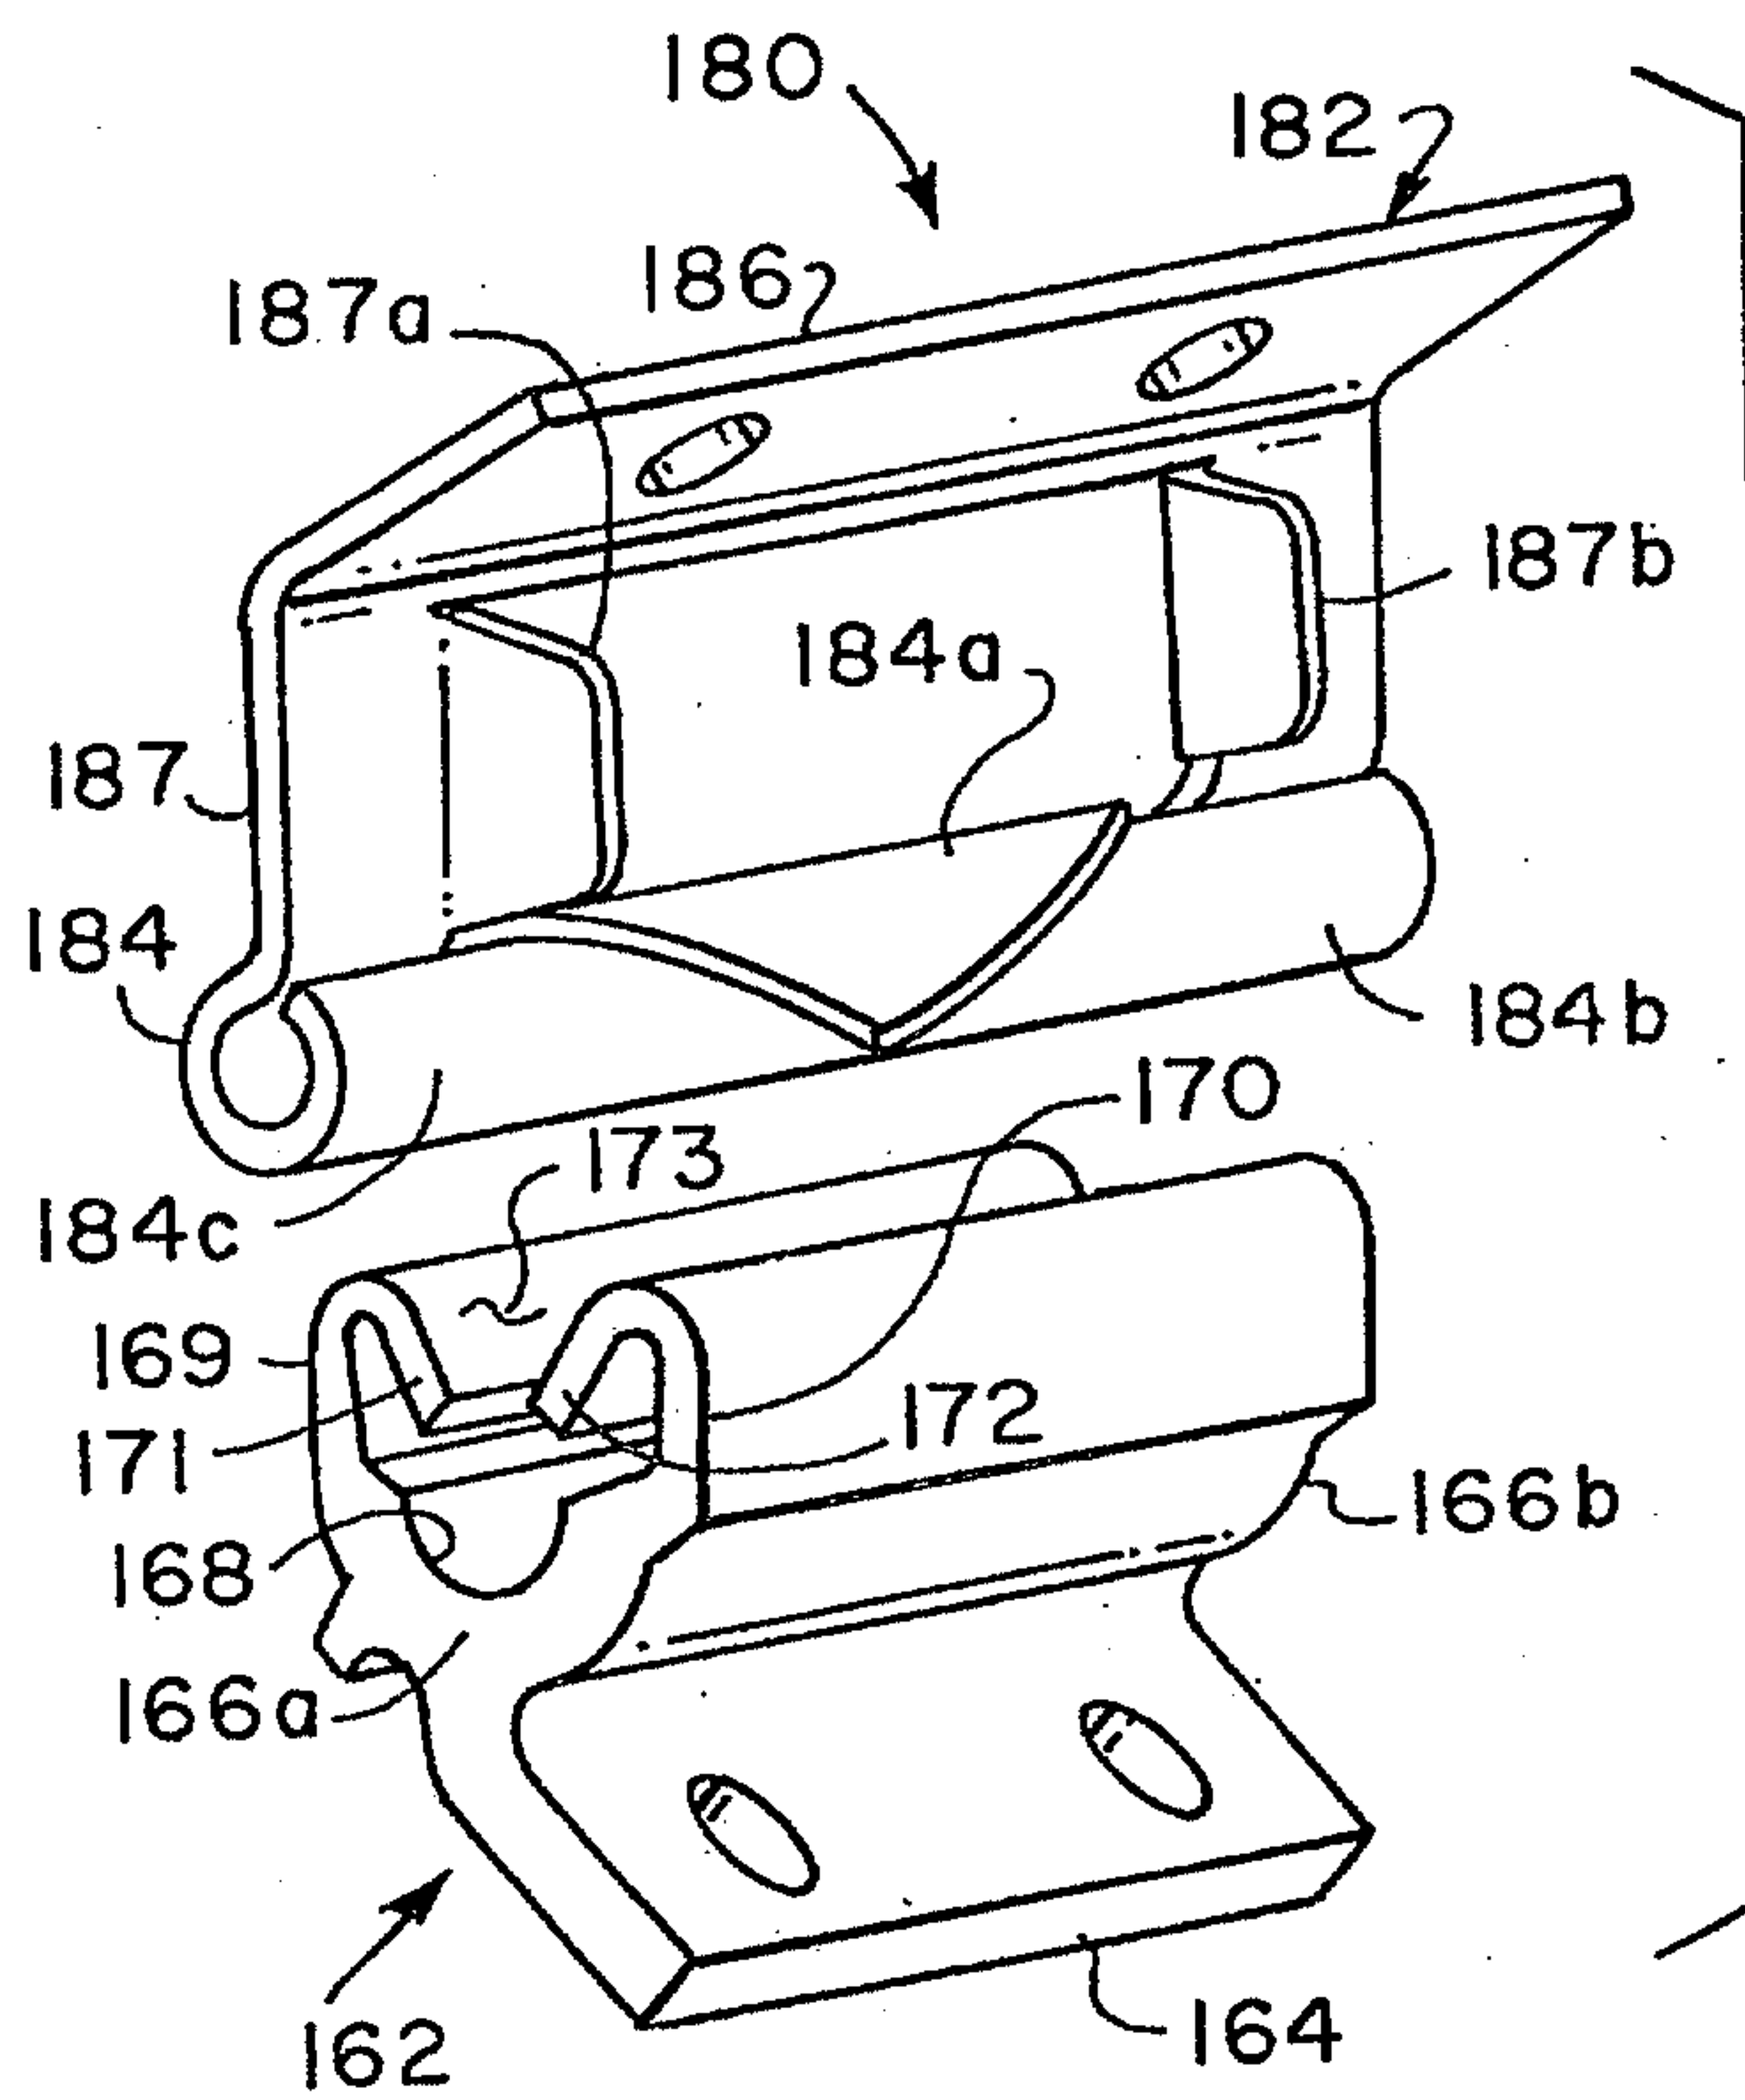


FIG. 13

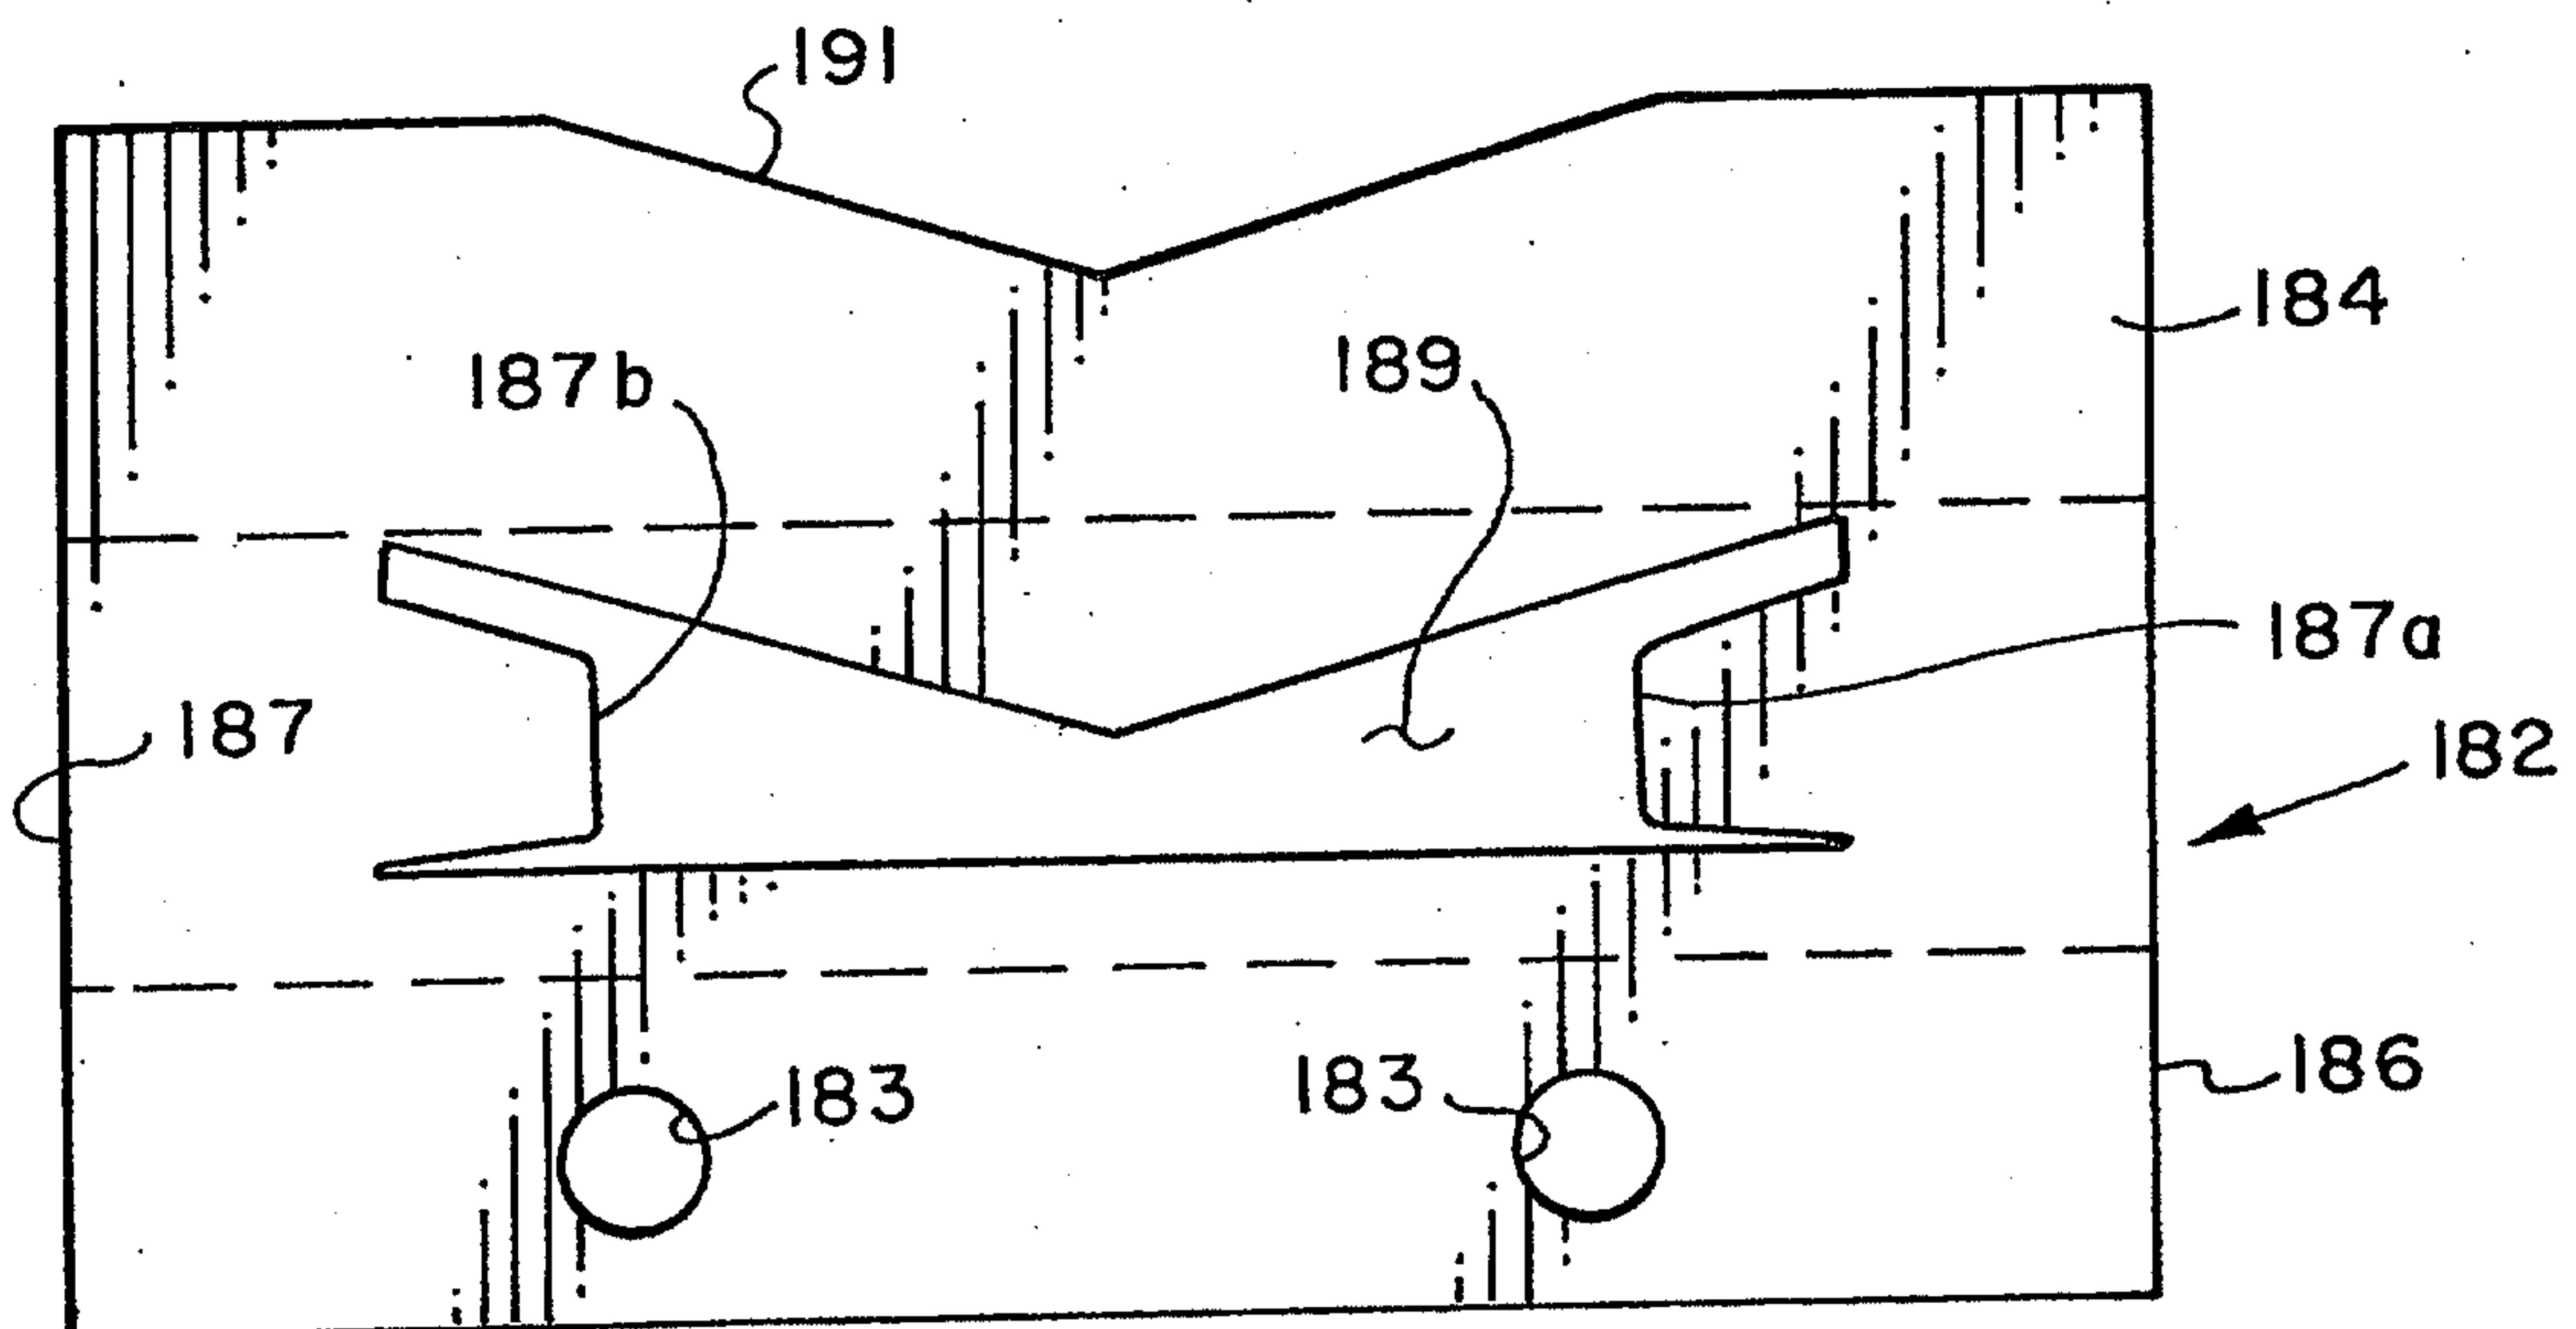
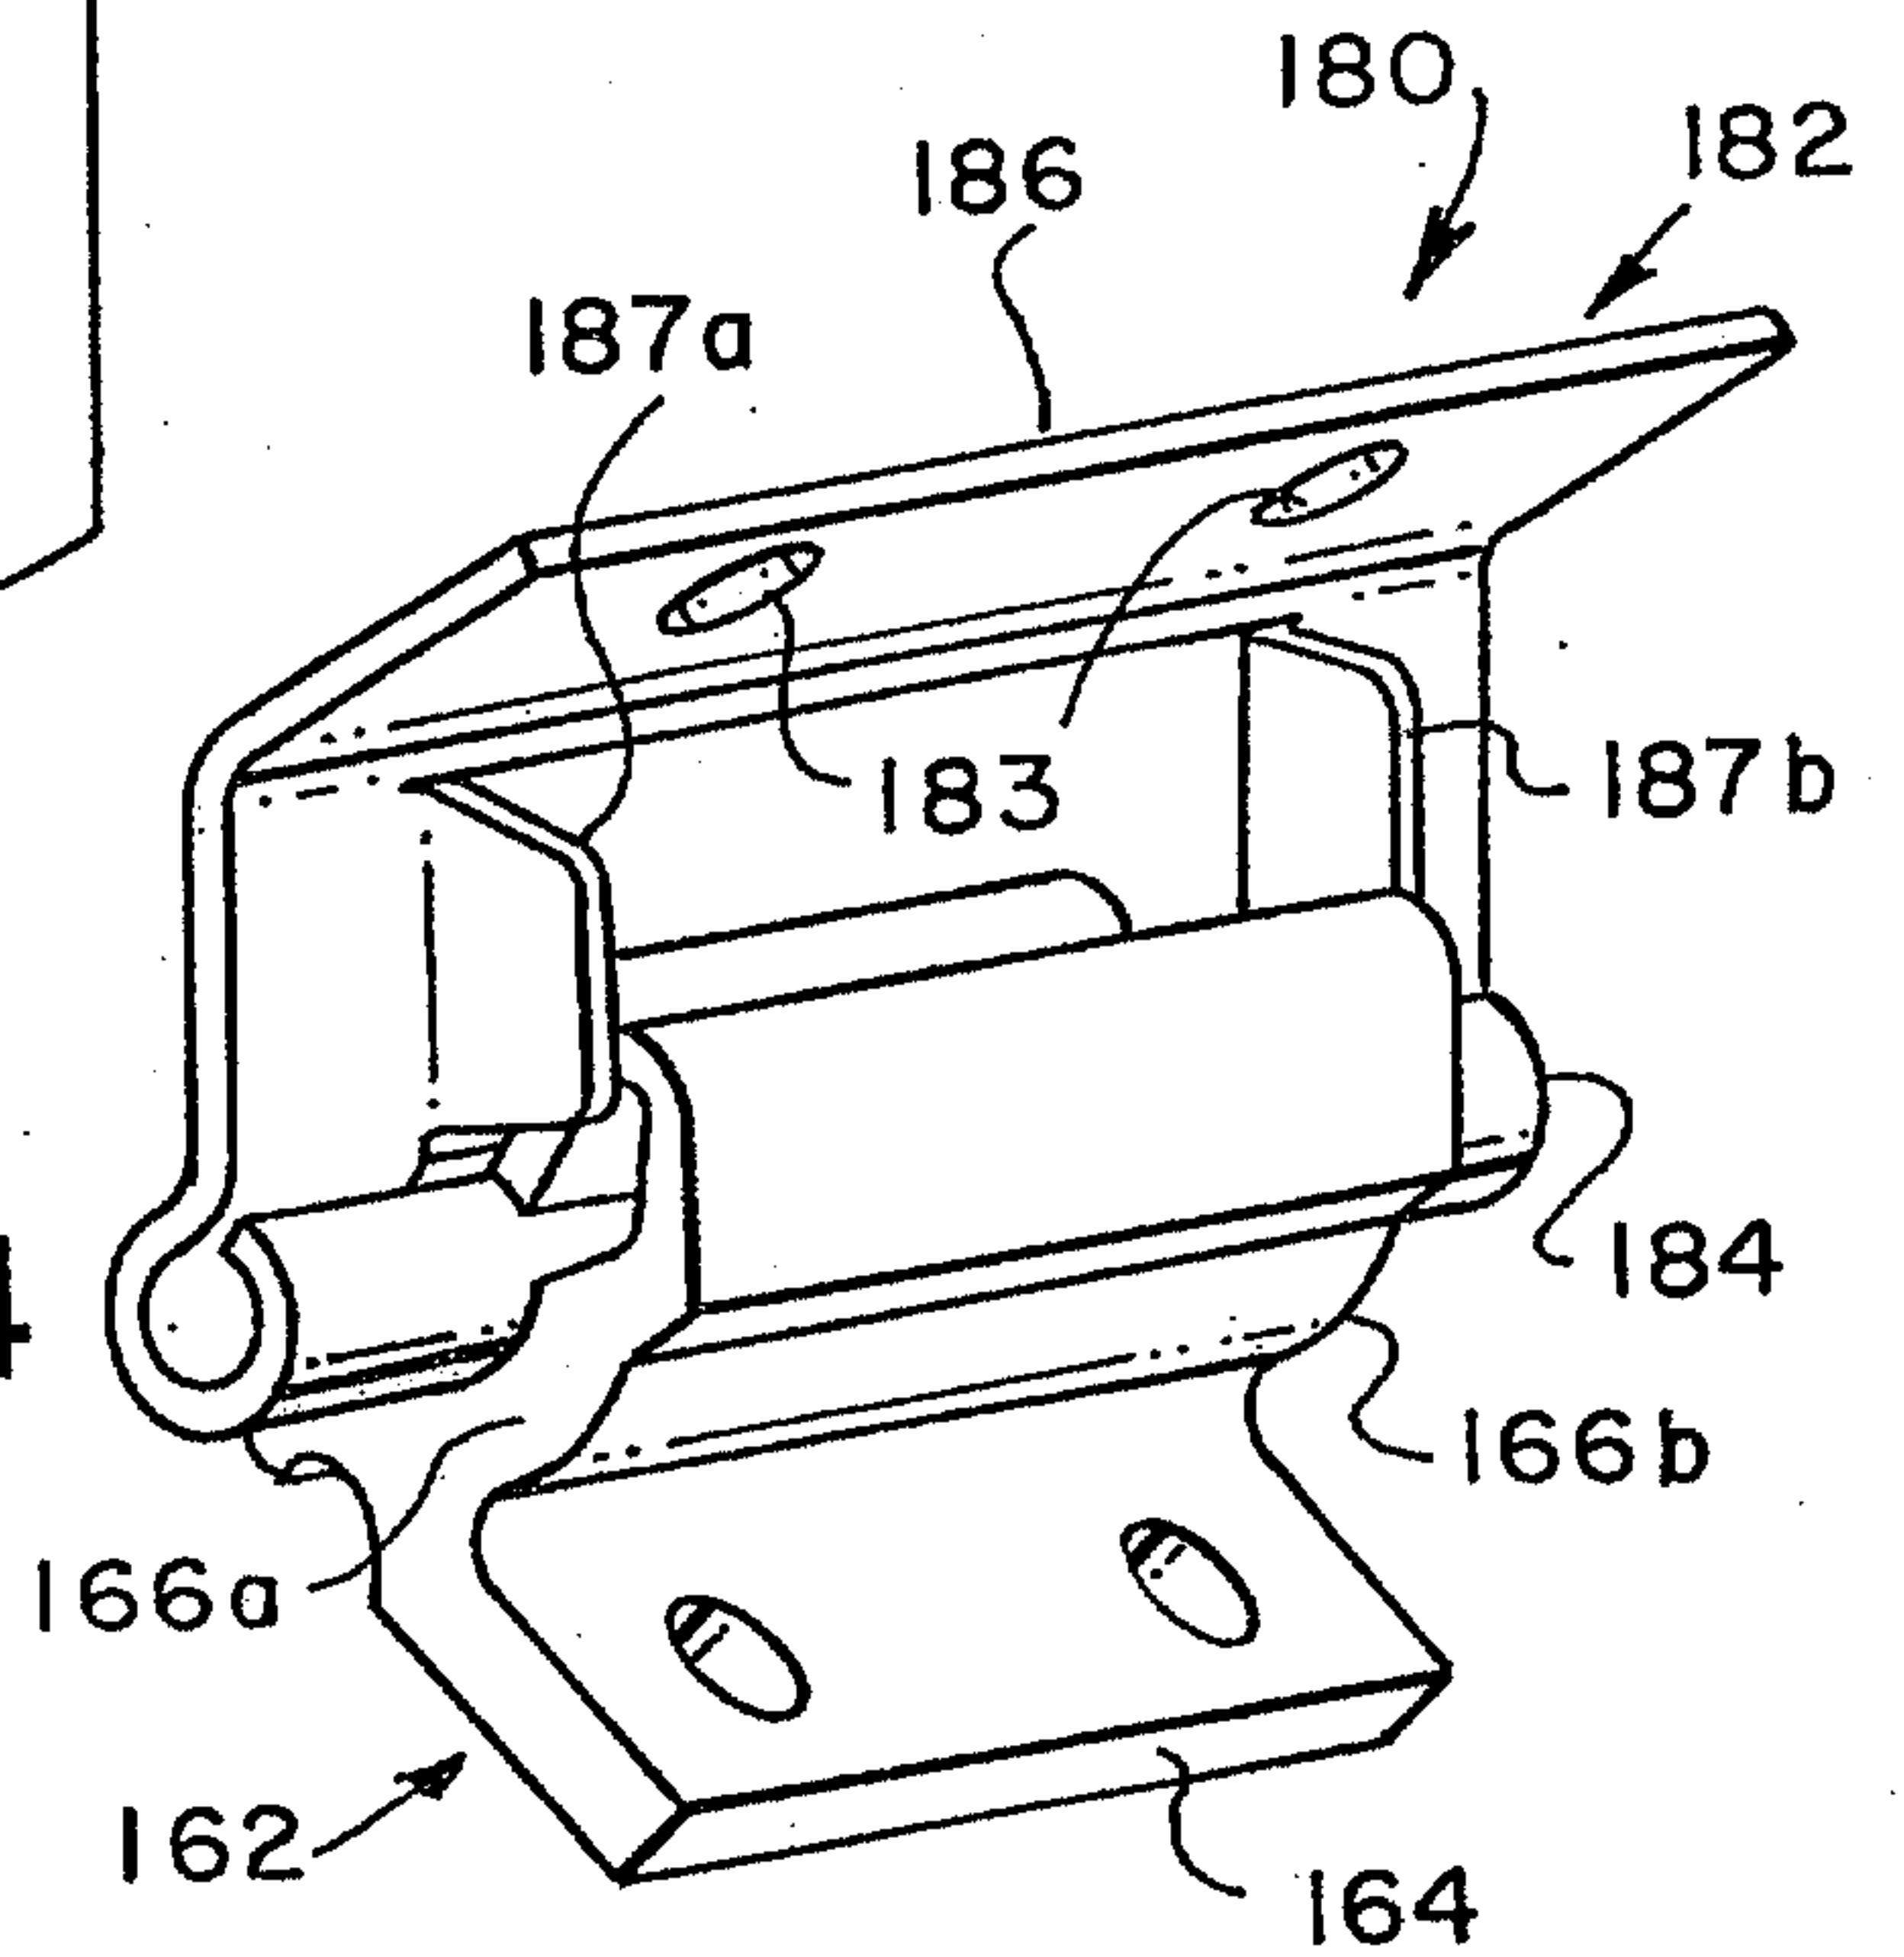


FIG. 15

10/15

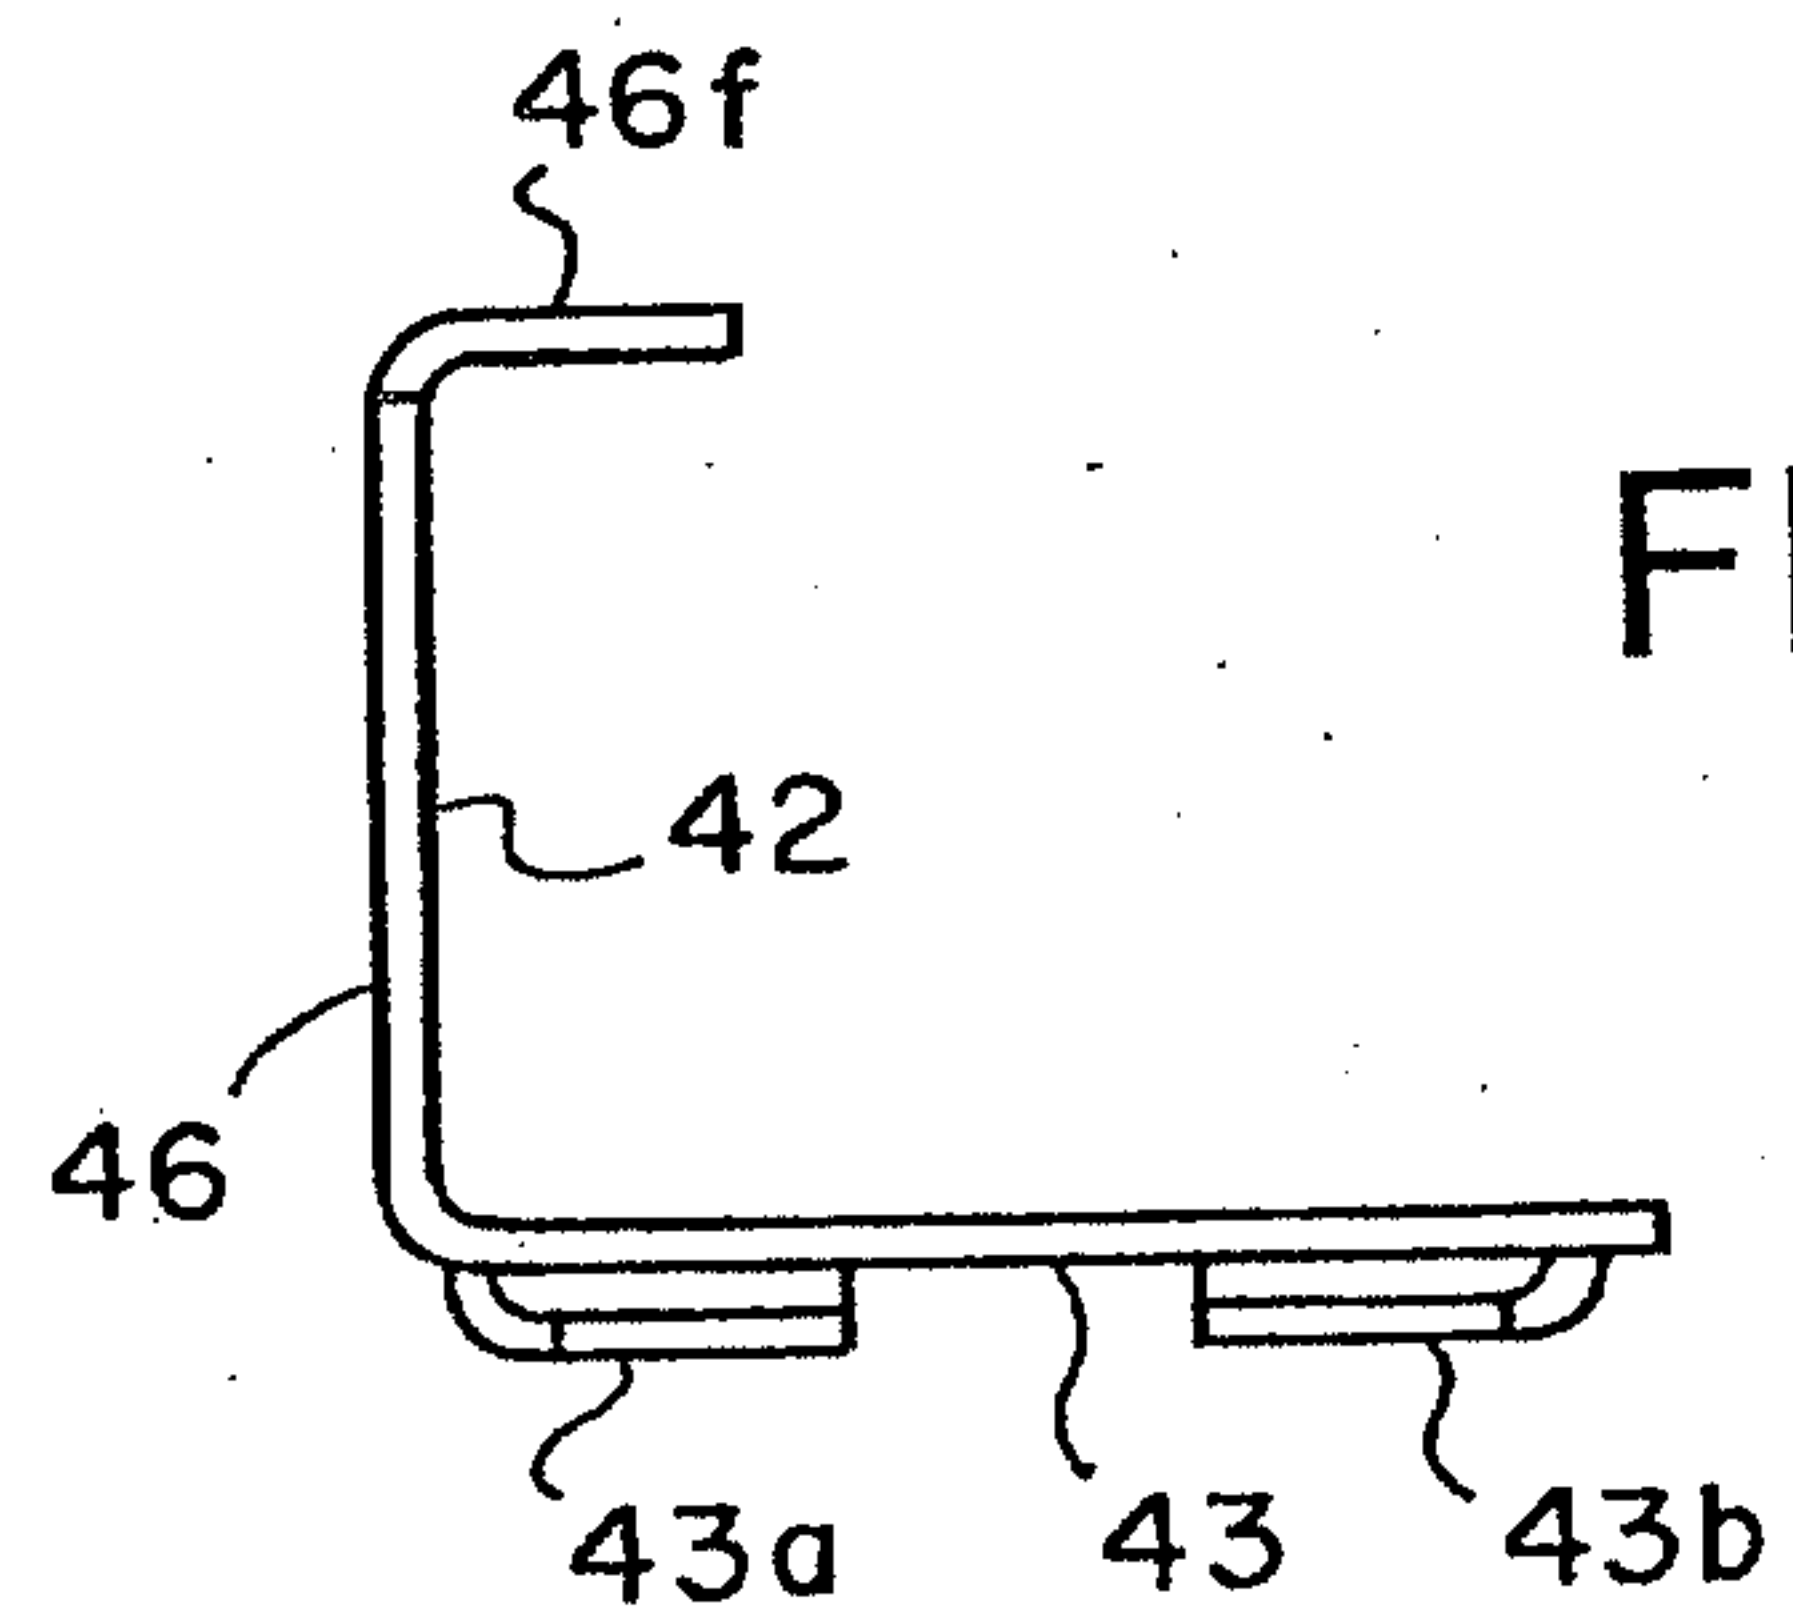
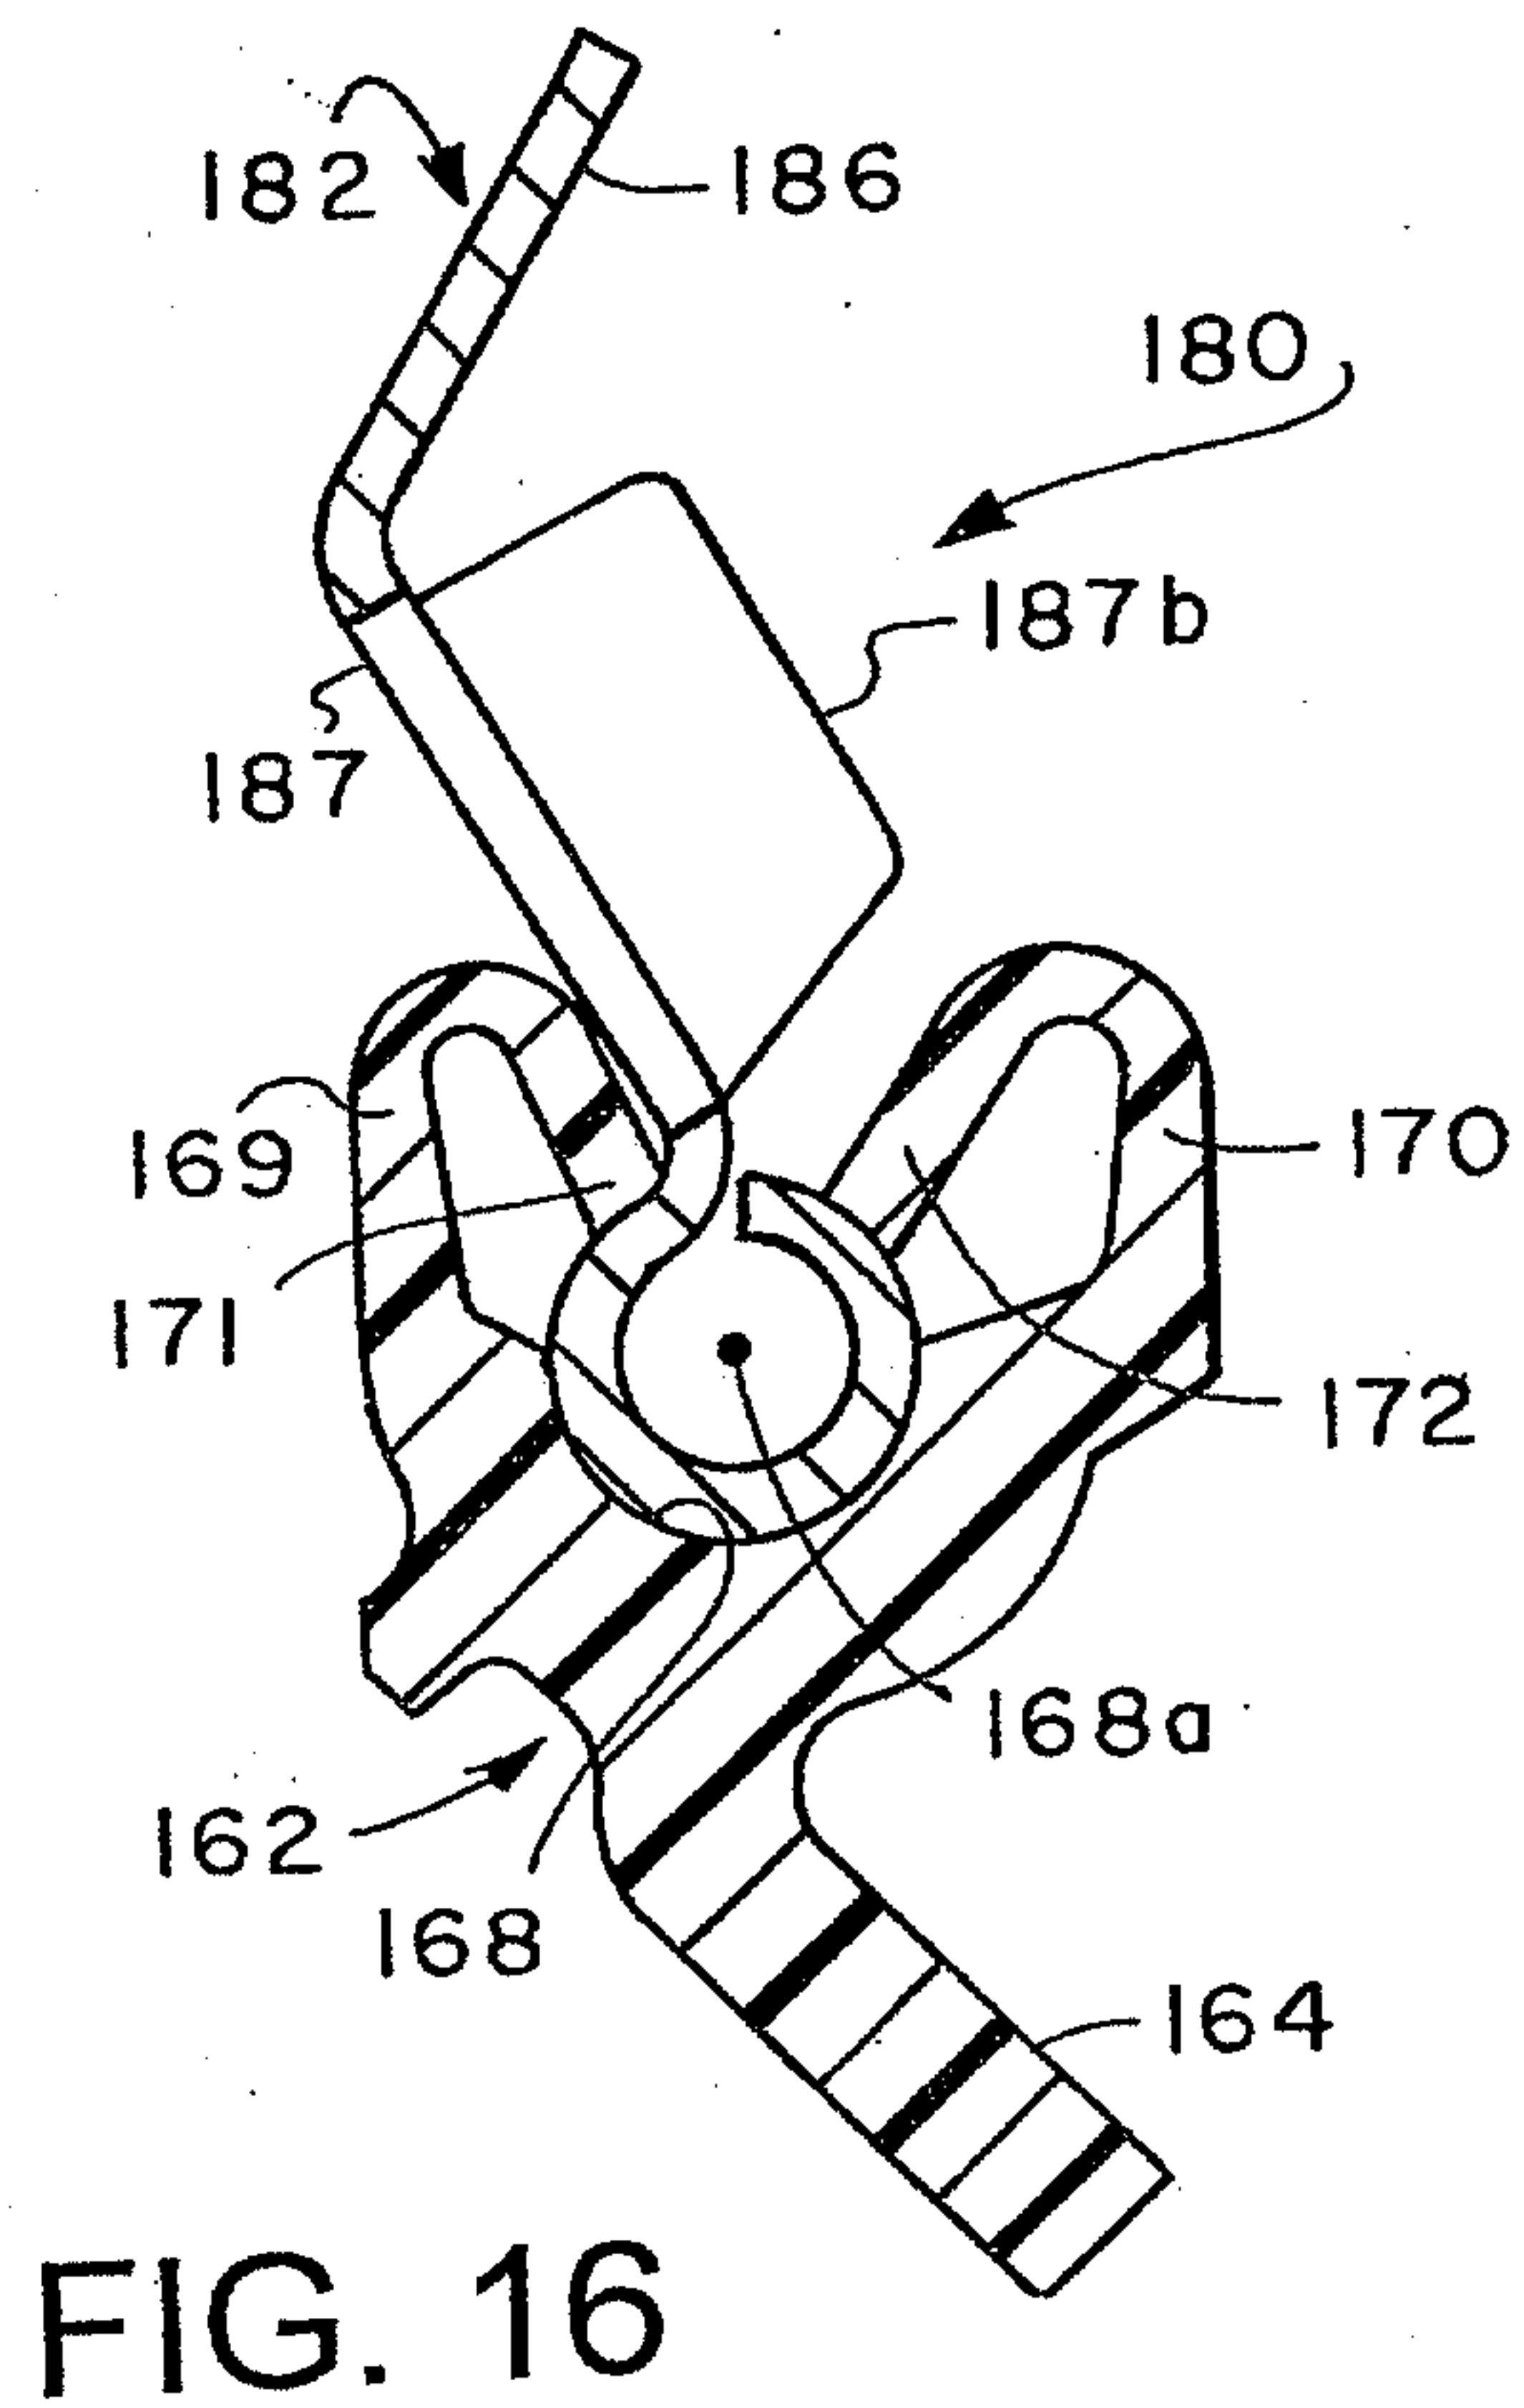
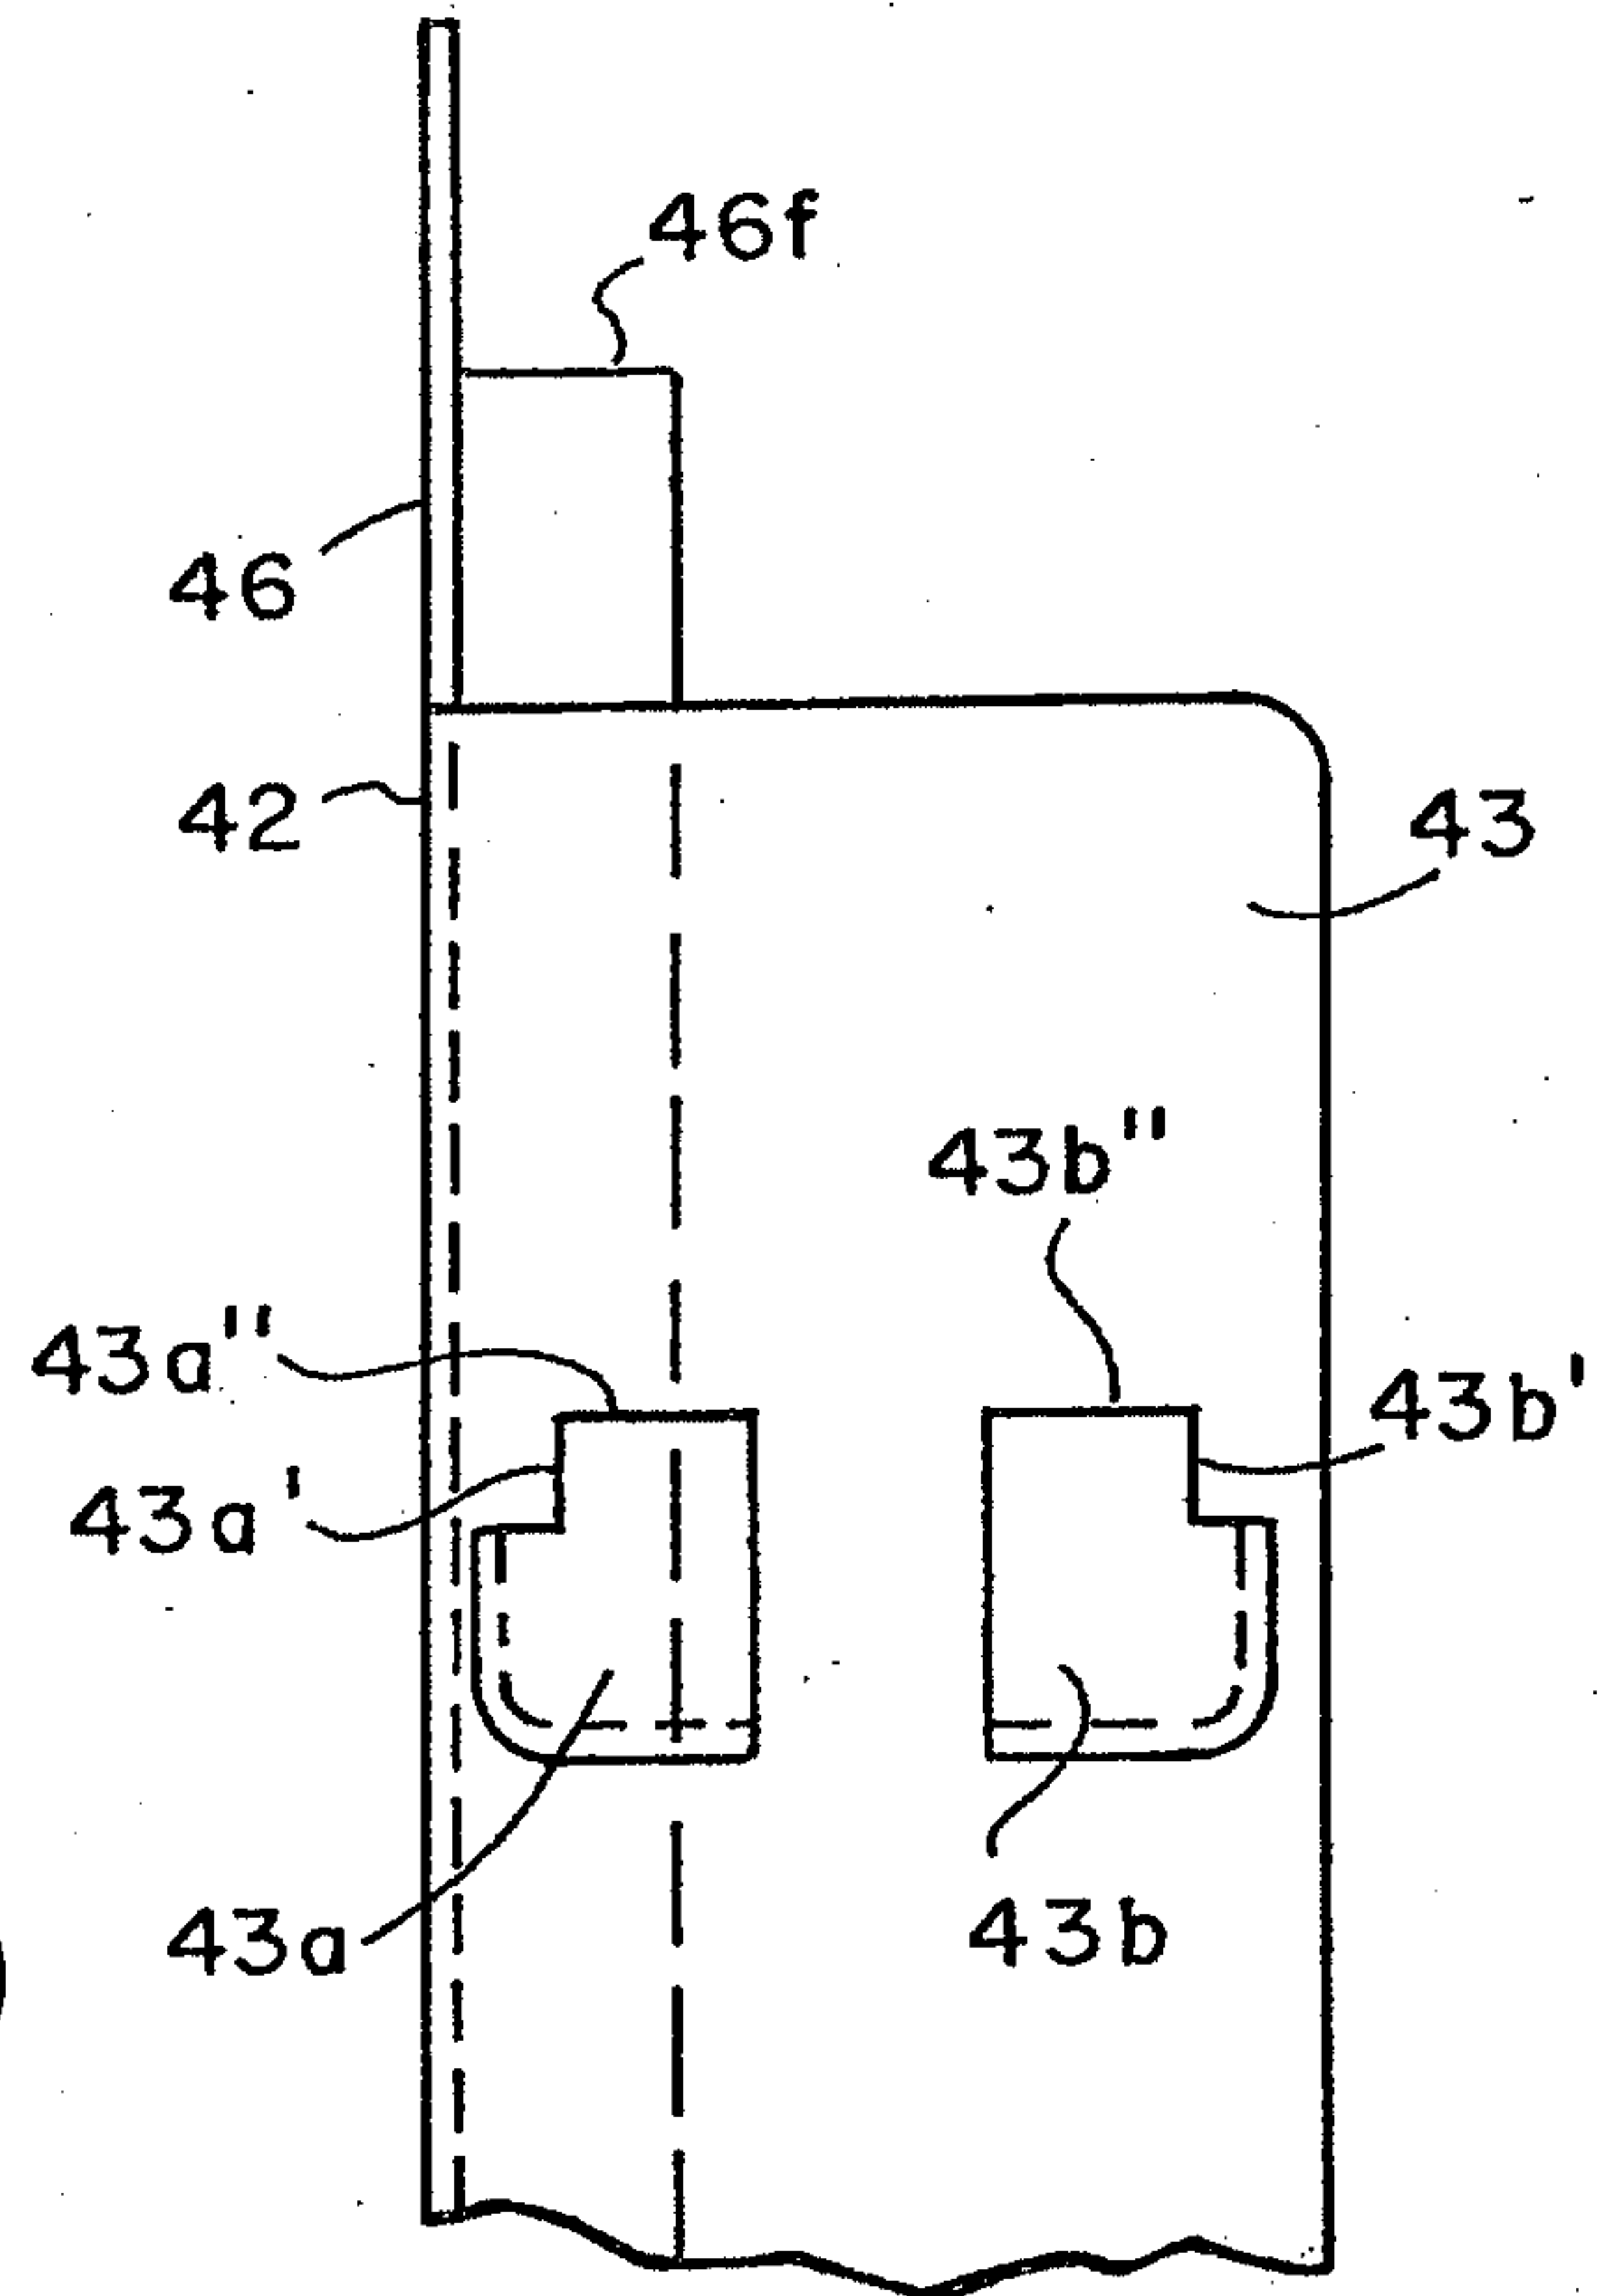


FIG. 19



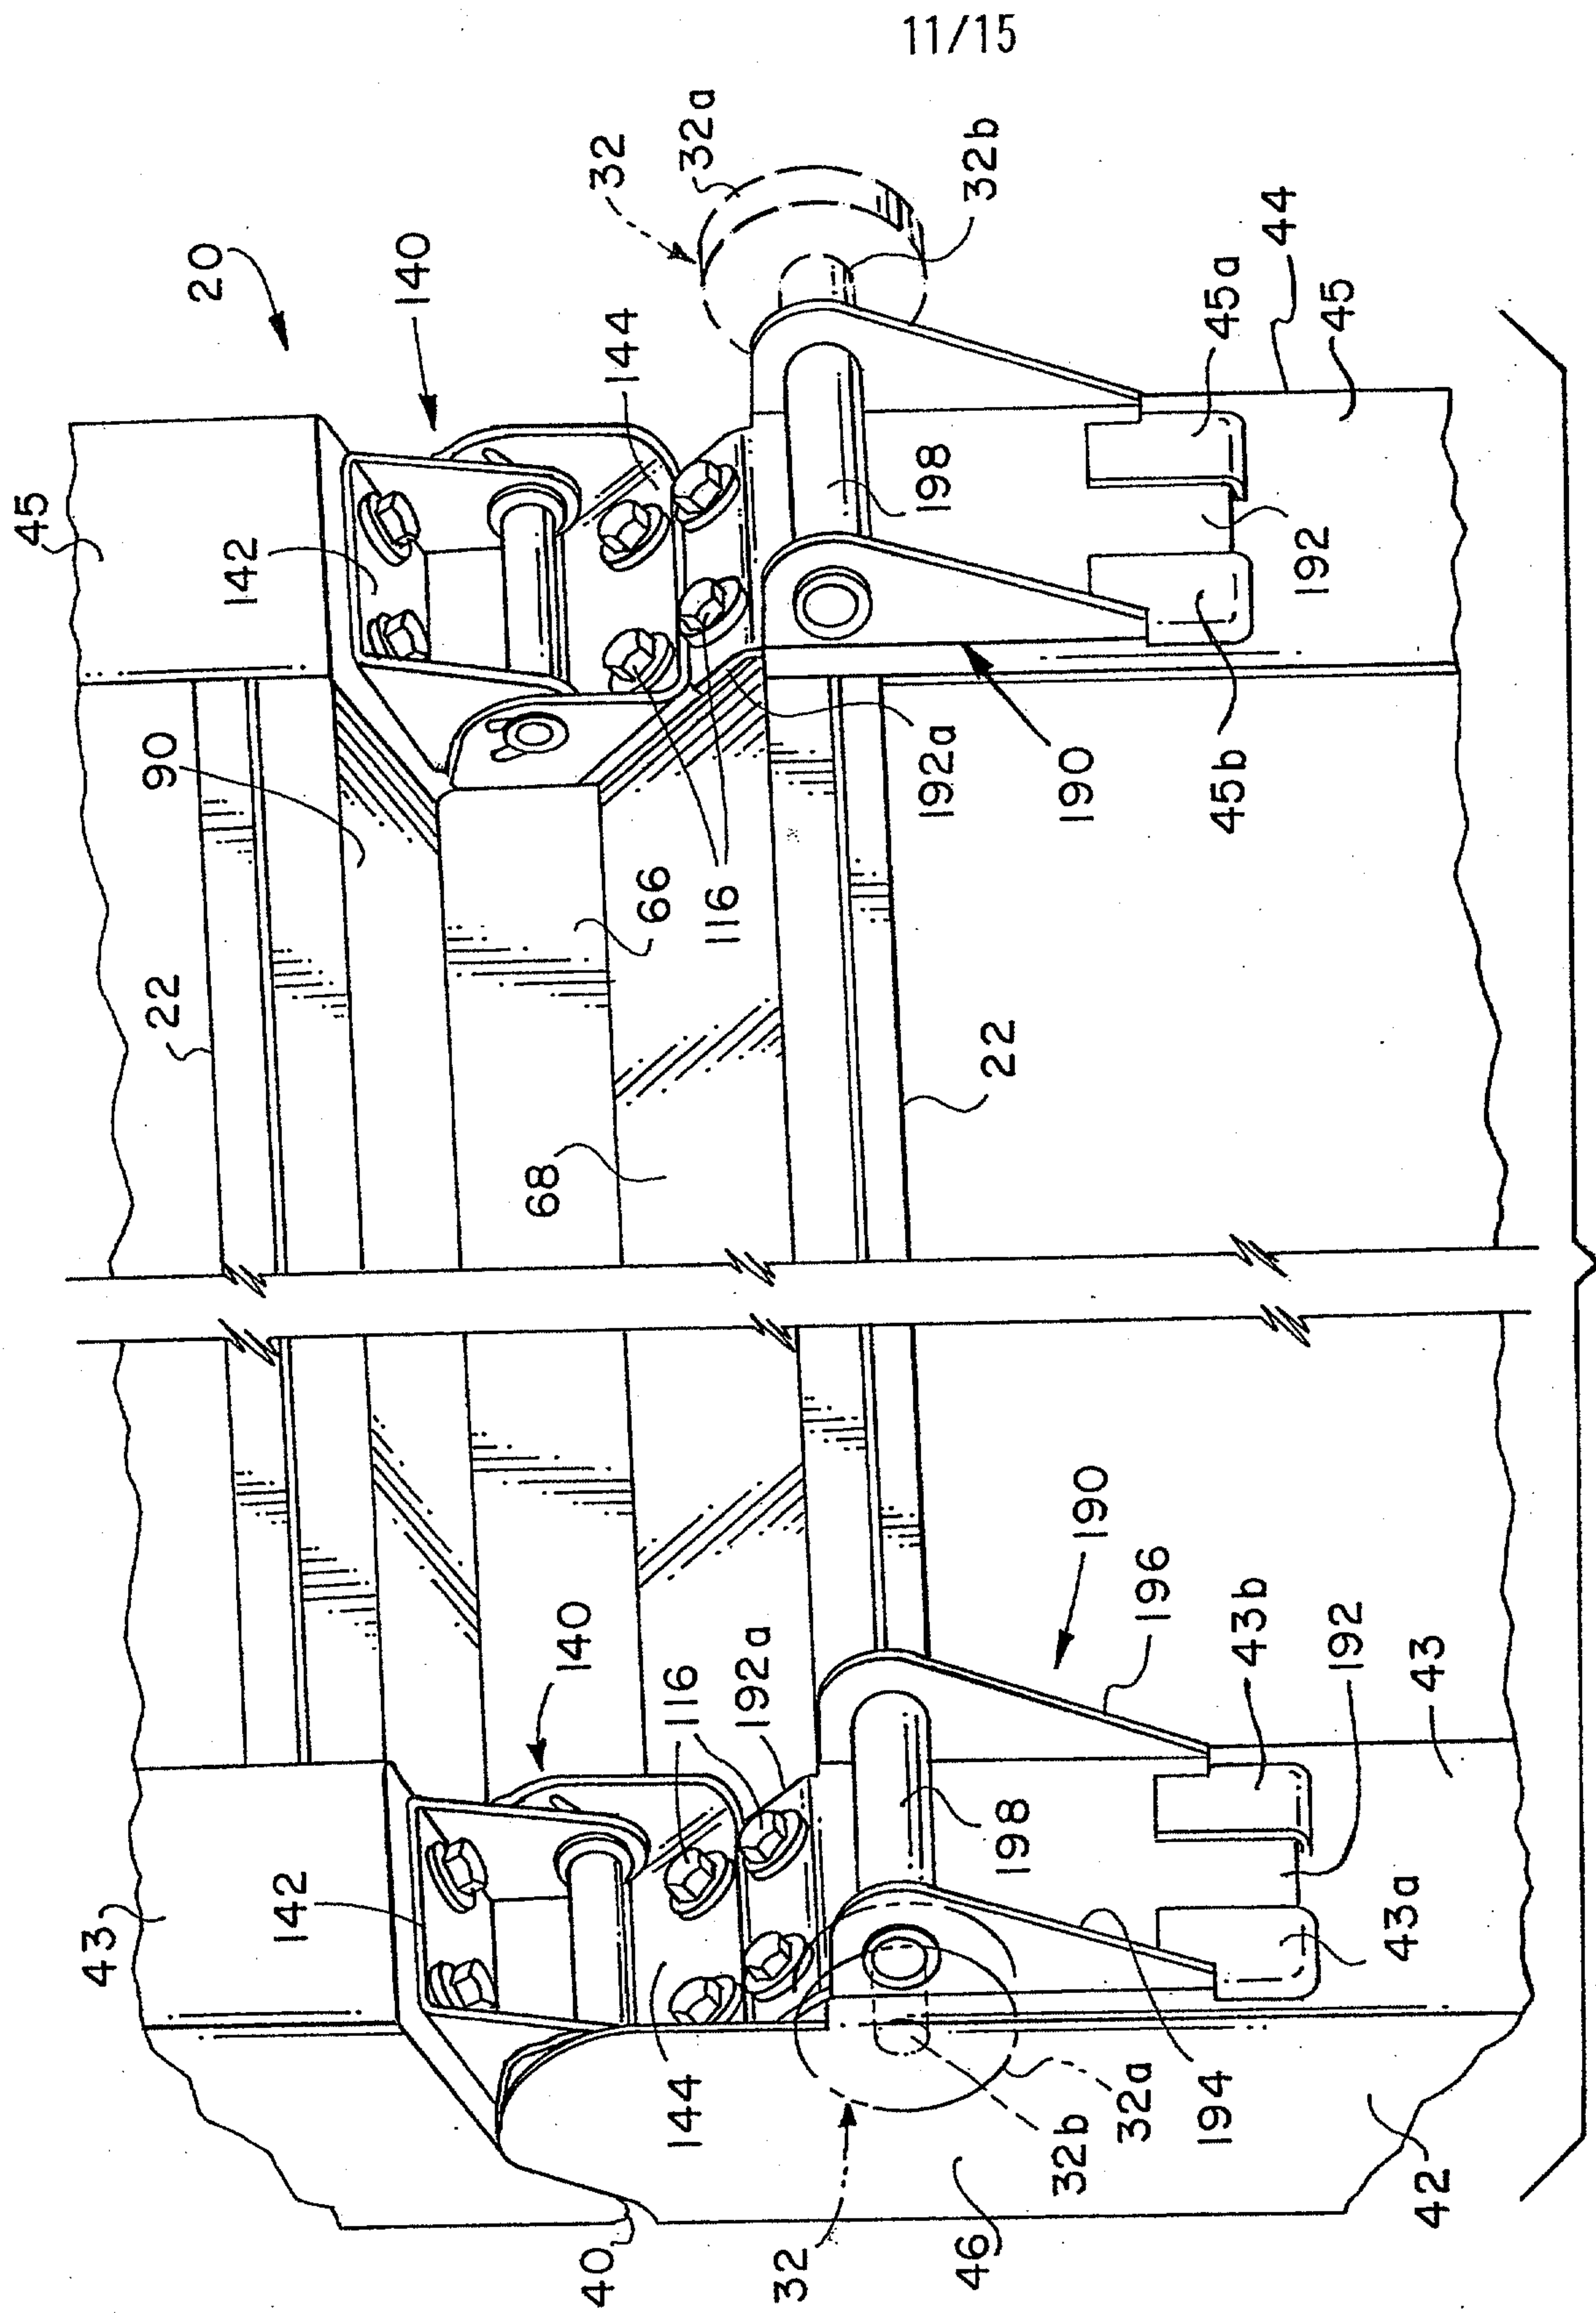


FIG. 17

12/15

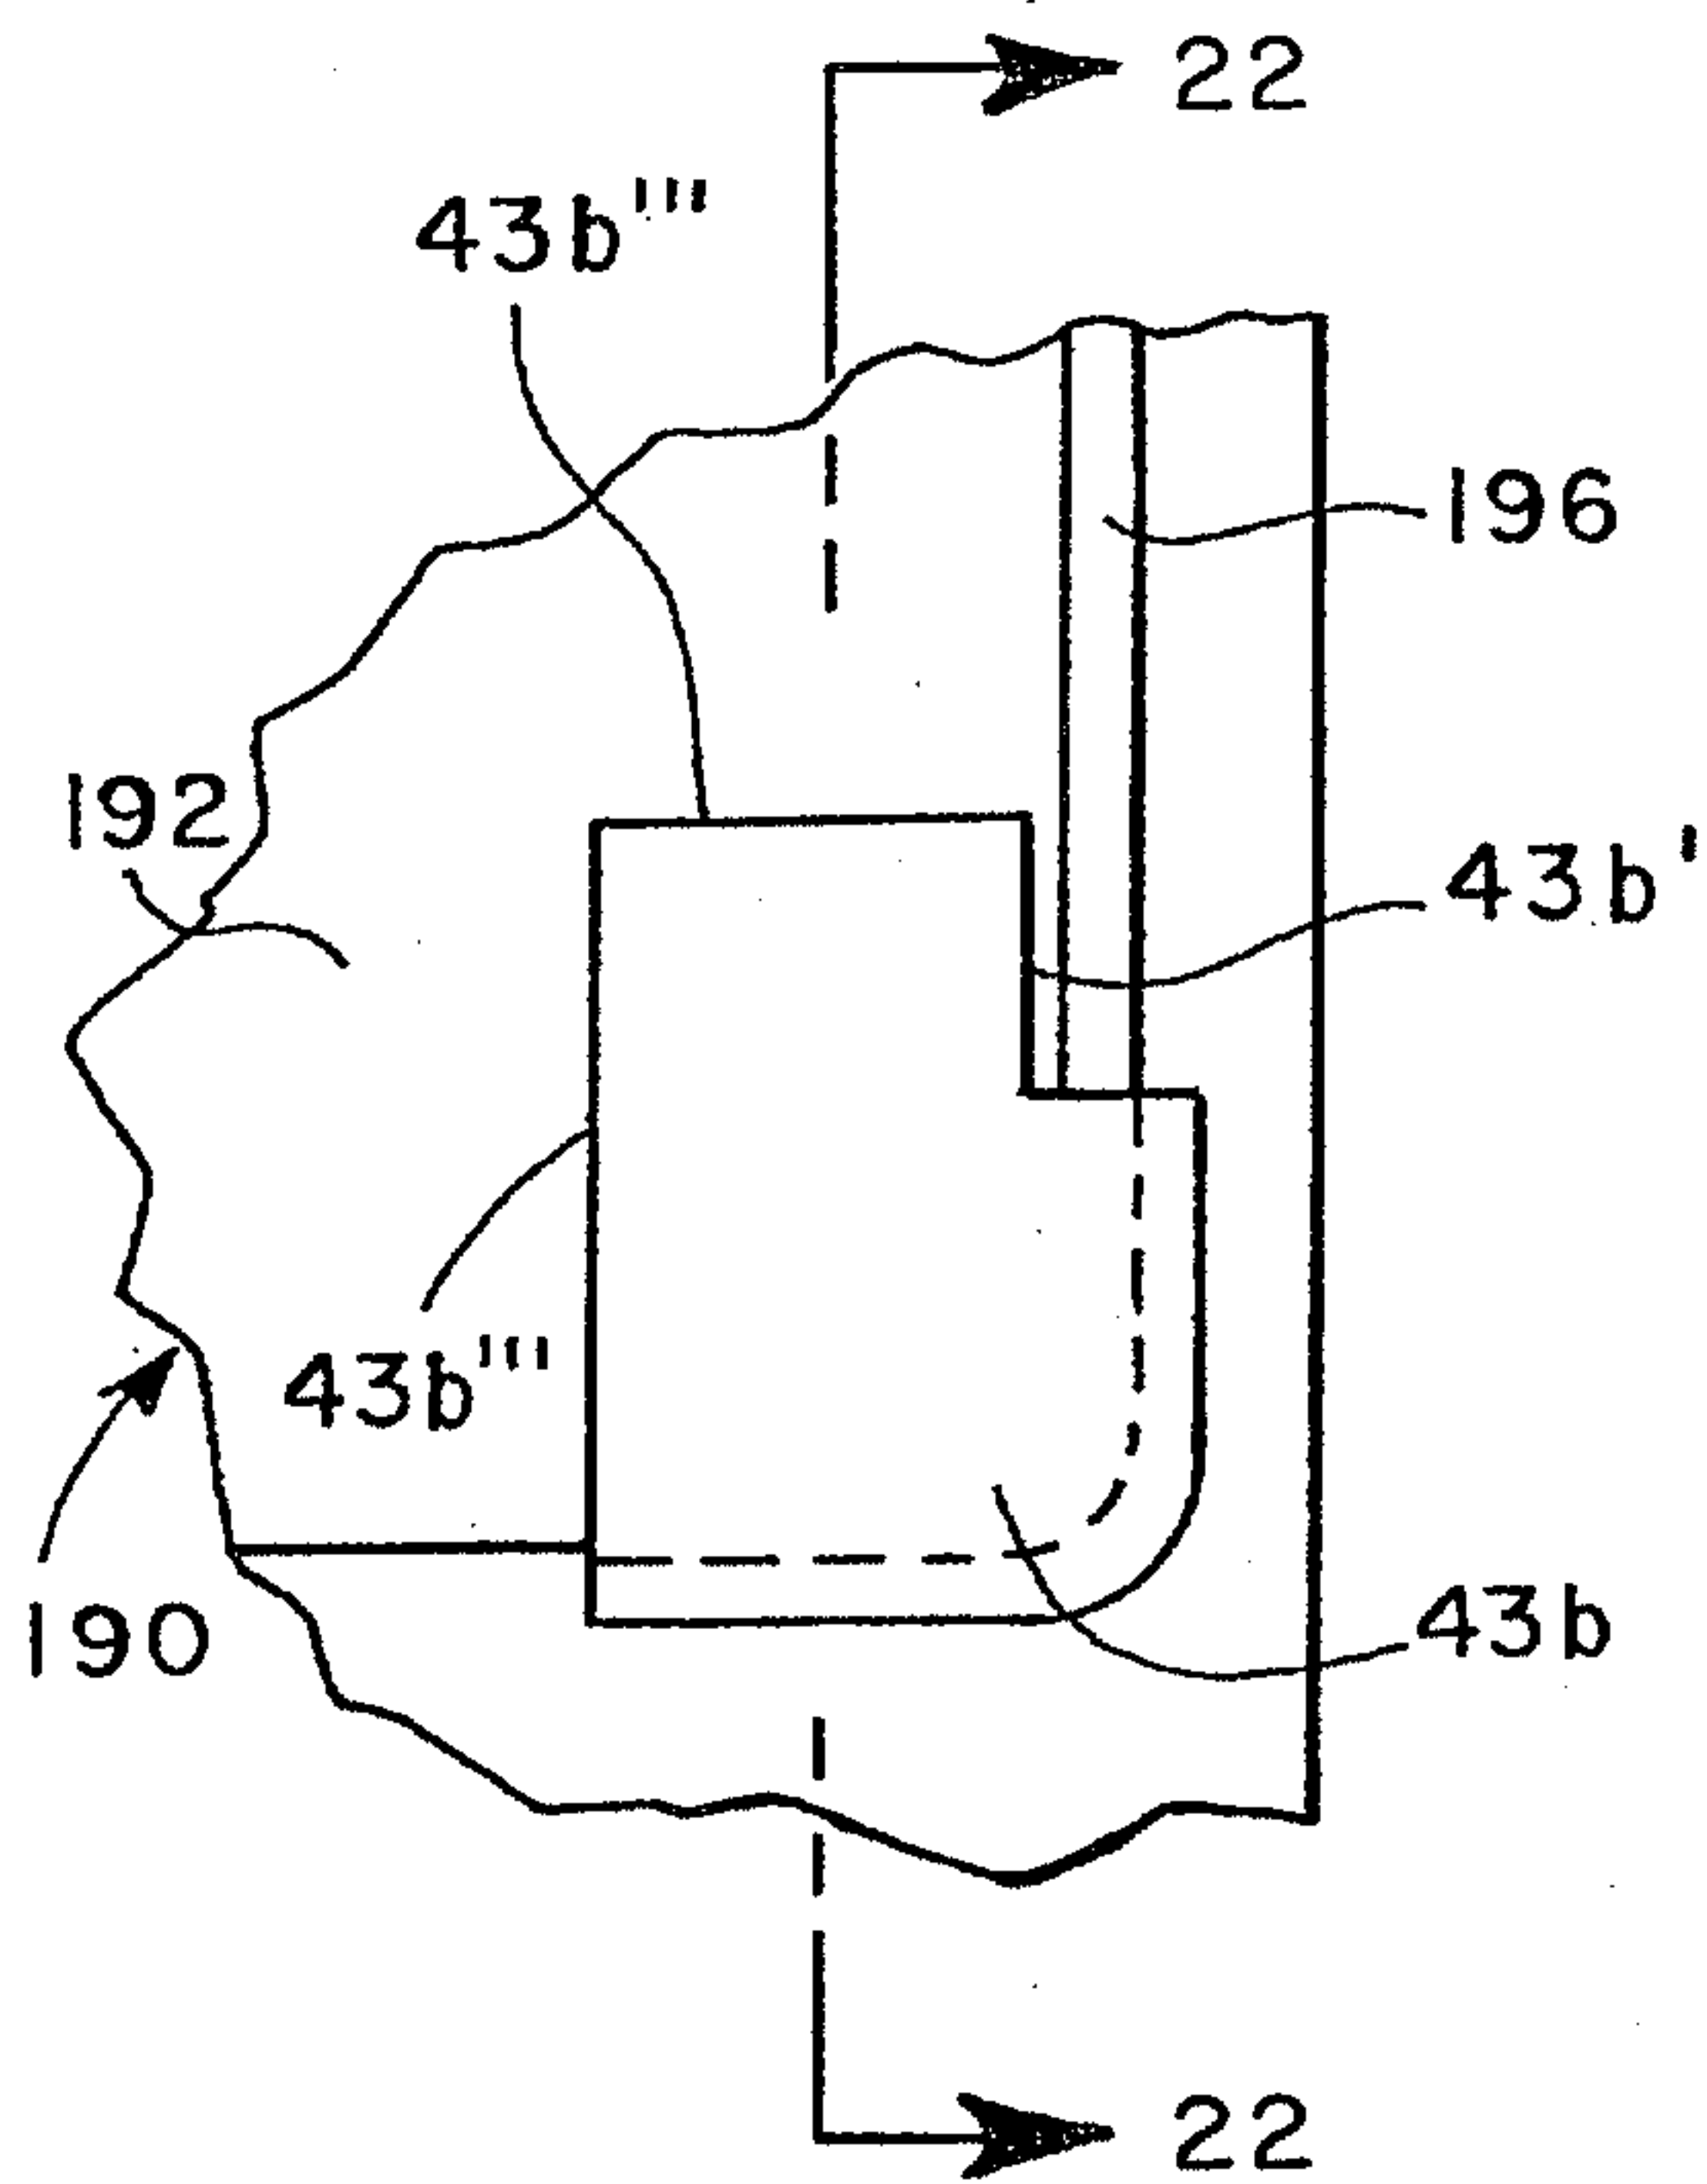


FIG. 20

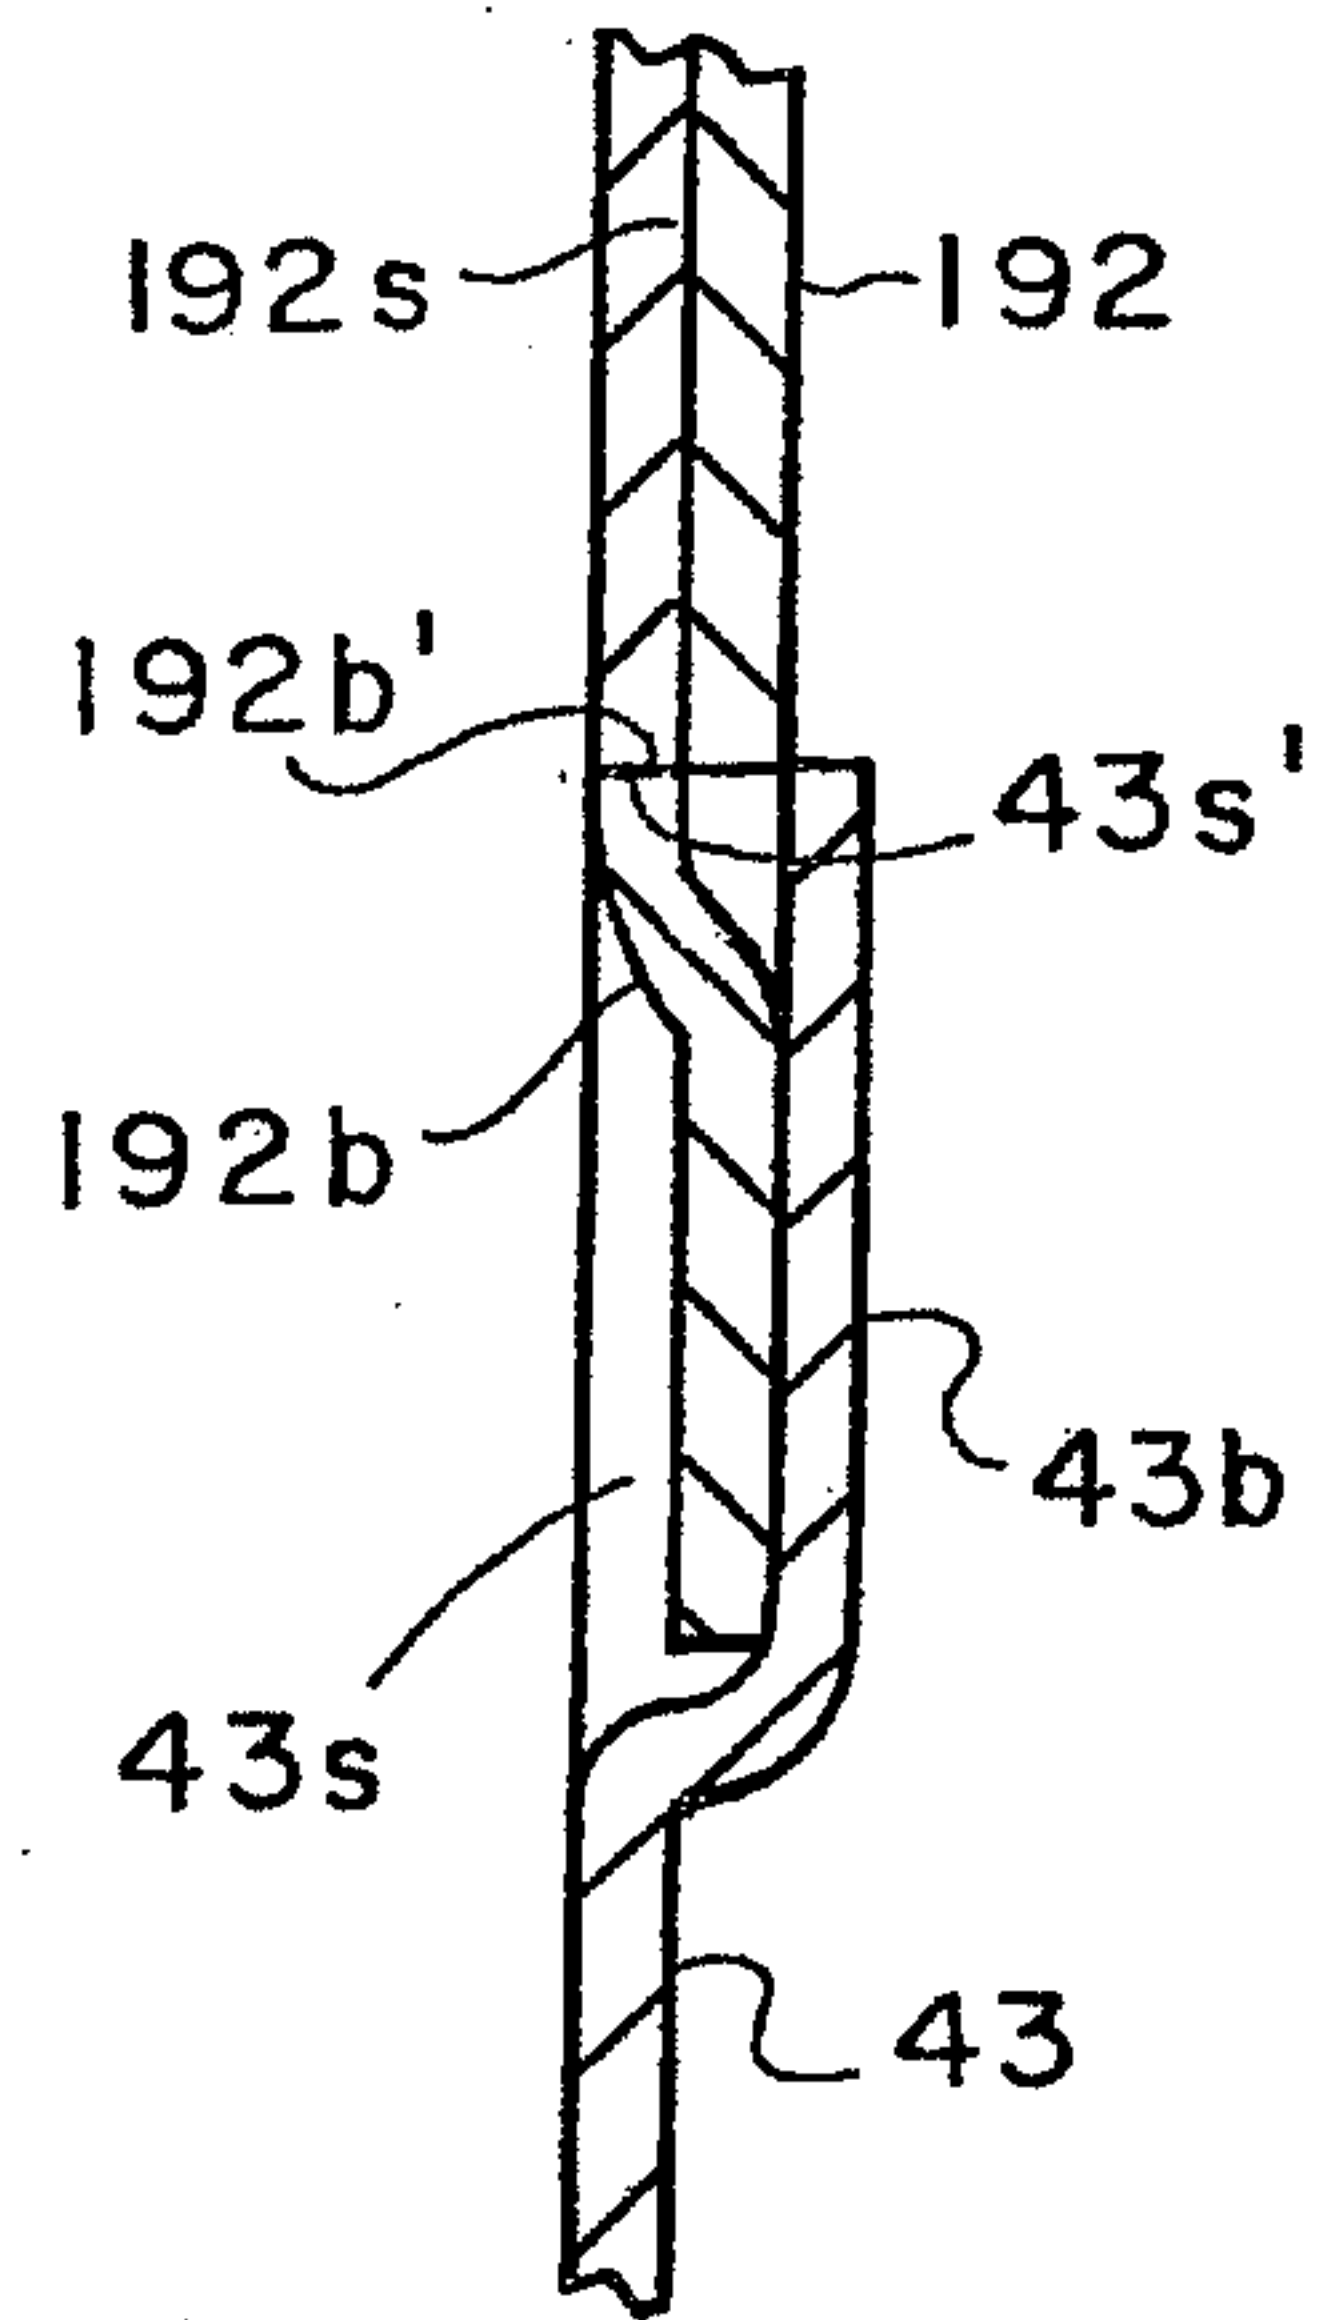


FIG. 22

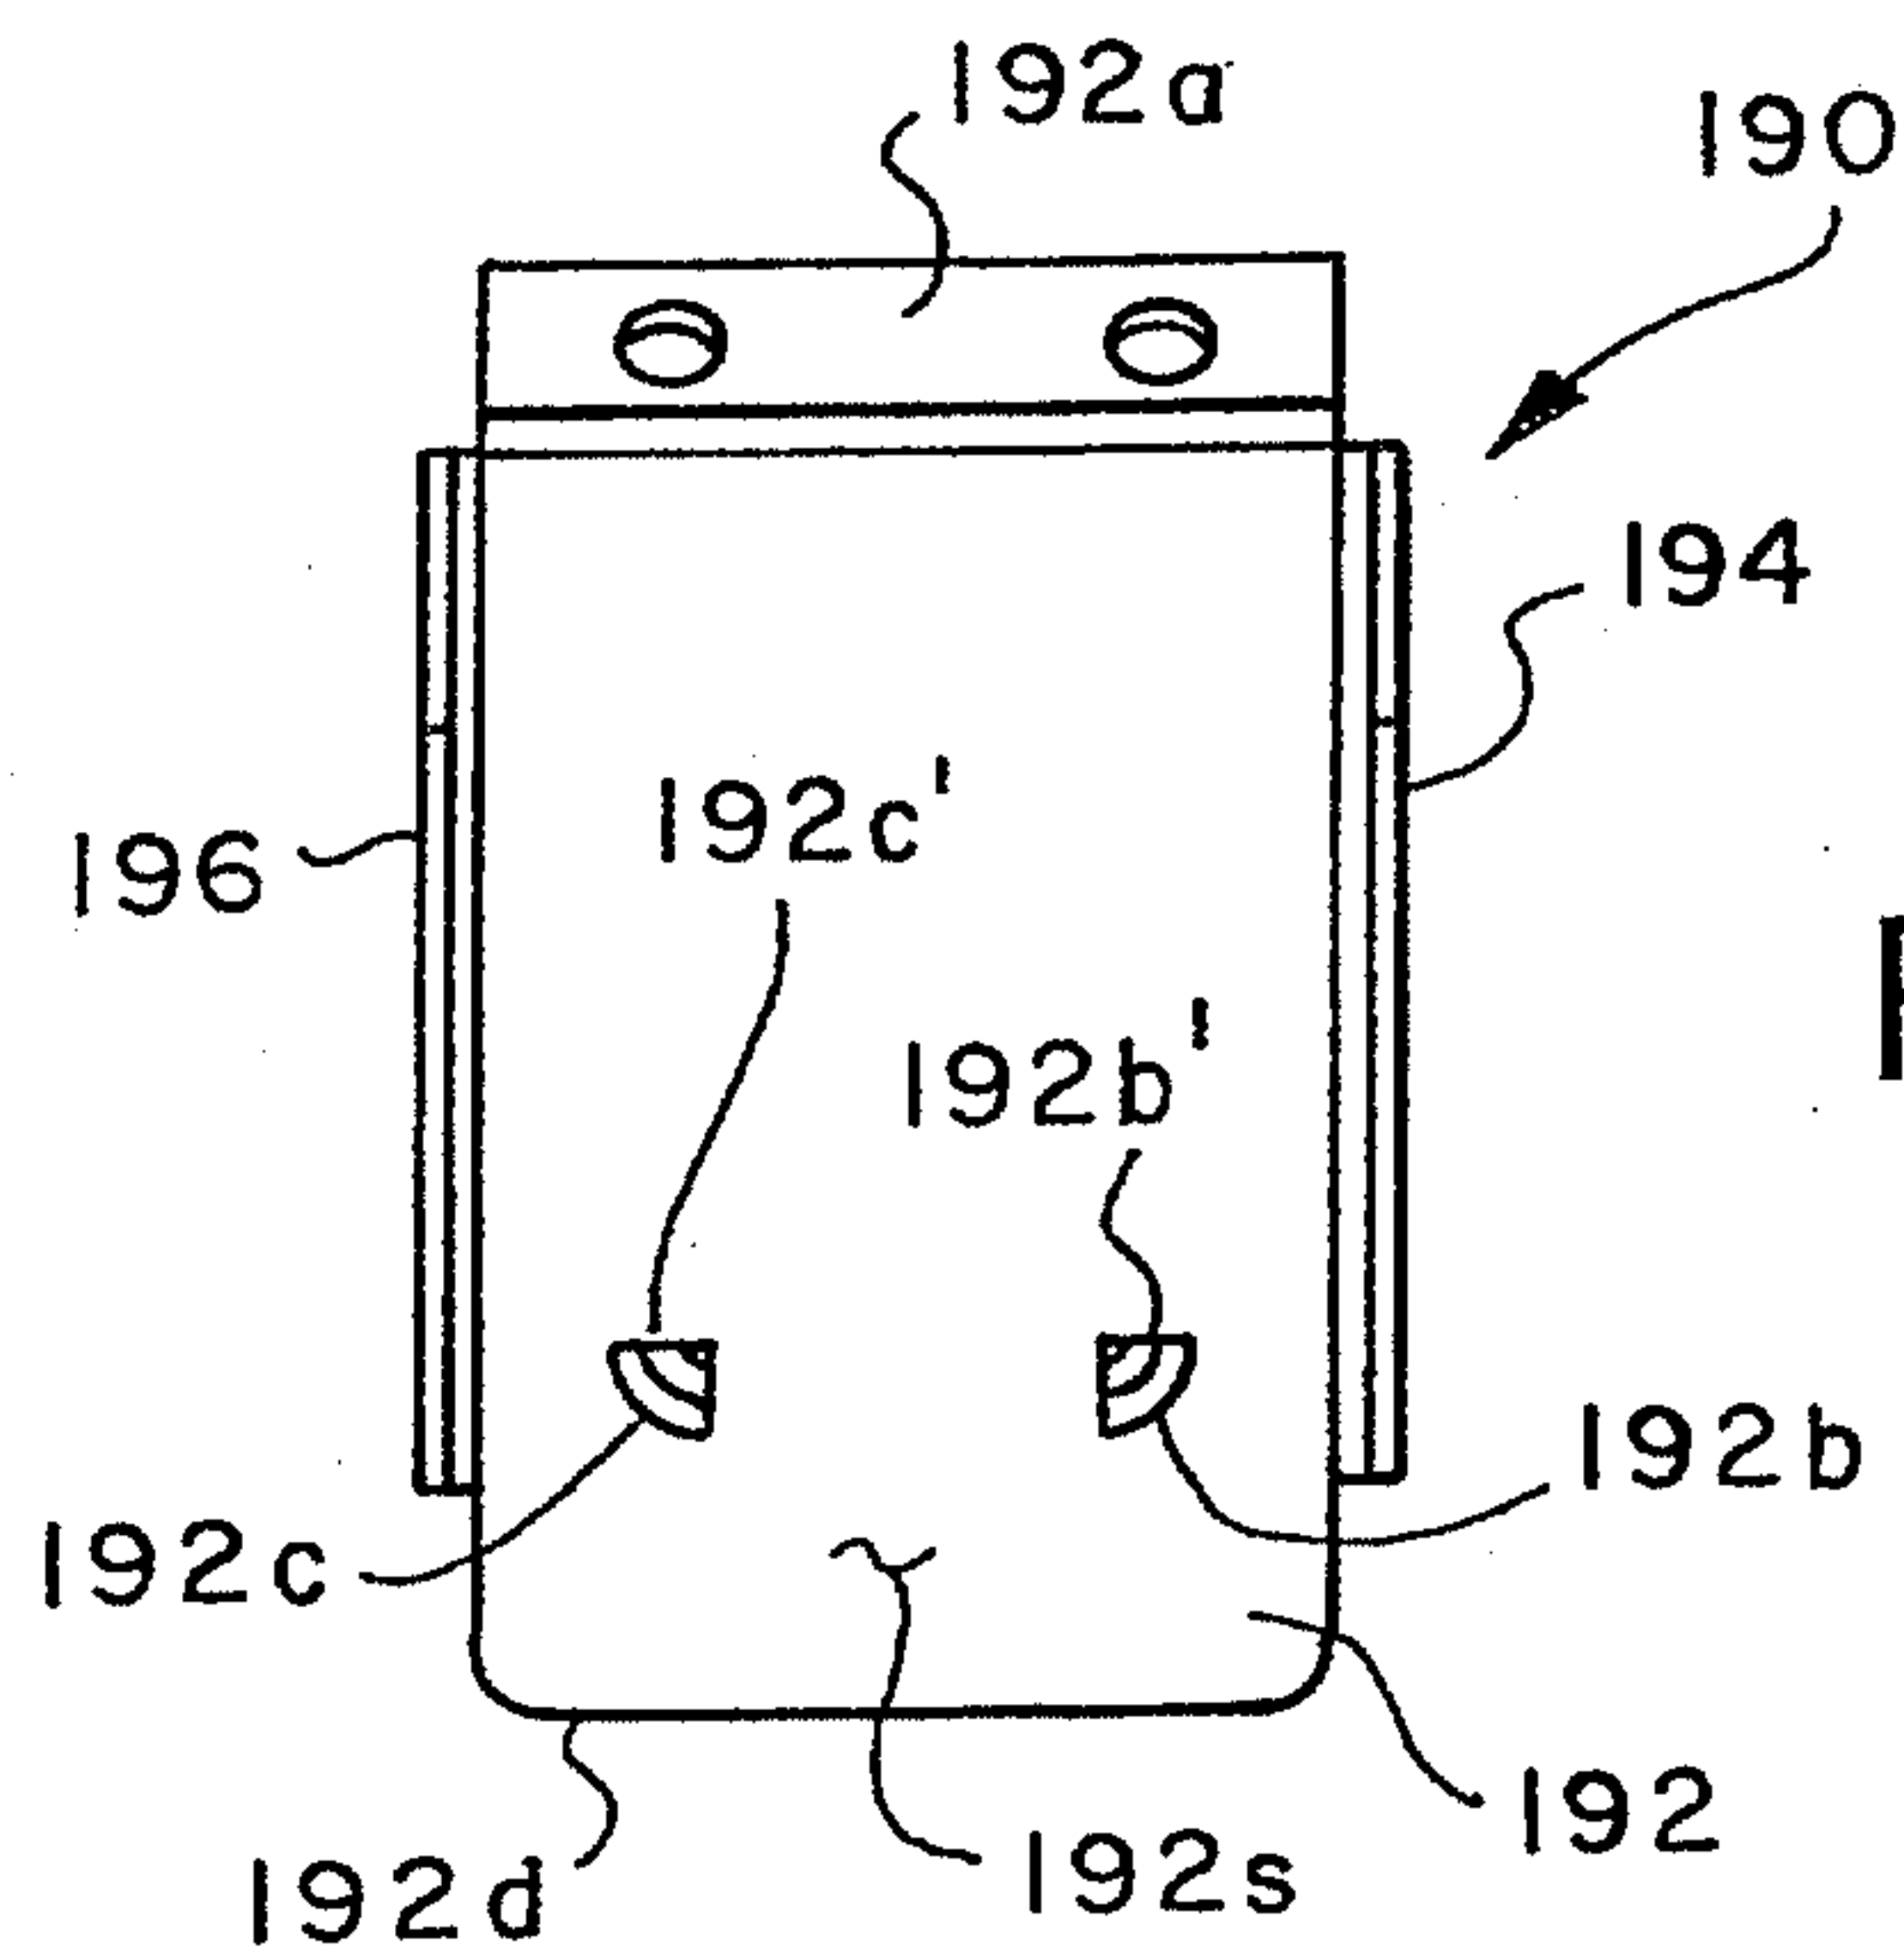


FIG. 21

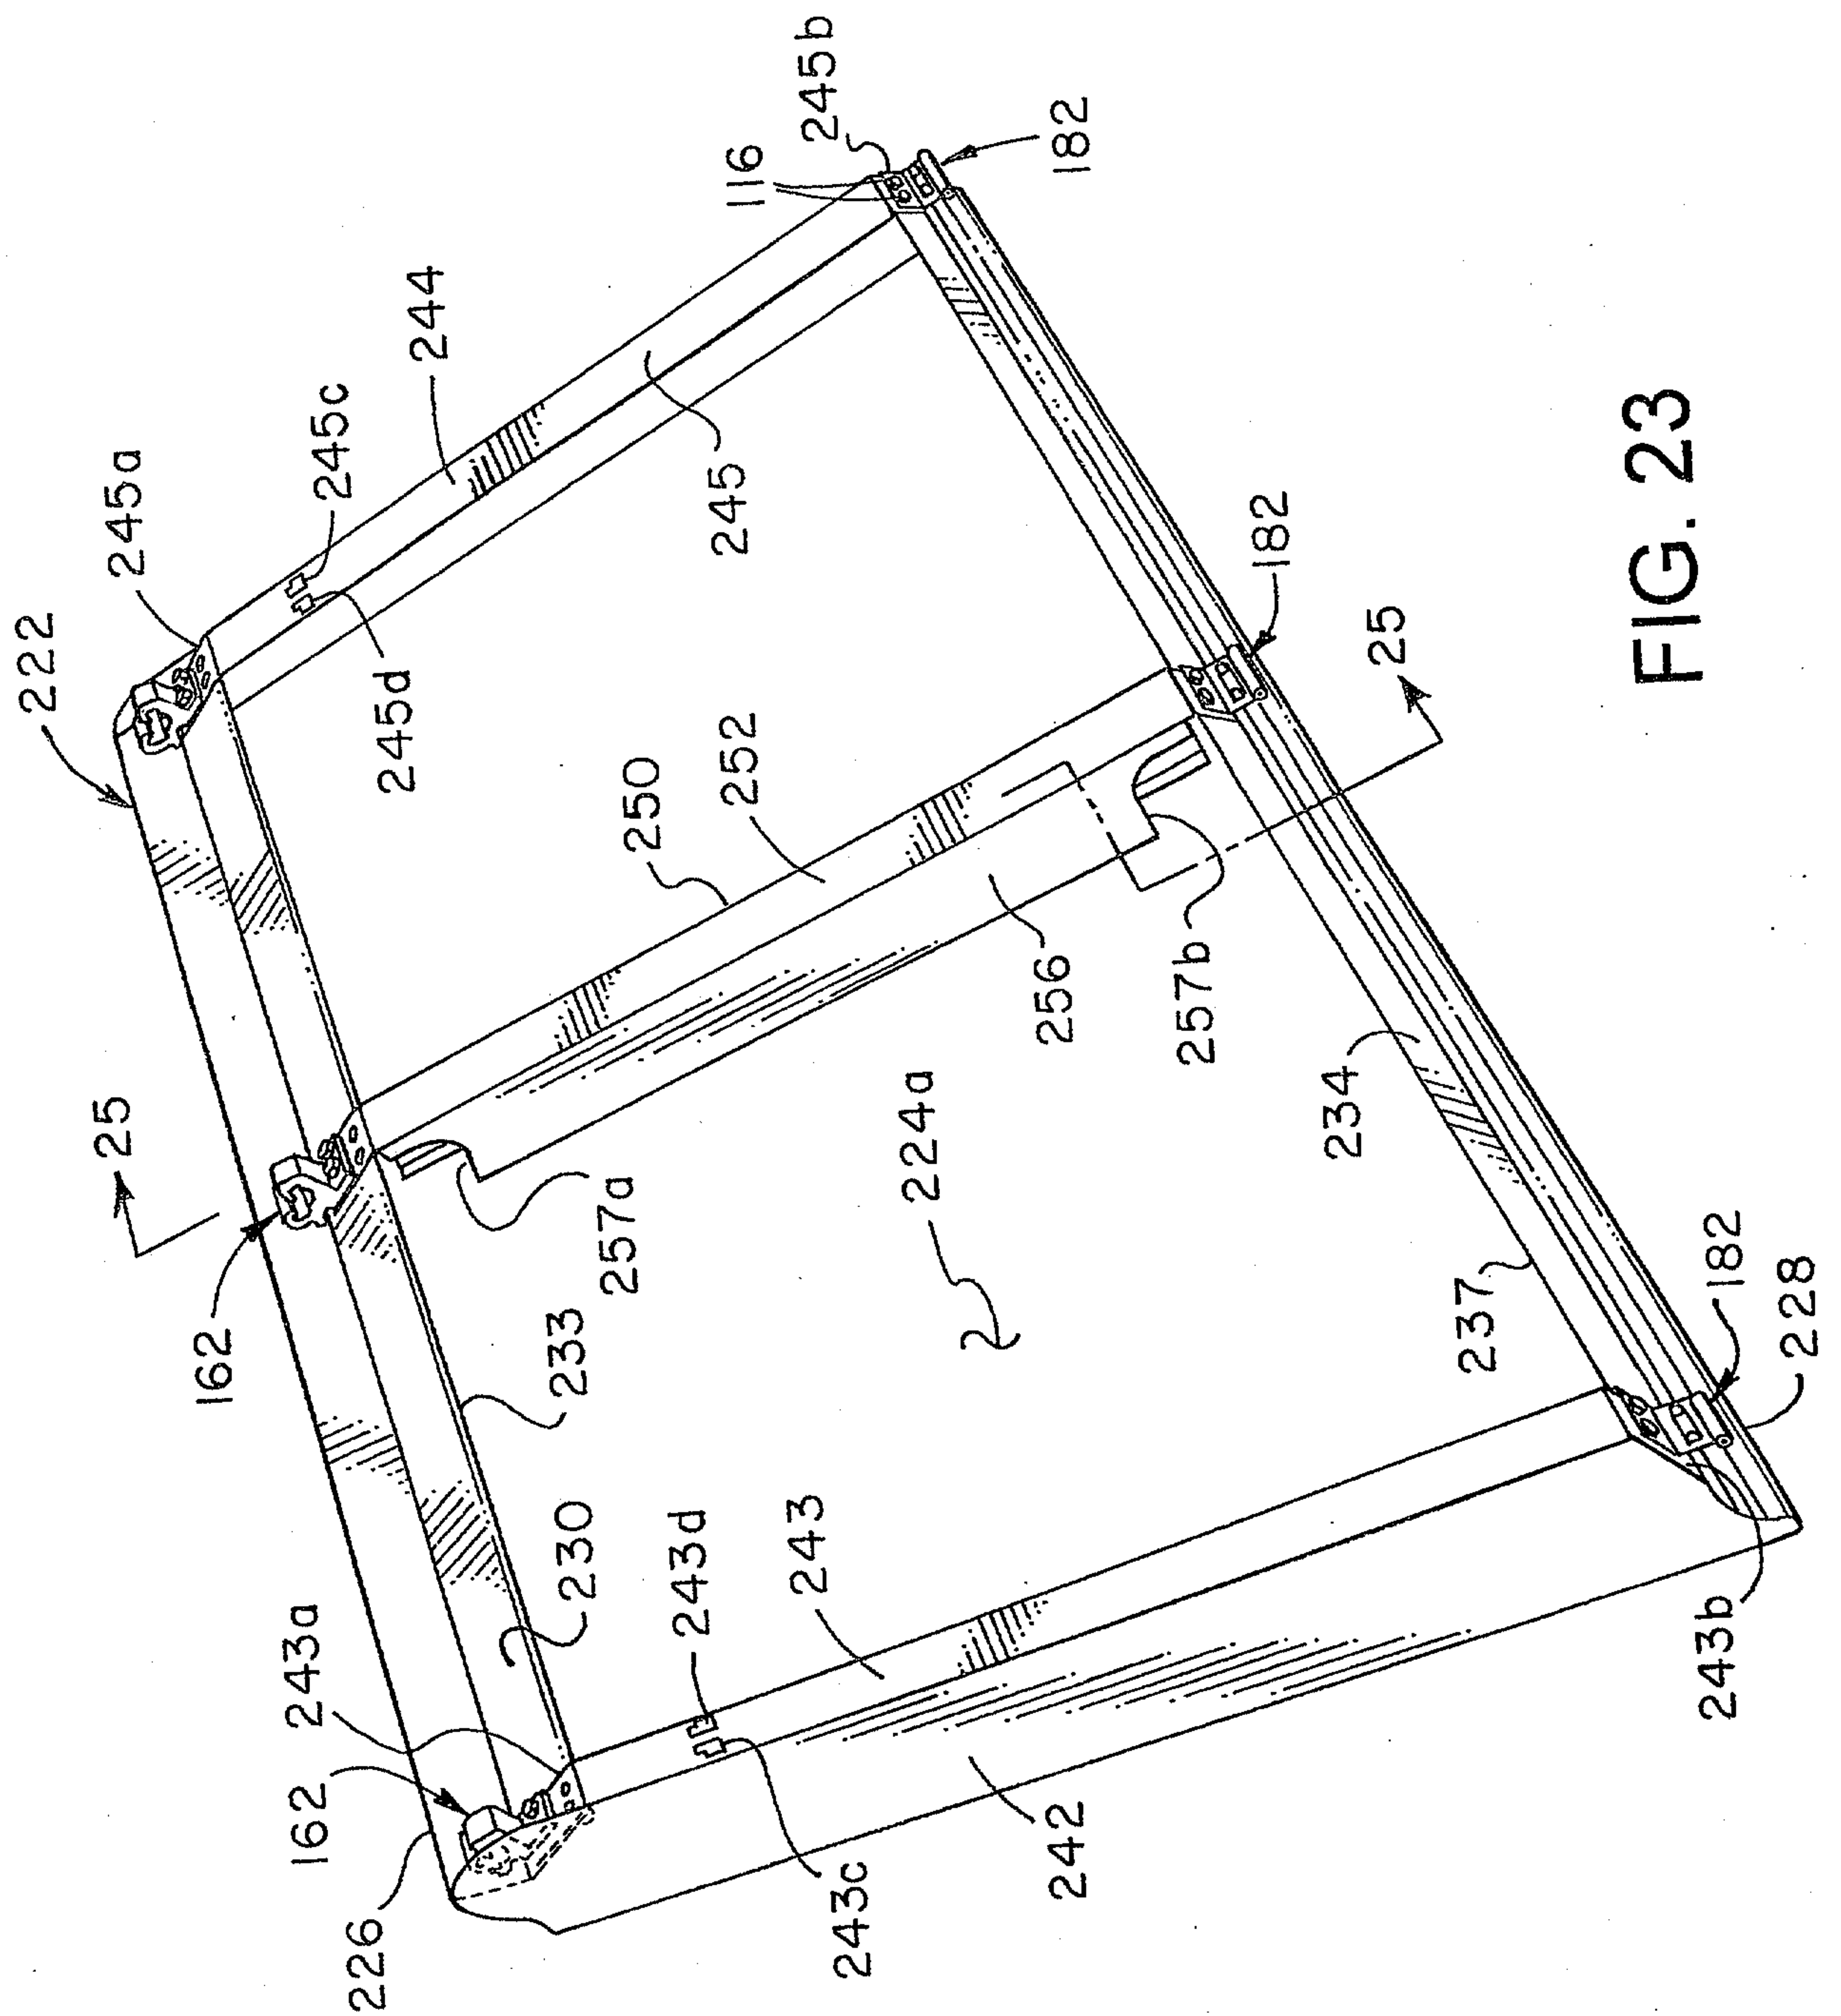


FIG. 23

14/15

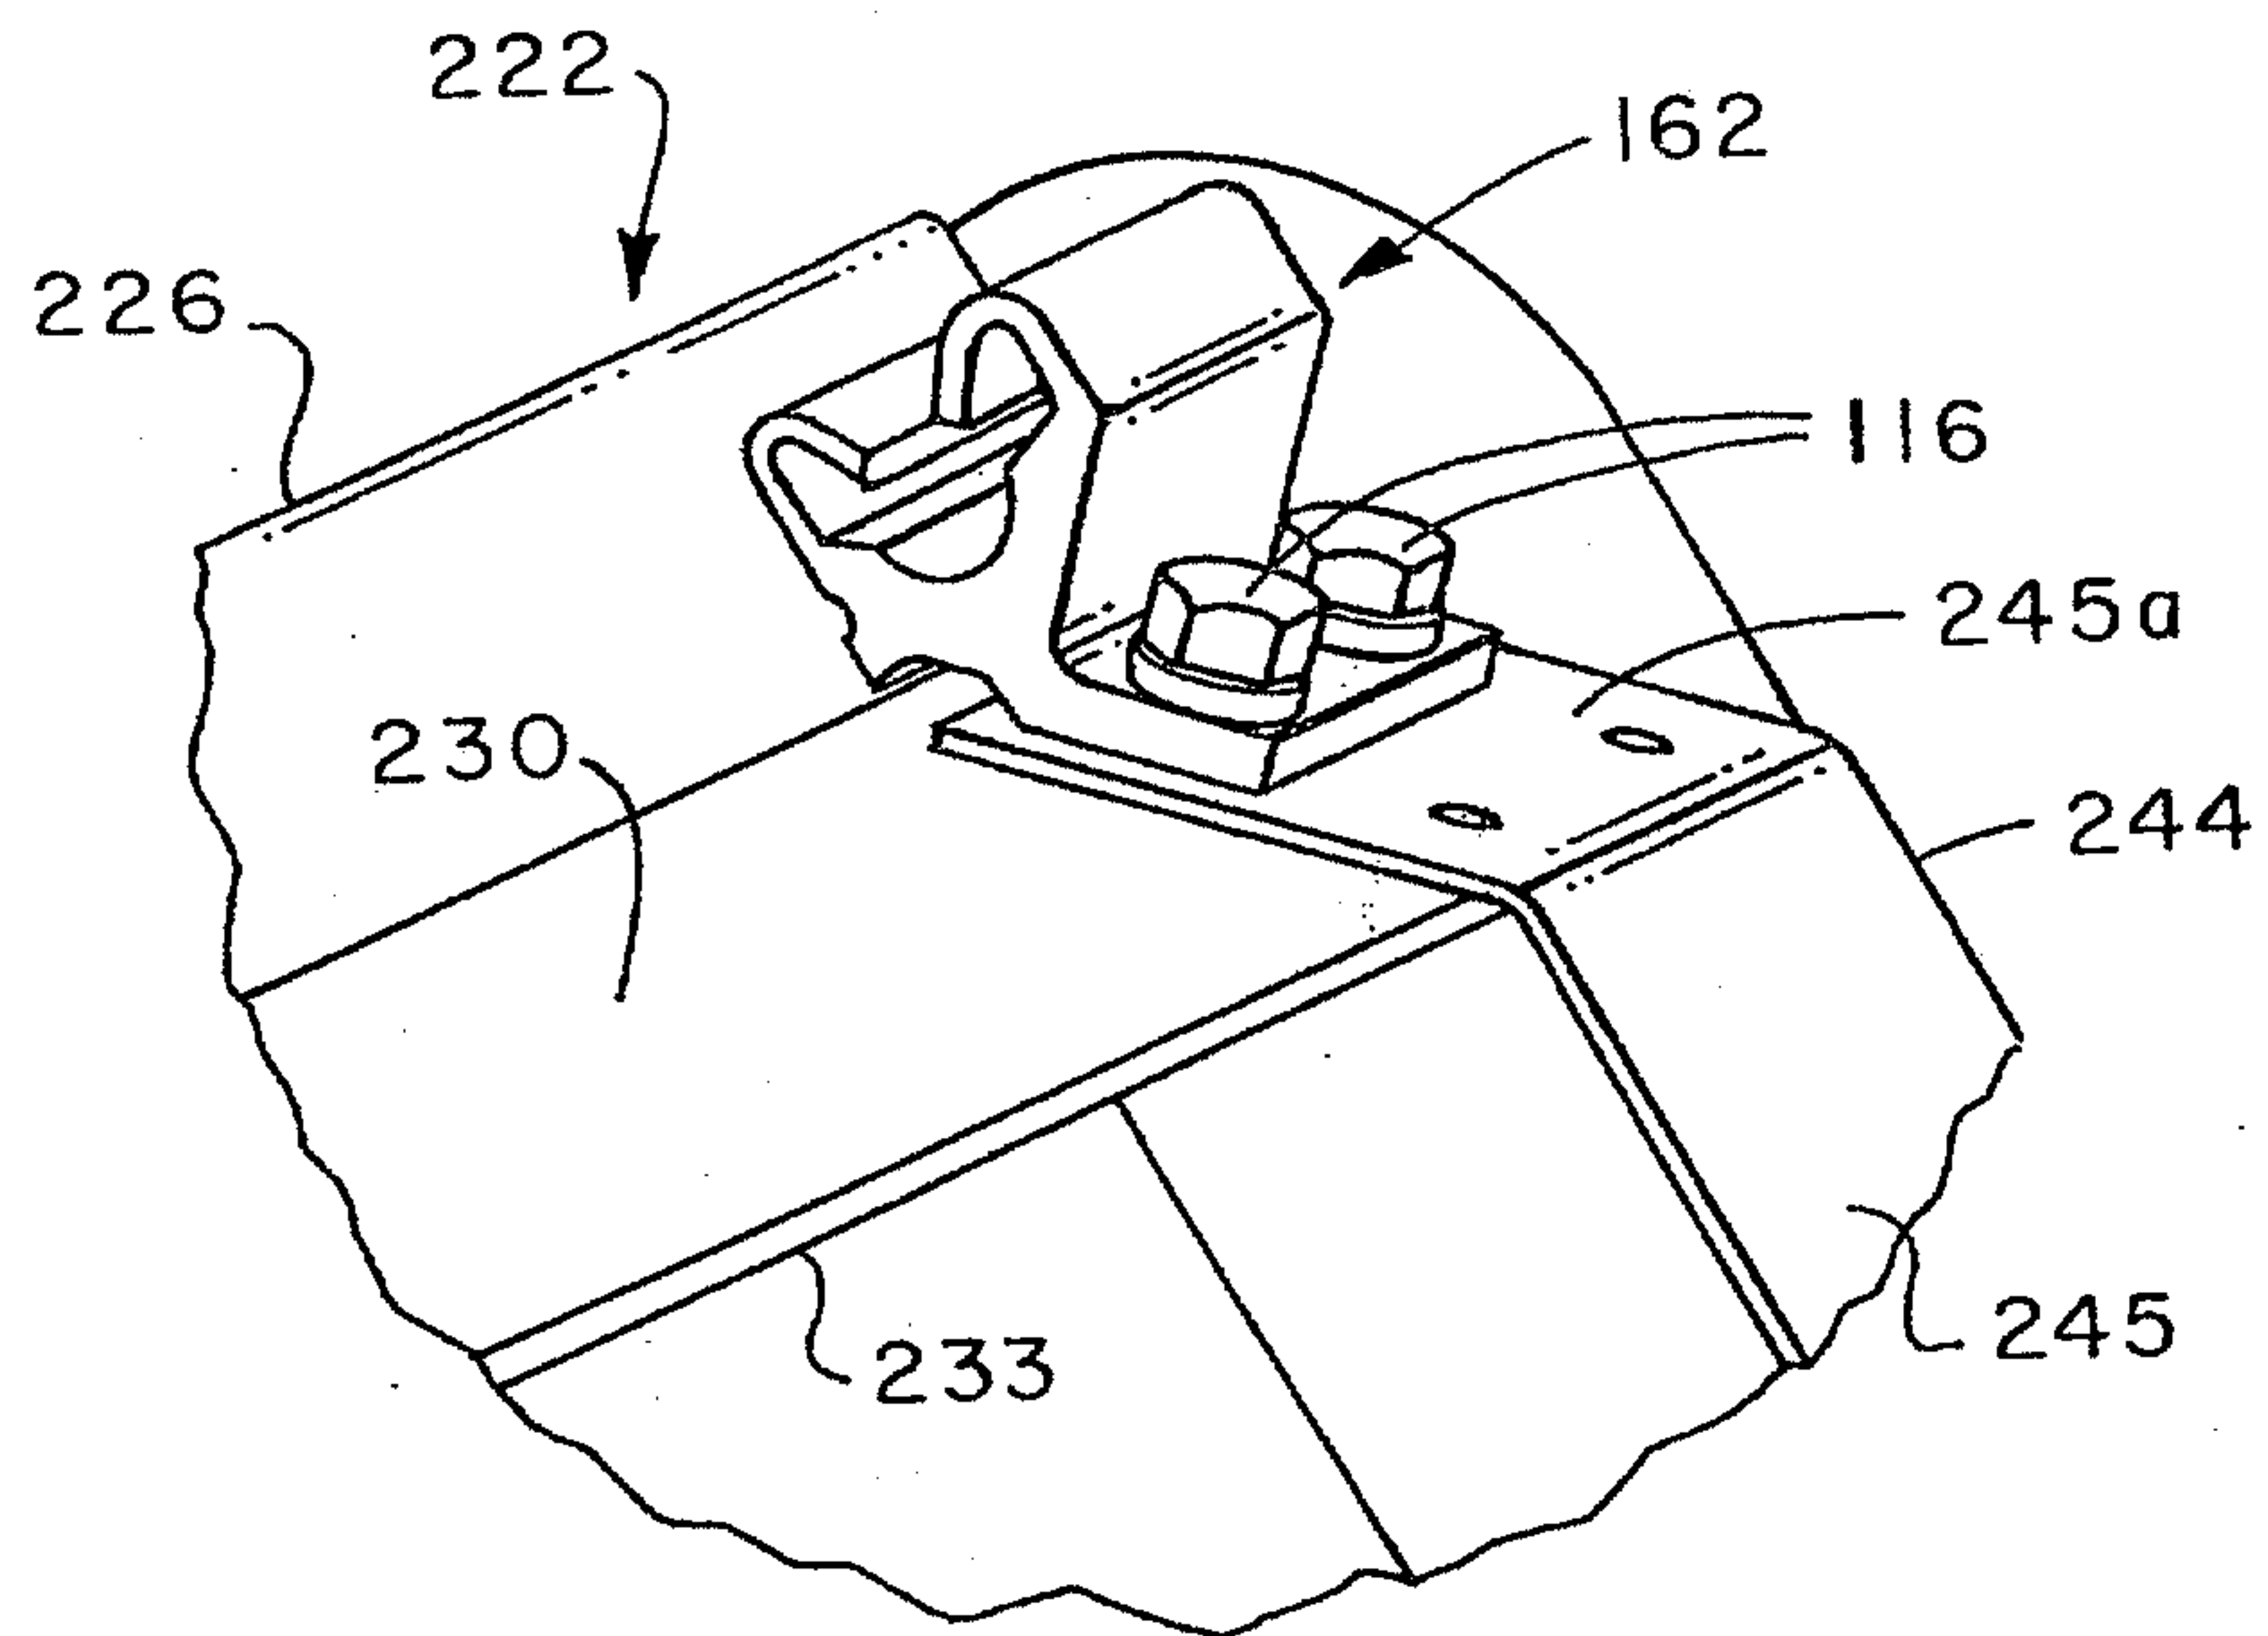


FIG. 24

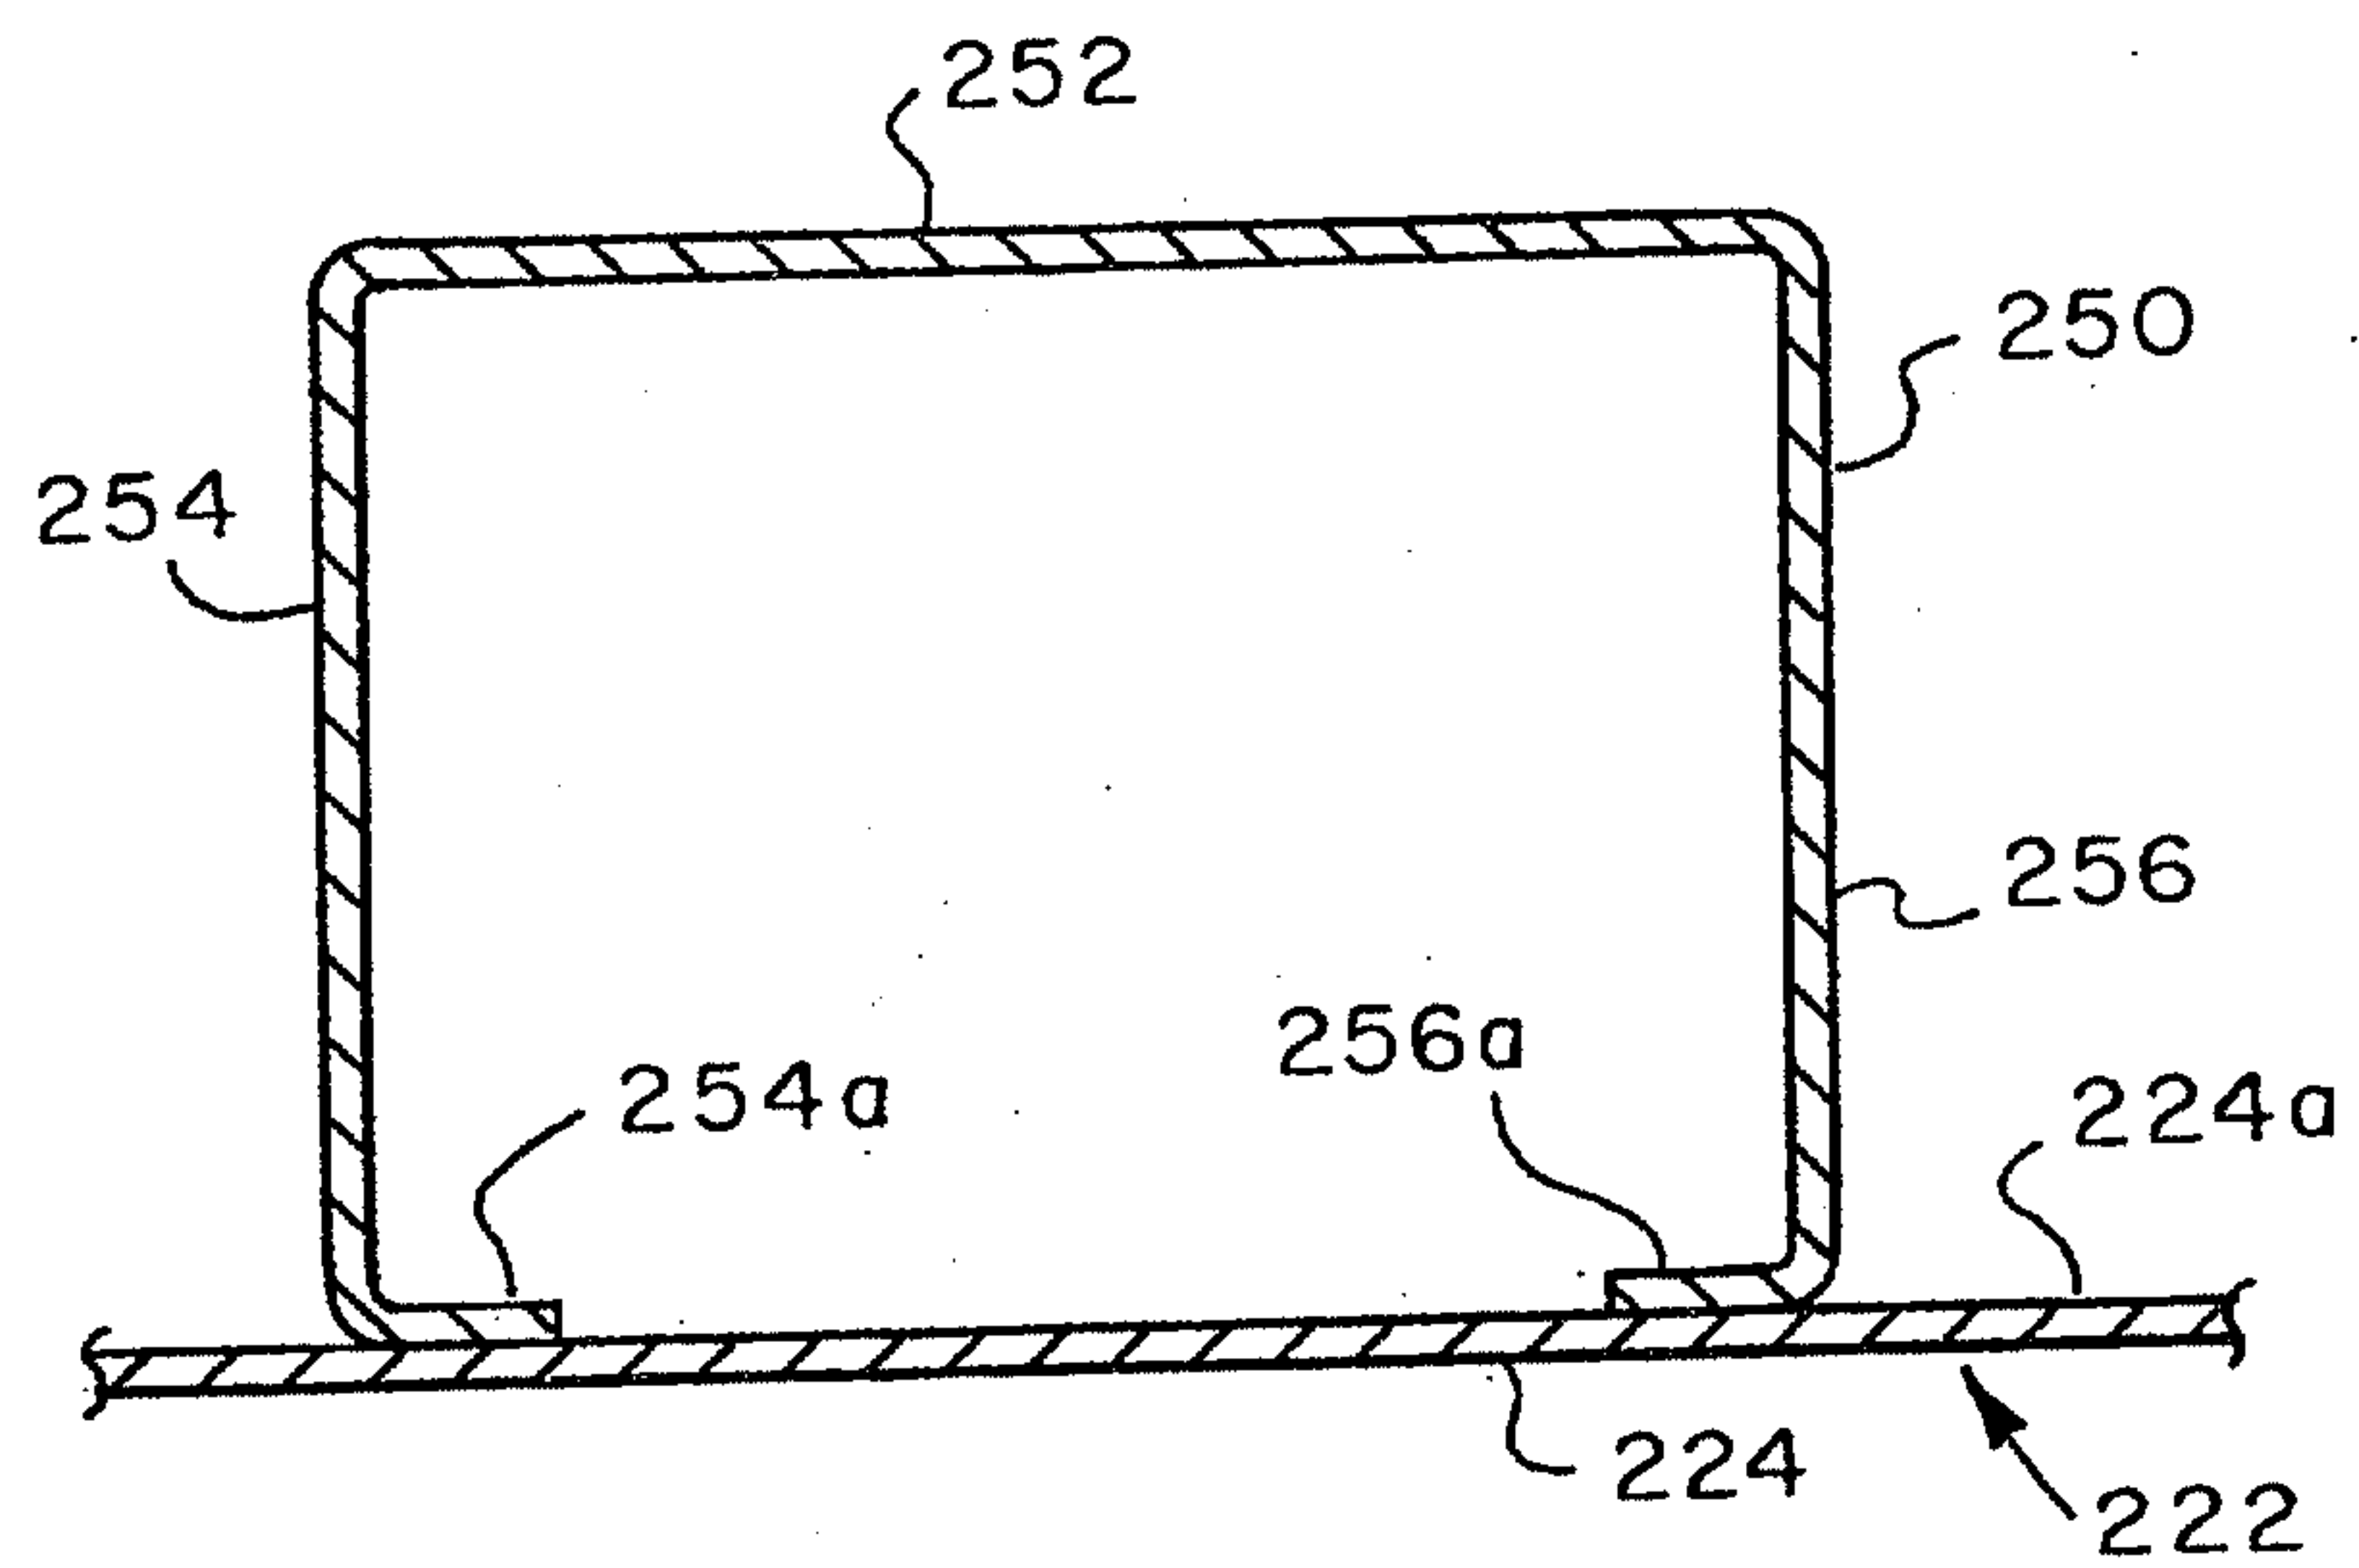


FIG. 26

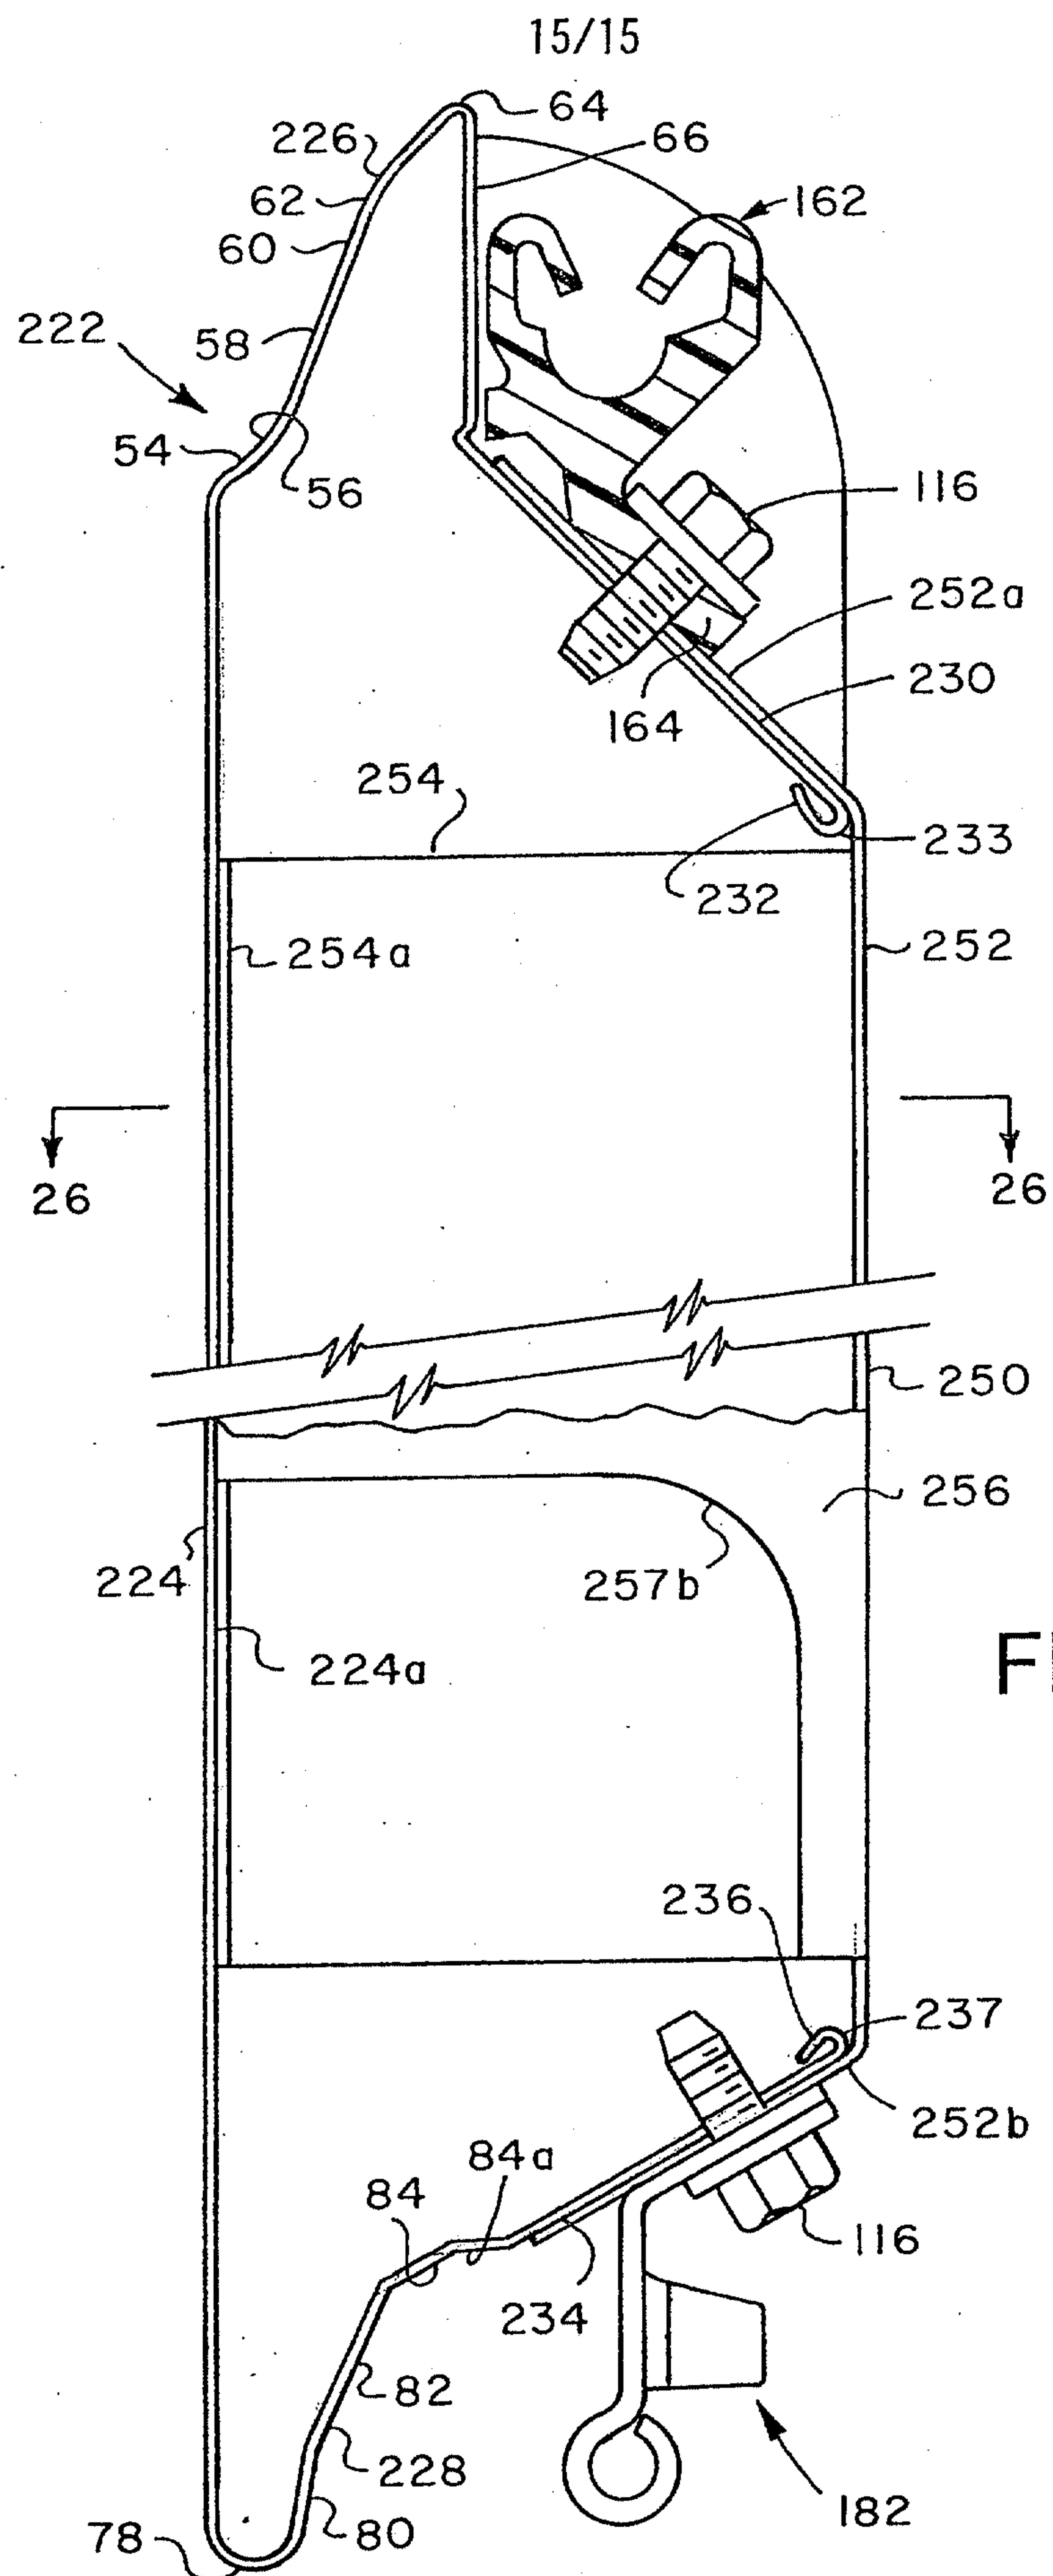


FIG. 25

